

## A32L450-PLG-TRI-SYS COMPONENTS

### A35413-

#### DESCRIPTION

Magiq 4 - Track Head - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White - Reflector 8° / 14° / 34°

#### GENERAL

Series: Magiq \_\_\_\_\_  
 Subseries: Magiq 4 Cell \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 510 \_\_\_\_\_  
 Length (in): 20 <sup>1</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 49 \_\_\_\_\_  
 Width (in): 1 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 93 \_\_\_\_\_  
 Height (in): 3 <sup>11</sup>/<sub>16</sub> \_\_\_\_\_  
 Light Distribution: Direct \_\_\_\_\_  
 Weight (kg): 0.902 \_\_\_\_\_  
 Weight (lbs): 1.99 \_\_\_\_\_  
 Fixture Finish: BLK / WHI \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 13.3 \_\_\_\_\_  
 Total Output Wattage (W): 12.9 \_\_\_\_\_  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - Universal \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 1050 \_\_\_\_\_

#### LED


Delivered Lumen Range: 500 - 999 lm \_\_\_\_\_  
 Number of LEDs: 4 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 781 / 843 / 860 / 878 \_\_\_\_\_  
 Nominal Lumen (lm): 880 / 950 / 970 / 990 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Efficiency (%): 80 \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_  
 Upon Request: Special Color Temperature RGBW Tunable Special LED \_\_\_\_\_

#### OPTICAL

Reflector: 8 / 14 / 34 \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

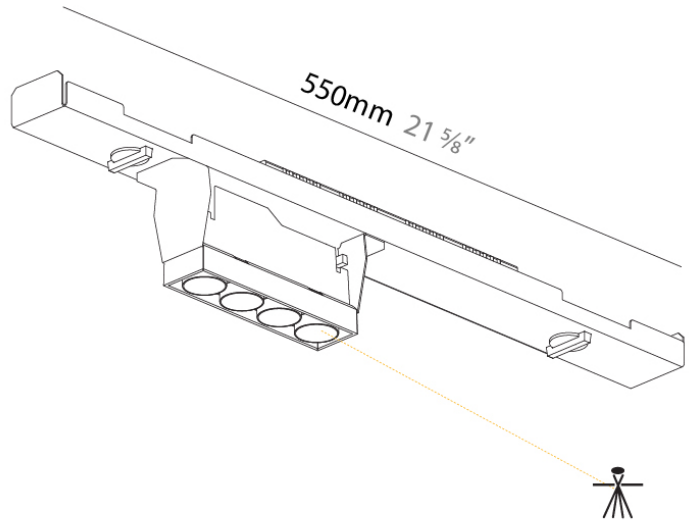

## A32L450-PLG-TRI-SYS COMPONENTS

### A35416-

#### DESCRIPTION

Magiq 4 Korona - Track Head - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflector: 8° / 18° / 34°

#### GENERAL

Series: Magiq \_\_\_\_\_  
 Subseries: Magiq 4 Cell Korona \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 550 \_\_\_\_\_  
 Length (in): 21 <sup>10</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 49 \_\_\_\_\_  
 Width (in): 1 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 93 \_\_\_\_\_  
 Height (in): 3 <sup>11</sup>/<sub>16</sub> \_\_\_\_\_  
 Light Distribution: Adjustable / Direct \_\_\_\_\_  
 Weight (kg): 0.902 \_\_\_\_\_  
 Weight (lbs): 1.99 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Holder Finish: WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 13.3 \_\_\_\_\_  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - Universal \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (MA): 1050 \_\_\_\_\_

#### LED


Delivered Lumen Range: 100 - 499 lm \_\_\_\_\_  
 Number of LEDs: 4 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 781 / 843 / 878 \_\_\_\_\_  
 Nominal Lumen (lm): 880 / 950 / 990 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Efficiency (%): 80 \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_  
 Upon Request: Special Color Temperature RGBW Tunable Special LED \_\_\_\_\_

#### OPTICAL

Reflector°: 8 / 18 / 34 \_\_\_\_\_  
 Adjustability: Tilt ±25° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

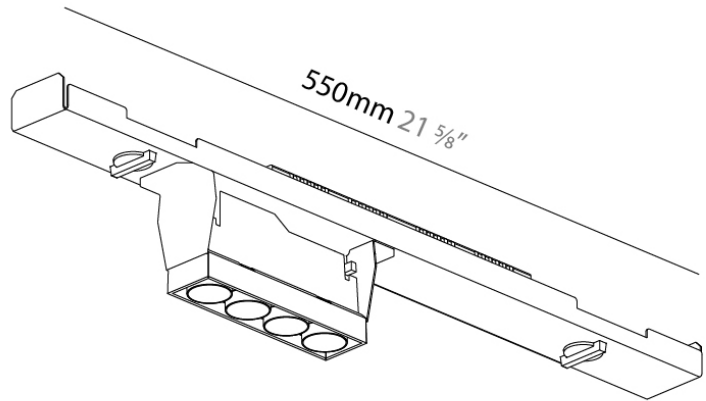

## A32L450-PLG-TRI-SYS COMPONENTS

### A35419-

#### DESCRIPTION

Magiq 8 - Track Head - 26.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White Base - Reflector 8° / 14° / 34°

#### GENERAL

Series: Magiq \_\_\_\_\_  
 Subseries: Magiq 8 Cell \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 550 \_\_\_\_\_  
 Length (in): 21 <sup>5</sup>/<sub>8</sub> \_\_\_\_\_  
 Width (mm): 49 \_\_\_\_\_  
 Width (in): 1 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 93 \_\_\_\_\_  
 Height (in): 3 <sup>11</sup>/<sub>16</sub> \_\_\_\_\_  
 Light Distribution: Adjustable / Direct \_\_\_\_\_  
 Weight (kg): 0.908 \_\_\_\_\_  
 Weight (lbs): 2 \_\_\_\_\_  
 Fixture Finish: BLK / WHI \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 20 - 29 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 30 \_\_\_\_\_  
 Total Output Wattage (W): 26 \_\_\_\_\_  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - Universal \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (MA): 1050 \_\_\_\_\_

#### LED


Delivered Lumen Range: 1000 - 1999 lm \_\_\_\_\_  
 Number of LEDs: 8 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 1561 / 1685 / 1809 / 1756 \_\_\_\_\_  
 Nominal Lumen (lm): 1760 / 1900 / 2040 / 1980 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_  
 Upon Request: Special Color Temperature RGBW Tunable Special LED \_\_\_\_\_

#### OPTICAL

Reflector°: 8 / 14 / 34 \_\_\_\_\_  
 Adjustability: Tilt ±25° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

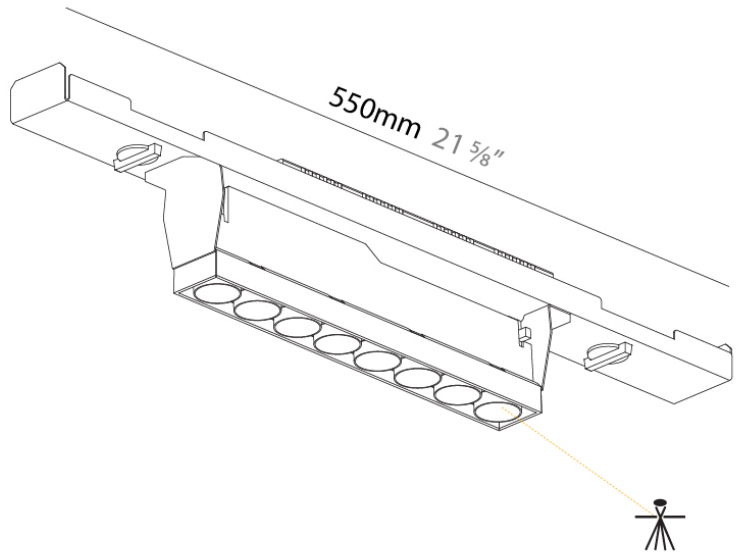

## A32L450-PLG-TRI-SYS COMPONENTS

### A35422-

#### DESCRIPTION

Magiq 8 Korona - Track Head - 26.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflector 8° / 14° / 34°

#### GENERAL

Series: Magiq \_\_\_\_\_  
 Subseries: Magiq 8 Cell Korona \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 550 \_\_\_\_\_  
 Length (in): 21 <sup>5</sup>/<sub>8</sub> \_\_\_\_\_  
 Width (mm): 49 \_\_\_\_\_  
 Width (in): 1 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 93 \_\_\_\_\_  
 Height (in): 3 <sup>11</sup>/<sub>16</sub> \_\_\_\_\_  
 Light Distribution: Adjustable / Direct \_\_\_\_\_  
 Weight (kg): 0.908 \_\_\_\_\_  
 Weight (lbs): 2 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Holder Finish: WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 20 - 29 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 26.6 \_\_\_\_\_  
 Total Output Wattage (W): 25.8 \_\_\_\_\_  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - Universal \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (MA): 1050 \_\_\_\_\_

#### LED


Delivered Lumen Range: 1000 - 1999 lm \_\_\_\_\_  
 Number of LEDs: 8 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 1561 / 1685 / 1721 / 1756 \_\_\_\_\_  
 Nominal Lumen (lm): 1760 / 1900 / 1940 / 1980 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_  
 Upon Request: Special Color Temperature RGBW Tunable Special LED \_\_\_\_\_

#### OPTICAL

Reflector°: 8 / 14 / 34 \_\_\_\_\_  
 Adjustability: Tilt ±25° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

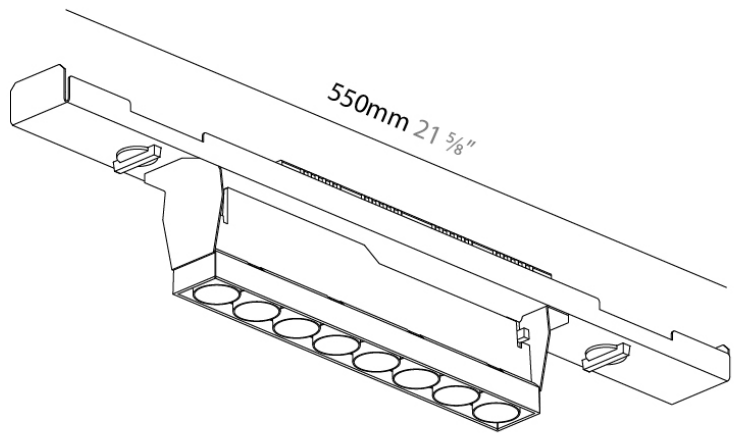

## A32L450-PLG-TRI-SYS COMPONENTS

### A35425-

#### DESCRIPTION

Magiq Wallwash - Track Head - 31.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White

#### GENERAL

Series: Magiq Wallwash  
 Subseries: Magiq Wallwash  
 Brand: Prolicht  
 Division: Architectural

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 550  
 Length (in): 21 <sup>5</sup>/<sub>8</sub>  
 Width (mm): 49  
 Width (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 114  
 Height (in): 3 <sup>11</sup>/<sub>16</sub>  
 Light Distribution: Asymmetric  
 Weight (kg): 1.134  
 Weight (lbs): 2.5  
 Fixture Finish: BLK / WHI  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 30 - 49 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 31.6  
 Total Output Wattage (W): 29.5  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 1  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 500

#### LED


Delivered Lumen Range: 2000 - 2999 lm  
 Number of LEDs: 5  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 2345 / 2339 / 2258 / 2443  
 Nominal Lumen (lm): 2375 / 2590 / 2500 / 2705  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature RGBW Tunable

#### OPTICAL

Adjustability: Tilt ±25°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

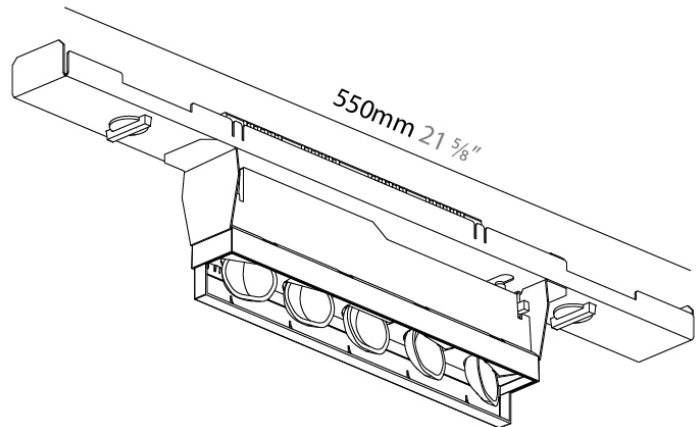

## A32L450-PLG-TRI-SYS COMPONENTS

### A380145

#### DESCRIPTION

2Look4 50 Plug - Track - Corner Connector

#### GENERAL

Series: 2Look4 50 Track

Brand: Prolicht

Division: Architectural

Mounting Location: Ceiling

#### PHYSICAL

Shape: Rectangle

Length (mm): 65

Length (in):  $2 \frac{9}{16}$

Width (mm): 65

Width (in):  $2 \frac{9}{16}$

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A380146-

#### DESCRIPTION

Magiq 4 Micro-Dot - 2Look4 50 Plug Profile Insert - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black - Dimmable - Lens - Optics 22° / 38°

#### GENERAL

Series: Magiq Micro Dot  
 Subseries: Magiq 2 Cell Micro-Dot  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 550  
 Length (in): 21 <sup>5</sup>/<sub>8</sub>  
 Width (mm): 49  
 Width (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 93  
 Height (in): 3 <sup>11</sup>/<sub>16</sub>  
 Light Distribution: Adjustable / Direct  
 Fixture Finish: BLK  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 14.3  
 Total Output Wattage (W): 12.1  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 1050

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Number of LEDs: 4  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 588 / 635 / 648 / 661  
 Nominal Lumen (lm): 880 / 950 / 970 / +990  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Optic°: 22 / 38

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

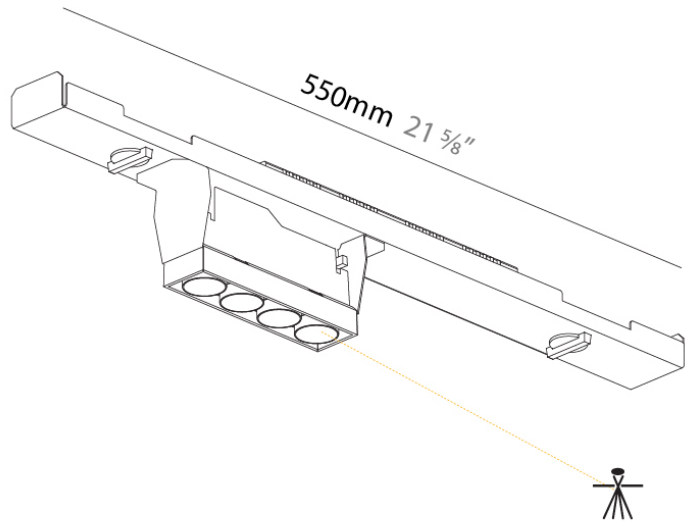

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A380147-

#### DESCRIPTION

Magiq 8 Micro-Dot - 2Look4 50 Plug Profile Insert - 26.9W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black - Lens - 22° / 38°

#### GENERAL

Series: Magiq Micro Dot  
 Subseries: Magiq 2 Cell Micro-Dot  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 550  
 Length (in): 21 <sup>5</sup>/<sub>8</sub>  
 Width (mm): 49  
 Width (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 93  
 Height (in): 3 <sup>11</sup>/<sub>16</sub>  
 Light Distribution: Downlight  
 Holder Finish: Black  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 20 - 29 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 26.9  
 Total Output Wattage (W): 24.2  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 1050

#### LED


Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 8  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1280 / 1384 / 1411 / 1440  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Optic°: 22 / 38

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

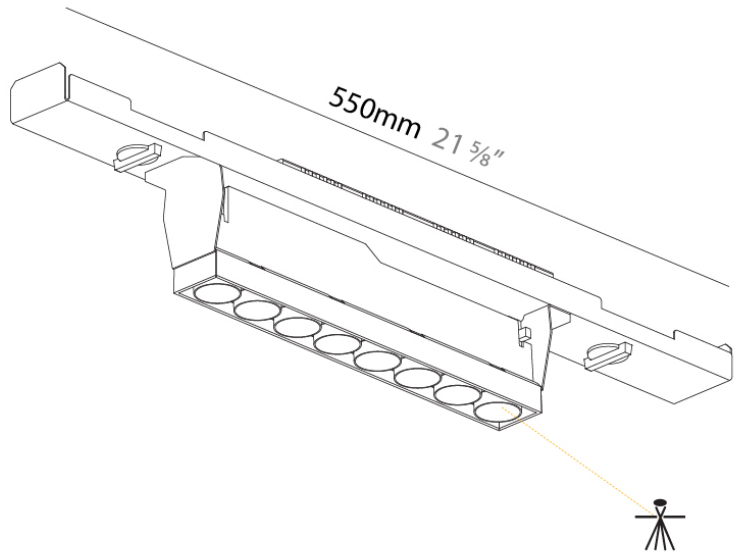



## A32L450-PLG-TRI-SYS COMPONENTS

### A38577-

#### DESCRIPTION

2Look4 50 Plug /Track - Cap Profile per Meter (Max. 3000mm)

#### GENERAL

Series: 2Look4 50 Plug

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Shape: Rectangle

Length (mm): 1000

Length (in): 39 <sup>3</sup>/<sub>8</sub>

Width (mm): 64

Width (in): 2 <sup>7</sup>/<sub>8</sub>

Height (mm): 14

Height (in): 9/16

Weight (kg): 0.129

Weight (lbs): 5/16

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

### A38578-

#### DESCRIPTION

2Look4 50 Plug/Track - End Cap -

#### GENERAL

Series: 2Look4 50 Track

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 1

Length (in): 1/16

Width (mm): 94

Width (in): 3 <sup>11</sup>/<sub>16</sub>

Height (mm): 101

Height (in): 4

Weight (kg): 0.044

Weight (lbs): 1/8

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



## A32L450-PLG-TRI-SYS COMPONENTS

### A3857900

#### DESCRIPTION

2Look4 50 Plug/Track - Linear Coupler (1 pair)

#### GENERAL

Series: 2Look4 50 Track

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Shape: Rectangle

Length (mm): 80

Length (in): 3 <sup>1</sup>/<sub>8</sub>

Width (mm): 85

Width (in): 3 <sup>3</sup>/<sub>8</sub>

Height (mm): 5

Height (in): 3/16

Weight (kg): 0.02

Weight (lbs): 1/16

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

### A3859400

#### DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 3 Wire

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 54

Length (in): 2  $\frac{1}{8}$

Width (mm): 28

Width (in): 1  $\frac{1}{8}$

Height (mm): 22

Height (in): 9/10

Weight (kg): 0.01

Weight (lbs): 0.022

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

## A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

### A3859500

#### DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 5 Wire

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 54

Length (in): 2  $\frac{1}{8}$

Width (mm): 28

Width (in): 1  $\frac{1}{8}$

Height (mm): 22

Height (in): 9/10

Weight (kg): 0.01

Weight (lbs): 3/8

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



## A32L450-PLG-TRI-SYS COMPONENTS

### A3859600

#### DESCRIPTION

2Look4Light Imagine - Plug Connectors - 3 Wire

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 38

Length (in): 1 1/2

Width (mm): 28

Width (in): 1 1/8

Height (mm): 13

Height (in): 1/2

Weight (kg): 0.01

Weight (lbs): 0.022

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

## A32L450-PLG-TRI-SYS COMPONENTS

### A3859700

#### DESCRIPTION

2Look4Light Systems - Plug Connectors - 5 Wire

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 38

Length (in): 1 1/2

Width (mm): 24

Width (in): 15/16

Height (mm): 14

Height (in): 9/16

Weight (kg): 0.01

Weight (lbs): 0.022

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

### A3859800

#### DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 1000m

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 1000

Length (in): 39 <sup>3</sup>/<sub>8</sub>

Width (mm): 28

Width (in): 1 <sup>1</sup>/<sub>8</sub>

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.27

Weight (lbs): 0.60

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE





## A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

### A3859900

#### DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 2000mm

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 2000

Length (in): 78 <sup>3</sup>/<sub>4</sub>

Width (mm): 28

Width (in): 1 <sup>1</sup>/<sub>8</sub>

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



## A32L450-PLG-TRI-SYS COMPONENTS

### A3860000

#### DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 3000mm

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 3000

Length (in): 118  $\frac{1}{8}$

Width (mm): 28

Width (in): 1  $\frac{1}{8}$

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

### A3860100

#### DESCRIPTION

2Look4 Systems - Plug Connector 3X0.75 - 1000mm Cable

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 1000

Length (in): 39 <sup>3</sup>/<sub>8</sub>

Width (mm): 28

Width (in): 1 <sup>1</sup>/<sub>8</sub>

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.191

Weight (lbs): 0.42

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

### A3860200

#### DESCRIPTION

2Look4 Systems - Plug Connector 3x0.75 - 2000mm

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 2000

Length (in): 78 <sup>3</sup>/<sub>4</sub>

Width (mm): 28

Width (in): 1 <sup>1</sup>/<sub>8</sub>

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.191

Weight (lbs): 0.42

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



## A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

### A3860300

#### DESCRIPTION

2Look4 Systems - Plug Connector 3x0.75 - 3000mm

#### GENERAL

Series: 2Look4 80

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 3000

Length (in): 118  $\frac{1}{8}$

Width (mm): 28

Width (in): 1  $\frac{1}{8}$

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.091

Weight (lbs): 0.20

Fixture Material: Plastic

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



## A32L450-PLG-TRI-SYS COMPONENTS TRIMLESS

PROJECT

TYPE

NOTES

QUANTITY

DATE

### A38606-

#### DESCRIPTION

2Look4 50 Plug - Aluminum Profile Per Meter -

#### GENERAL

Series: 2Look4 50 Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Trimless

Mounting Location: Ceiling

Subcategory: Profile

#### PHYSICAL

Shape: Rectangle

Length (mm): 3000

Length (in): 118 <sup>7</sup>/<sub>16</sub>

Width (mm): 50

Width (in): 1 <sup>15</sup>/<sub>16</sub>

Height (mm): 101

Height (in): 4

Weight (kg): 2.746

Weight (lbs): 6 1/16

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38844-

#### DESCRIPTION

Centriq - Track Head - 12.1W / 14.7W - LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Beam 10°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 59  
 Diameter (in): 2 5/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 80  
 Height (in): 3 1/8  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 0.868  
 Weight (lbs): 1.914  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 12.1 / 14.7  
 Total Output Wattage (W): 11 / 13.4  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 350

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 520 / 580 / 627 / 640  
 Nominal Lumen (lm): 960 / 1070 / 1157 / 1180  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Beam Angle: 10  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

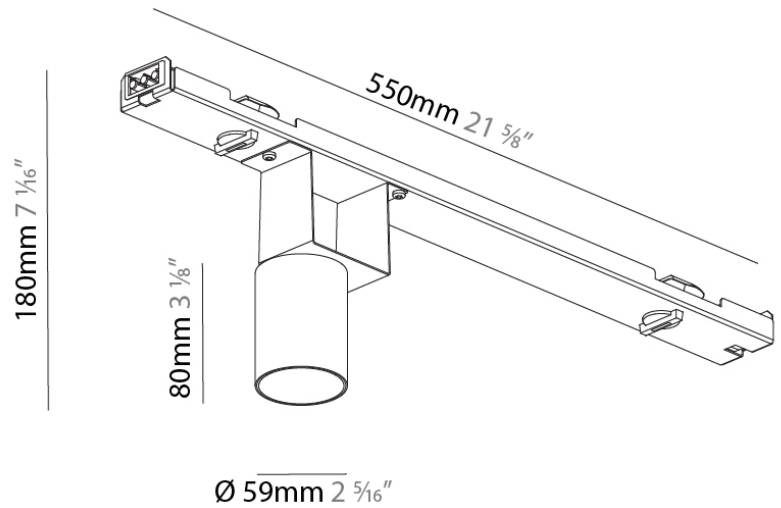

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38845-

#### DESCRIPTION

Centriq - Track Head - 13.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors: 20° / 40° / 60°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 59  
 Diameter (in): 2 5/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 80  
 Height (in): 3 1/8  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 0.868  
 Weight (lbs): 1.914  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 13.4  
 Total Output Wattage (W): 12.2  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 350

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 890 / 920 / 970 / 990  
 Nominal Lumen (lm): 1304 / 1352 / 1421 / 1450  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Reflector°: 20 / 40 / 60  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

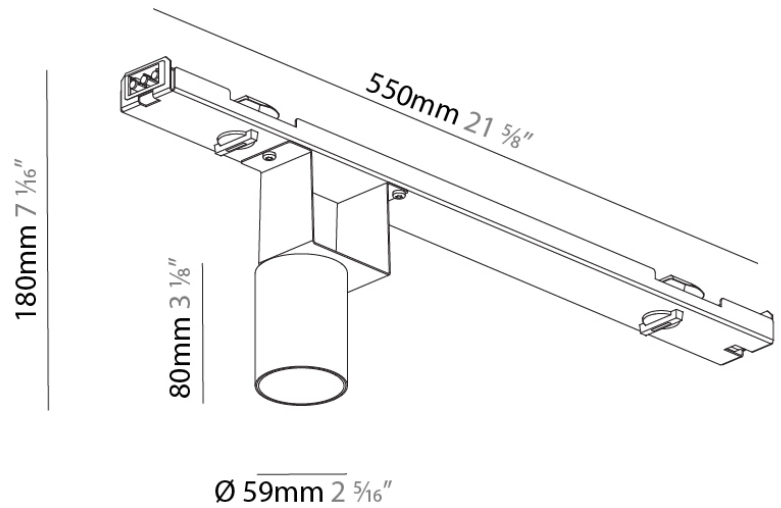



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38846-

#### DESCRIPTION

Centriq - Track Head - 18.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 20° / 25° / 40°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 75  
 Diameter (in): 2 15/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 125  
 Height (in): 4 15/16  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.047  
 Weight (lbs): 2.31  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 18.7  
 Total Output Wattage (W): 17  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 500

#### LED


Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1450 / 1490 / 1568 / 1600  
 Nominal Lumen (lm): 2360 / 2420 / 2548 / 2600  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Reflector°: 20 / 25 / 40  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

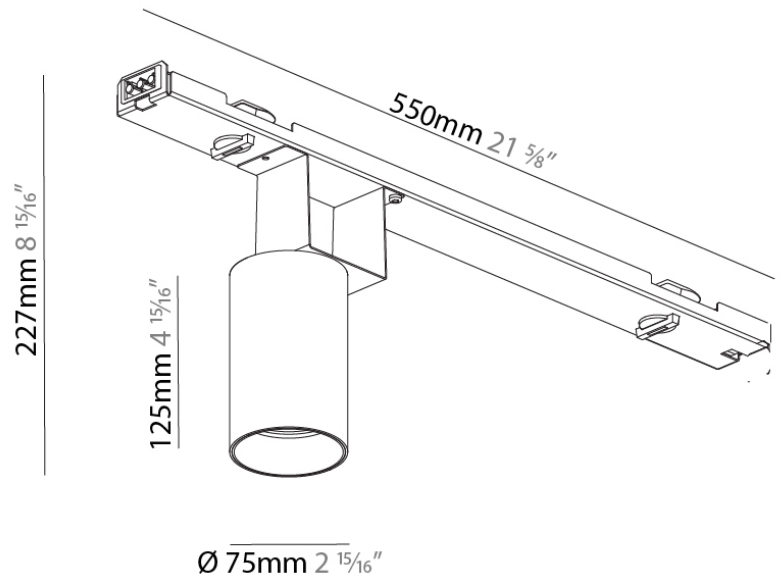

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38847-

#### DESCRIPTION

Centriq - Track Head - 26.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 20° / 25° / 40°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 75  
 Diameter (in): 2 15/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 125  
 Height (in): 4 15/16  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.047  
 Weight (lbs): 2.31  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 20 - 29 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 26.4  
 Total Output Wattage (W): 24  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 700

#### LED


Delivered Lumen Range: 2000 - 2999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1970 / 2020 / 2105 / 2170  
 Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Reflector°: 20 / 25 / 40  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

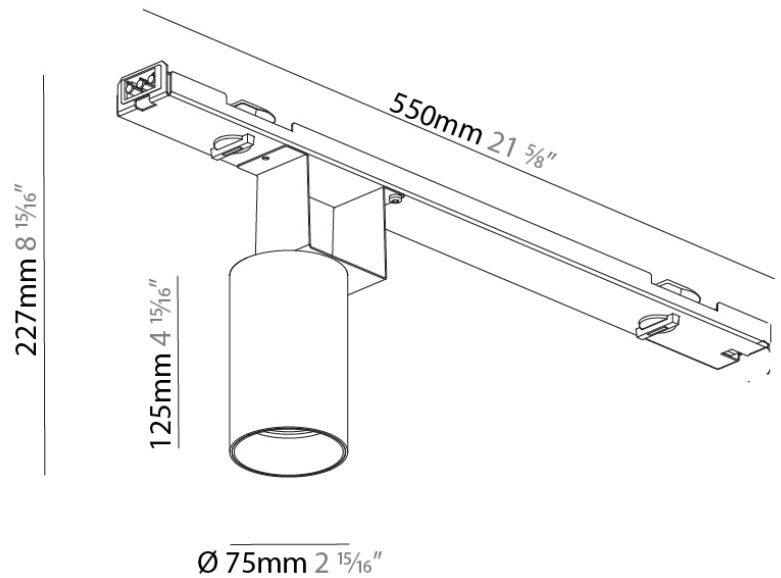

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38848-

#### DESCRIPTION

Centriq - Track Head - 12.1W / 14.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Beam 10°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 75  
 Diameter (in): 2 15/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 125  
 Height (in): 4 15/16  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.041  
 Weight (lbs): 2.30  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 12.1 / 14.7  
 Total Output Wattage (W): 11 / 13.4  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 350

#### LED


Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 870 / 970 / 1039 / 1060  
 Nominal Lumen (lm): 960 / 1070 / 1156 / 1180  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Beam Angle: 10  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

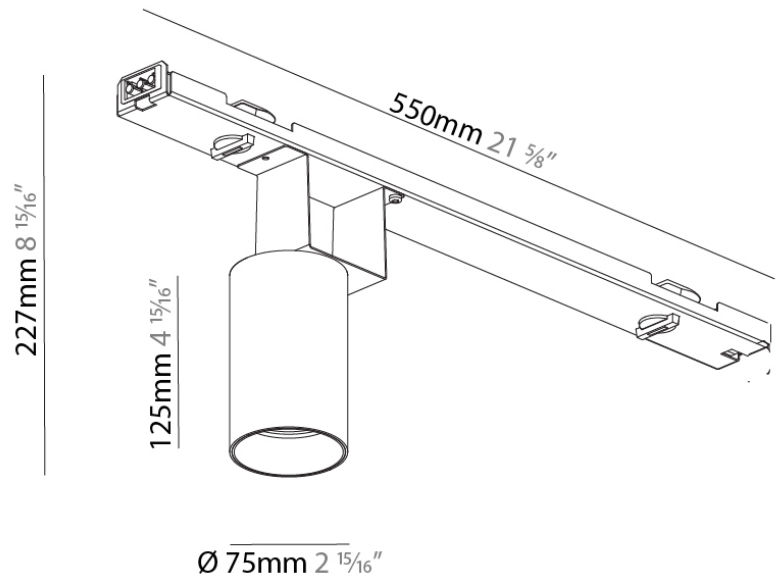

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38849-

#### DESCRIPTION

Centriq - Track Head - 18.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 18° / 26° / 40°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 95  
 Diameter (in): 3 13/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 150  
 Height (in): 5 7/8  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.69  
 Weight (lbs): 3.73  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 20.9  
 Total Output Wattage (W): 17  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 500

#### LED


Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1630 / 1670 / 1754 / 1790  
 Nominal Lumen (lm): 2360 / 2420 / 2548 / 2600  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special LED

#### OPTICAL

Reflector°: 18 / 26 / 40  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

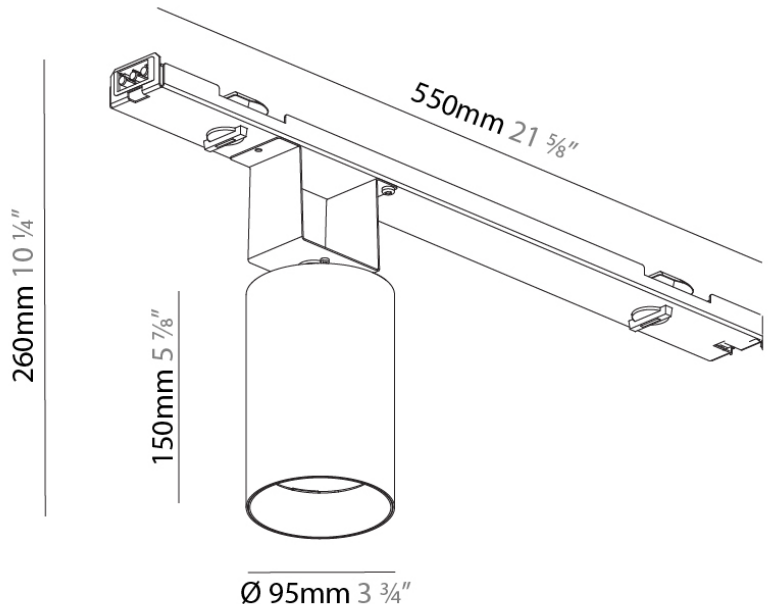

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38850-

#### DESCRIPTION

Centriq - Track Head - 26.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 18° / 26° / 40°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 95  
 Diameter (in): 3 13/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 150  
 Height (in): 5 7/8  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.69  
 Weight (lbs): 3.73  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 20 - 29 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 26.4  
 Total Output Wattage (W): 24  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 700

#### LED


Delivered Lumen Range: 2000 - 2999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 2210 / 2270 / 2391 / 2440  
 Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Reflector°: 18 / 26 / 40  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

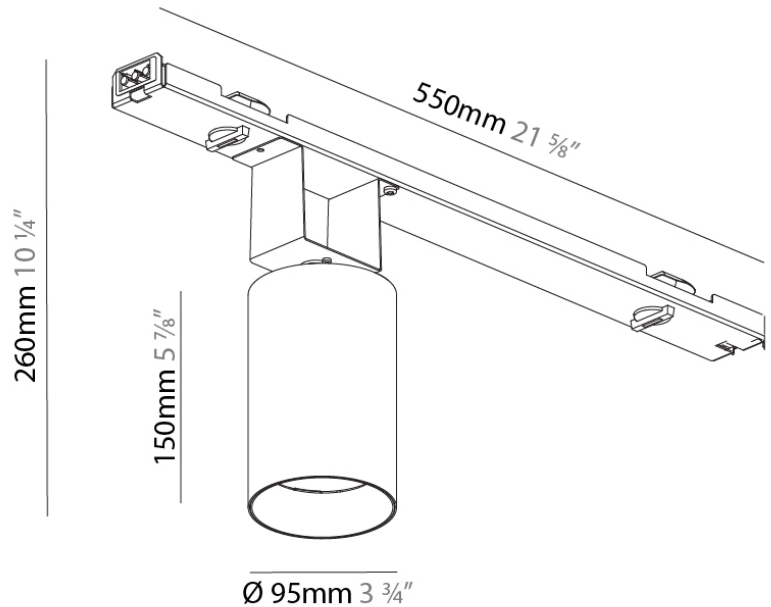

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38851-

#### DESCRIPTION

Centriq - Track Head - 12.1W / 14.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Beam 10°

#### GENERAL

Series: Centriq  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 95  
 Diameter (in): 3 13/16  
 Length (mm): 550  
 Length (in): 21 5/8  
 Height (mm): 150  
 Height (in): 5 7/8  
 Light Distribution: Adjustable / Direct  
 Weight (kg): 1.69  
 Weight (lbs): 3.73  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 12.1 / 14.7  
 Total Output Wattage (W): 11 / 13.4  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 350

#### LED


Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 830 / 930 / 1009 / 1030  
 Nominal Lumen (lm): 960 / 1070 / 1156 / 1180  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature Special Led

#### OPTICAL

Beam Angle: 10  
 Adjustability: Rotational 340°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

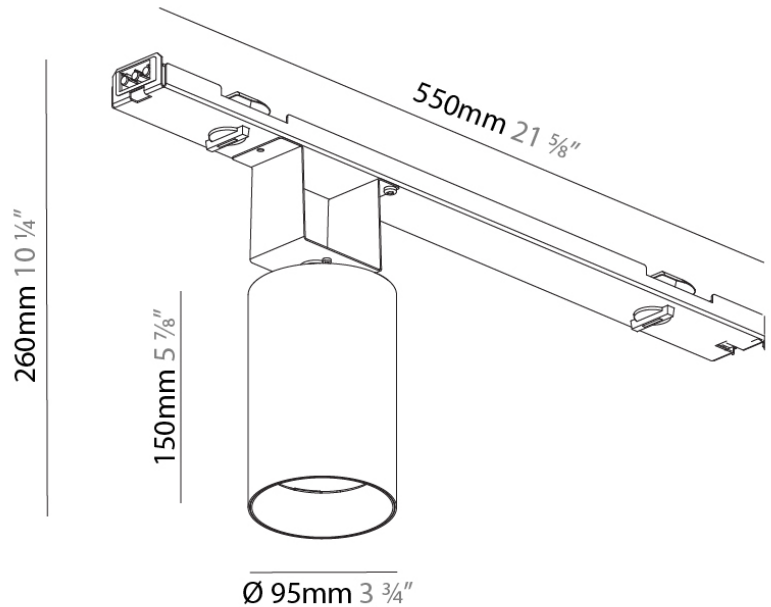

## A32L450-PLG-TRI-SYS COMPONENTS

### A38853-

#### DESCRIPTION

Magiq 4 Korona - Track Head - 13.3W LED (Zhaga Standard) - 2700K - White - Reflectors 10° / 20° / 40°

#### GENERAL

Series: Magiq \_\_\_\_\_  
 Subseries: Magiq 4 Cell Korona \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Length (mm): 550 \_\_\_\_\_  
 Length (in): 21 <sup>19</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 49 \_\_\_\_\_  
 Width (in): 1 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 93 \_\_\_\_\_  
 Height (in): 3 <sup>11</sup>/<sub>16</sub> \_\_\_\_\_  
 Light Distribution: Adjustable / Direct \_\_\_\_\_  
 Weight (kg): 0.902 \_\_\_\_\_  
 Weight (lbs): 2 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 13.3 \_\_\_\_\_  
 Total Output Wattage (W): 12 \_\_\_\_\_  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - Universal \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (MA): 1050 \_\_\_\_\_

#### LED


Delivered Lumen Range: 500 - 999 lm \_\_\_\_\_  
 Number of LEDs: 4 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 783 / 848 / 862 / 880 \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_  
 Upon Request: Special Color Temperature RGBW Tunable Special LED \_\_\_\_\_

#### OPTICAL

Reflector°: 10 / 20 / 40 \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

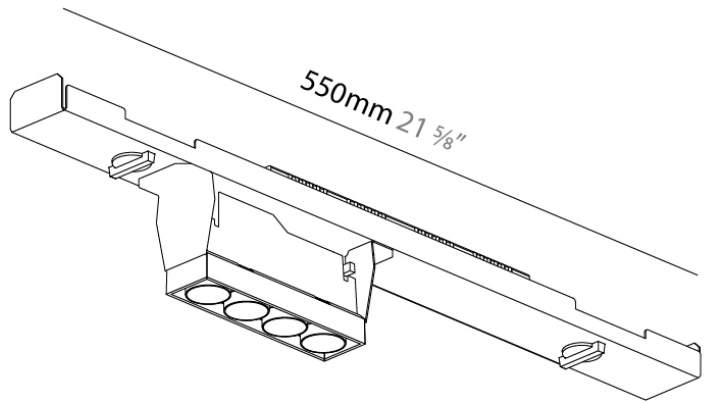

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38856-

#### DESCRIPTION

Magiq Hollow Wallwash - Track Head - 19.0W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Black

#### GENERAL

Series: Magiq Hollow Wallwash  
 Subseries: Magiq Hollow Wallwash Black  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 450  
 Length (in): 17 <sup>13</sup>/<sub>16</sub>  
 Width (mm): 49  
 Width (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 99  
 Height (in): 3 <sup>14</sup>/<sub>16</sub>  
 Light Distribution: Asymmetric  
 Weight (kg): 0.962  
 Weight (lbs): 2.12  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19.0  
 Total Output Wattage (W): 17.3  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (MA): 700

#### LED


Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 8  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 1113 / 1177 / 1346  
 Nominal Lumen (lm): 1328.2 / 1404.5 / 1606.3  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature RGBW Tunable

#### OPTICAL

Adjustability: Tilt ±25°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

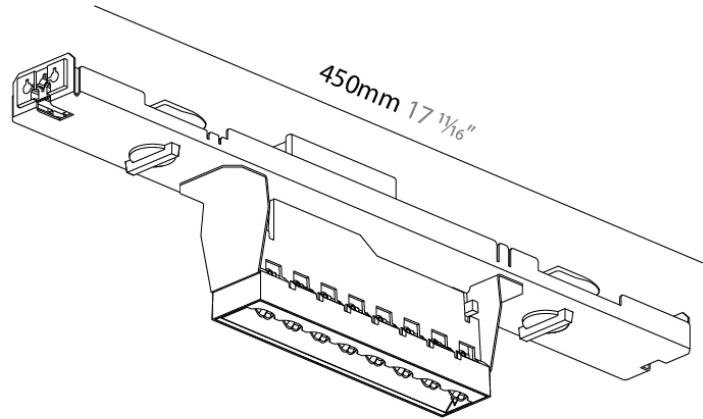



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A32L450-PLG-TRI-SYS COMPONENTS TRACK

### A38858-

#### DESCRIPTION

Magiq Hollow Wallwash Korona - Track Head - 19.0W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Black

#### GENERAL

Series: Magiq Hollow Wallwash  
 Subseries: Magiq Hollow Wallwash Korona  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 450  
 Length (in): 17 <sup>11</sup>/<sub>16</sub>  
 Width (mm): 49  
 Width (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 99  
 Height (in): 1 <sup>15</sup>/<sub>16</sub>  
 Light Distribution: Asymmetric  
 Weight (kg): 0.962  
 Weight (lbs): 2.12  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19.0  
 Total Output Wattage (W): 17.3  
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (mA): 700

#### LED


Delivered Lumen Range: 1000 - 1999 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 1113 / 1177 / 1346  
 Nominal Lumen (lm): 1328.2 / 1404.5 / 1606.3  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature RGBW Tunable

#### OPTICAL

Adjustability: Tilt ±25°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

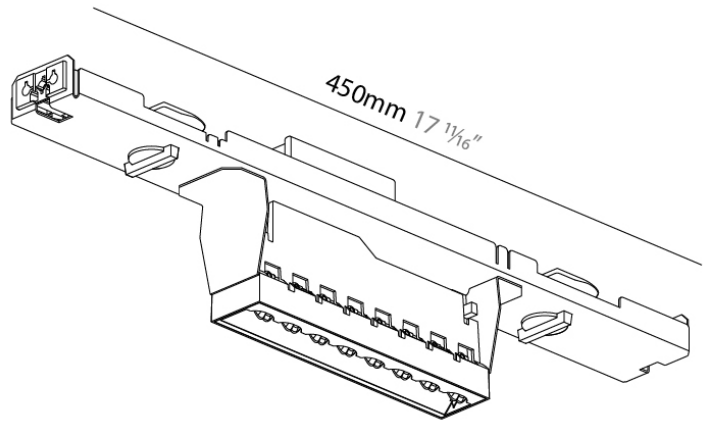

### LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)