

A32L450-PLG-TRI-SYS COMPONENTS

A35413-

DESCRIPTION

Magiq 4 - Track Head - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White - Reflector 8° / 14° / 34°

GENERAL

Series: Magiq _____
 Subseries: Magiq 4 Cell _____
 Partner: Prolicht _____
 Division: Architectural _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 510 _____
 Length (in): 20 ¹/₁₆ _____
 Width (mm): 49 _____
 Width (in): 1 ¹⁵/₁₆ _____
 Height (mm): 93 _____
 Height (in): 3 ¹¹/₁₆ _____
 Weight (kg): 0.902 _____
 Weight (lbs): 1.99 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum Die Cast _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 13.3 _____
 Total Output Wattage (W): 12.9 _____
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Constant Current (mA): 1050 _____

LED


Delivered Lumen Range: 500 - 999 lm _____
 Number of LEDs: 4 _____
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 _____
 Max. Delivered Lumen (lm): 781 / 843 / 860 / 878 _____
 Nominal Lumen (lm): 880 / 950 / 970 / 990 _____
 CRI: >90 CRI _____
 Efficiency (%): 80 _____
 Lamp Life (hrs): 50000 _____
 Upon Request: Special Color Temperature RGBW Tunable Special LED _____

OPTICAL

Reflector: 8 / 14 / 34 _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

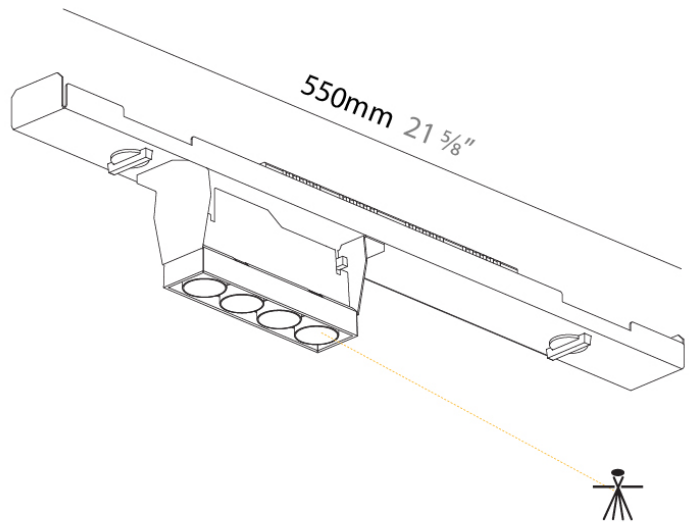

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS

A35416-

DESCRIPTION

Magiq 4 Korona - Track Head - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflector: 8° / 18° / 34°

GENERAL

Series: Magiq
 Subseries: Magiq 4 Cell Korona
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable / Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 550
 Length (in): 21 ¹⁰/₁₆
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 93
 Height (in): 3 ¹¹/₁₆
 Weight (kg): 0.902
 Weight (lbs): 1.99
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 13.3
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 1050

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 4
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 781 / 843 / 878
 Nominal Lumen (lm): 880 / 950 / 990
 CRI: >90 CRI
 Efficiency (%): 80
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature RGBW Tunable Special LED

OPTICAL

Reflector°: 8 / 18 / 34
 Adjustability: Tilt ±25°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

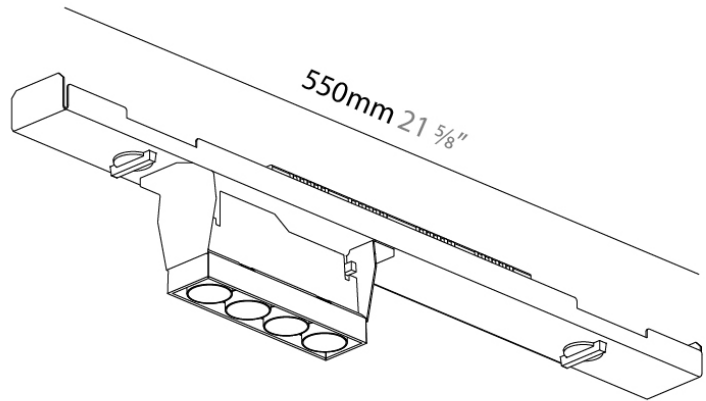

A32L450-PLG-TRI-SYS COMPONENTS

A35419-

DESCRIPTION

Magiq 8 - Track Head - 26.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White Base - Reflector 8° / 14° / 34°

GENERAL

Series: Magiq
 Subseries: Magiq 8 Cell
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable / Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 550
 Length (in): 21 5/8
 Width (mm): 49
 Width (in): 1 15/16
 Height (mm): 93
 Height (in): 3 11/16
 Weight (kg): 0.908
 Weight (lbs): 2
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30
 Total Output Wattage (W): 26
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 1050

LED


Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 8
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1561 / 1685 / 1809 / 1756
 Nominal Lumen (lm): 1760 / 1900 / 2040 / 1980
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature RGBW Tunable Special LED

OPTICAL

Reflector°: 8 / 14 / 34
 Adjustability: Tilt ±25°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

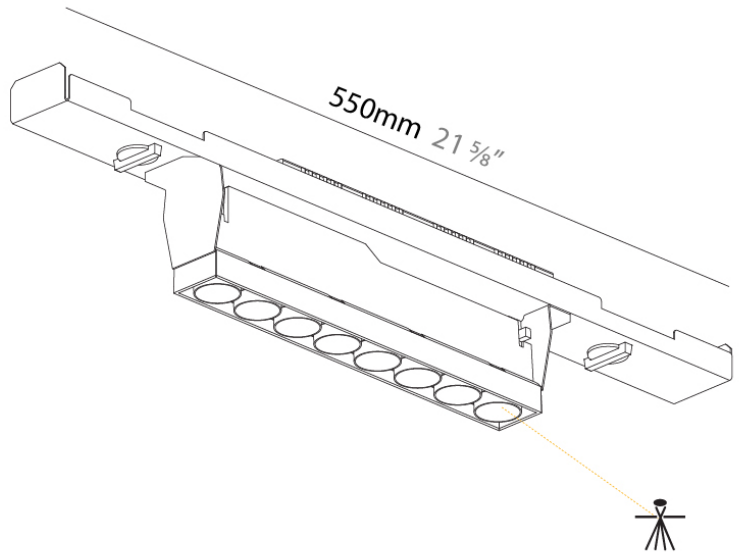

A32L450-PLG-TRI-SYS COMPONENTS

A35422-

DESCRIPTION

Magiq 8 Korona - Track Head - 26.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflector 8° / 14° / 34°

GENERAL

Series: Magiq _____
 Subseries: Magiq 8 Cell Korona _____
 Partner: Prolicht _____
 Division: Architectural _____
 Light Distribution: Adjustable / Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 550 _____
 Length (in): 21 ⁵/₈ _____
 Width (mm): 49 _____
 Width (in): 1 ¹⁵/₁₆ _____
 Height (mm): 93 _____
 Height (in): 3 ¹¹/₁₆ _____
 Weight (kg): 0.908 _____
 Weight (lbs): 2 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Holder Finish: WHI / BLK _____
 Fixture Material: Aluminum Die Cast _____

ELECTRICAL

Input Wattage Range: 20 - 29 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 26.6 _____
 Total Output Wattage (W): 25.8 _____
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Constant Current (MA): 1050 _____

LED


Delivered Lumen Range: 1000 - 1999 lm _____
 Number of LEDs: 8 _____
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 _____
 Max. Delivered Lumen (lm): 1561 / 1685 / 1721 / 1756 _____
 Nominal Lumen (lm): 1760 / 1900 / 1940 / 1980 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____
 Upon Request: Special Color Temperature RGBW Tunable Special LED _____

OPTICAL

Reflector°: 8 / 14 / 34 _____
 Adjustability: Tilt ±25° _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

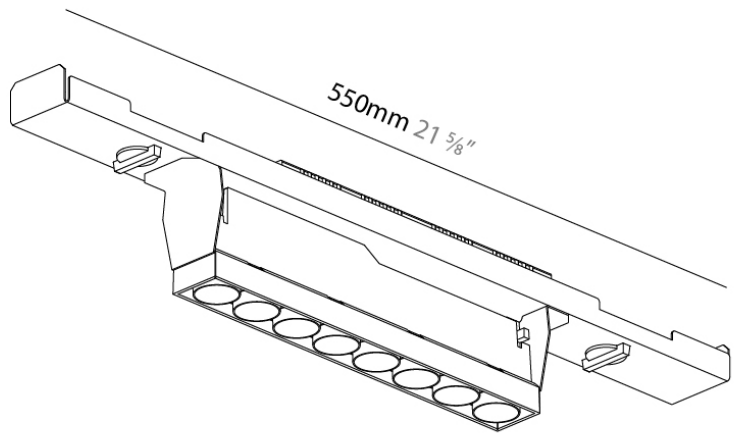

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS

A35425-

DESCRIPTION

Magiq Wallwash - Track Head - 31.6W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black or White

GENERAL

Series: Magiq Wallwash
 Subseries: Magiq Wallwash
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Asymmetric

PHYSICAL

Shape: Rectangle
 Length (mm): 550
 Length (in): 21 ⁵/₈
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 114
 Height (in): 3 ¹¹/₁₆
 Weight (kg): 1.134
 Weight (lbs): 2.5
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 31.6
 Total Output Wattage (W): 29.5
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 1
 Input Voltage (V): 120 - 277
 Constant Current (mA): 500

LED


Delivered Lumen Range: 2000 - 2999 lm
 Number of LEDs: 5
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2345 / 2339 / 2258 / 2443
 Nominal Lumen (lm): 2375 / 2590 / 2500 / 2705
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature RGBW Tunable

OPTICAL

Adjustability: Tilt ±25°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

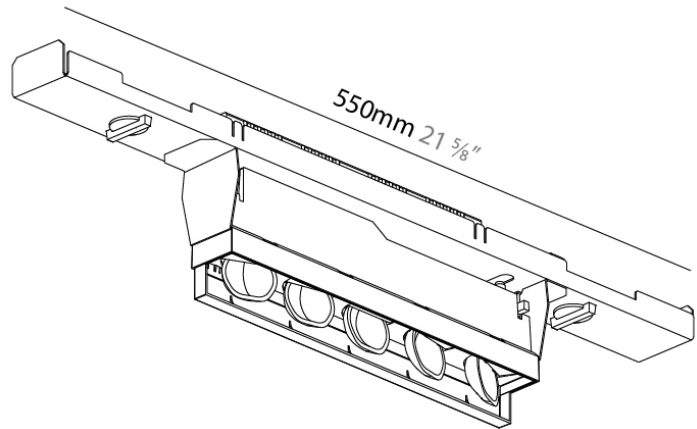

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A380146-

DESCRIPTION

Magiq 4 Micro-Dot - 2Look4 50 Plug Profile Insert - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black - Dimmable - Lens - Optics 22° / 38°

GENERAL

Series: Magiq Micro Dot
 Subseries: Magiq 2 Cell Micro-Dot
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 550
 Length (in): 21 ⁵/₈
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 93
 Height (in): 3 ¹¹/₁₆
 Fixture Finish: BLK
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14.3
 Total Output Wattage (W): 12.1
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 1050

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 4
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 588 / 635 / 648 / 661
 Nominal Lumen (lm): 880 / 950 / 970 / +990
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 22 / 38

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

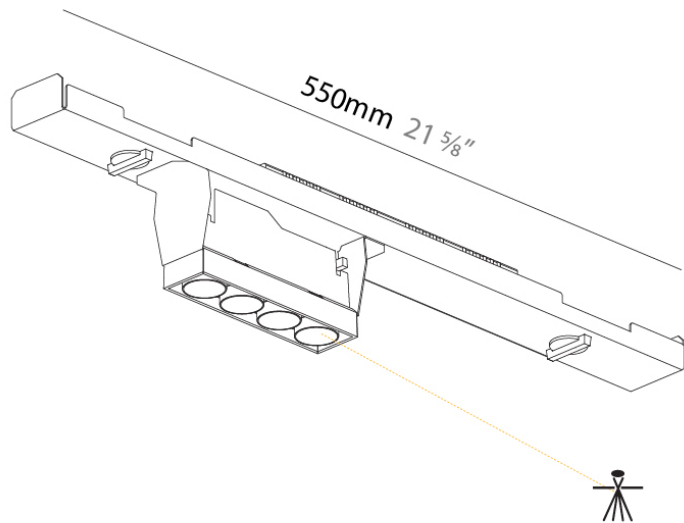

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A380147-

DESCRIPTION

Magiq 8 Micro-Dot - 2Look4 50 Plug Profile Insert - 26.9W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Black - Lens - 22° / 38°

GENERAL

Series: Magiq Micro Dot
 Subseries: Magiq 2 Cell Micro-Dot
 Partner: Prolight
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Rectangle
 Length (mm): 550
 Length (in): 21 ⁵/₈
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 93
 Height (in): 3 ¹¹/₁₆
 Holder Finish: Black
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 26.9
 Total Output Wattage (W): 24.2
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (mA): 1050

LED


Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 8
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1280 / 1384 / 1411 / 1440
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 22 / 38

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

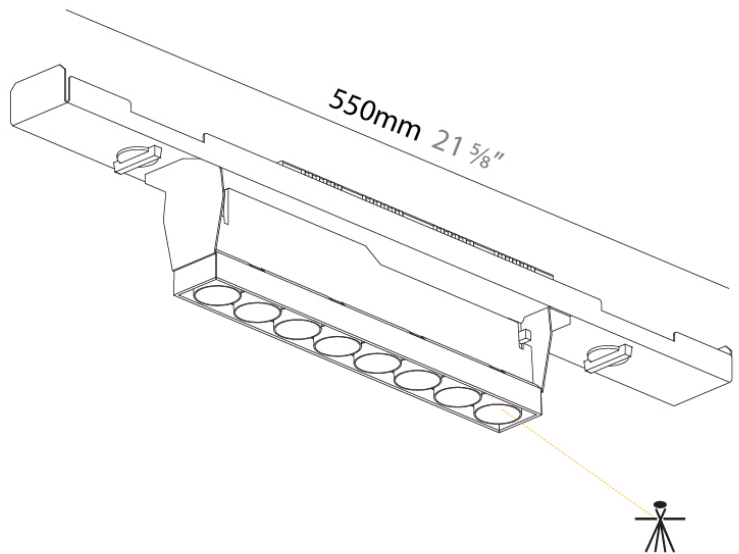

A32L450-PLG-TRI-SYS COMPONENTS

A38577-

DESCRIPTION

2Look4 50 Plug /Track - Cap Profile per Meter (Max. 3000mm)

GENERAL

Series: 2Look4 50 Plug

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 1000

Length (in): $39 \frac{3}{8}$

Width (mm): 64

Width (in): $2 \frac{7}{8}$

Height (mm): 14

Height (in): $9/16$

Weight (kg): 0.129

Weight (lbs): $5/16$

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

A38578-

DESCRIPTION

2Look4 50 Plug/Track - End Cap -

GENERAL

Series: 2Look4 50 Track

Partner: Prolight

Division: Architectural

PHYSICAL

Length (mm): 1

Length (in): 1/16

Width (mm): 94

Width (in): 3 ¹¹/₁₆

Height (mm): 101

Height (in): 4

Weight (kg): 0.044

Weight (lbs): 1/8

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

A3857900

DESCRIPTION

2Look4 50 Plug/Track - Linear Coupler (1 pair)

GENERAL

Series: 2Look4 50 Track

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 80

Length (in): 3 $\frac{1}{8}$

Width (mm): 85

Width (in): 3 $\frac{3}{8}$

Height (mm): 5

Height (in): 3/16

Weight (kg): 0.02

Weight (lbs): 1/16

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

A3859400

DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 3 Wire

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 54

Length (in): 2 1/8

Width (mm): 28

Width (in): 1 1/8

Height (mm): 22

Height (in): 9/10

Weight (kg): 0.01


Weight (lbs): 0.022

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

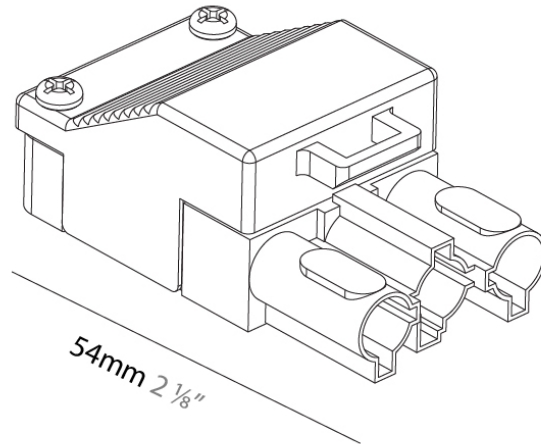

A32L450-PLG-TRI-SYS COMPONENTS

A3859500

DESCRIPTION

2Look4Light Imagine - Power Feed Socket - 5 Wire

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 54

Length (in): 2 ¹/₈

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 9/10

Weight (kg): 0.01



Weight (lbs): 3/8

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

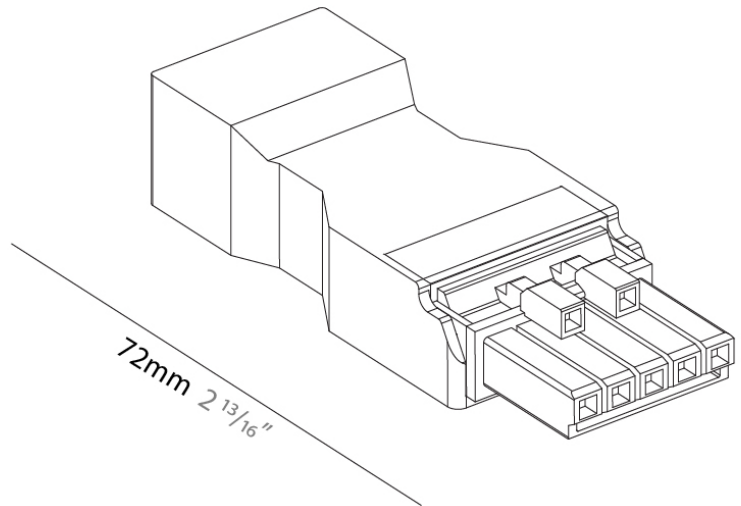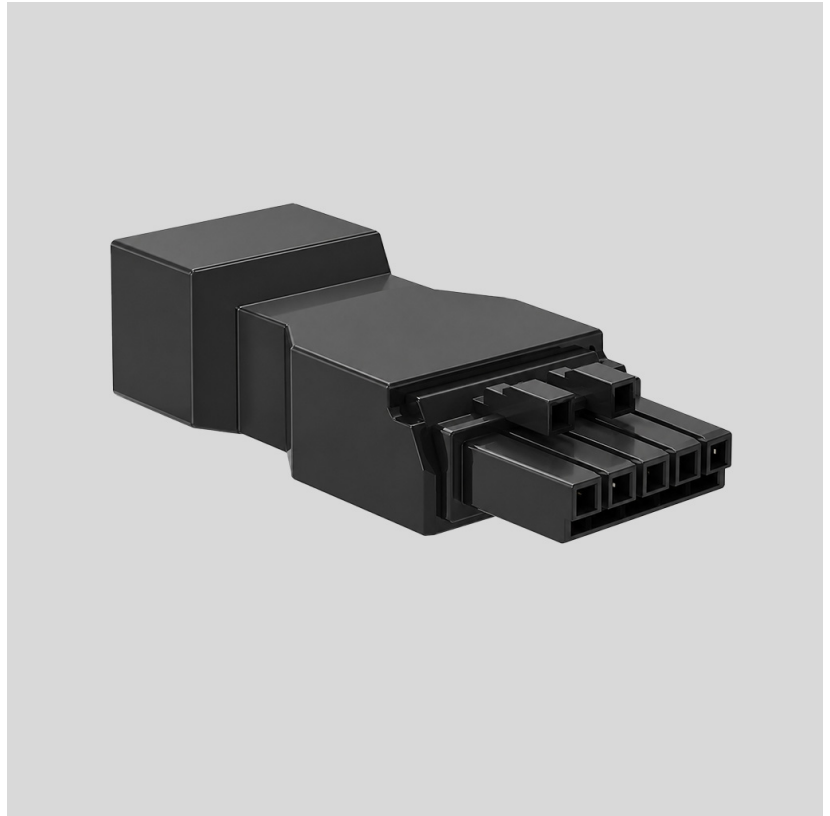

A32L450-PLG-TRI-SYS COMPONENTS



A3859600

DESCRIPTION
 2Look4Light Imagine - Plug Connectors - 3 Wire

GENERAL
 Series: 2Look4 80
 Partner: Prolight
 Division: Architectural

PHYSICAL
 Length (mm): 38
 Length (in): 1 1/2
 Width (mm): 28
 Width (in): 1 1/8
 Height (mm): 13
 Height (in): 1/2
 Weight (kg): 0.01
 Weight (lbs): 0.022
 Fixture Material: Plastic

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

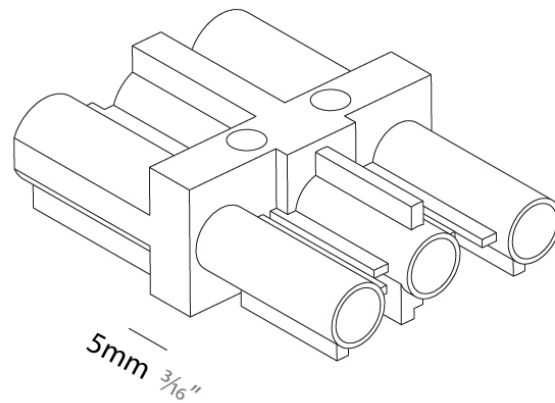

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS

A3859700

DESCRIPTION

2Look4Light Systems - Plug Connectors - 5 Wire

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 38

Length (in): 1 1/2

Width (mm): 24

Width (in): 15/16

Height (mm): 14

Height (in): 9/16


Weight (kg): 0.01

Weight (lbs): 0.022

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

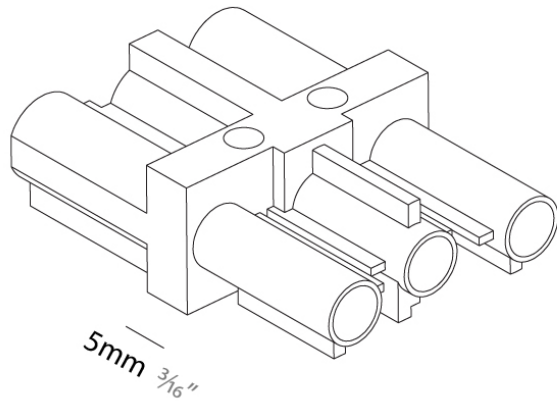

A32L450-PLG-TRI-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3859800

DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 1000m

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 1000

Length (in): 39 ³/₈

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.27

Weight (lbs): 0.60

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

A3859900

DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 2000mm

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 2000

Length (in): 78 ³/₄

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

A3860000

DESCRIPTION

2Look4 Systems - Plug Connector 5x1.0 - 3000mm

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 3000

Length (in): 118 ¹/₈

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.3

Weight (lbs): 0.66

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

A3860100

DESCRIPTION

2Look4 Systems - Plug Connector 3X0.75 - 1000mm Cable

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 1000

Length (in): 39 ³/₈

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.191

Weight (lbs): 0.42

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3860200

DESCRIPTION

2Look4 Systems - Plug Connector 3x0.75 - 2000mm

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 2000

Length (in): 78 ³/₄

Width (mm): 28

Width (in): 1 ¹/₈

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.191

Weight (lbs): 0.42

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS

A3860300

DESCRIPTION

2Look4 Systems - Plug Connector 3x0.75 - 3000mm

GENERAL

Series: 2Look4 80

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 3000

Length (in): 118 $\frac{1}{8}$

Width (mm): 28

Width (in): 1 $\frac{1}{8}$

Height (mm): 22

Height (in): 7/8

Weight (kg): 0.091

Weight (lbs): 0.20

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A32L450-PLG-TRI-SYS COMPONENTS TRIMLESS

PROJECT

TYPE

NOTES

QUANTITY

DATE

A38606-

DESCRIPTION

2Look4 50 Plug - Aluminum Profile Per Meter -

GENERAL

Series: 2Look4 50 Plug

Partner: Prolicht

Division: Architectural

Installation: Trimless

Product Type: Linear Profiles

Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle

Length (mm): 3000

Length (in): 118 $\frac{7}{16}$

Width (mm): 50

Width (in): 1 $\frac{15}{16}$

Height (mm): 101

Height (in): 4

Weight (kg): 2.746

Weight (lbs): 6 $\frac{1}{16}$

Fixture Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38844-

DESCRIPTION

Centriq - Track Head - 12.1W / 14.7W - LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Beam 10°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 59
 Diameter (in): 2 ⁵/₁₆
 Length (mm): 550
 Length (in): 21 ⁵/₈
 Height (mm): 80
 Height (in): 3 ¹/₈
 Weight (kg): 0.868
 Weight (lbs): 1.914
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.1 / 14.7
 Total Output Wattage (W): 11 / 13.4
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 520 / 580 / 627 / 640
 Nominal Lumen (lm): 960 / 1070 / 1157 / 1180
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature Special Led

OPTICAL

Beam Angle: 10
 Adjustability: Rotational 340°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

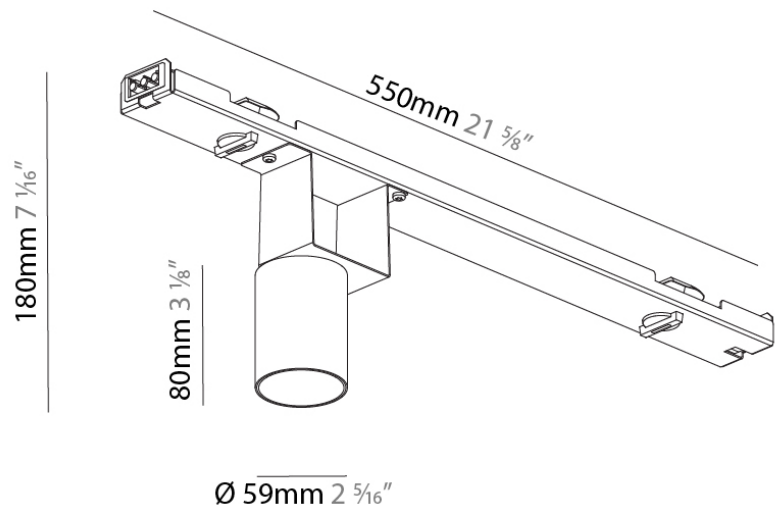

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38845-

DESCRIPTION

Centriq - Track Head - 13.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors: 16° / 32° / 46°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 59
 Diameter (in): 2 5/16
 Length (mm): 550
 Length (in): 21 5/8
 Height (mm): 80
 Height (in): 3 1/8
 Weight (kg): 0.868
 Weight (lbs): 1.914
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 13.4
 Total Output Wattage (W): 12.2
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 890 / 920 / 970 / 990
 Nominal Lumen (lm): 1304 / 1352 / 1421 / 1450
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature Special Led

OPTICAL

Reflector°: 16 / 32 / 46
 Adjustability: Rotational 340°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

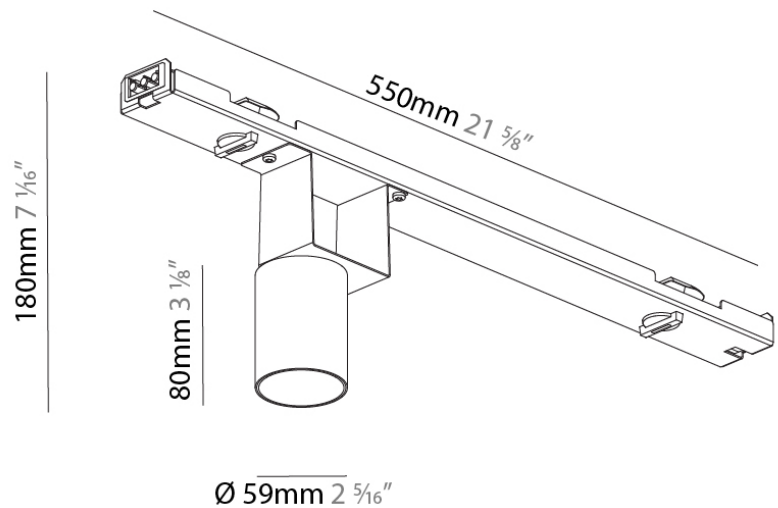

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38846-

DESCRIPTION

Centriq - Track Head - 18.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 20° / 25° / 40°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Length (mm): 550
 Length (in): 21 5/8
 Height (mm): 125
 Height (in): 4 15/16
 Weight (kg): 1.047
 Weight (lbs): 2.31
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.7
 Total Output Wattage (W): 17
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 500

LED


Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1450 / 1490 / 1568 / 1600
 Nominal Lumen (lm): 2360 / 2420 / 2548 / 2600
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature Special Led

OPTICAL

Reflector°: 20 / 25 / 40
 Adjustability: Rotational 340°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

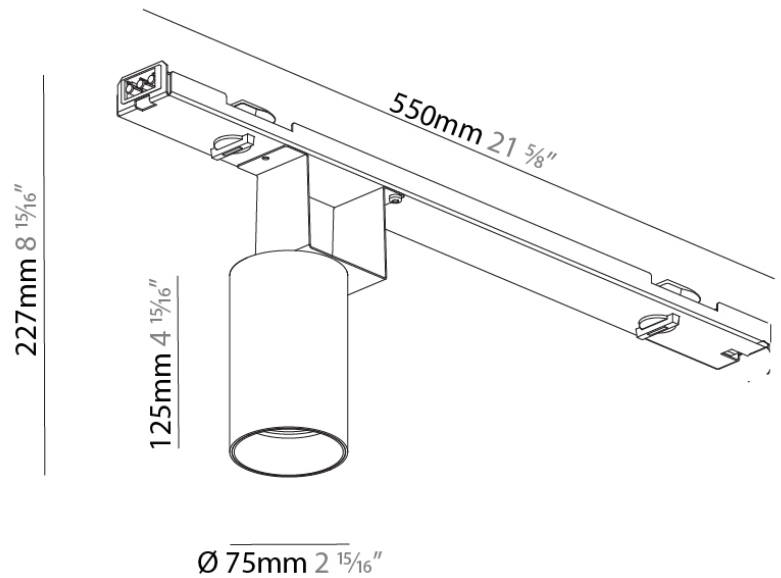

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38847-

DESCRIPTION

Centriq - Track Head - 26.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Reflectors 20° / 25° / 40°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Length (mm): 550
 Length (in): 21 5/8
 Height (mm): 125
 Height (in): 4 15/16
 Weight (kg): 1.047
 Weight (lbs): 2.31
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 26.4
 Total Output Wattage (W): 24
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 700

LED


Delivered Lumen Range: 2000 - 2999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1970 / 2020 / 2105 / 2170
 Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature Special Led

OPTICAL

Reflector°: 20 / 25 / 40
 Adjustability: Rotational 340°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

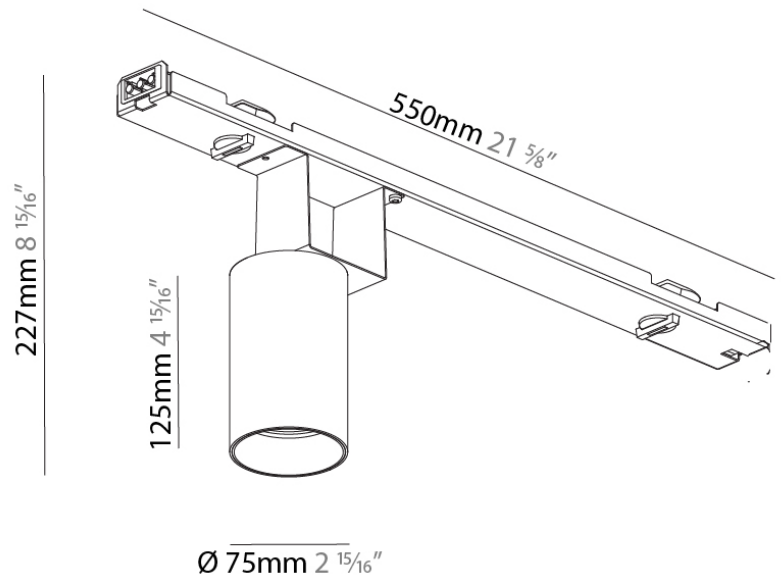

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38848-

DESCRIPTION

Centriq - Track Head - 12.1W / 14.7W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Beam 10°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Length (mm): 550
 Length (in): 21 5/8
 Height (mm): 125
 Height (in): 4 15/16
 Weight (kg): 1.041
 Weight (lbs): 2.30
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.1 / 14.7
 Total Output Wattage (W): 11 / 13.4
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED


Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 870 / 970 / 1039 / 1060
 Nominal Lumen (lm): 960 / 1070 / 1156 / 1180
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature Special Led

OPTICAL

Beam Angle: 10
 Adjustability: Rotational 340°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

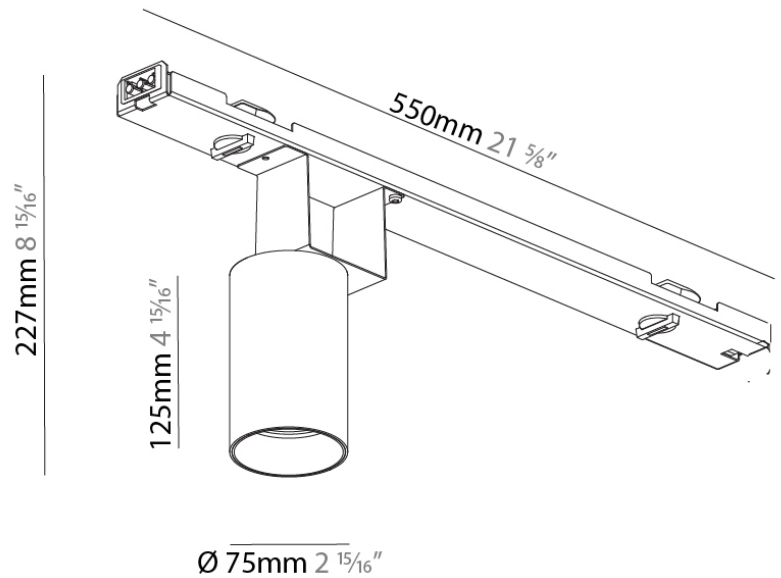

A32L450-PLG-TRI-SYS COMPONENTS

A38853-

DESCRIPTION

Magiq 4 Korona - Track Head - 13.3W LED (Zhaga Standard) - 2700K - White - Reflectors 10° / 20° / 40°

GENERAL

Series: Magiq
 Subseries: Magiq 4 Cell Korona
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable / Direct

PHYSICAL

Length (mm): 550
 Length (in): 21 ¹⁰/₁₆
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 93
 Height (in): 3 ¹¹/₁₆
 Weight (kg): 0.902
 Weight (lbs): 2
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 13.3
 Total Output Wattage (W): 12
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 1050

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 4
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 783 / 848 / 862 / 880
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature RGBW Tunable Special LED

OPTICAL

Reflector°: 10 / 20 / 40
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

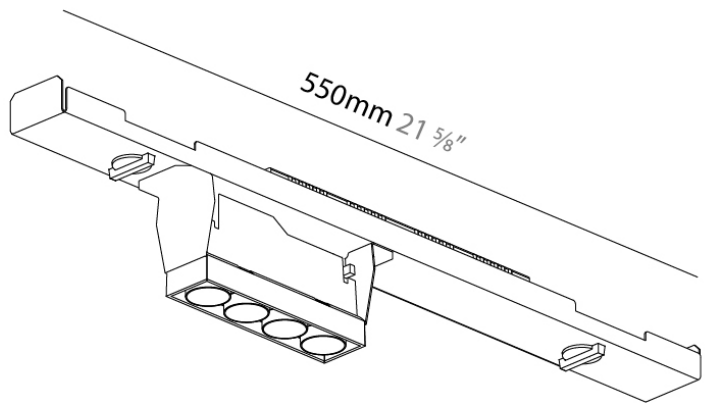

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38856-

DESCRIPTION

Magiq Hollow Wallwash - Track Head - 19.0W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Black

GENERAL

Series: Magiq Hollow Wallwash

Subseries: Magiq Hollow Wallwash Black

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Linear Profiles

Mounting Location: Ceiling

Light Distribution: Asymmetric

PHYSICAL

Shape: Rectangle

Length (mm): 450

Length (in): 17 ¹¹/₁₆

Width (mm): 49

Width (in): 1 ¹⁵/₁₆

Height (mm): 99

Height (in): 3 ¹⁴/₁₆

Weight (kg): 0.962

Weight (lbs): 2.12

Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 19.0

Total Output Wattage (W): 17.3

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Delivered Lumen Range: 1000 - 1999 lm

Number of LEDs: 8

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1113 / 1177 / 1346

Nominal Lumen (lm): 1328.2 / 1404.5 / 1606.3

CRI: >90 CRI

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature RGBW Tunable

OPTICAL


Adjustability: Tilt ±25°

Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

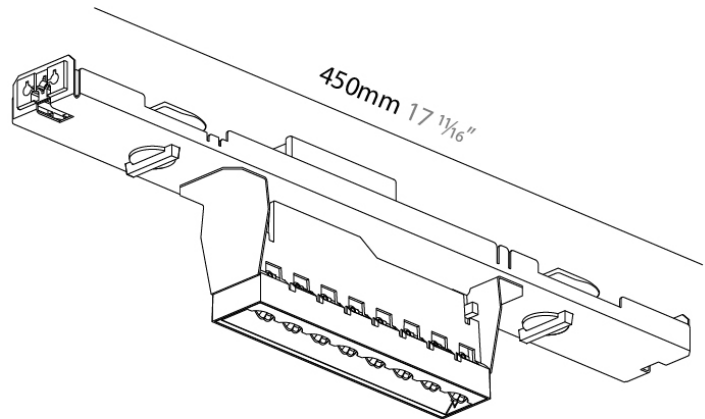

A32L450-PLG-TRI-SYS COMPONENTS TRACK

A38858-

DESCRIPTION

Magiq Hollow Wallwash Korona - Track Head - 19.0W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Black

GENERAL

Series: Magiq Hollow Wallwash
 Subseries: Magiq Hollow Wallwash Korona
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Light Distribution: Asymmetric

PHYSICAL

Shape: Rectangle
 Length (mm): 450
 Length (in): 17 ¹¹/₁₆
 Width (mm): 49
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 99
 Height (in): 1 ¹⁵/₁₆
 Weight (kg): 0.962
 Weight (lbs): 2.12
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19.0
 Total Output Wattage (W): 17.3
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (mA): 700

LED


Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 1113 / 1177 / 1346
 Nominal Lumen (lm): 1328.2 / 1404.5 / 1606.3
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature RGBW Tunable

OPTICAL

Adjustability: Tilt ±25°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

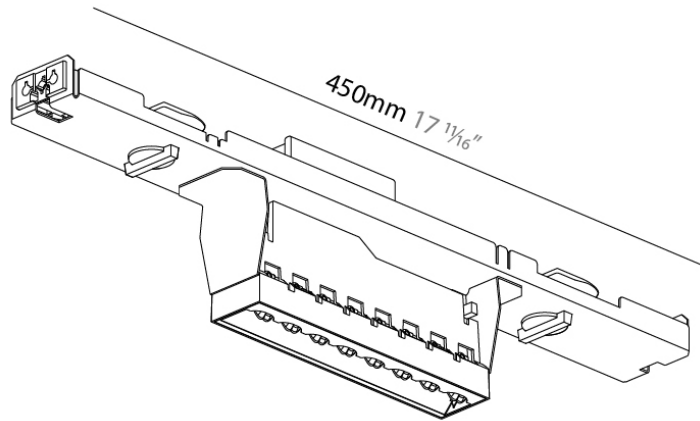

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)