

## A32L450-TRK-TRI-SYS COMPONENTS

### A3848300

**DESCRIPTION**  
2Look4 50 Track - Spacer

#### GENERAL

Series: 2Look4 50 Track  
Partner: Prolicht  
Division: Architectural

#### PHYSICAL

Shape: Round  
Length (mm): 32  
Length (in): 1 ¼  
Width (mm): 32  
Width (in): 1 ¼  
Height (mm): 11  
Height (in): 7/16  
Weight (kg): 0.021  
Weight (lbs): 1/16  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |



## A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

### A38576-02

**DESCRIPTION**  
2Look4 50 Track - Aluminum Profile per Meter (Max. 3000mm) - Black

#### GENERAL

Series: 2Look4 50 Track  
Partner: Prolicht  
Division: Architectural  
Installation: Trimless  
Product Type: Linear Profiles  
Mounting Location: Ceiling

#### PHYSICAL

Length (mm): 1000  
Length (in): 39 <sup>3</sup>/<sub>8</sub>  
Width (mm): 50  
Width (in): 1 <sup>15</sup>/<sub>16</sub>  
Height (mm): 101  
Height (in): 4  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |



## A32L450-TRK-TRI-SYS COMPONENTS

### A38577-

**DESCRIPTION**  
2Look4 50 Plug /Track - Cap Profile per Meter (Max. 3000mm)

#### GENERAL

Series: 2Look4 50 Plug  
Partner: Prolicht  
Division: Architectural

#### PHYSICAL

Shape: Rectangle  
Length (mm): 1000  
Length (in): 39 <sup>3</sup>/<sub>8</sub>  
Width (mm): 64  
Width (in): 2 <sup>1</sup>/<sub>8</sub>  
Height (mm): 14  
Height (in): 9/16  
Weight (kg): 0.129  
Weight (lbs): 5/16  
Fixture Finish: WHI / BLK  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |



## A32L450-TRK-TRI-SYS COMPONENTS

### A38578-

**DESCRIPTION**  
2Look4 50 Plug/Track - End Cap -

#### GENERAL

Series: 2Look4 50 Track  
Partner: Prolicht  
Division: Architectural

#### PHYSICAL

Length (mm): 1  
Length (in): 1/16  
Width (mm): 94  
Width (in): 3 <sup>17</sup>/<sub>64</sub>  
Height (mm): 101  
Height (in): 4  
Weight (kg): 0.044  
Weight (lbs): 1/8  
Fixture Finish: WHI / BLK  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |



## A32L450-TRK-TRI-SYS COMPONENTS

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

### A3857900

**DESCRIPTION**  
2Look4 50 Plug/Track - Linear Coupler (1 pair)

#### GENERAL

Series: 2Look4 50 Track  
Partner: Prolicht  
Division: Architectural

#### PHYSICAL

Shape: Rectangle  
Length (mm): 80  
Length (in): 3 1/8  
Width (mm): 85  
Width (in): 3 3/8  
Height (mm): 5  
Height (in): 3/16  
Weight (kg): 0.02  
Weight (lbs): 1/16  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

### A38796

**DESCRIPTION**  
2Look4 20 Track - Trimless - 3-Track - 2000mm / 78 3/4"

#### GENERAL

Series: 2Look4 20 Track  
Partner: Prolicht  
Division: Architectural  
Installation: Trimless  
Product Type: Linear Profiles  
Mounting Location: Ceiling

#### PHYSICAL

Shape: Rectangle  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Weight (kg): 2.2  
Weight (lbs): 4 7/8  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

### A38797

**DESCRIPTION**  
2Look4 20 Track - Trimless - 3-Track - 3000mm / 118 1/8"

#### GENERAL

Series: 2Look4 20 Track  
Partner: Prolicht  
Division: Architectural  
Installation: Trimless  
Product Type: Linear Profiles  
Mounting Location: Ceiling

#### PHYSICAL

Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Weight (kg): 3.3  
Weight (lbs): 7 1/4  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T062-

#### GENERAL

Series: Magiq Wallwash  
 Subseries: Magiq Wallwash Plus Black  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Track System Line Voltage  
 Mounting Location: Ceiling  
 Light Distribution: Wallwash

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 392  
 Length (in): 15 7/16  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 130  
 Height (in): 5 1/8  
 Weight (kg): 1.777  
 Weight (lbs): 3.91  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 30 - 49 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 48.4  
 Total Output Wattage (W): 44  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 1  
 Input Voltage (V): 120 - 277  
 Constant Current (mA): 700

#### LED


Delivered Lumen Range: 3000 - 4999 lm  
 Number of LEDs: 5  
 Color Temperature (\*K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 3220 / 3430 / 3538 / 3610  
 Nominal Lumen (lm): 3570 / 3800 / 3920 / 4000  
 CRI: >90 CRI  
 Efficiency (%): 80  
 Lamp Life (hrs): 50000  
 Upon Request: Special Color Temperature

#### OPTICAL

Adjustability: Tilt 15°

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

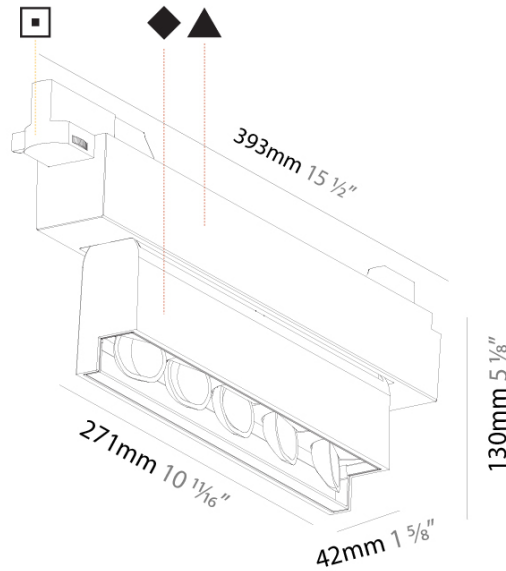

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T428-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1759lm, CRI:90 - Dimmable, Beam Angle 50°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19  
 Total Output Wattage (W): 17.2  
 Dimming: Non-Dimmable  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 500

**LED**  
 Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1656 / 1665 / 1743 / 1759  
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 50  
 Adjustability: Rotational 350°, Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

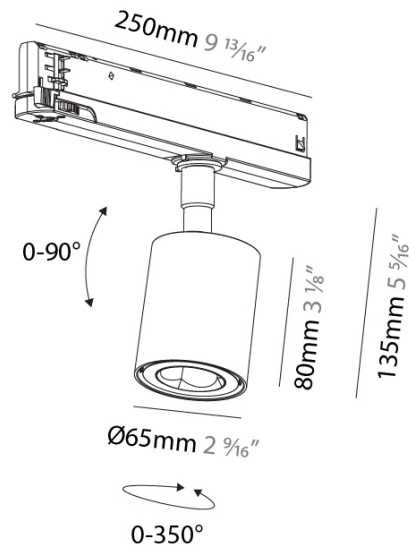

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T429-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1081lm, CRI:90 - Dimmable, Beam Angle 34°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 144  
 Height (in): 5 11/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 14  
 Total Output Wattage (W): 12.7  
 Dimming: Non-Dimming / DALI Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 700

**LED**  
 Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700-6500 Tunable White  
 Max. Delivered Lumen (lm): 919 - 1081  
 Nominal Lumen (lm): 1242 - 1460  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 34  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

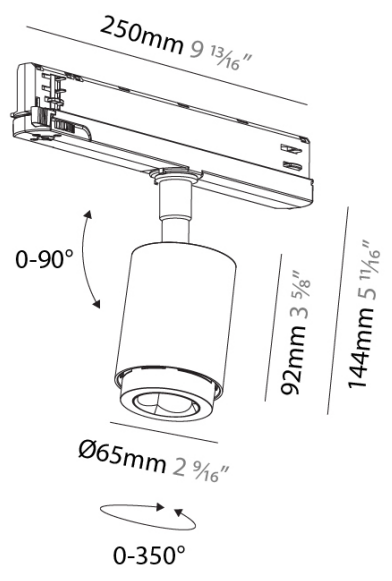

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T430-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1603lm, CRI:90 - Dimmable, Beam Angle 34°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 144  
 Height (in): 5 11/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19  
 Total Output Wattage (W): 17.2  
 Dimming: Non-Dimmable  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (MA): 500

**LED**  
 Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1510 / 1517 / 1588 / 1603  
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 34  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

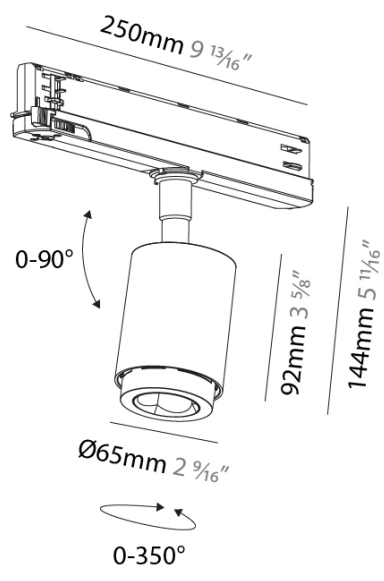

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T431-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1724lm, CRI:90 - Dimmable, Beam Angle Wallwasher

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19  
 Total Output Wattage (W): 17.2  
 Dimming: Non-Dimmable  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (MA): 500

**LED**  
 Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1624 / 1632 / 1708 / 1724  
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: Wallwasher  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

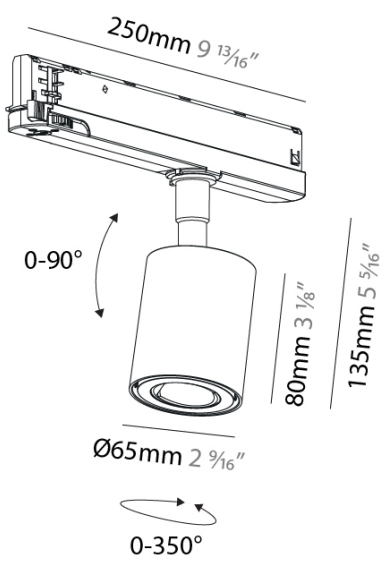

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T432-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1162lm, CRI:90 - Dimmable, Beam Angle Wallwasher

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 14  
 Total Output Wattage (W): 12.7  
 Dimming: Non-Dimming / DALI Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 700

**LED**  
 Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700-6500 Tunable White  
 Max. Delivered Lumen (lm): 988 - 1162  
 Nominal Lumen (lm): 1242 - 1460  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 34  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

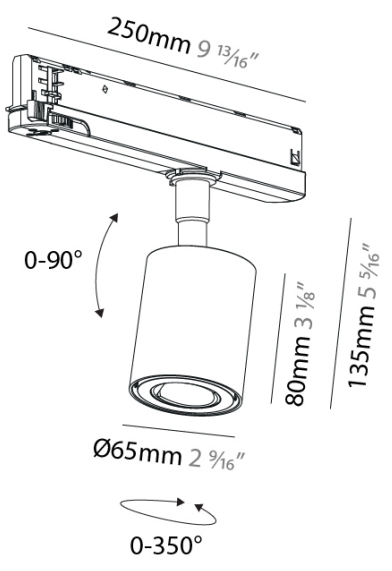

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T433-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1461lm, CRI:90 - Dimmable, Beam Angle 14°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19  
 Total Output Wattage (W): 17.2  
 Dimming: Non-Dimmable  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 500

**LED**  
 Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1394 / 1377 / 1459 / 1461  
 Nominal Lumen (lm): 1820 / 1797 / 1905 / 1907  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 14  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

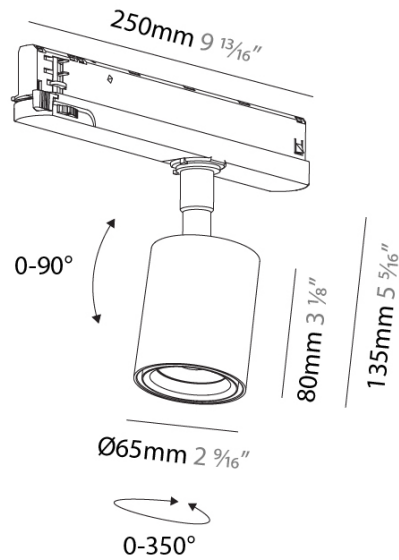

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T434-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1381lm, CRI:90 - Dimmable, Beam Angle 62°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 14  
 Total Output Wattage (W): 12.7  
 Dimming: Non-Dimming / DALI Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 700

**LED**  
 Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700-6500 Tunable White  
 Max. Delivered Lumen (lm): 1175 - 1381  
 Nominal Lumen (lm): 1242 - 1460  
 CRI: >90 CRI

**OPTICAL**  
 Beam Angle: 62  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

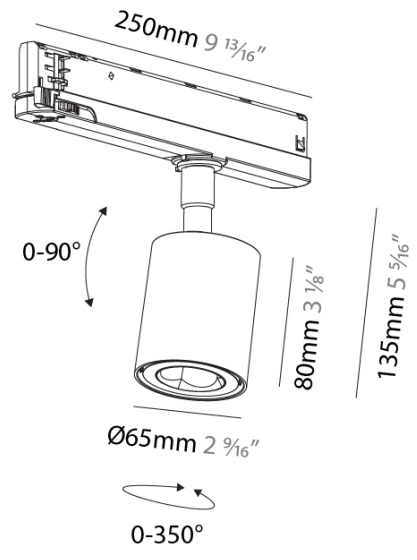

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T435-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1932lm, CRI:90 - Dimmable, Beam Angle 60°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 19  
 Total Output Wattage (W): 17.2  
 Dimming: Non-Dimming / DALI Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Constant Current (mA): 500

**LED**  
 Delivered Lumen Range: 1000 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 1820 / 1829 / 1914 / 1932  
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 60  
 Adjustability: Rotational 350°; Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

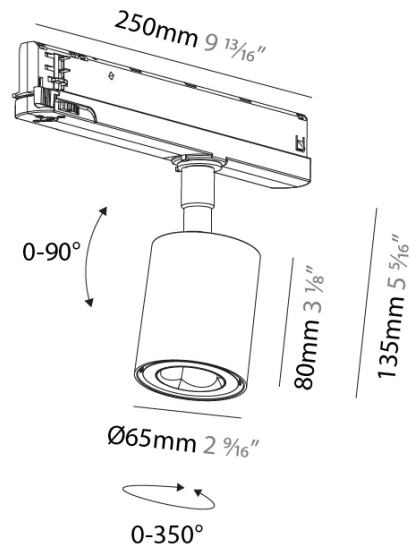

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### A3T436-

**DESCRIPTION**  
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1186lm, CRI:90 - Dimmable, Beam Angle 50°

**GENERAL**  
 Series: 2Look4 50 Track  
 Subseries: Oiko Pro In  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct


**PHYSICAL**  
 Shape: Cylinder  
 Diameter (mm): 65  
 Diameter (in): 2 5/16  
 Length (mm): 250  
 Length (in): 9 13/16  
 Height (mm): 136  
 Height (in): 5 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: GRY / BLK / WHI  
 Fixture Material: Aluminum Die Cast

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 14  
 Total Output Wattage (W): 12.7  
 Dimming: Non-Dimming / DALI Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120Vac  
 Input Voltage (V): 120  
 Constant Current (mA): 700

**LED**  
 Delivered Lumen Range: 500 - 1999 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700-6500 Tunable White  
 Max. Delivered Lumen (lm): 1008 - 1186  
 Nominal Lumen (lm): 1242 - 1460  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**OPTICAL**  
 Beam Angle: 50  
 Adjustability: Rotational 350°, Tilt 90°

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

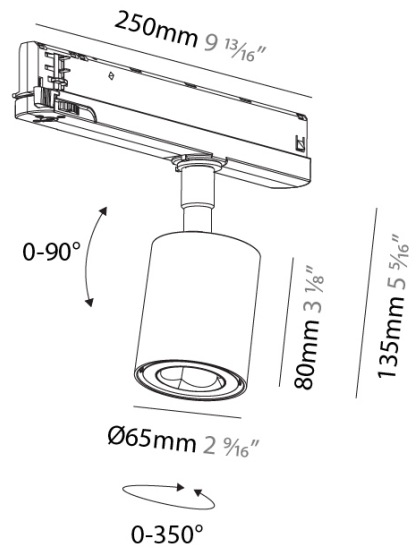

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRACK


### STR1110-

**DESCRIPTION**  
 Track - End Feed - Right Side

**GENERAL**  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Track

**PHYSICAL**  
 Length (mm): 148  
 Length (in): 5 <sup>13</sup>/<sub>16</sub>  
 Width (mm): 32  
 Width (in): 1 <sup>1</sup>/<sub>4</sub>  
 Height (mm): 38  
 Height (in): 1 <sup>1</sup>/<sub>2</sub>  
 Fixture Finish: WHI / BLK / GRY  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

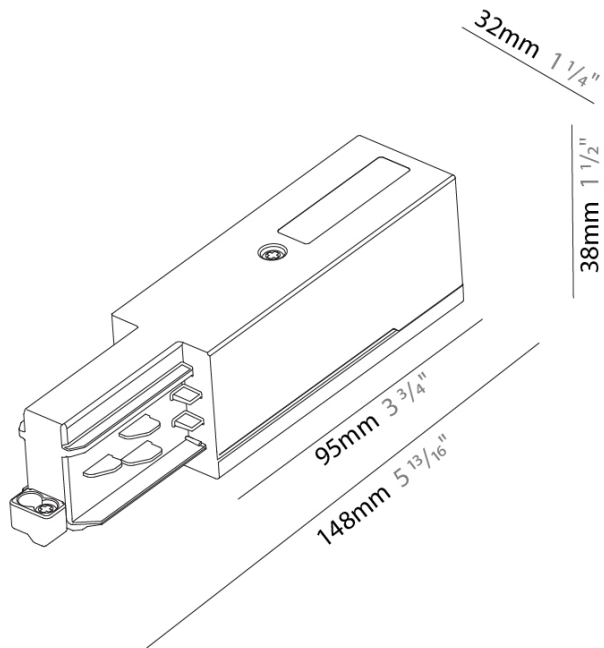

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRACK


### STR121-

**DESCRIPTION**  
 Track - End Feed - Left Side

**GENERAL**  
 Partner: Prolight  
 Division: Architectural  
 Installation: Track

**PHYSICAL**  
 Length (mm): 148  
 Length (in): 5 <sup>13</sup>/<sub>16</sub>  
 Width (mm): 32  
 Width (in): 1 <sup>1</sup>/<sub>4</sub>  
 Height (mm): 38  
 Height (in): 1 <sup>1</sup>/<sub>2</sub>  
 Fixture Finish: WHI / BLK / GRY  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

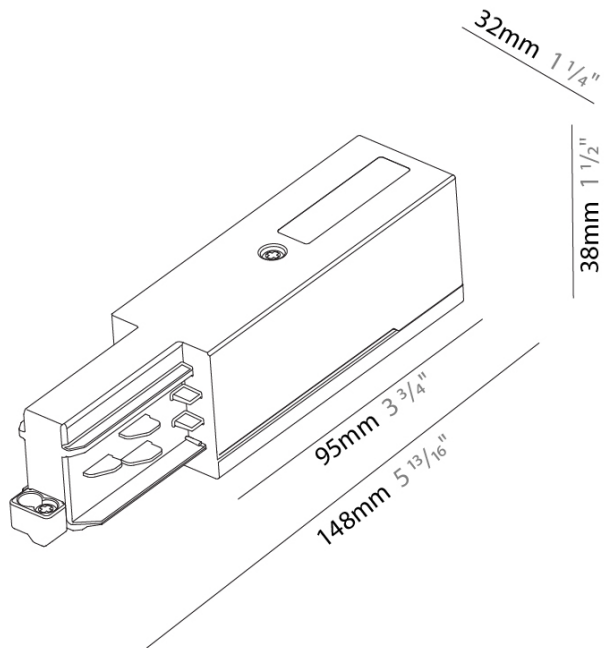

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### STR141-

**DESCRIPTION**  
Track - Central Feed - \_\_\_\_\_

**GENERAL**



Partner: Prolight \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Installation: Track \_\_\_\_\_

**PHYSICAL**

Length (mm): 254 \_\_\_\_\_  
 Length (in): 10 \_\_\_\_\_  
 Width (mm): 32 \_\_\_\_\_  
 Width (in): 1 1/4 \_\_\_\_\_  
 Height (mm): 38 \_\_\_\_\_  
 Height (in): 1 5/16 \_\_\_\_\_  
 Fixture Finish: WHI / BLK / GRY \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

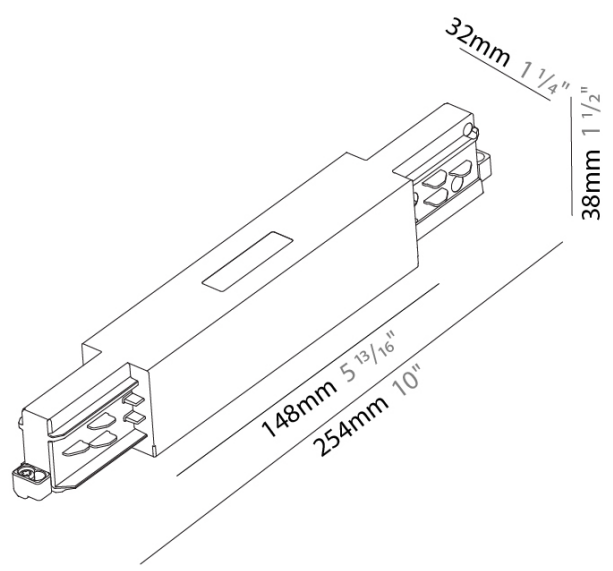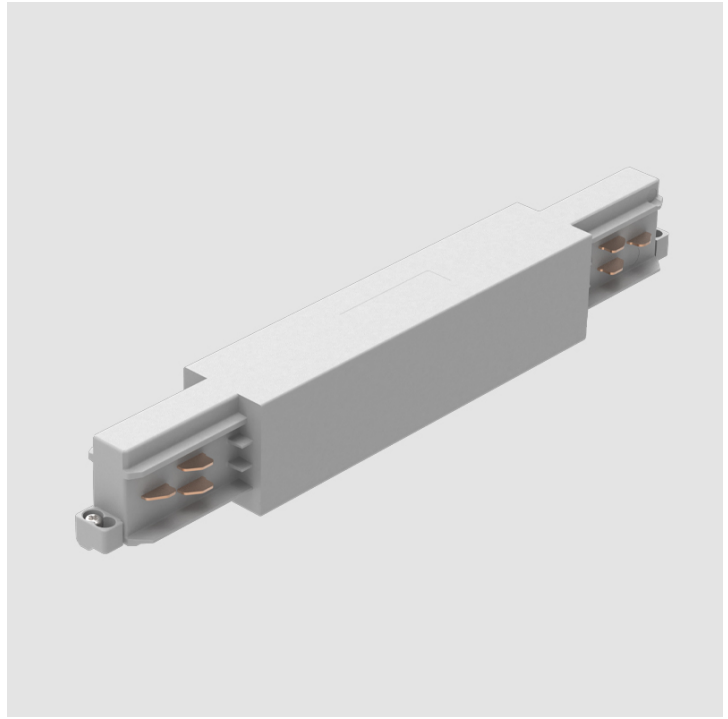

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK



### STR2100-

**DESCRIPTION**  
Track - Straight Connector - \_\_\_\_\_

**GENERAL**  
Partner: Prolight \_\_\_\_\_  
Division: Architectural \_\_\_\_\_  
Installation: Track \_\_\_\_\_

**PHYSICAL**  
Length (mm): 115 \_\_\_\_\_  
Length (in): 4 1/2 \_\_\_\_\_  
Width (mm): 26 \_\_\_\_\_  
Width (in): 1 \_\_\_\_\_  
Height (mm): 33 \_\_\_\_\_  
Height (in): 1 5/16 \_\_\_\_\_  
Fixture Finish: WHI / BLK / GRY \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

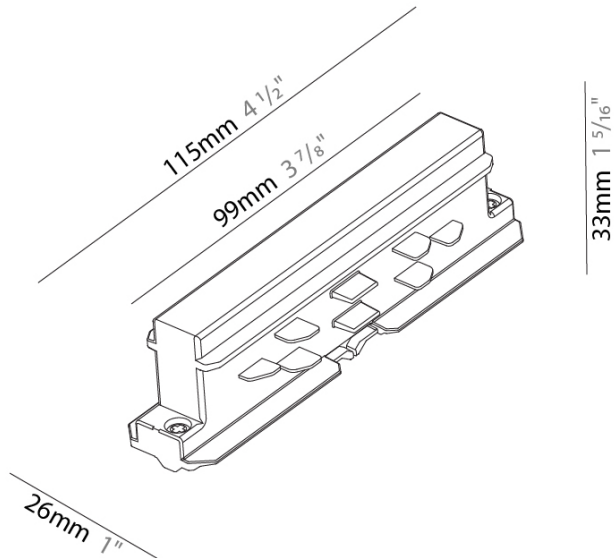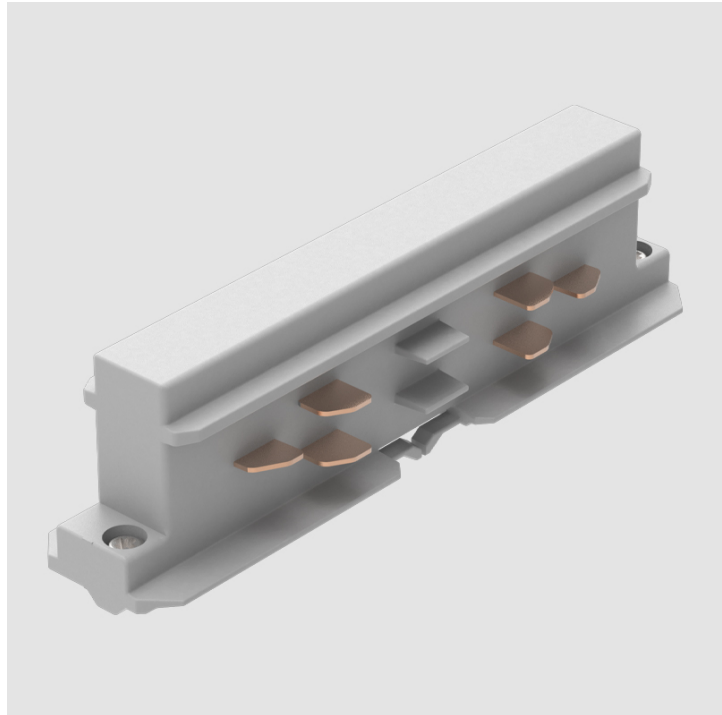

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK



### STR3400-

**DESCRIPTION**  
Track - L-Connector, Outside Corner (Feedable) - \_\_\_\_\_

**GENERAL**  
Partner: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_  
Installation: Track \_\_\_\_\_

**PHYSICAL**  
Length (mm): 143 \_\_\_\_\_  
Length (in): 5 <sup>5</sup>/<sub>8</sub> \_\_\_\_\_  
Width (mm): 32 \_\_\_\_\_  
Width (in): 1 <sup>1</sup>/<sub>4</sub> \_\_\_\_\_  
Height (mm): 38 \_\_\_\_\_  
Height (in): 1 <sup>1</sup>/<sub>2</sub> \_\_\_\_\_  
Fixture Finish: WHI / BLK / GRY \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

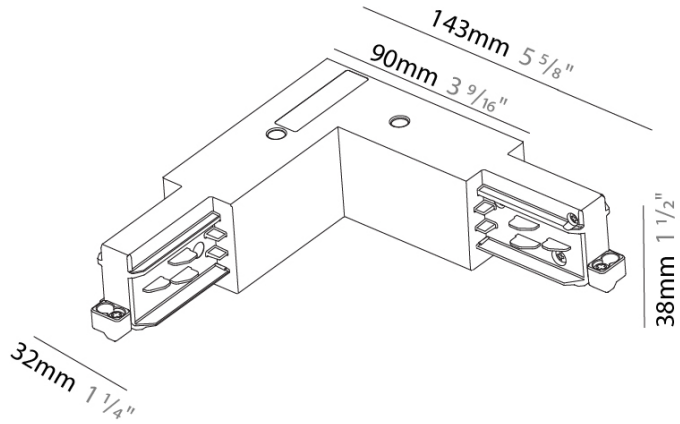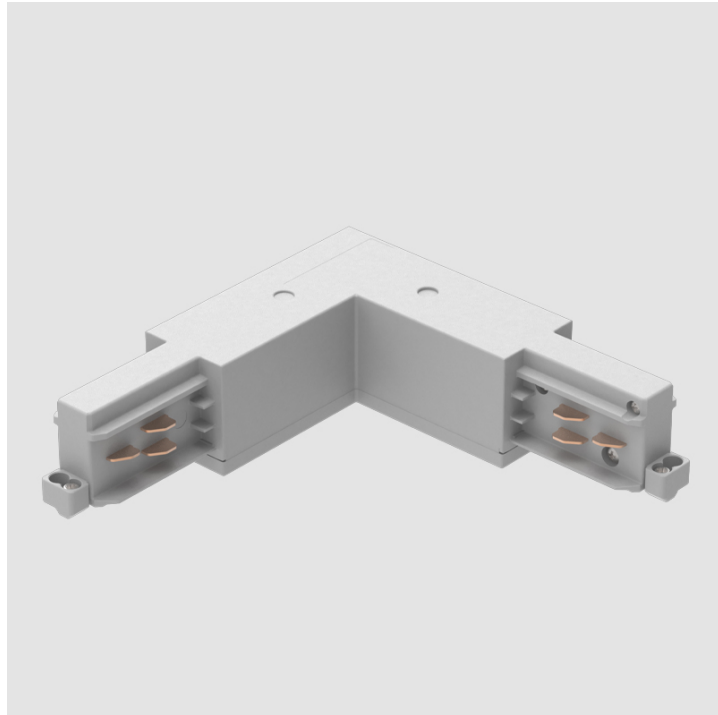

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A32L450-TRK-TRI-SYS COMPONENTS TRACK



### STR3500-

**DESCRIPTION**  
 Track - 3-Circuit L-Connector, Inside Corner (Feedable)

**GENERAL**  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Installation: Track \_\_\_\_\_

**PHYSICAL**  
 Length (mm): 143 \_\_\_\_\_  
 Length (in): 5 5/8 \_\_\_\_\_  
 Width (mm): 32 \_\_\_\_\_  
 Width (in): 1 1/4 \_\_\_\_\_  
 Height (mm): 38 \_\_\_\_\_  
 Height (in): 1 1/2 \_\_\_\_\_  
 Fixture Finish: WHI / BLK / GRY \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

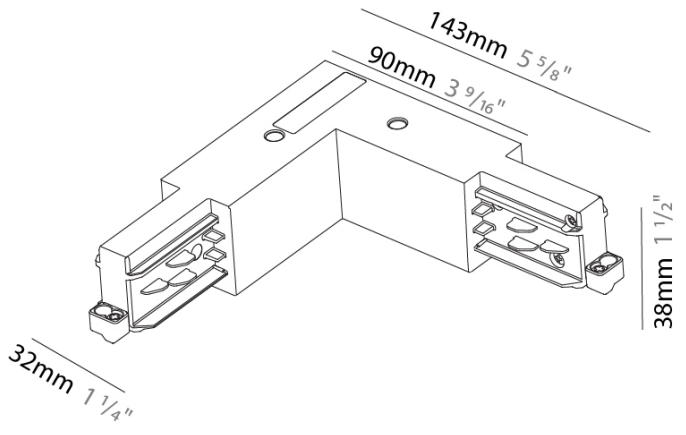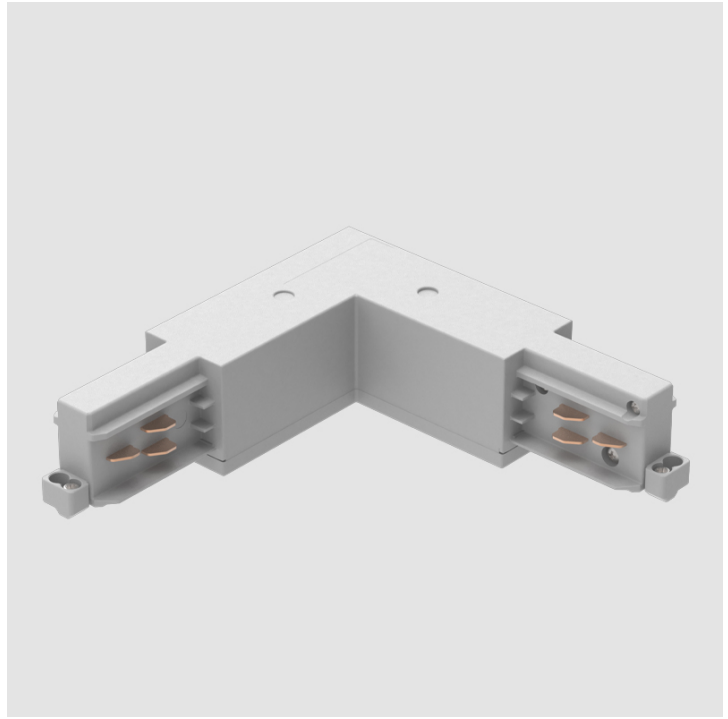

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS SURFACE



### STRS4100-

**DESCRIPTION**  
Track - Surface - End Cap

**GENERAL**  
Partner: Prolicht  
Division: Architectural  
Installation: Surface

**PHYSICAL**  
Length (mm): 32  
Length (in): 1 1/4  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

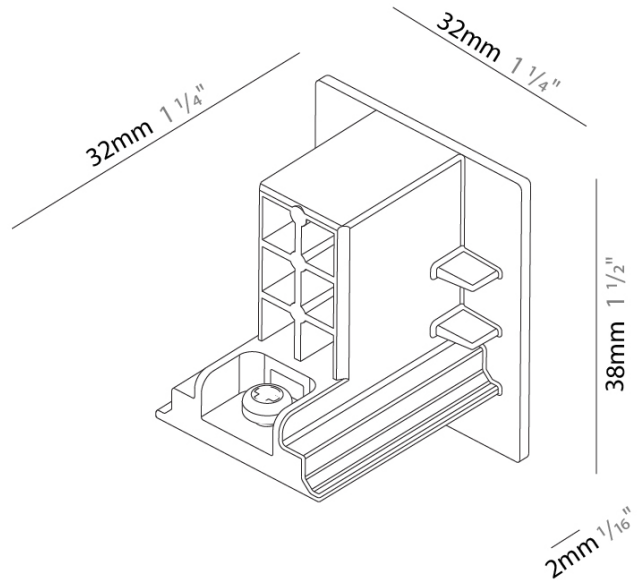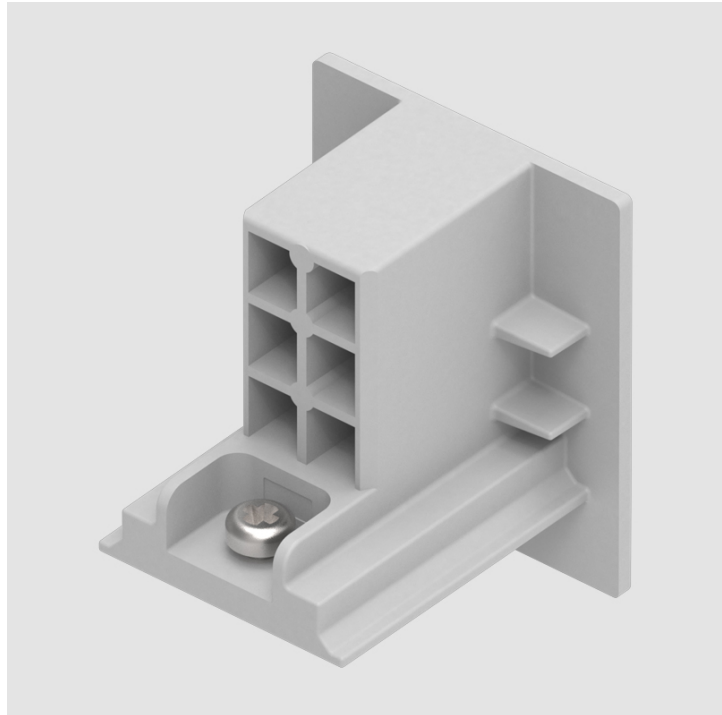

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### STRS4400-



**DESCRIPTION**  
Track - 4' Surface Mount 3-Circuit Track - 120V

**GENERAL**  
Partner: Prolicht  
Division: Architectural  
Installation: Track

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 1219  
Length (in): 48  
Width (mm): 32  
Width (in): 1 1/4  
Height (mm): 38  
Height (in): 1 1/2  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

**ELECTRICAL**  
Driver Included: No

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

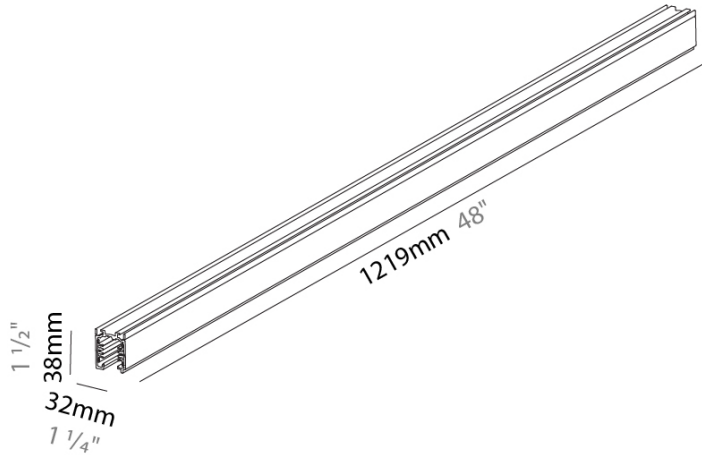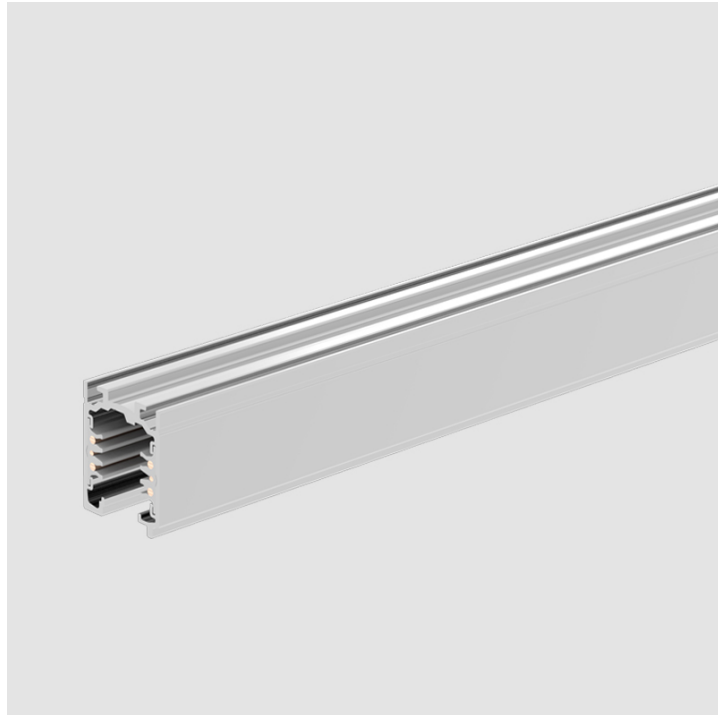

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### STRS4800-


**DESCRIPTION**  
Track - 8' Surface Mount 3-Circuit Track - 120V

**GENERAL**  
Partner: Prolicht  
Division: Architectural  
Installation: Track

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 2438  
Length (in): 96"  
Width (mm): 32  
Width (in): 1 1/4"  
Height (mm): 38  
Height (in): 1 1/2"  
Fixture Finish: WHI / BLK / GRY  
Fixture Material: Aluminum

**ELECTRICAL**  
Driver Included: No

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

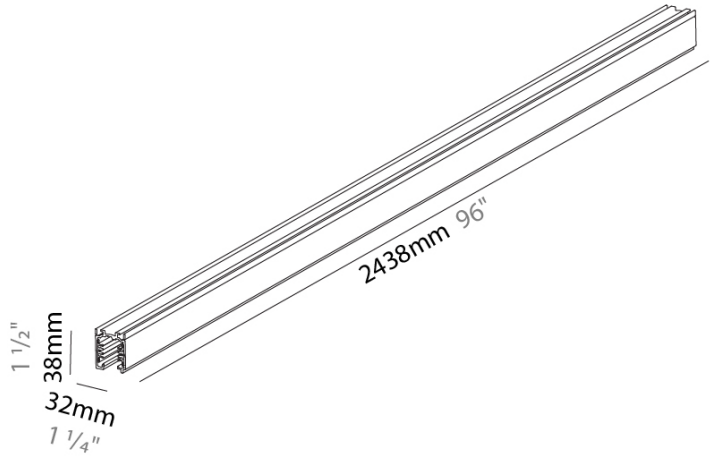

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

## A32L450-TRK-TRI-SYS COMPONENTS TRACK

### STRV120


**DESCRIPTION**  
Cutting Tool for Track Conductors

**GENERAL**  
Partner: Prolicht  
Division: Architectural  
Installation: Track

**PHYSICAL**  
Length (mm): 245  
Length (in): 9 5/8  
Height (mm): 58  
Height (in): 2 5/16  
Fixture Material: Aluminum

**ELECTRICAL**  
Driver Included: No

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

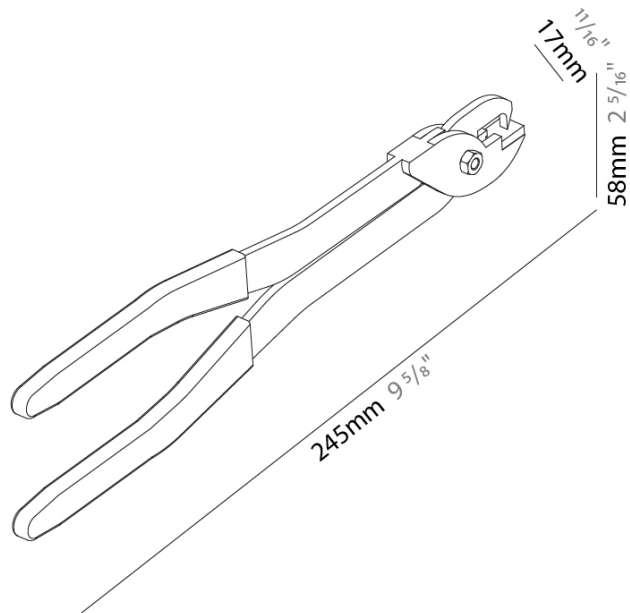

|          |       |
|----------|-------|
| PROJECT  | _____ |
| TYPE     | _____ |
| NOTES    | _____ |
| QUANTITY | _____ |
| DATE     | _____ |

### LEGEND

|  |   |  |  |  |  |
|--|---|--|--|--|--|
|  | floor-mounted   |  | pivotable  |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating   |  | warm dim / natural dimming LED   |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted  |  | rechargeable battery powered   |
|  | wall-mounted  |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index  |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature  |
|  | direct/indirect light distribution                        |  | super spot   |  | lumen (luminous flux)  |
|  | indirect light distribution                               |  | lens   |  | efficacy (lumens per watt)   |
|  | asymmetric light distribution                             |  | lens pack  |  | Unified Glare Rating (UGR) range from 5-40   |
|  | aura light distribution                                   |  | shine ring   |  | marine grade (AISI 316 stainless steel)  |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on  |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on   |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance  |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth  |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion   |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material  |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation  |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation   |
|  | separately switchable                                     |  | indirect diffuser  |  | ETL Certified to UL and CSA Standards  |
|  | sensor  |  | direct diffuser  |  | UL Certified to UL and CSA Standards   |
|  | remote control  |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards  |
|  | available upon request                                    |  | accessory  |  | Certified for North American Standards   |

### IP RATING

|  |  |
|--|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)   |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water   |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas  |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods  |

### IK RATING

|  |   |
|--|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |