

A32L450-TRK-TRI-SYS COMPONENTS

A3848300

DESCRIPTION
2Look4 50 Track - Spacer

GENERAL

Series: 2Look4 50 Track
Partner: Prolicht
Division: Architectural

PHYSICAL

Shape: Round
Length (mm): 32
Length (in): 1 ¼
Width (mm): 32
Width (in): 1 ¼
Height (mm): 11
Height (in): 7/16
Weight (kg): 0.021
Weight (lbs): 1/16
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____



PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

A38576-02

DESCRIPTION
2Look4 50 Track - Aluminum Profile per Meter (Max. 3000mm) - Black

GENERAL

Series: 2Look4 50 Track
Partner: Prolicht
Division: Architectural
Installation: Trimless
Product Type: Linear Profiles
Mounting Location: Ceiling

PHYSICAL

Length (mm): 1000
Length (in): $39\frac{3}{8}$
Width (mm): 50
Width (in): $1\frac{15}{16}$
Height (mm): 101
Height (in): 4
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



A32L450-TRK-TRI-SYS COMPONENTS

A38577-

DESCRIPTION
2Look4 50 Plug /Track - Cap Profile per Meter (Max. 3000mm)

GENERAL

Series: 2Look4 50 Plug
Partner: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 ³/₈
Width (mm): 64
Width (in): 2 ¹/₈
Height (mm): 14
Height (in): 9/16
Weight (kg): 0.129
Weight (lbs): 5/16
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |



A32L450-TRK-TRI-SYS COMPONENTS

A38578-

DESCRIPTION
2Look4 50 Plug/Track - End Cap -

GENERAL

Series: 2Look4 50 Track
Partner: Prolicht
Division: Architectural

PHYSICAL

Length (mm): 1
Length (in): 1/16
Width (mm): 94
Width (in): 3 ¹⁷/₆₄
Height (mm): 101
Height (in): 4
Weight (kg): 0.044
Weight (lbs): 1/8
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____



PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

A32L450-TRK-TRI-SYS COMPONENTS

A3857900

DESCRIPTION
2Look4 50 Plug/Track - Linear Coupler (1 pair)

GENERAL

Series: 2Look4 50 Track
Partner: Prolicht
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 80
Length (in): 3 1/8
Width (mm): 85
Width (in): 3 3/8
Height (mm): 5
Height (in): 3/16
Weight (kg): 0.02
Weight (lbs): 1/16
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

A38796

DESCRIPTION
2Look4 20 Track - Trimless - 3-Track - 2000mm / 78 3/4"

GENERAL
Series: 2Look4 20 Track
Partner: Prolicht
Division: Architectural
Installation: Trimless
Product Type: Linear Profiles
Mounting Location: Ceiling

PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 32
Width (in): 1 1/4
Height (mm): 38
Height (in): 1 1/2
Weight (kg): 2.2
Weight (lbs): 4 7/8
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20



PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRIMLESS

A38797

DESCRIPTION
2Look4 20 Track - Trimless - 3-Track - 3000mm / 118 1/8"

GENERAL
Series: 2Look4 20 Track
Partner: Prolicht
Division: Architectural
Installation: Trimless
Product Type: Linear Profiles
Mounting Location: Ceiling

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 32
Width (in): 1 1/4
Height (mm): 38
Height (in): 1 1/2
Weight (kg): 3.3
Weight (lbs): 7 1/4
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20



| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T062-

GENERAL

Series: Magiq Wallwash
 Subseries: Magiq Wallwash Plus Black
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Track System Line Voltage
 Mounting Location: Ceiling
 Light Distribution: Wallwash

PHYSICAL

Shape: Rectangle
 Length (mm): 392
 Length (in): 15 7/16
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 130
 Height (in): 5 1/8
 Weight (kg): 1.777
 Weight (lbs): 3.91
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 48.4
 Total Output Wattage (W): 44
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 1
 Input Voltage (V): 120 - 277
 Constant Current (MA): 700

LED


Delivered Lumen Range: 3000 - 4999 lm
 Number of LEDs: 5
 Color Temperature (*K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3220 / 3430 / 3538 / 3610
 Nominal Lumen (lm): 3570 / 3800 / 3920 / 4000
 CRI: >90 CRI
 Efficiency (%): 80
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature

OPTICAL

Adjustability: Tilt 15°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

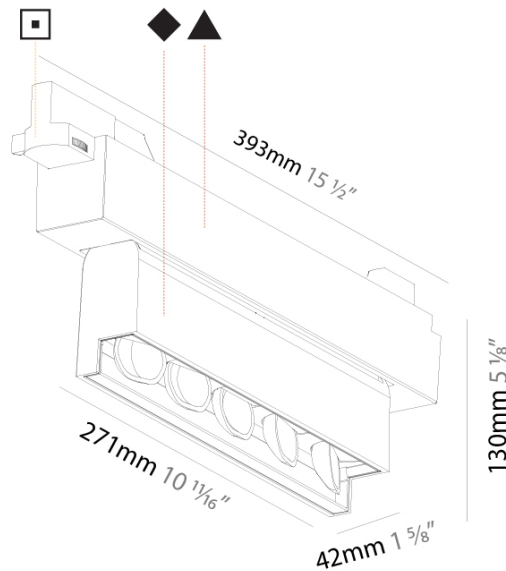

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T428-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1759lm, CRI:90 - Dimmable, Beam Angle 50°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19
 Total Output Wattage (W): 17.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (MA): 500

LED
 Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1656 / 1665 / 1743 / 1759
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 50
 Adjustability: Rotational 350°, Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

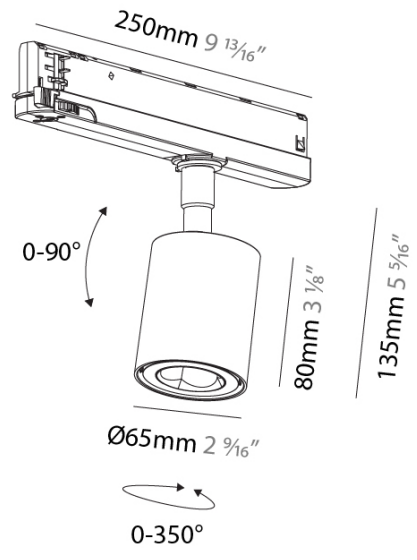

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T429-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1081lm, CRI:90 - Dimmable, Beam Angle 34°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 144
 Height (in): 5 11/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimming / DALI Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (MA): 700

LED
 Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 919 - 1081
 Nominal Lumen (lm): 1242 - 1460
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 34
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

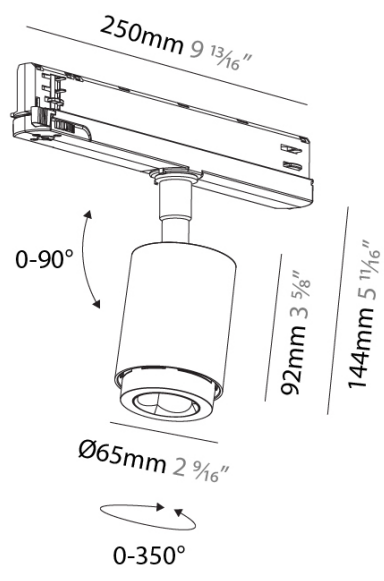

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T430-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1603lm, CRI:90 - Dimmable, Beam Angle 34°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 144
 Height (in): 5 11/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19
 Total Output Wattage (W): 17.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (MA): 500

LED
 Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1510 / 1517 / 1588 / 1603
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 34
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

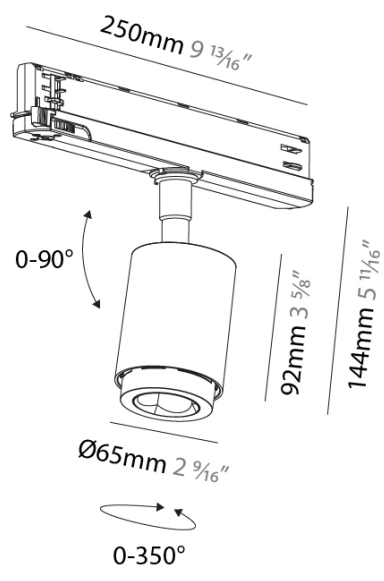

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T431-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1724lm, CRI:90 - Dimmable, Beam Angle Wallwasher

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19
 Total Output Wattage (W): 17.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (MA): 500

LED
 Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1624 / 1632 / 1708 / 1724
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: Wallwasher
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

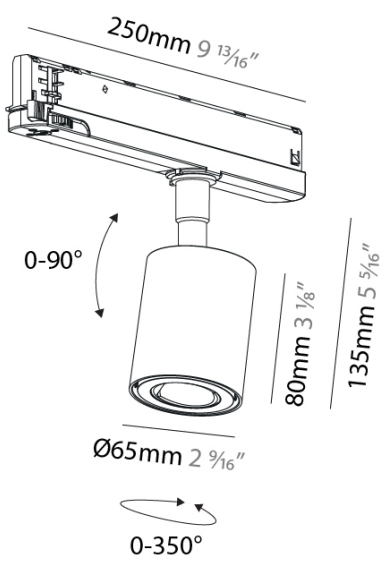

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T432-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1162lm, CRI:90 - Dimmable, Beam Angle Wallwasher

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimming / DALI Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (mA): 700

LED
 Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 988 - 1162
 Nominal Lumen (lm): 1242 - 1460
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 34
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

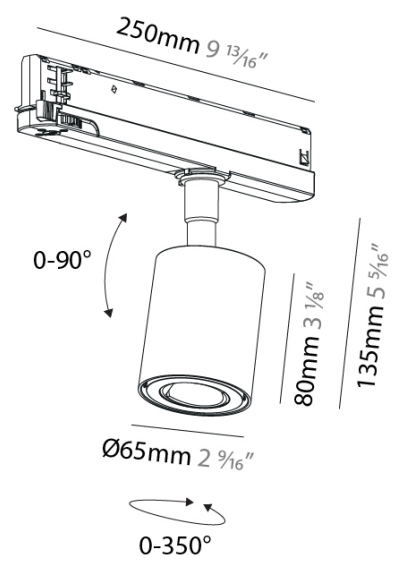

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T433-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1461lm, CRI:90 - Dimmable, Beam Angle 14°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 5/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19
 Total Output Wattage (W): 17.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (MA): 500

LED
 Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1394 / 1377 / 1459 / 1461
 Nominal Lumen (lm): 1820 / 1797 / 1905 / 1907
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 14
 Adjustability: Rotational 350°, Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

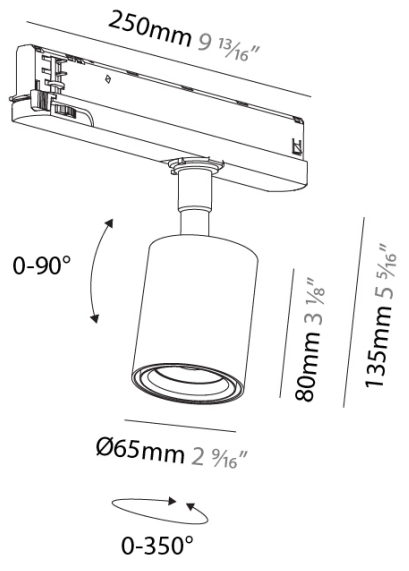

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T434-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1381lm, CRI:90 - Dimmable, Beam Angle 62°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimming / DALI Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (mA): 700

LED
 Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 1175 - 1381
 Nominal Lumen (lm): 1242 - 1460
 CRI: >90 CRI

OPTICAL
 Beam Angle: 62
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

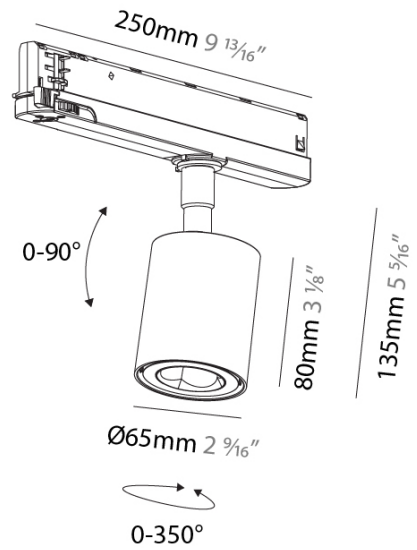

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T435-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 19W LED, 2700K / 3000K / 3500K / 4000K, Max 1932lm, CRI:90 - Dimmable, Beam Angle 60°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 19
 Total Output Wattage (W): 17.2
 Dimming: Non-Dimming / DALI Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Constant Current (mA): 500

LED
 Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1820 / 1829 / 1914 / 1932
 Nominal Lumen (lm): 2040 / 2050 / 2146 / 2166
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 60
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

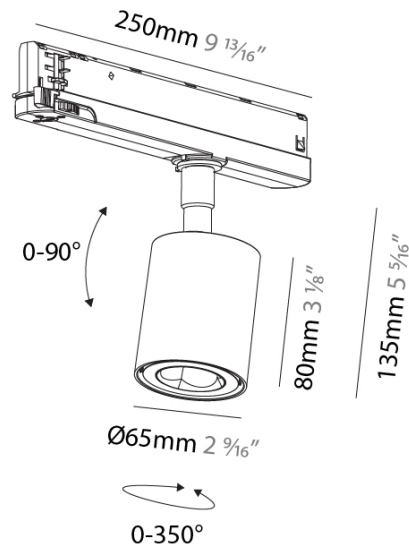

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

A3T436-

DESCRIPTION
 2LOOK4 50 Track - Oiko Pro In insert - 14W LED, Tuneable White (2700K-6500K), Max 1186lm, CRI:90 - Dimmable, Beam Angle 50°

GENERAL
 Series: 2Look4 50 Track
 Subseries: Oiko Pro In
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct


PHYSICAL
 Shape: Cylinder
 Diameter (mm): 65
 Diameter (in): 2 5/16
 Length (mm): 250
 Length (in): 9 13/16
 Height (mm): 136
 Height (in): 5 3/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: GRY / BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimming / DALI Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Input Voltage (V): 120
 Constant Current (mA): 700

LED
 Delivered Lumen Range: 500 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 1008 - 1186
 Nominal Lumen (lm): 1242 - 1460
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 50
 Adjustability: Rotational 350°, Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

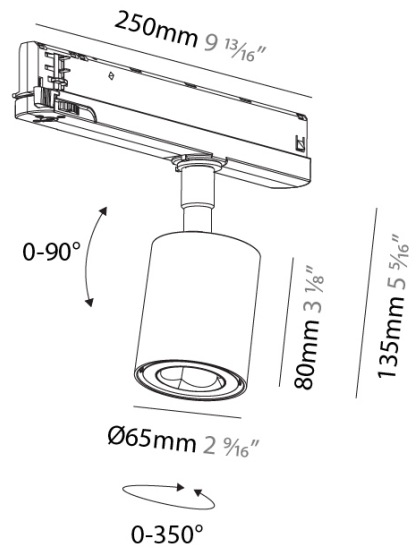

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRACK


STR1110-

DESCRIPTION
 Track - End Feed - Right Side

GENERAL
 Partner: Prolight
 Division: Architectural
 Installation: Track

PHYSICAL
 Length (mm): 148
 Length (in): 5 ¹³/₁₆
 Width (mm): 32
 Width (in): 1 ¹/₄
 Height (mm): 38
 Height (in): 1 ¹/₂
 Fixture Finish: WHI / BLK / GRY
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

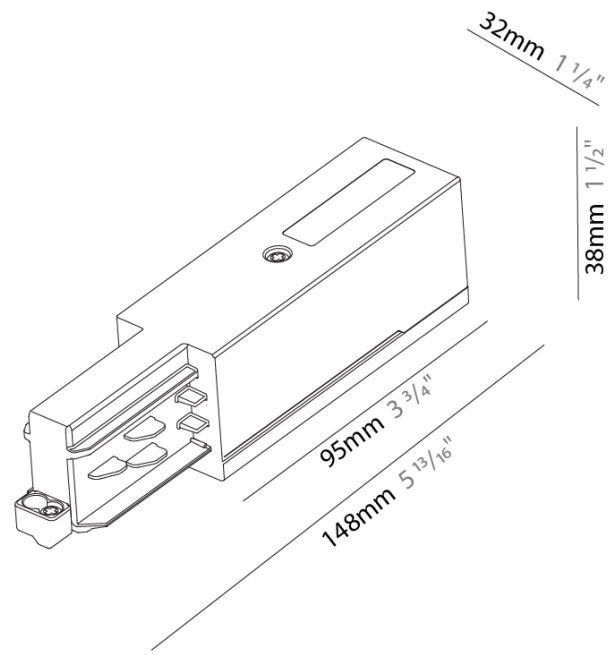

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK


STR121-

DESCRIPTION
Track - End Feed - Left Side

GENERAL
Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL
Length (mm): 148
Length (in): 5 ¹³/₁₆
Width (mm): 32
Width (in): 1 ¹/₄
Height (mm): 38
Height (in): 1 ¹/₂
Fixture Finish: WHI / BLK / GRY
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

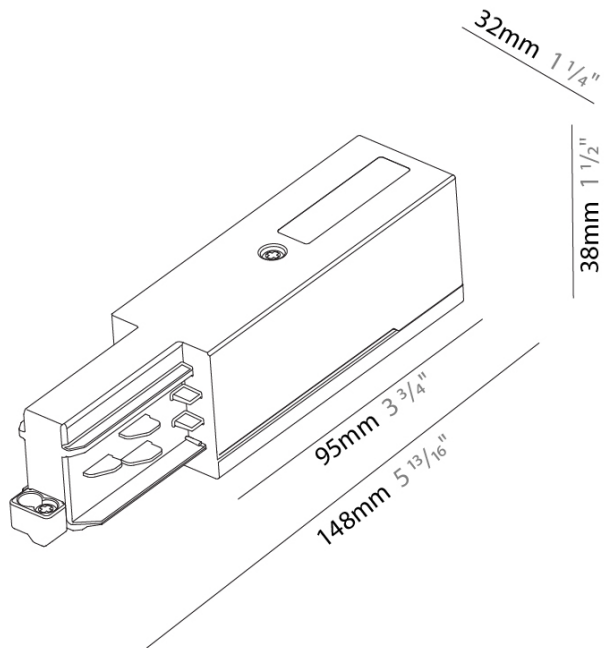

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK



STR141-

DESCRIPTION
Track - Central Feed - _____

GENERAL
Partner: Prolight _____
Division: Architectural _____
Installation: Track _____

PHYSICAL
Length (mm): 254 _____
Length (in): 10 _____
Width (mm): 32 _____
Width (in): 1 1/4 _____
Height (mm): 38 _____
Height (in): 1 5/16 _____
Fixture Finish: WHI / BLK / GRY _____
Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards _____
IP rating: IP20 _____

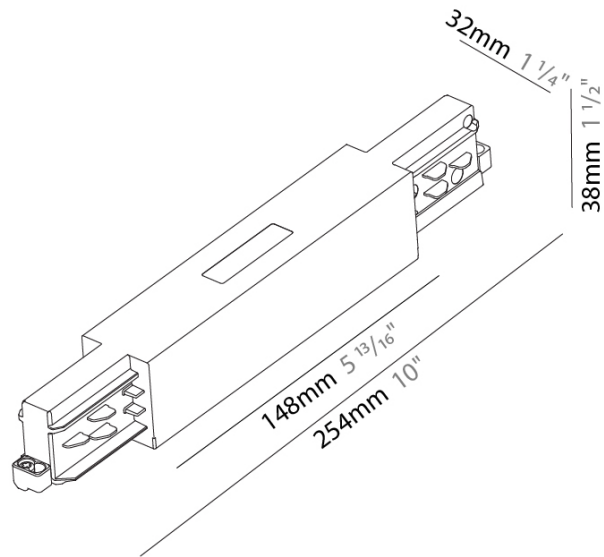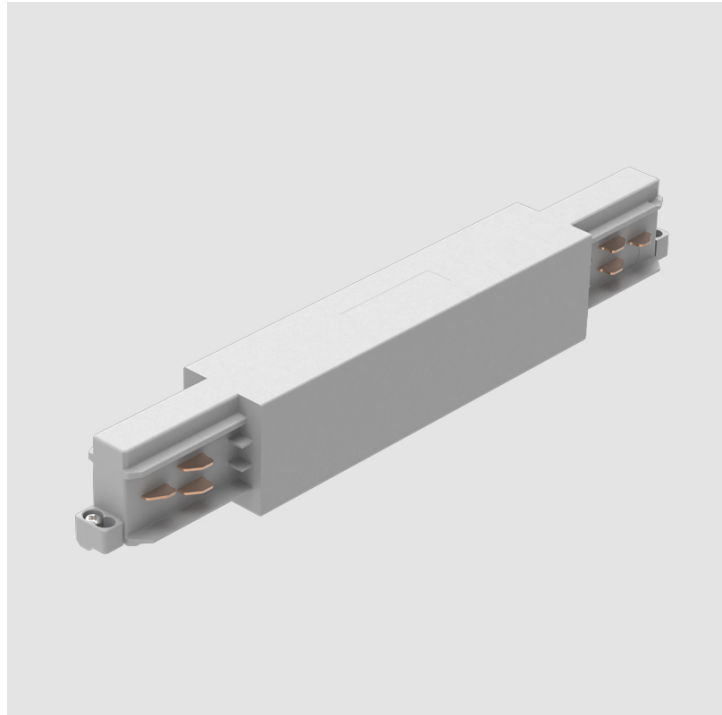

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK



STR2100-

DESCRIPTION
Track - Straight Connector - _____

GENERAL
Partner: Prolight _____
Division: Architectural _____
Installation: Track _____

PHYSICAL
Length (mm): 115 _____
Length (in): 4 1/2 _____
Width (mm): 26 _____
Width (in): 1 _____
Height (mm): 33 _____
Height (in): 1 5/16 _____
Fixture Finish: WHI / BLK / GRY _____
Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards _____
IP rating: IP20 _____

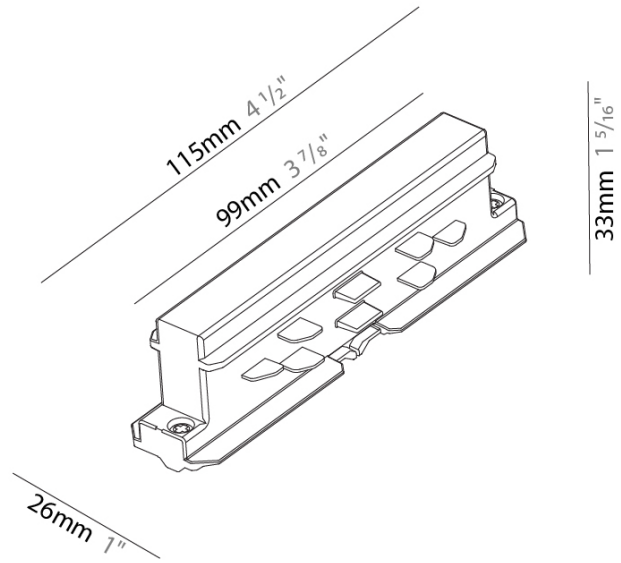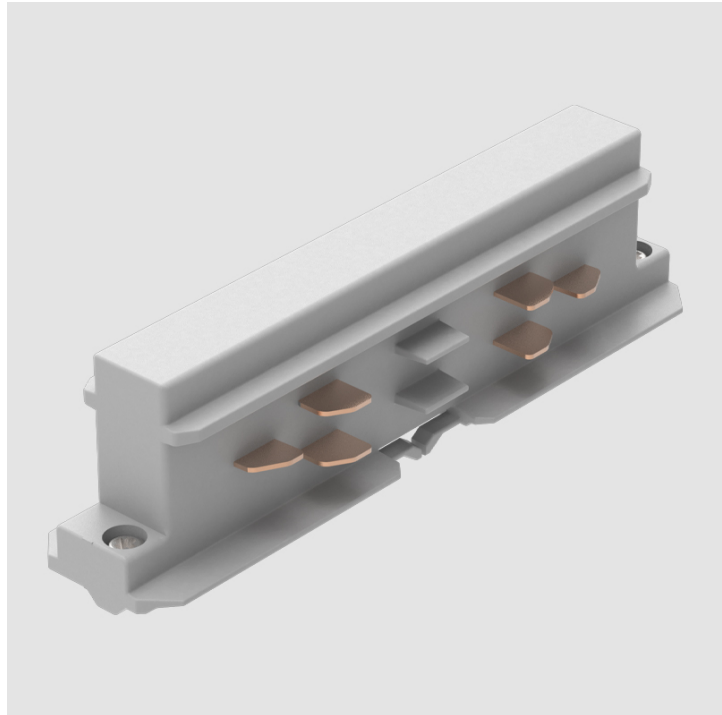

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK



STR3400-

DESCRIPTION
Track - L-Connector, Outside Corner (Feedable) - _____

GENERAL
Partner: Prolicht _____
Division: Architectural _____
Installation: Track _____

PHYSICAL
Length (mm): 143 _____
Length (in): 5 ⁵/₈ _____
Width (mm): 32 _____
Width (in): 1 ¹/₄ _____
Height (mm): 38 _____
Height (in): 1 ¹/₂ _____
Fixture Finish: WHI / BLK / GRY _____
Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards _____
IP rating: IP20 _____

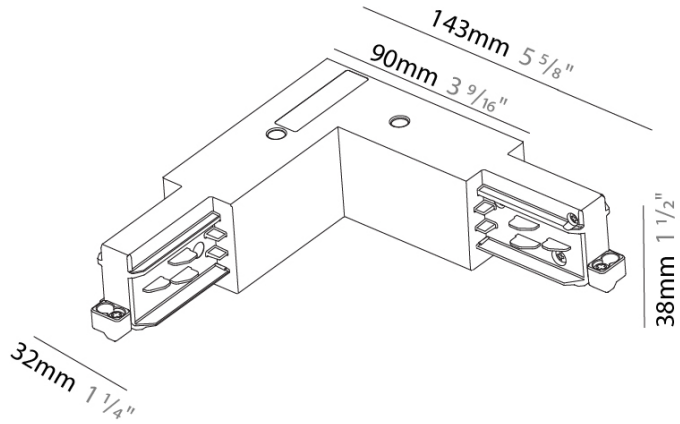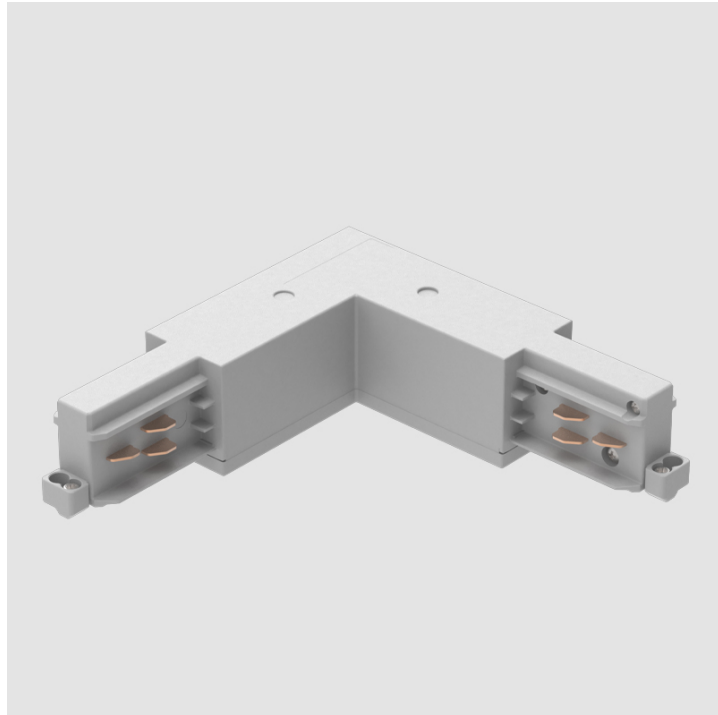

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A32L450-TRK-TRI-SYS COMPONENTS TRACK



STR3500-

DESCRIPTION
 Track - 3-Circuit L-Connector, Inside Corner (Feedable)

GENERAL
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Track _____

PHYSICAL
 Length (mm): 143 _____
 Length (in): 5 ⁵/₈ _____
 Width (mm): 32 _____
 Width (in): 1 ¹/₄ _____
 Height (mm): 38 _____
 Height (in): 1 ¹/₂ _____
 Fixture Finish: WHI / BLK / GRY _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

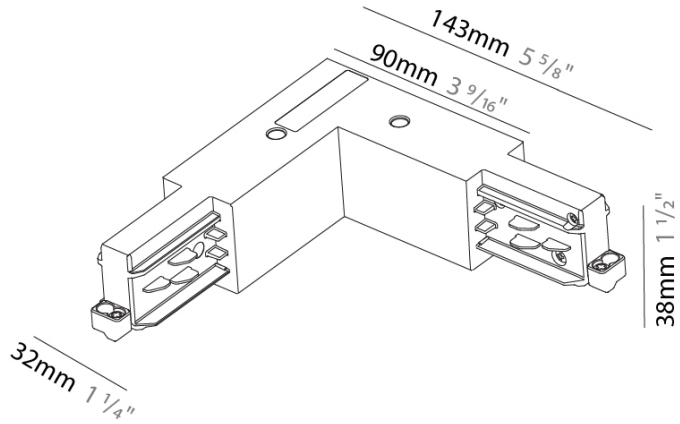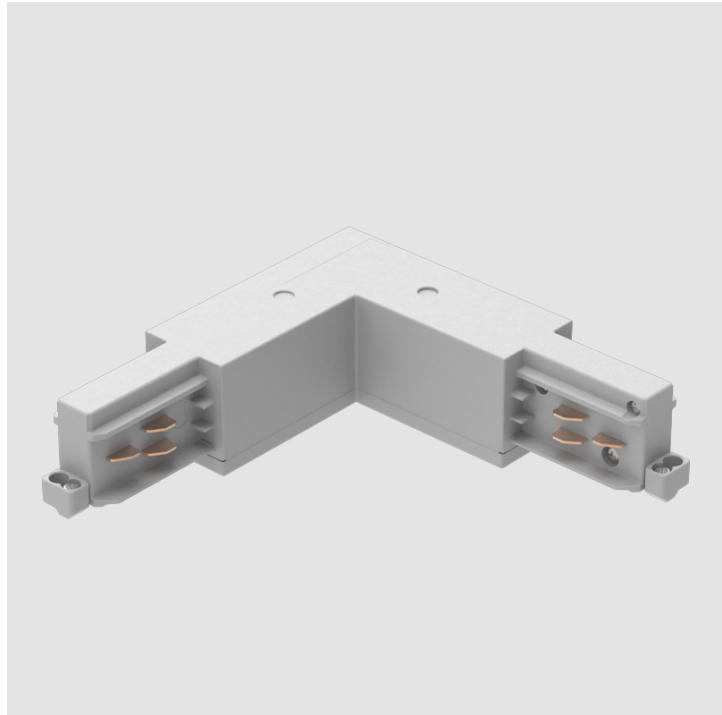

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS SURFACE



STR4100-

DESCRIPTION
Track - Surface - End Cap - _____

GENERAL
Partner: Prolicht _____
Division: Architectural _____
Installation: Surface _____

PHYSICAL
Length (mm): 32 _____
Length (in): 1 1/4 _____
Width (mm): 32 _____
Width (in): 1 1/4 _____
Height (mm): 38 _____
Height (in): 1 1/2 _____
Fixture Finish: WHI / BLK / GRY _____
Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards _____
IP rating: IP20 _____

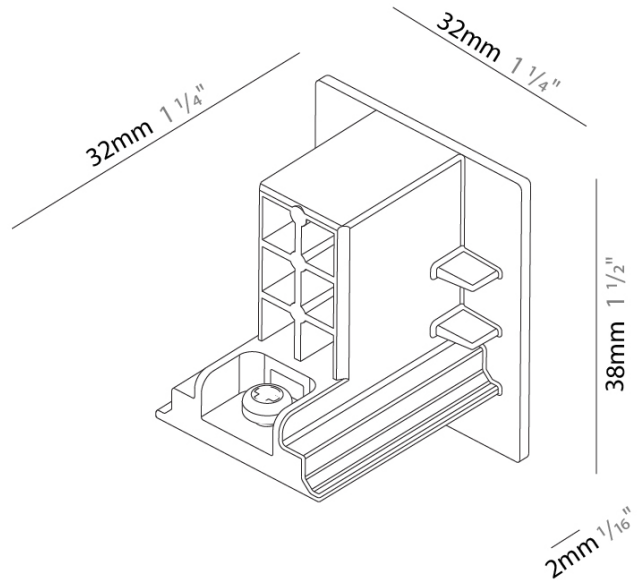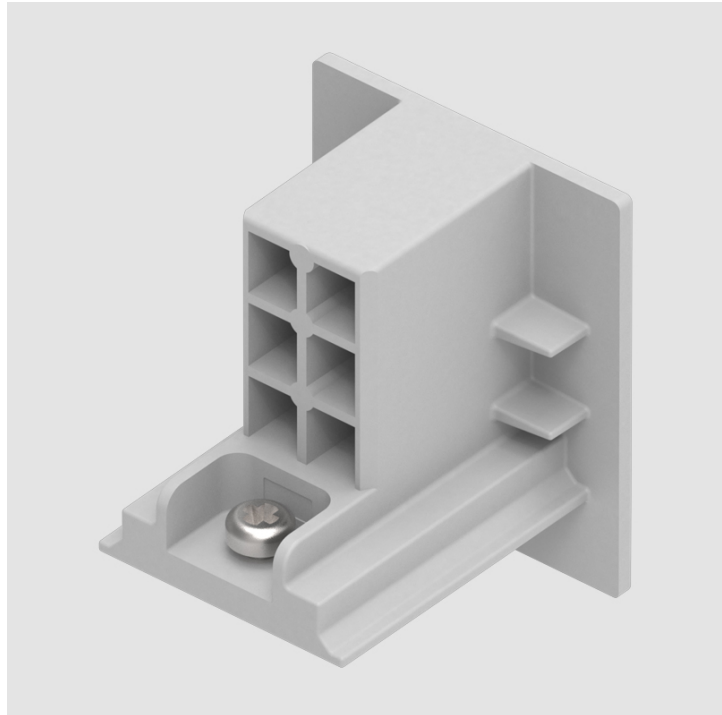

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

STRS4400-



DESCRIPTION
Track - 4' Surface Mount 3-Circuit Track

GENERAL
Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL
Shape: Rectangle
Length (mm): 1219
Length (in): 48
Width (mm): 32
Width (in): 1 1/4
Height (mm): 38
Height (in): 1 1/2
Fixture Finish: WHI / BLK / GRY
Fixture Material: Aluminum

ELECTRICAL
Driver Included: No

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

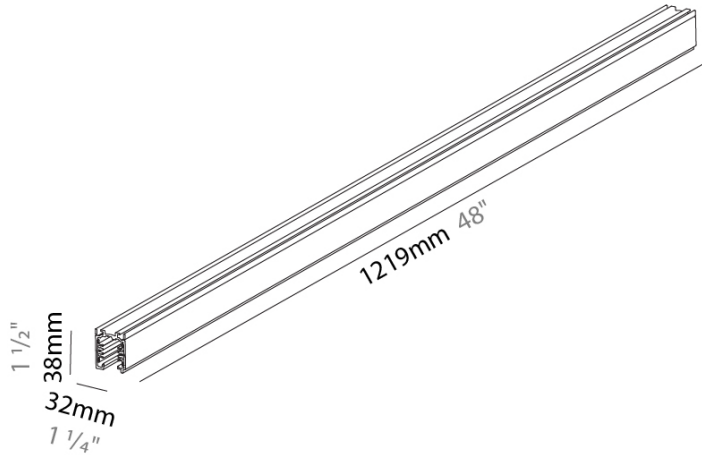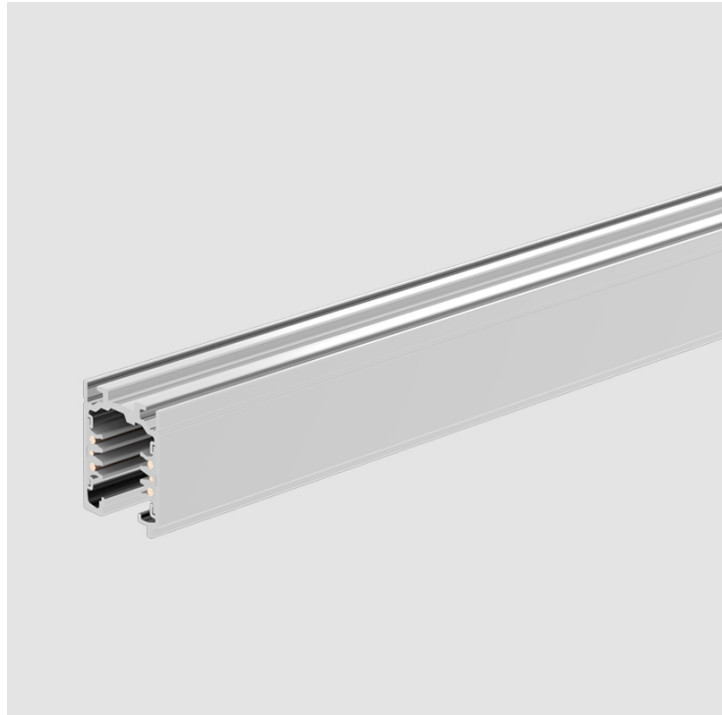

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

STRS4800-



DESCRIPTION
Track - 8' Surface Mount 3-Circuit Track

GENERAL
Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL
Shape: Rectangle
Length (mm): 2438
Length (in): 96"
Width (mm): 32
Width (in): 1 1/4"
Height (mm): 38
Height (in): 1 1/2"
Fixture Finish: WHI / BLK / GRY
Fixture Material: Aluminum

ELECTRICAL
Driver Included: No

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

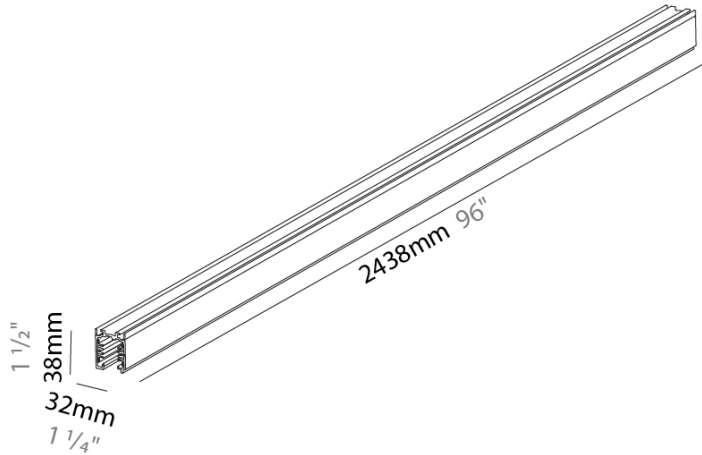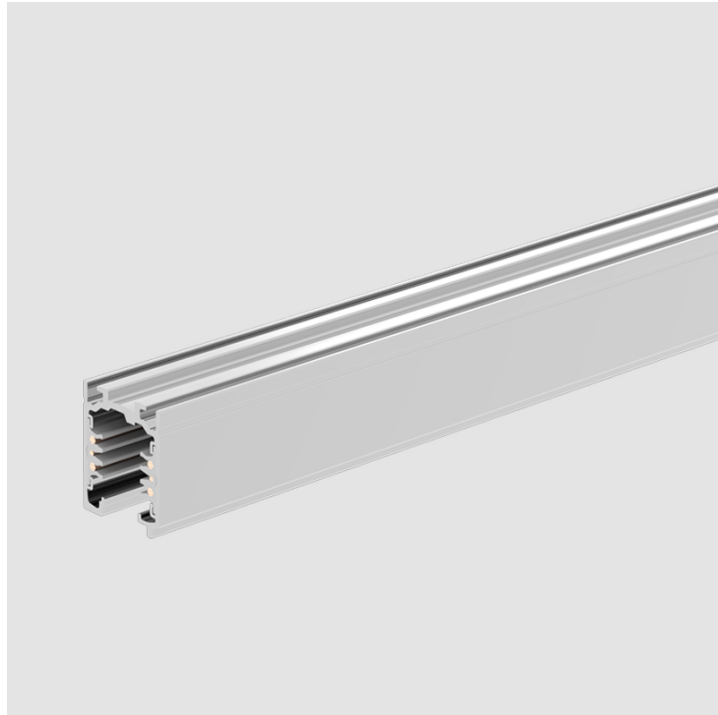

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A32L450-TRK-TRI-SYS COMPONENTS TRACK

STRV120


DESCRIPTION
Cutting Tool for Track Conductors

GENERAL
Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL
Length (mm): 245
Length (in): 9 5/8
Height (mm): 58
Height (in): 2 5/16
Fixture Material: Aluminum

ELECTRICAL
Driver Included: No

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

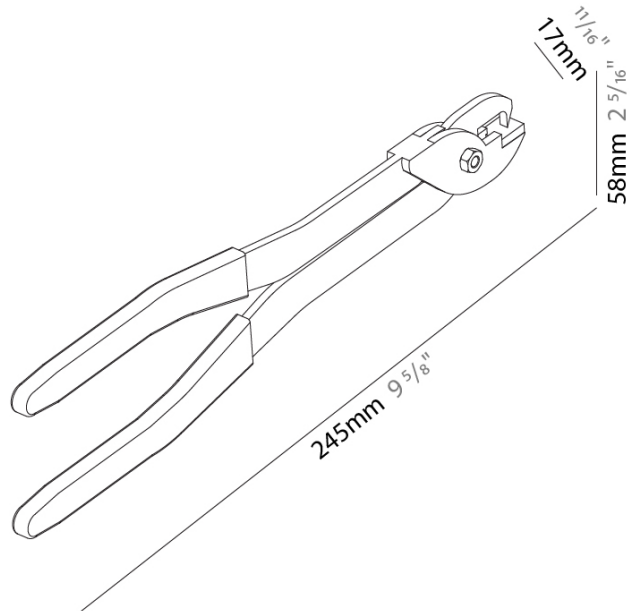

PROJECT _____






































































TYPE _____

NOTES _____











QUANTITY _____

DATE _____











LEGEND

| | | | | | |
|--|---|---|--|---|--|
|  | floor-mounted |  | pivotal |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  | wall and ceiling: recessed and surface mounted |  | rotating |  | warm dim / natural dimming LED |
|  | ceiling-mounted and wall-mounted |  | illuminate tilted |  | rechargeable battery powered |
|  | wall-mounted |  | color of suspension cable |  | fixture with natural vivid LED (upon request) |
|  | omni-directional light distribution |  | length of suspension cable |  | color rendering index |
|  | direct light distribution |  | reflector degree selection |  | color temperature |
|  | direct/indirect light distribution |  | super spot |  | lumen (luminous flux) |
|  | indirect light distribution |  | lens |  | efficacy (lumens per watt) |
|  | asymmetric light distribution |  | lens pack |  | Unified Glare Rating (UGR) range from 5-40 |
|  | aura light distribution |  | shine ring |  | marine grade (AISI 316 stainless steel) |
|  | round wall or ceiling cut-out |  | integrated shine ring with diffuser |  | walk on |
|  | square wall or ceiling cut-out |  | free individual colors 01-29 |  | drive on |
|  | the supplied jig specifies the cutout dimensions |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance |
|  | minimum distance (meters) lamp - object |  | luminaire part to be colored (F1) |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth |  | luminaire part to be colored (F2) |  | lamp protected against explosion |
|  | ceiling thickness in mm |  | luminaire part to be colored (F3) |  | blown glass using traditional methods by master glass blower |
|  | ceiling thickness selection |  | luminaire part to be colored (F4) |  | acoustic material |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5) |  | protection class I, protection insulation |
|  | included or excluded LED driver/transformer/control gear |  | color of 3-circuit adaptor |  | protection class II, protection insulation |
|  | separately switchable |  | indirect diffuser |  | ETL Certified to UL and CSA Standards |
|  | sensor |  | direct diffuser |  | UL Certified to UL and CSA Standards |
|  | remote control |  | ball-proof (upon request) |  | CSA Certified to UL and CSA Standards |
|  | available upon request |  | accessory |  | Certified for North American Standards |

IP RATING

| | |
|---|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  | protected against ingress of dust protected against jets of water |
|  | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|---|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |