

A3CLK30-SUS-SYS COMPONENTS

A380052-

DESCRIPTION

Magiq 4 Korona - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector 10° / 20° / 40°

GENERAL

Series: Magiq
 Subseries: Magiq 4 Cell
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 167
 Length (in): 6 ⁹/₁₆
 Width (mm): 30
 Width (in): 1 ³/₁₆
 Height (mm): 55
 Height (in): 2 ³/₁₆
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16.3
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 1050
 Upon Request: 0-10Vdc Dimming / DALI

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 4
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 780 / 850 / 862 / 880
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 10 / 20 / 40
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

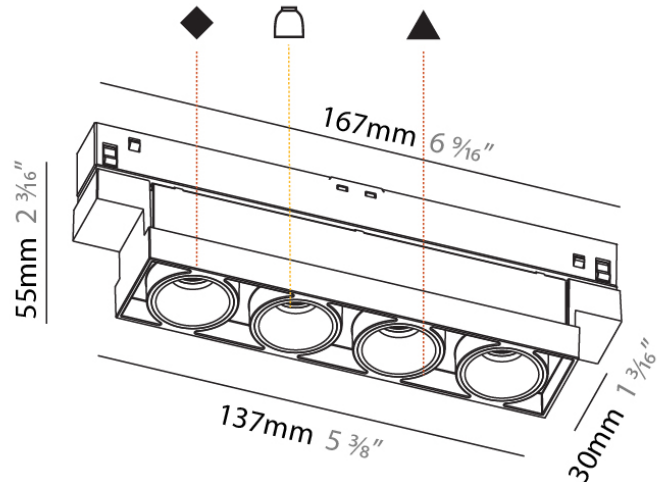

A3CLK30-SUS-SYS COMPONENTS

A380062-

DESCRIPTION

Magiq 4 - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector: 10° / 20° / 40°

GENERAL

Series: Clicktrack
 Subseries: Magiq 4 Cell
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 167
 Length (in): 6 ⁹/₁₆
 Width (mm): 30
 Width (in): 1 ³/₁₆
 Height (mm): 55
 Height (in): 2 ³/₁₆
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16.3
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 1050
 Upon Request: 0-10Vdc Dimming / DALI

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 780 / 850 / 862 / 880
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 10 / 20 / 40
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

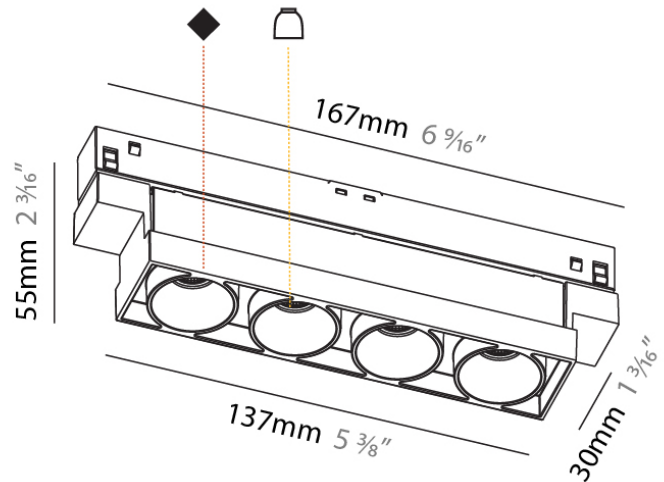

A3CLK30-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


A380106-

DESCRIPTION
Hangover 75 - Indirect Diffuser

GENERAL
Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 70
Diameter (in): 2 ³/₄
Fixture Finish: RED / ORG / YEL / GRN / BLU
Fixture Material: Acrylic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

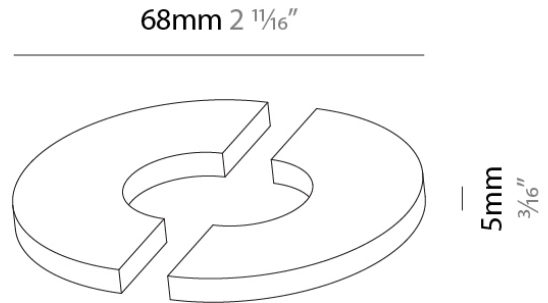

A3CLK30-SUS-SYS COMPONENTS

A38803

DESCRIPTION

Clicktrack - Trimless - 48V Power Feed - Black

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 25
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 143
 Length (in): 5 ¹⁰/₁₆
 Width (mm): 16
 Width (in): 10/16
 Height (mm): 18
 Height (in): 11/16
 Weight (kg): 0.042
 Weight (lbs): 0.09
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

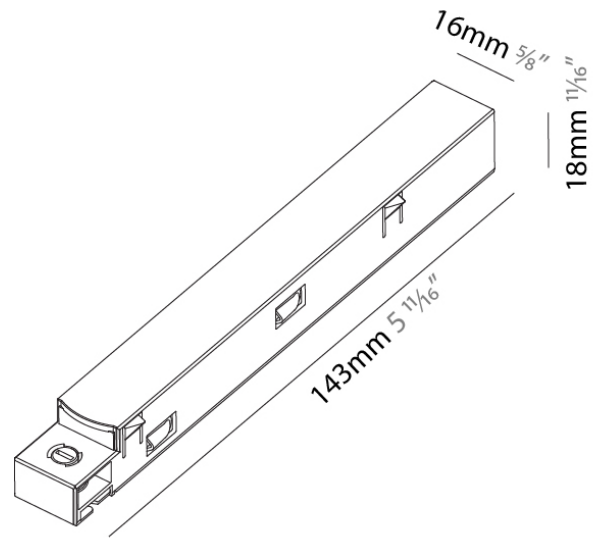

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS SUSPENSION

A38930-

DESCRIPTION

Clicktrack 30 - Aluminum Profile - 1000 / 2000 / 3000mm

GENERAL



Series: Clicktrack
 Subseries: Clicktrack 30
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): $39 \frac{3}{8}$
 Width (mm): 30
 Width (in): $1 \frac{3}{16}$
 Height (mm): 64
 Height (in): $2 \frac{1}{2}$
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

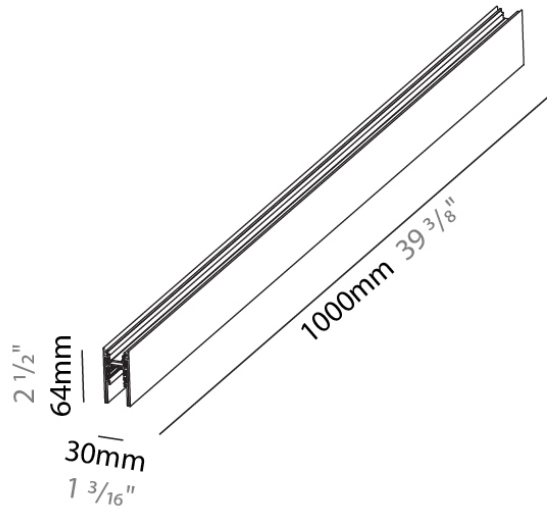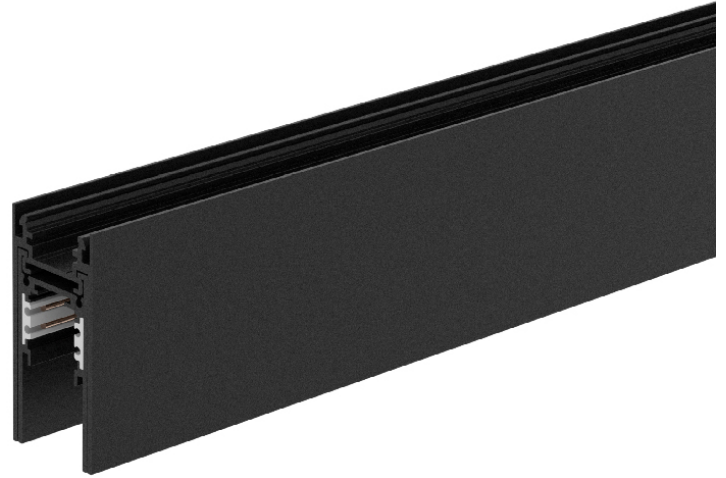

A3CLK30-SUS-SYS COMPONENTS SUSPENSION

A38931-

DESCRIPTION

Clicktrack 30 - Suspension System - End Cap -

GENERAL

Series: Clicktrack

Subseries: Clicktrack 30

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Profile

PHYSICAL

Length (mm): 30

Length (in): 1 ³/₁₆

Width (mm): 12

Width (in): 1/2

Height (mm): 64

Height (in): 2 ¹/₂

Weight (kg): 0.054

Weight (lbs): 1/8



ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

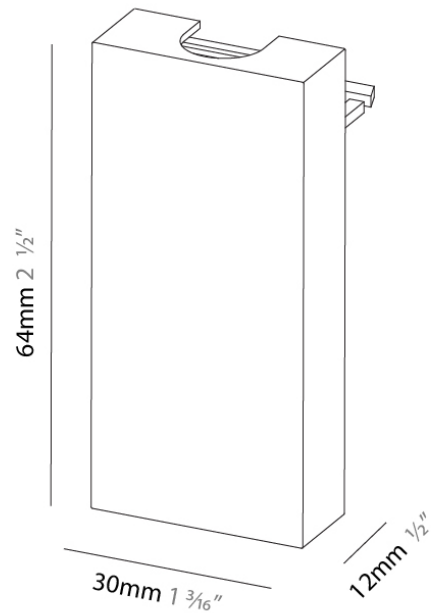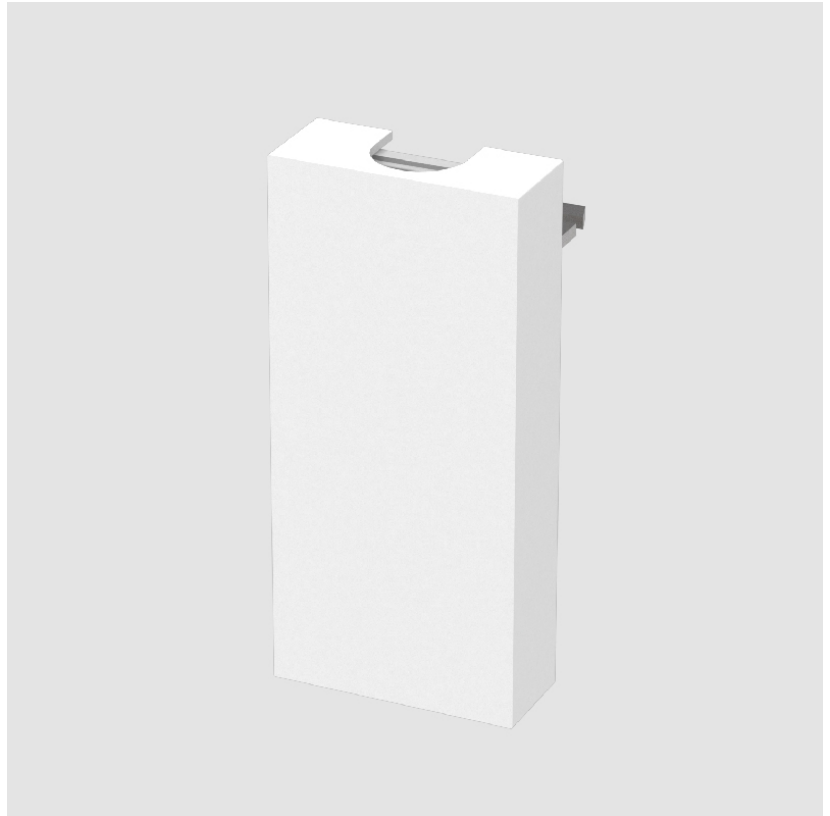

A3CLK30-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A38952

DESCRIPTION

Clicktrack - Suspension System - Linear Coupler - Black

GENERAL

Series: Clicktrack

Subseries: Clicktrack 30

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 142

Length (in): 5 ⁹/₁₆

Width (mm): 18

Width (in): 11/16

Height (mm): 19

Height (in): 3/4

Weight (kg): 0.017

Weight (lbs): 1/16


Fixture Finish: BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

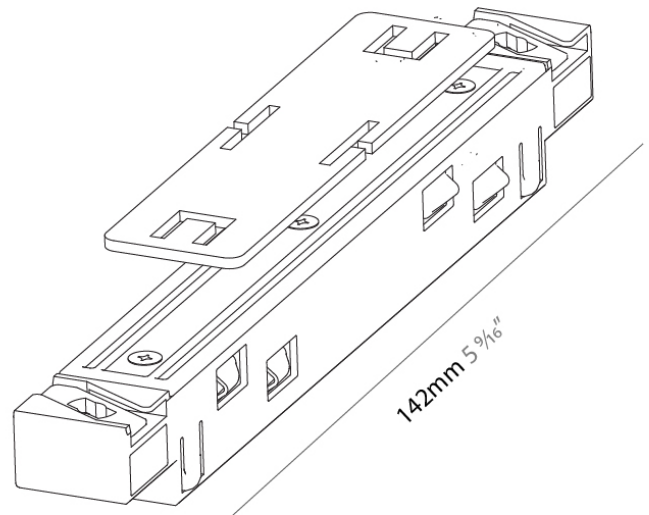

A3CLK30-SUS-SYS COMPONENTS

A38957-

DESCRIPTION

Hypro 30 - Suspension System - Suspension Cable - 2000mm 78 3/4" -

GENERAL

Series: Clicktrack
 Subseries: Clicktrack 30
 Brand: Prolicht
 Division: Architectural


PHYSICAL

Shape: Round
 Length (mm): 26
 Length (in): 1
 Width (mm): 30
 Width (in): 1 3/16
 Height (mm): 2000
 Height (in): 78 3/4
 Weight (kg): 0.029
 Weight (lbs): 0.064
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

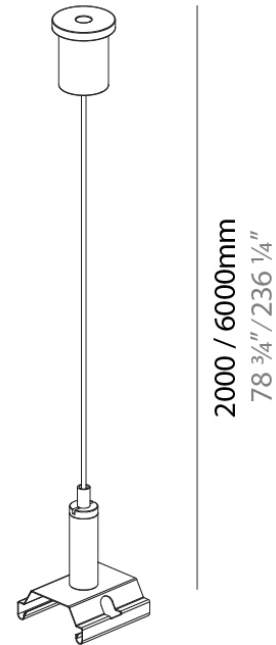

A3CLK30-SUS-SYS COMPONENTS

A38958-

DESCRIPTION

Clicktrack 30 - Suspension System - Suspension Cable - 6000mm
236 1/4" -

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural


PHYSICAL

Shape: Round
Length (mm): 26
Length (in): 1
Width (mm): 30
Width (in): 1 3/16
Height (mm): 6000
Height (in): 236 1/4
Weight (kg): 0.029
Weight (lbs): 0.64
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

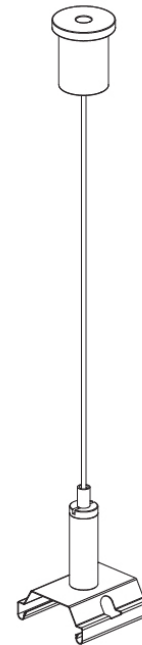

2000 / 6000mm
78 3/4" / 236 1/4"



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3CLK30-SUS-SYS COMPONENTS

A38959-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (Non-Dimming) for Direct Only

GENERAL


Series: Clicktrack
Subseries: Clicktrack 30
Brand: Prolicht
Division: Architectural

PHYSICAL

Length (mm): 528
Length (in): 20 ¹³/₁₆
Width (mm): 64
Width (in): 2 ¹/₂
Height (mm): 30
Height (in): 1 ³/₁₆
Weight (kg): 1.247
Weight (lbs): 2.7
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

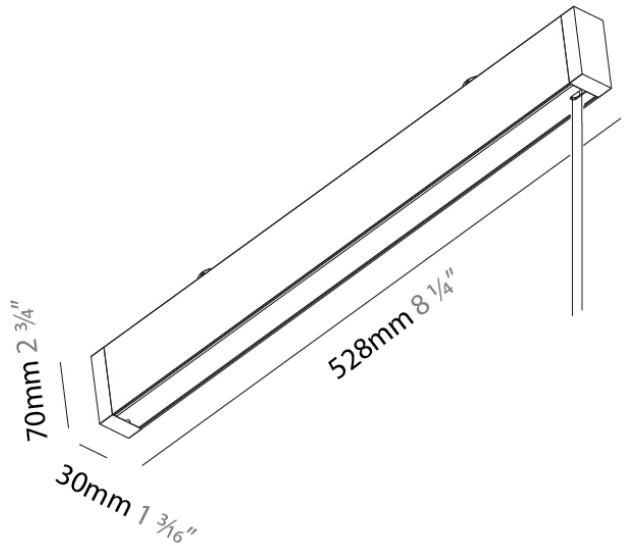

A3CLK30-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38960-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (0-10V Dimming) for Direct Light Only

GENERAL

Series: Clicktrack
 Subseries: Clicktrack 30
 Brand: Prolicht
 Division: Architectural

PHYSICAL


Length (mm): 528
 Length (in): 20 13/16
 Width (mm): 64
 Width (in): 2 1/2
 Height (mm): 30
 Height (in): 1 3/16
 Weight (kg): 1.247
 Weight (lbs): 2.7

ELECTRICAL

Total Output Wattage (W): 100

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

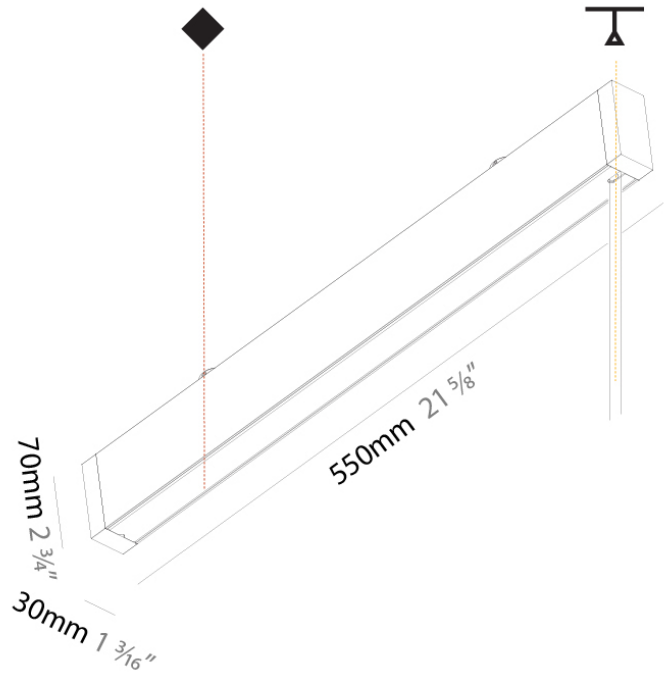

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T078-

DESCRIPTION

Centriq - Track Head - 30mm / 1 3/16" - 4.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°

GENERAL

Series: Centriq
 Subseries: Centriq 125
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 30
 Diameter (in): 1 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 99
 Height (in): 3 7/8
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.063
 Weight (lbs): 0.139
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4.3
 Total Output Wattage (W): 3.9
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 340
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 260 / 270 / 290
 Nominal Lumen (lm): 343.9 / 359.9 / 391.8
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

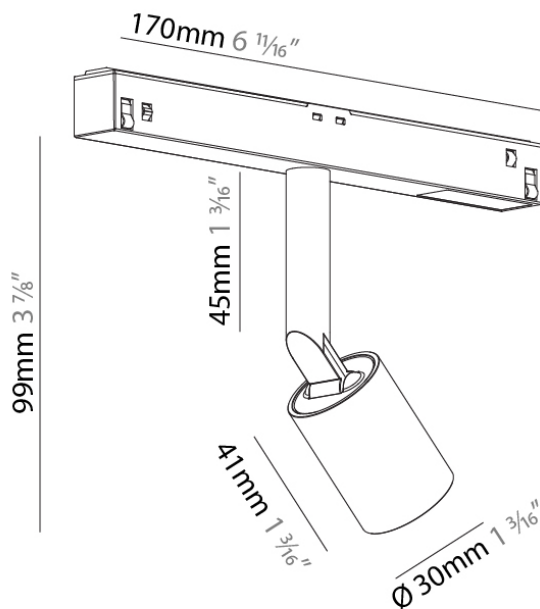

A3CLK30-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T079-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.31W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 113
 Height (in): 4 7/16
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.117
 Weight (lbs): 0.258
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.31
 Total Output Wattage (W): 5.74
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Type: Constant Voltage - 120Vac
 Driver Class: Class 2
 Input Voltage (V): 48

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 360 / 390 / 420
 Nominal Lumen (lm): 448.1 / 483.1 / 513.9
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Beam Angle: 10
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

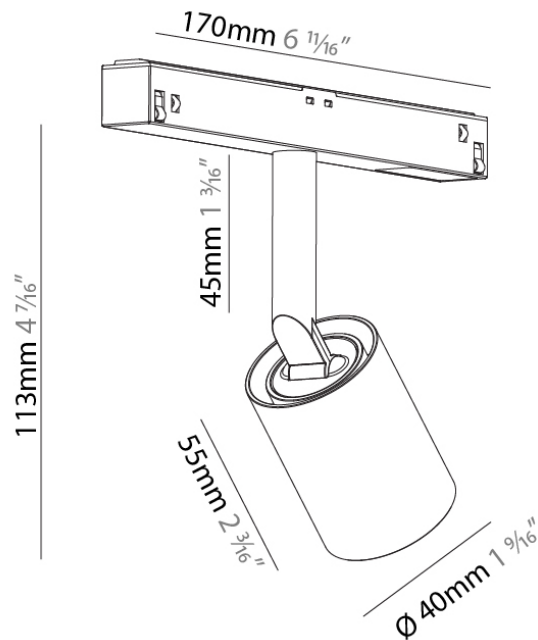

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T080-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 113
 Height (in): 4 7/16
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.144
 Weight (lbs): 0.318
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.5
 Total Output Wattage (W): 5.9
 Driver Included: No

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 468 / 490 / 520
 Nominal Lumen (lm): 732 / 769 / 780
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 20 / 40 / 50
 Optic°: 31 / 36
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

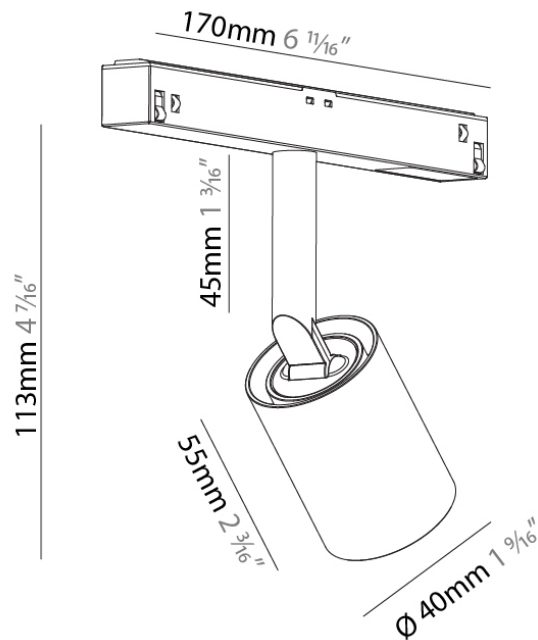

A3CLK30-SUS-SYS COMPONENTS

A3T081-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 9.2W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 137
 Height (in): 5 3/8
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.54
 Weight (lbs): 1.19
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 9.2
 Total Output Wattage (W): 8.4
 Driver Included: No

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 486 / 524 / 548
 Nominal Lumen (lm): 625.3 / 660.1 / 712.4
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector: 9
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

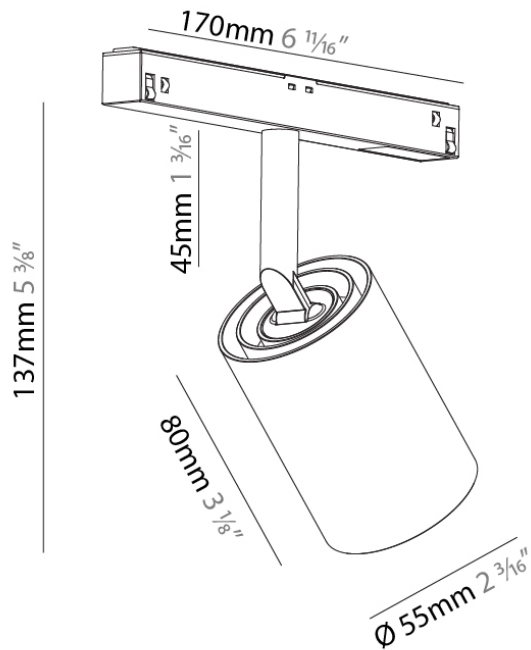

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T082-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 137
 Height (in): 5 3/8
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.548
 Weight (lbs): 1.21
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.8
 Total Output Wattage (W): 11.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 600
 Upon Request: 0-10Vdc dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 760 / 820
 Nominal Lumen (lm): 1196 / 1257 / 1275
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 17 / 33 / 46
 Optic°: 15 / 25 / 35
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

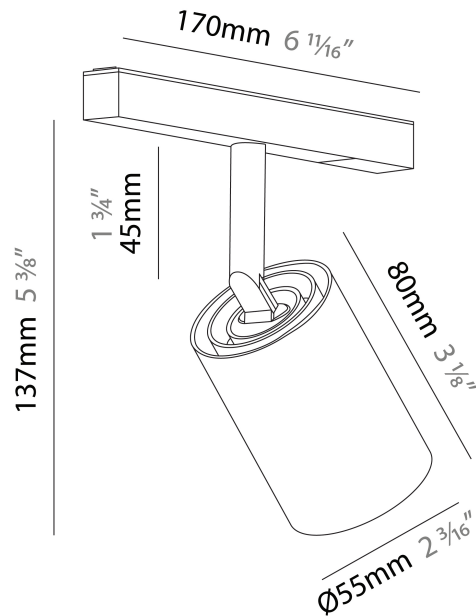

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS

A3T086-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 620mm/24 7/16" - 6.7W / 8W LED (Zhaga Standard) - 2700K / 000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 620
 Length (in): 24 7/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Light Distribution: Direct
 Weight (kg): 0.405
 Weight (lbs): 0.89
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.6 / 7.9
 Total Output Wattage (W): 6 / 7.2
 Dimming: 0-10V Dimming
 Driver Included: No

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 360 / 540
 Nominal Lumen (lm): 600 / 900
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

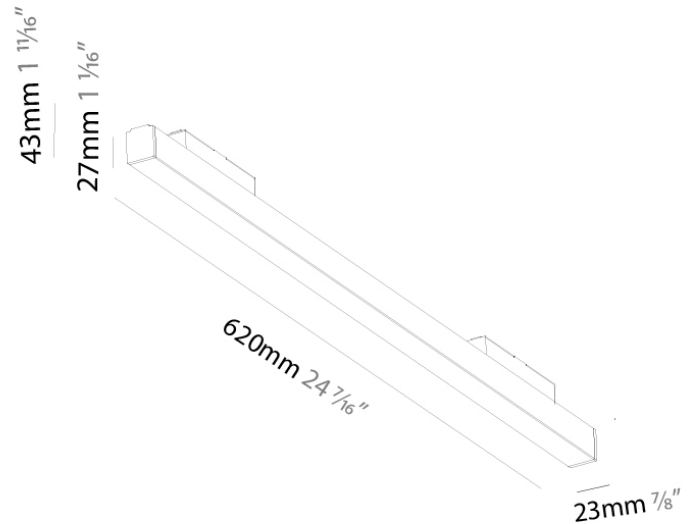

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS

A3T087-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 820mm / 32 5/16" - 8.9W / 10.7W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 820
 Length (in): 32 5/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Light Distribution: Direct
 Weight (kg): 0.531
 Weight (lbs): 1.17
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 8.8 / 10.6
 Total Output Wattage (W): 8 / 9.6
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 480 / 720
 Nominal Lumen (lm): 800 / 1200
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

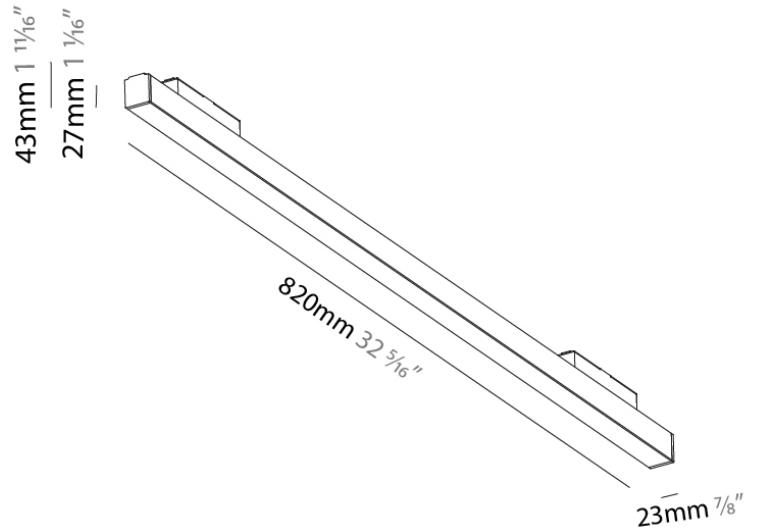

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T088-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1020mm / 40 3/16" - 11.1W / 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 1020
 Length (in): 40 3/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Light Distribution: Direct
 Weight (kg): 0.655
 Weight (lbs): 1.44
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Input Wattage (W): 11.0 / 13.2
 Total Output Wattage (W): 10 / 12
 Driver Included: No

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 600 / 900
 Nominal Lumen (lm): 1000 / 1500
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

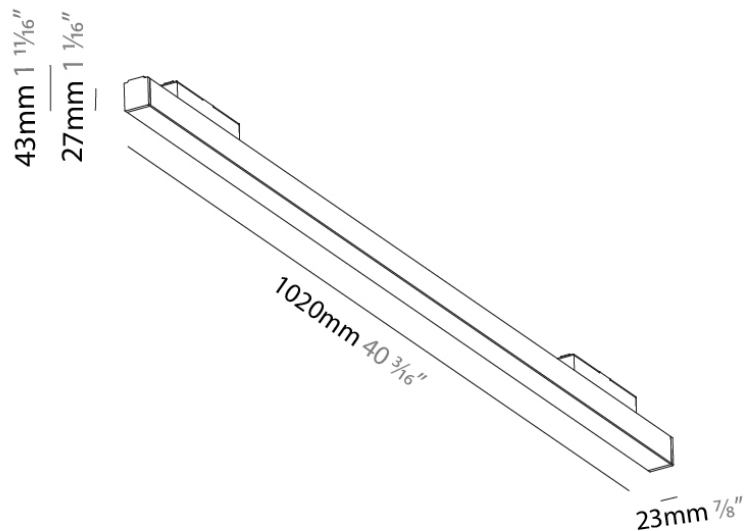

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T089-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1220mm / 48 1/16" - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 1220
 Length (in): 48 1/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Light Distribution: Direct
 Weight (kg): 0.764
 Weight (lbs): 1.684
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 13.2 / 15.8
 Total Output Wattage (W): 12 /
 Dimming: 0-10V Dimming
 Driver Included: No

LED

Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 1080
 Nominal Lumen (lm): 1200
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

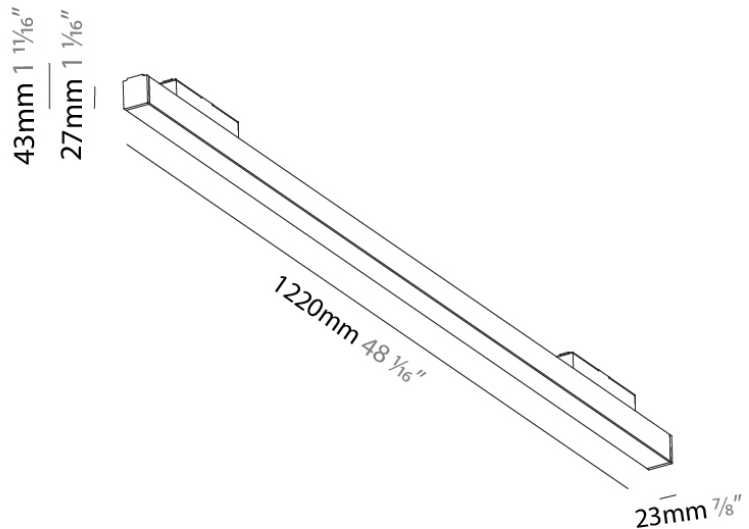

A3CLK30-SUS-SYS COMPONENTS

A3T090-

DESCRIPTION

Snooker - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker
 Subseries: Snooker Modular System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Max. Overall Height (mm): 2072
 Max. Overall Height (in): 81 ⁹/₁₆
 Light Distribution: Downlight
 Weight (kg): 0.506
 Weight (lbs): 1.12
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 270 / 290 / 304 / 310
 Nominal Lumen (lm): 448 / 483 / 504 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

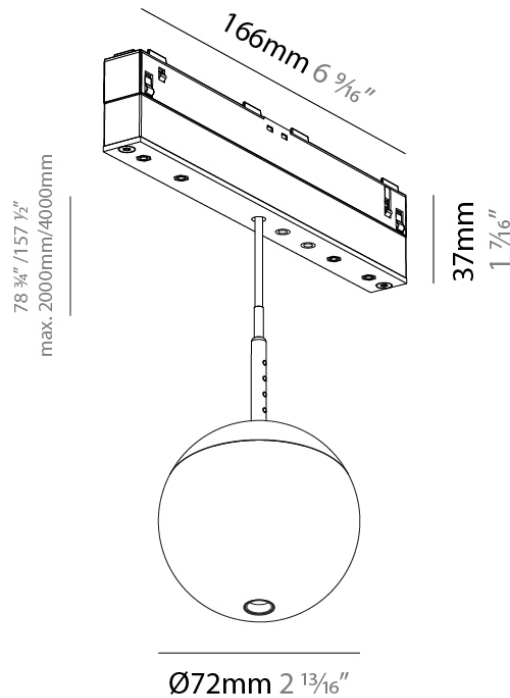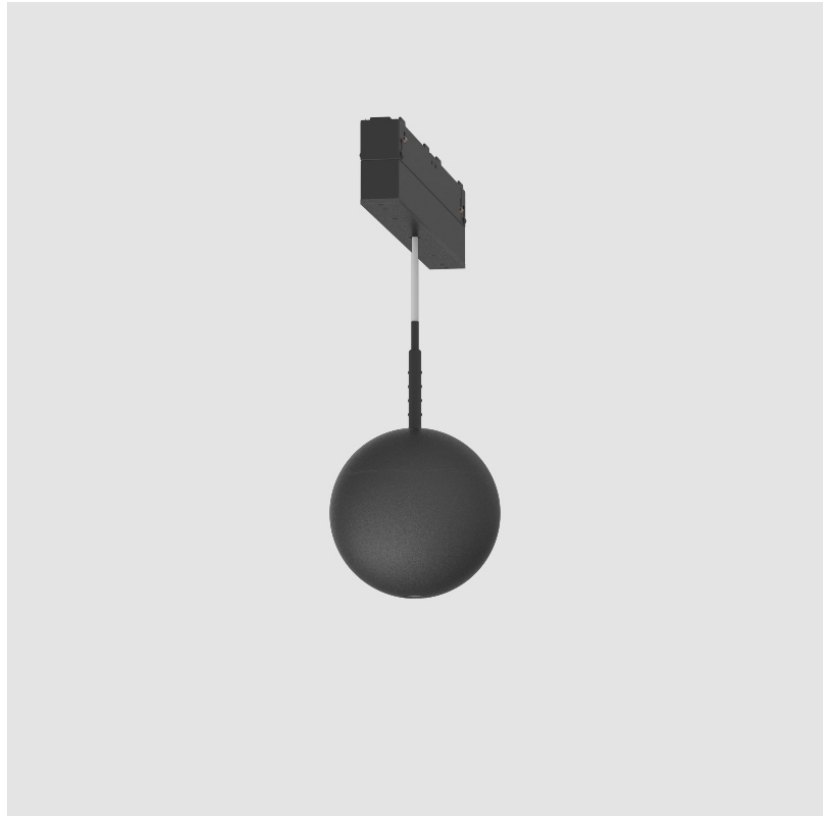

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T091-

DESCRIPTION

Snooker Shine - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Diffuser Shine Ring

GENERAL

Series: Snooker
 Subseries: Snooker Modular System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Max. Overall Height (mm): 2072
 Max. Overall Height (in): 81 ⁹/₁₆
 Light Distribution: Direct
 Weight (kg): 0.506
 Weight (lbs): 1.12
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 1.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 280 / 310 / 330
 Nominal Lumen (lm): 448.1 / 483.1 / 513.9
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

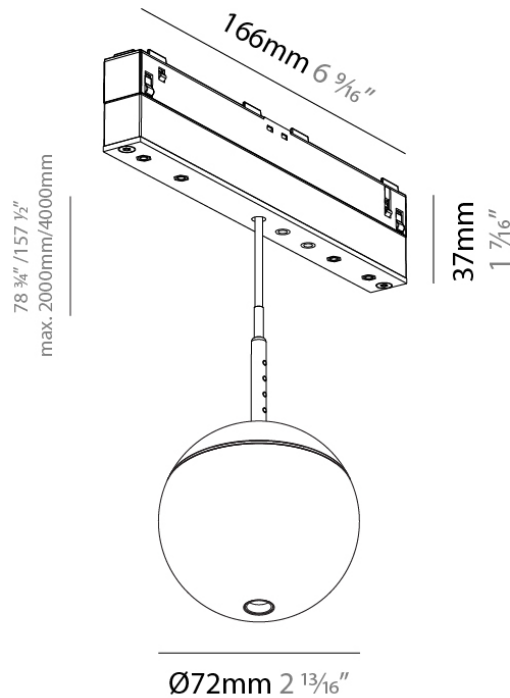

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T117

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Length (mm): 166
 Length (in): 6 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.2
 Weight (lbs): 0.44
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL



Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20
 Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

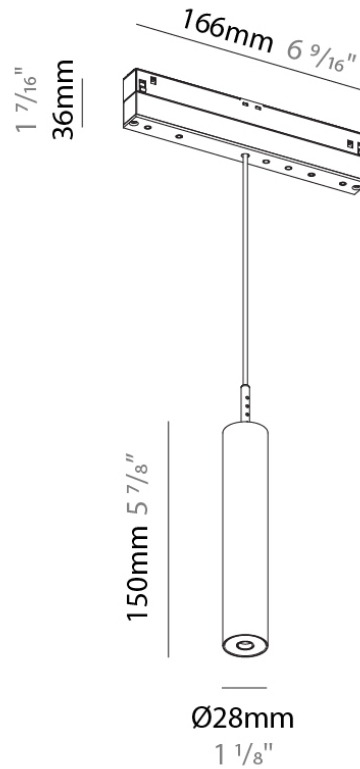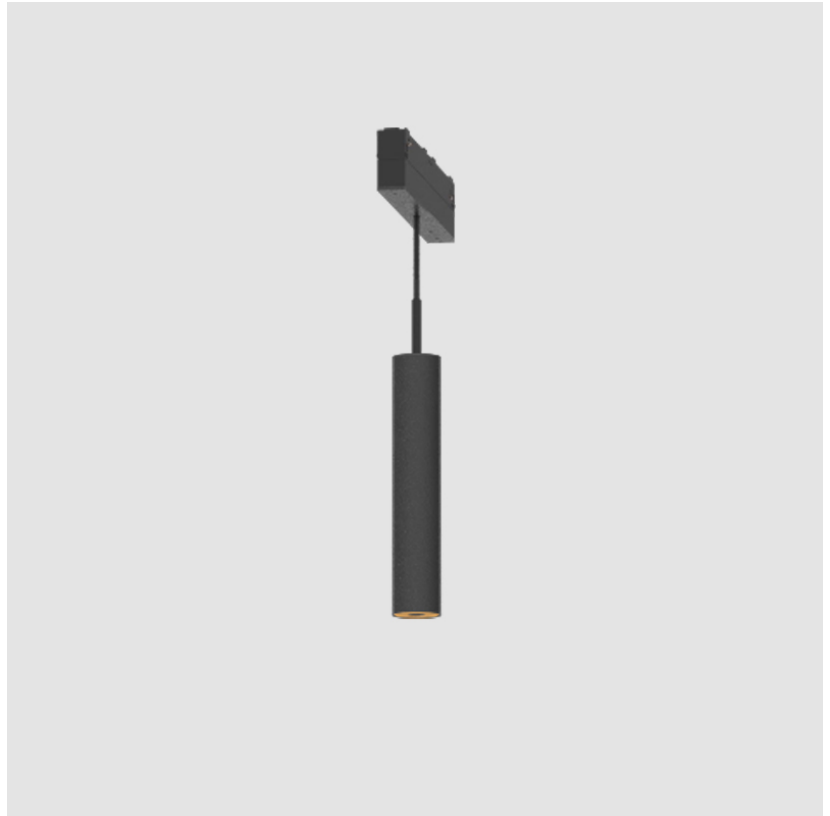

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T118-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

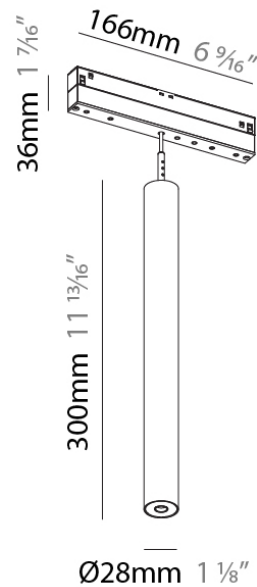

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T119-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED



Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

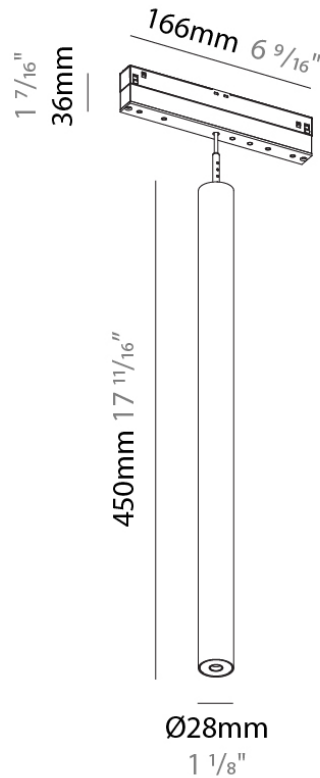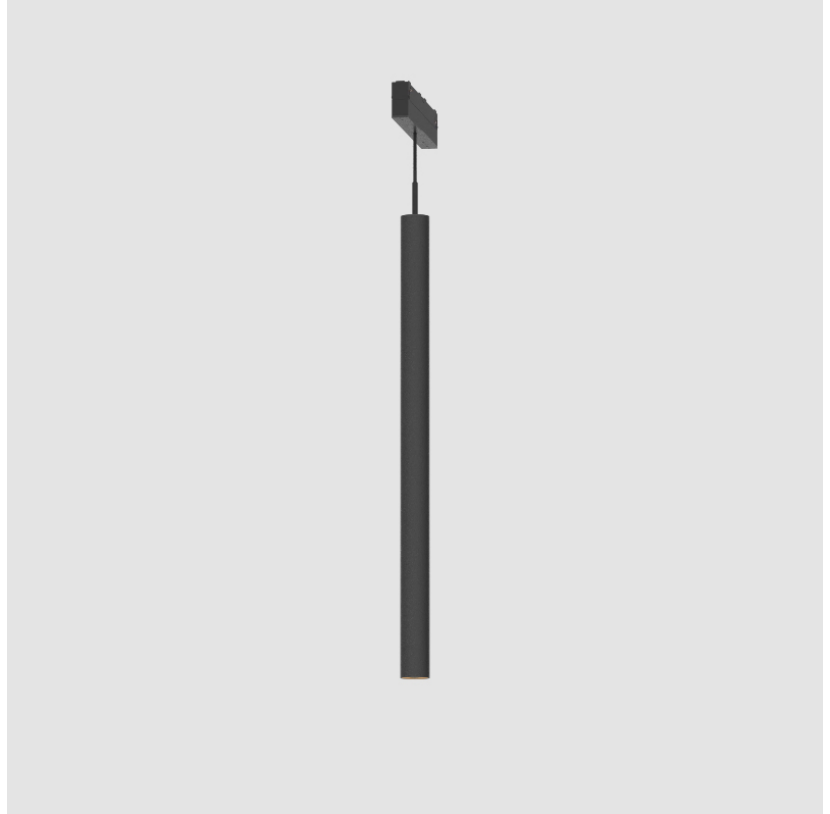

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T120-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Length (mm): 166
 Length (in): 6 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.2
 Weight (lbs): 0.44
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL


Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20
 Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

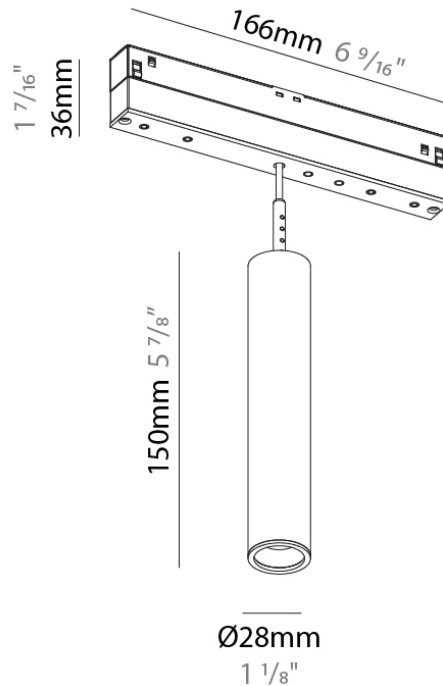

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T121-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

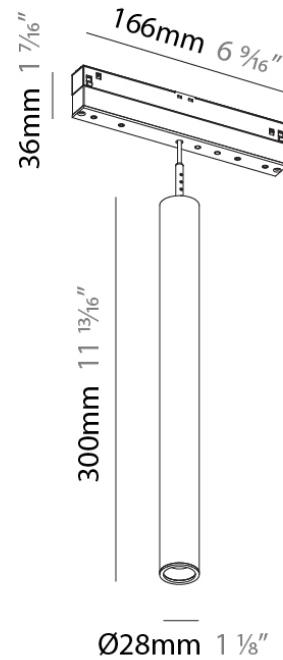

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T122-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

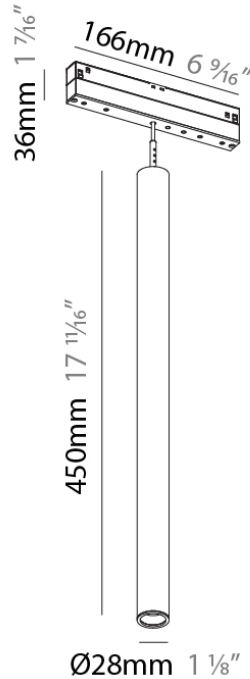

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T129-

DESCRIPTION

Hangover 40 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

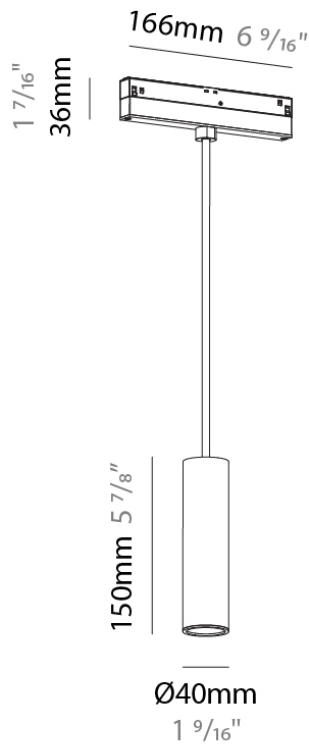

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T130-

DESCRIPTION

Hangover 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

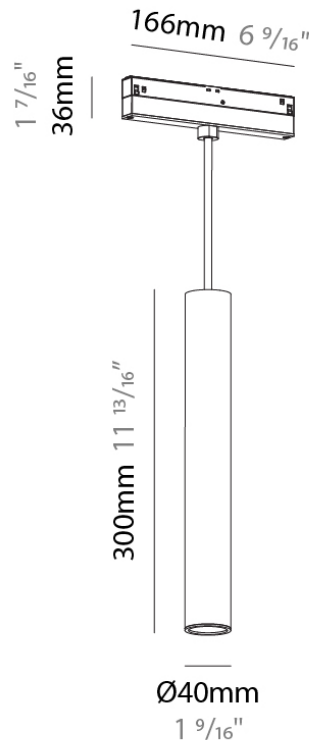

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T131-

DESCRIPTION

Hangover 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Light Distribution: Downlight
 Weight (kg): 0.856
 Weight (lbs): 1.887
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

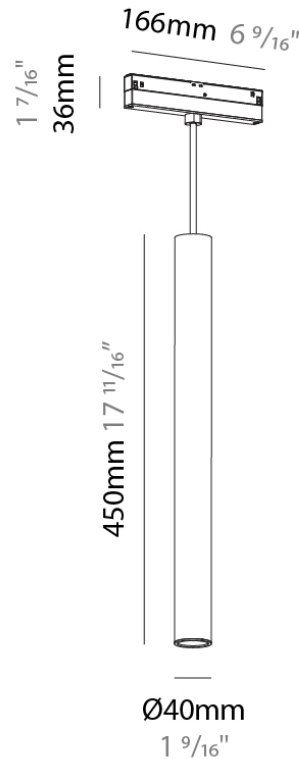

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T132-

DESCRIPTION

Hangover Plug 40 - Track Head - 150mm / 5 7/8" - 10W LED
(Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40° / 50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Downlight

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

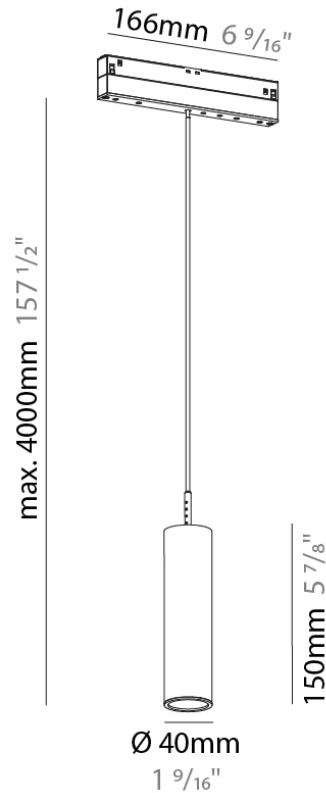

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T133-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 8.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

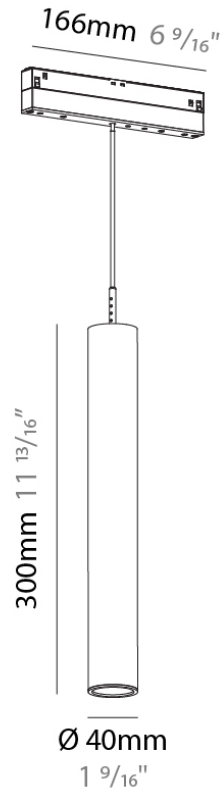

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T134-

DESCRIPTION

Hangover Plug 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 450

Height (in): 17 11/16

Max. Overall Height (mm): 2450

Max. Overall Height (in): 96 7/16

Light Distribution: Downlight

Weight (kg): 0.856

Weight (lbs): 1.887

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

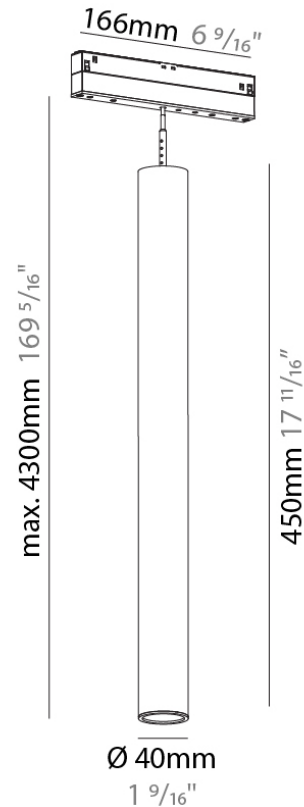

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T135-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover _____

Subseries: Hangover 75 _____

Brand: Prolicht _____

Division: Architectural _____

Mounting Type: Track _____

Mounting Location: Ceiling _____

Subcategory: Downlight _____

PHYSICAL

Shape: Cylinder _____

Diameter (mm): 75 _____

Diameter (in): 2 15/16 _____

Height (mm): 150 _____

Height (in): 5 7/8 _____

Max. Overall Height (mm): 2150 _____

Max. Overall Height (in): 84 5/8 _____

Light Distribution: Downlight _____

Weight (kg): 0.433 _____

Weight (lbs): 0.955 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 8.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 898 / 944 / 956 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____

Lamp Life (hrs): 50000 _____


OPTICAL

Reflector°: 18 / 36 / 52 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

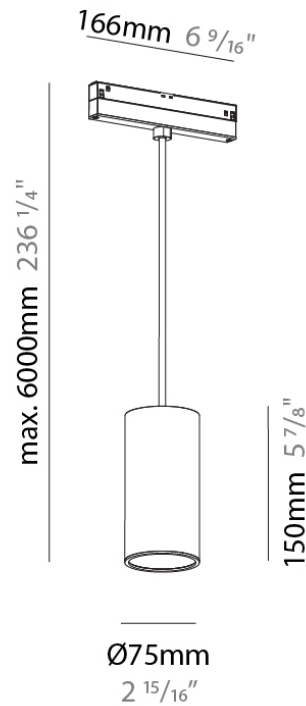

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T136-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover

Subseries: Hangover 75

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Direct / Indirect

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20.8

Total Output Wattage (W): 19

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1729 - 1837

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

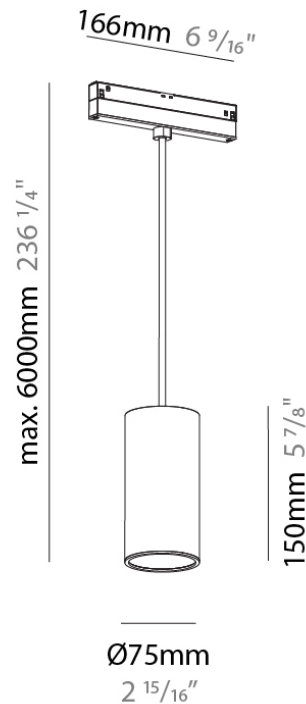

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T137-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
 Subseries: Hangover 75
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 8.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 898 / 944 / 956
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

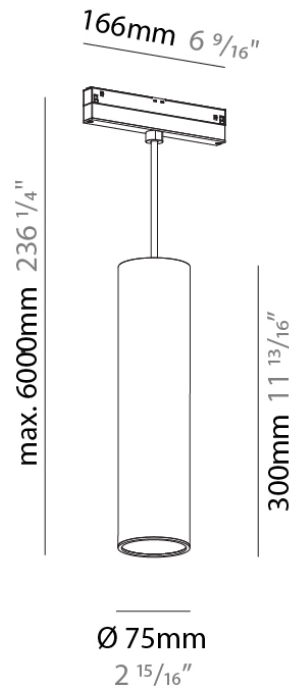

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T138-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - Dir / Ind - 20.8W
LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector
18°/36°/52°

GENERAL

Series: Hangover

Subseries: Hangover 75

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 300

Height (in): 11 13/16

Max. Overall Height (mm): 2300

Max. Overall Height (in): 90 3/16

Light Distribution: Downlight

Weight (kg): 0.666

Weight (lbs): 1.468

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black /
Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20.8

Total Output Wattage (W): 19

Dimming: Non-Dimmable

Driver Included: No

Driver Type: Constant Voltage - Universal

Input Voltage (V): 48

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 1000 - 1999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1729 - 1837

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

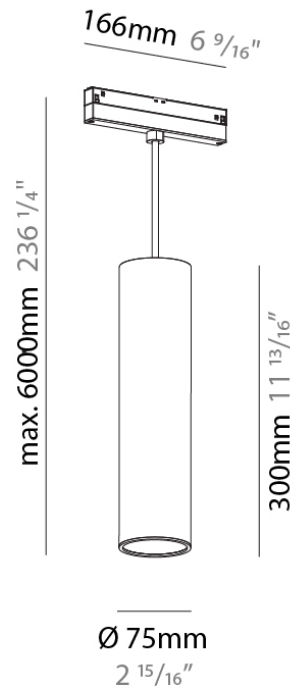

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T139-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - 6W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 75
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 385 / 408 / 442
 Nominal Lumen (lm): 455.22 / 482 / 522.17
 CRI: >90 CRI

OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

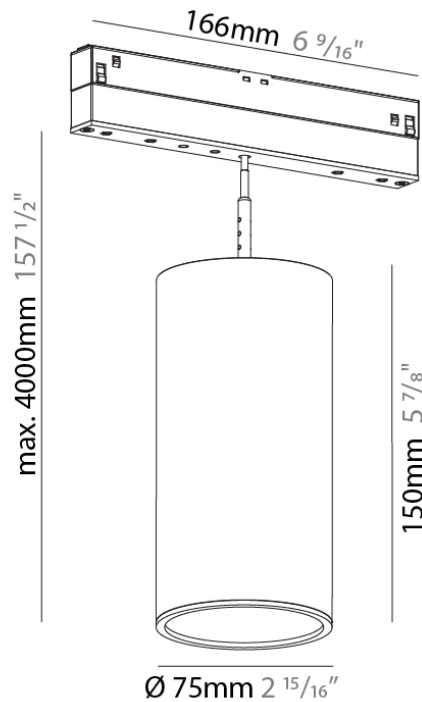

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T140-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover

Subseries: Hangover Plug 75

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Downlight

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 708 - 788

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

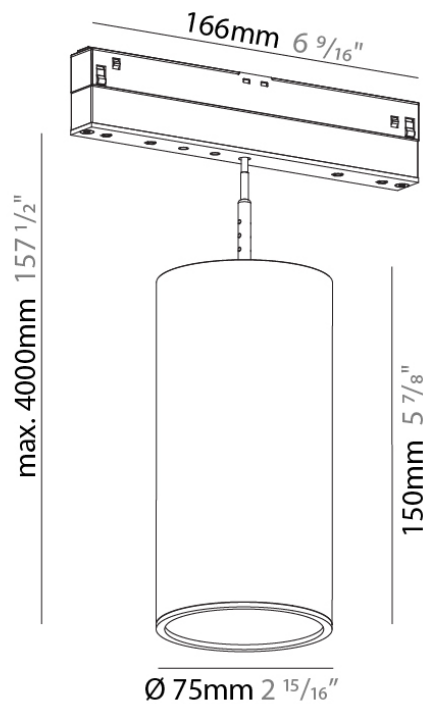

A3CLK30-SUS-SYS COMPONENTS

ENCP50

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 670

Length (in): 26 ³/₈

Width (mm): 44

Width (in): 1 ³/₄

Height (mm): 38


Height (in): 1 ¹/₂

Gasket: 1554JGASKET

Fixture Material: Metal

RATINGS AND CERTIFICATIONS



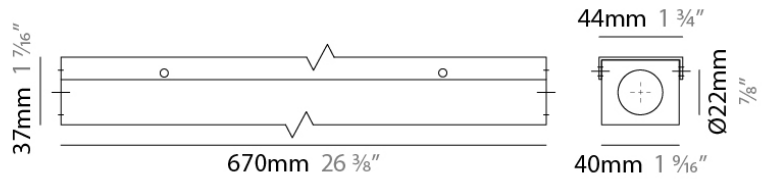







IP rating: IP20



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)