

A3CLK30-SUS-SYS COMPONENTS

A380052-

DESCRIPTION

Magiq 4 Korona - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector 10° / 20° / 40°

GENERAL

Series: Clicktrack

Subseries: Magiq 4 Cell

Partner: Prolicht

Division: Architectural

Light Distribution: Direct

PHYSICAL

Shape: Rectangle

Length (mm): 167

Length (in): 6 ⁹/₁₆

Width (mm): 30

Width (in): 1 ³/₁₆

Height (mm): 55

Height (in): 2 ³/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 16.3

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 1050

Upon Request: 0-10Vdc Dimming / DALI

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 4

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 780 / 850 / 862 / 880

CRI: >90 CRI

Lamp Life (hrs): 50000

Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL


Reflector°: 10 / 20 / 40

Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

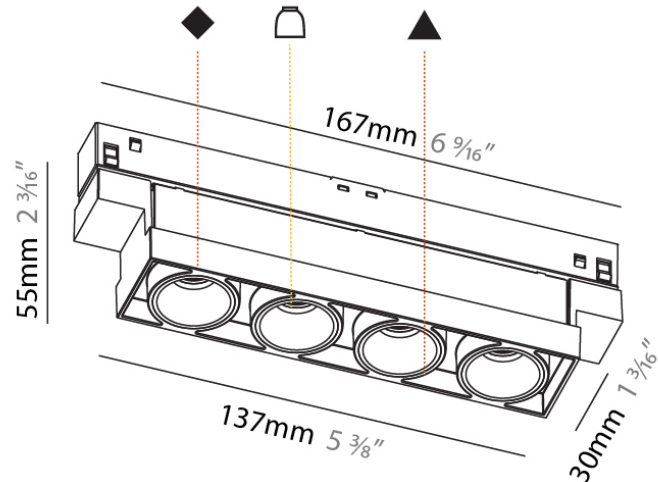

A3CLK30-SUS-SYS COMPONENTS

A380062-

DESCRIPTION

Magiq 4 - Insert for Hypro 30 / 2LOOK4 25 Magtrack - 16.3W LED (Zhaga Standard) - Black - 2700K / 3000K / 4000K - Reflector: 10° / 20° / 40°

GENERAL

Series: Clicktrack
 Subseries: Magiq 4 Cell
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 167
 Length (in): 6 ⁹/₁₆
 Width (mm): 30
 Width (in): 1 ³/₁₆
 Height (mm): 55
 Height (in): 2 ³/₁₆
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16.3
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 1050
 Upon Request: 0-10Vdc Dimming / DALI

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 780 / 850 / 862 / 880
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 10 / 20 / 40
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

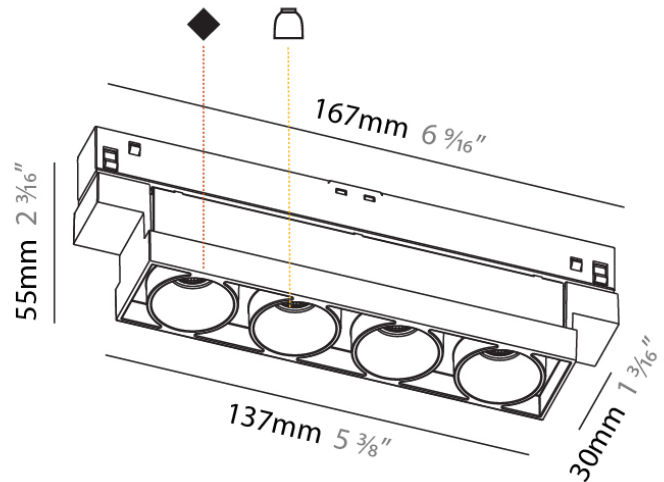

A3CLK30-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


A380106-

DESCRIPTION
Hangover 75 - Indirect Diffuser

GENERAL
Series: Hangover
Subseries: Hangover 75
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 70
Diameter (in): 2 ³/₄
Fixture Finish: RED / ORG / YEL / GRN / BLU
Fixture Material: Acrylic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

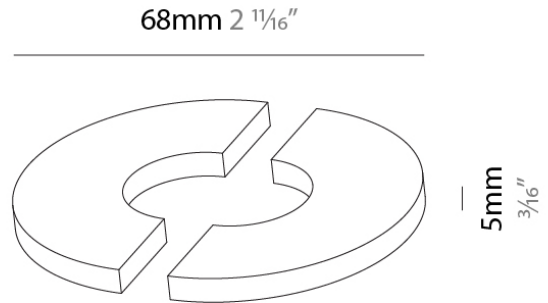

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A38803

DESCRIPTION

Clicktrack - Trimless - 48V Power Feed - Black

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 25
 Partner: Prolight
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 143
 Length (in): 5 ¹⁰/₁₆
 Width (mm): 16
 Width (in): 10/16
 Height (mm): 18
 Height (in): 11/16
 Weight (kg): 0.042
 Weight (lbs): 0.09
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

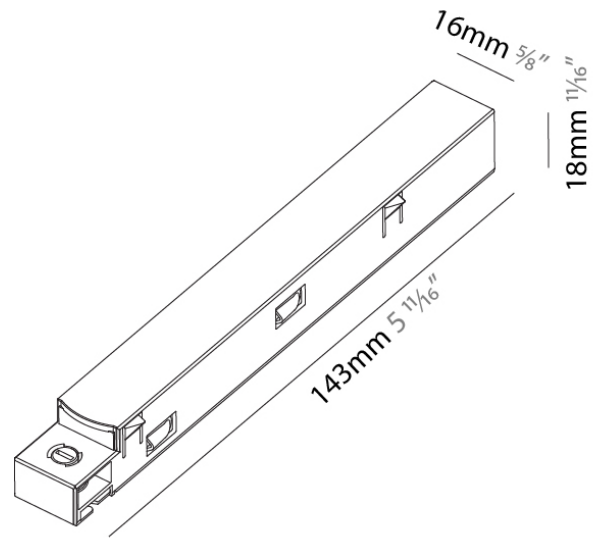

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS SUSPENSION

A38930-

DESCRIPTION

Clicktrack 30 - Aluminum Profile - 1000 / 2000 / 3000mm

GENERAL



Series: Clicktrack
 Subseries: Clicktrack 30
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 ³/₈
 Width (mm): 30
 Width (in): 1 ³/₁₆
 Height (mm): 64
 Height (in): 2 ¹/₂
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

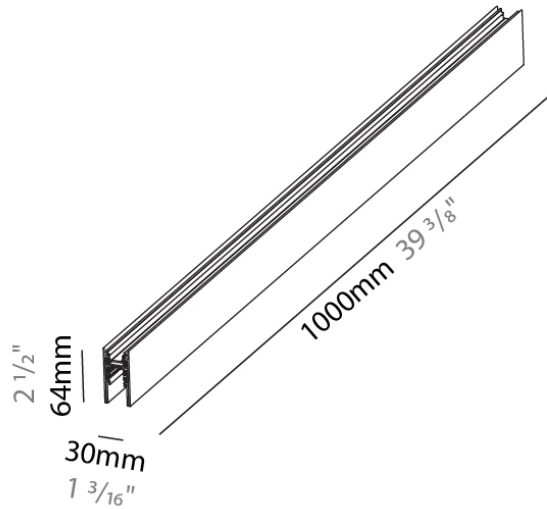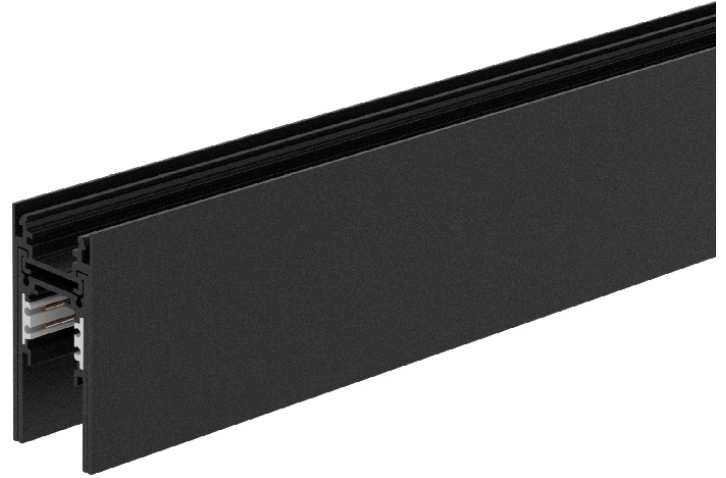

A3CLK30-SUS-SYS COMPONENTS SUSPENSION

A38931-

DESCRIPTION

Clicktrack 30 - Suspension System - End Cap -

GENERAL

Series: Clicktrack
 Subseries: Clicktrack 30
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL



Length (mm): 30
 Length (in): 1 ³/₁₆
 Width (mm): 12
 Width (in): 1/2
 Height (mm): 64
 Height (in): 2 ¹/₂
 Weight (kg): 0.054
 Weight (lbs): 1/8

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

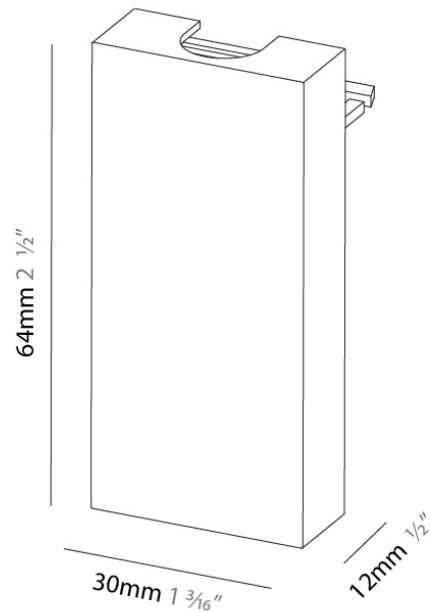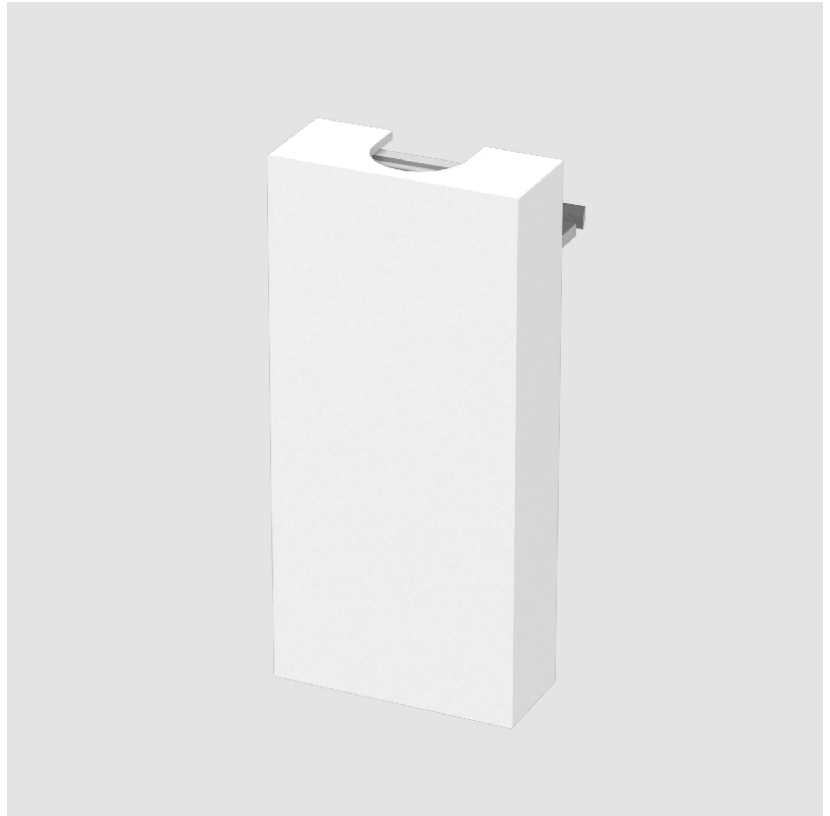

A3CLK30-SUS-SYS COMPONENTS

A38952

DESCRIPTION

Clicktrack - Suspension System - Linear Coupler - Black

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 30
 Partner: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 142
 Length (in): 5 ⁹/₁₆
 Width (mm): 18
 Width (in): 11/16
 Height (mm): 19
 Height (in): 3/4
 Weight (kg): 0.017
 Weight (lbs): 1/16
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

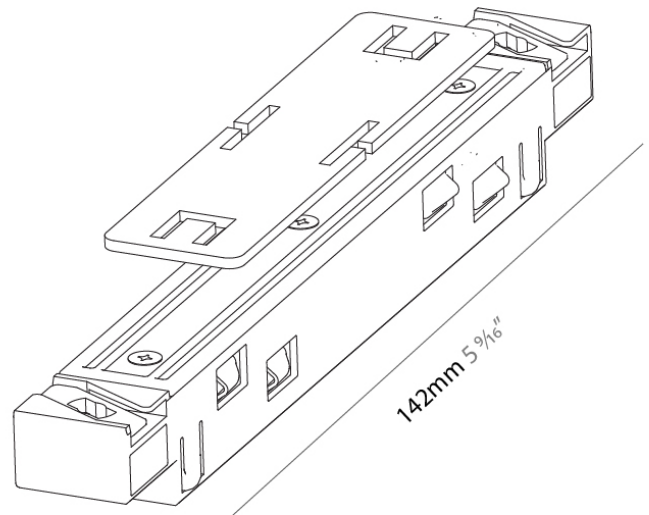

A3CLK30-SUS-SYS COMPONENTS

A38957-

DESCRIPTION

Clicktrack 30 - Suspension System - Suspension Cable - 2000mm
78 3/4" -

GENERAL

Series: Clicktrack
Subseries: Clicktrack 30
Partner: Prolicht
Division: Architectural


PHYSICAL

Shape: Round
Length (mm): 26
Length (in): 1
Width (mm): 30
Width (in): 1 3/16
Height (mm): 2000
Height (in): 78 3/4
Weight (kg): 0.029
Weight (lbs): 0.064
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

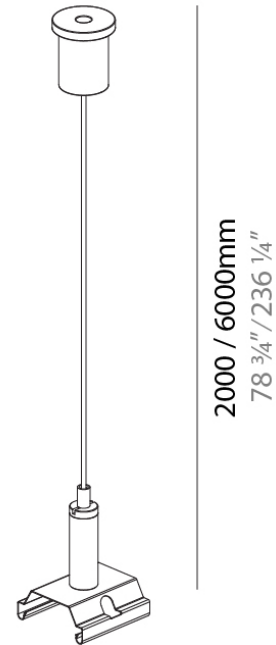

A3CLK30-SUS-SYS COMPONENTS

A38958-

DESCRIPTION
 Clicktrack 30 - Suspension System - Suspension Cable - 6000mm
 236 1/4" -

GENERAL
 Series: Clicktrack
 Subseries: Clicktrack 30
 Partner: Prolicht
 Division: Architectural

PHYSICAL
 Shape: Round
 Length (mm): 26
 Length (in): 1
 Width (mm): 30
 Width (in): 1 3/16
 Height (mm): 6000
 Height (in): 236 1/4
 Weight (kg): 0.029
 Weight (lbs): 0.64
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3CLK30-SUS-SYS COMPONENTS

A38959-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (Non-Dimming) for Direct Only

GENERAL


Series: Clicktrack
Subseries: Clicktrack 30
Partner: Prolicht
Division: Architectural

PHYSICAL

Length (mm): 528
Length (in): 20 ¹³/₁₆
Width (mm): 64
Width (in): 2 ¹/₂
Height (mm): 30
Height (in): 1 ³/₁₆
Weight (kg): 1.247
Weight (lbs): 2.7
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

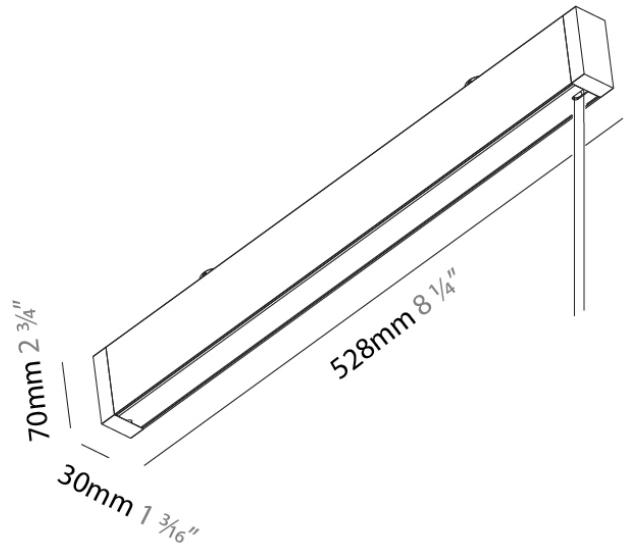

A3CLK30-SUS-SYS COMPONENTS

A38960-

DESCRIPTION

Clicktrack 30 - Suspension System - 528mm 20 13/16" Supply Unit 100W 48V (0-10V Dimming) for Direct Light Only

GENERAL

Series: Clicktrack

Subseries: Clicktrack 30

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 528

Length (in): 20 13/16

Width (mm): 64

Width (in): 2 1/2

Height (mm): 30

Height (in): 1 3/16

Weight (kg): 1.247

Weight (lbs): 2.7

ELECTRICAL

Total Output Wattage (W): 100

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

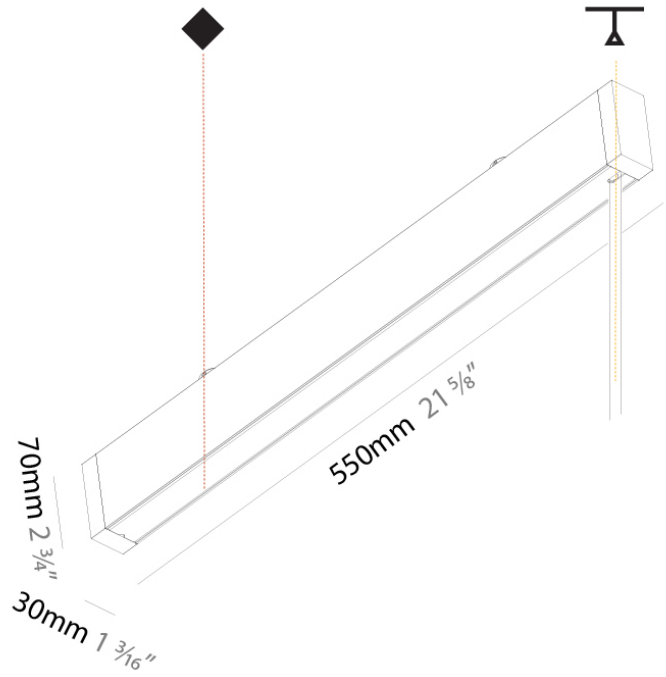

A3CLK30-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A39014-

DESCRIPTION

Suspension Power Feed 5x0.75 - 2000mm

GENERAL

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 ³/₄

Length (mm): 2000

Length (in): 78 ³/₄

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 30

Height (in): 1 ¹/₁₆

Weight (kg): 0.3

Weight (lbs): 0.661


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

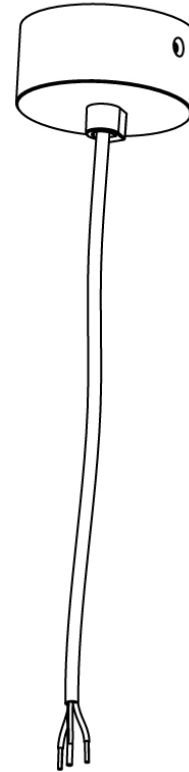

A

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T078-

DESCRIPTION

Centriq - Track Head - 30mm / 1 3/16" - 4.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°

GENERAL

Series: Centriq
 Subseries: Centriq 125
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 30
 Diameter (in): 1 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 99
 Height (in): 3 7/8
 Weight (kg): 0.063
 Weight (lbs): 0.139
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4.3
 Total Output Wattage (W): 3.9
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 340
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 260 / 270 / 290
 Nominal Lumen (lm): 343.9 / 359.9 / 391.8
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic: 24 / 32
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

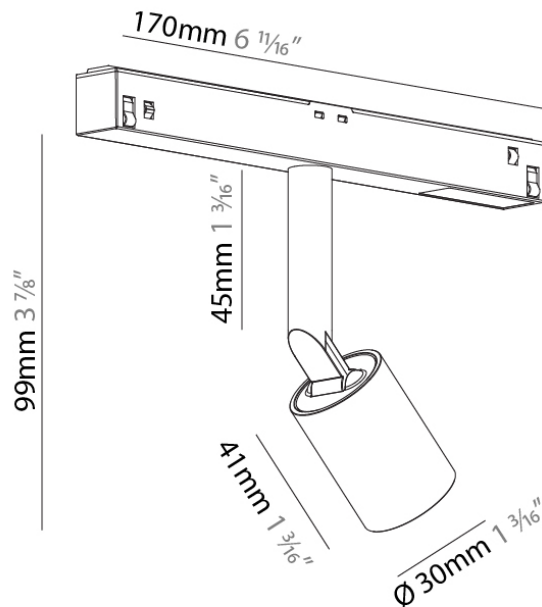

A3CLK30-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T079-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.31W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 113
 Height (in): 4 7/16
 Weight (kg): 0.117
 Weight (lbs): 0.258
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.31
 Total Output Wattage (W): 5.74
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Type: Constant Voltage - 120Vac
 Driver Class: Class 2
 Input Voltage (V): 48

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 360 / 390 / 420
 Nominal Lumen (lm): 448.1 / 483.1 / 513.9
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Beam Angle: 10
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

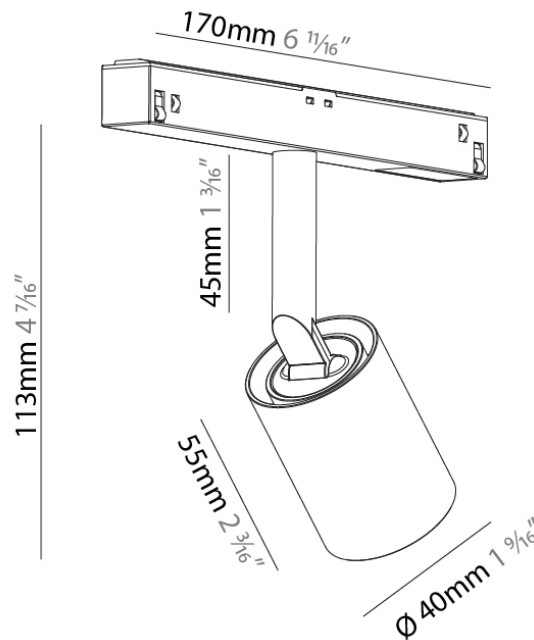

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T080-

DESCRIPTION

Centriq - Track Head - 40mm / 1 9/16" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Adjustable

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 113
 Height (in): 4 7/16
 Weight (kg): 0.144
 Weight (lbs): 0.318

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.5
 Total Output Wattage (W): 5.9
 Driver Included: No

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 468 / 490 / 520
 Nominal Lumen (lm): 732 / 769 / 780
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 20 / 40 / 50
 Optic°: 31 / 36
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

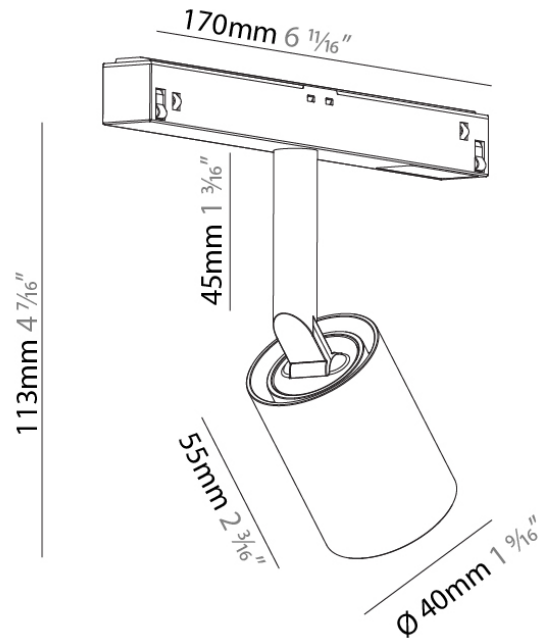

A3CLK30-SUS-SYS COMPONENTS

A3T081-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 9.2W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq _____
 Partner: Prolight _____
 Division: Architectural _____
 Light Distribution: Adjustable _____

PHYSICAL

Aperture Sizes - Downlights: 2" _____
 Shape: Cylinder _____
 Diameter (mm): 55 _____
 Diameter (in): 2 3/16 _____
 Length (mm): 170 _____
 Length (in): 6 11/16 _____
 Height (mm): 137 _____
 Height (in): 5 3/8 _____
 Weight (kg): 0.54 _____
 Weight (lbs): 1.19 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 9.2 _____
 Total Output Wattage (W): 8.4 _____
 Driver Included: No _____

LED


Delivered Lumen Range: 500 - 999 lm _____
 Number of LEDs: 1 _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 486 / 524 / 548 _____
 Nominal Lumen (lm): 625.3 / 660.1 / 712.4 _____
 CRI: >90 CRI _____
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request) _____

OPTICAL

Reflector°: 9 _____
 Adjustability: Rotational 360°; Tilt 90° _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

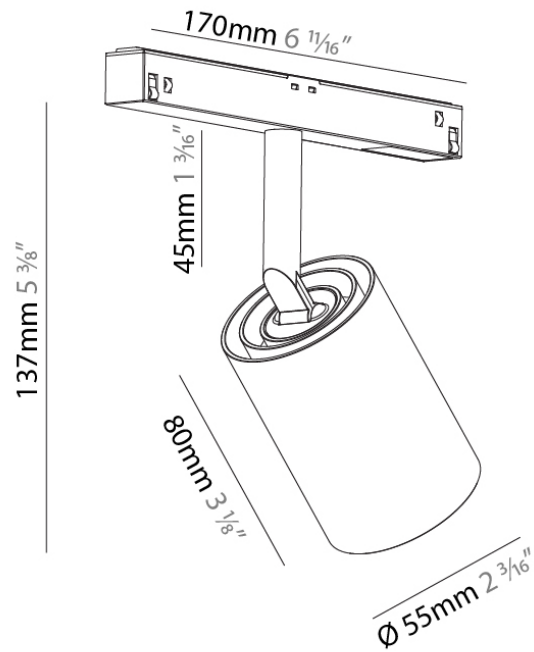

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T082-

DESCRIPTION

Centriq - Track Head - 55mm / 2 3/16" - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

GENERAL

Series: Centriq
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Light Distribution: Adjustable

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Height (mm): 137
 Height (in): 5 3/8
 Weight (kg): 0.548
 Weight (lbs): 1.21
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.8
 Total Output Wattage (W): 11.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 600
 Upon Request: 0-10Vdc dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 760 / 820
 Nominal Lumen (lm): 1196 / 1257 / 1275
 CRI: >90 CRI
 Lamp Life (hrs): 50000
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 17 / 33 / 46
 Optic°: 15 / 25 / 35
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

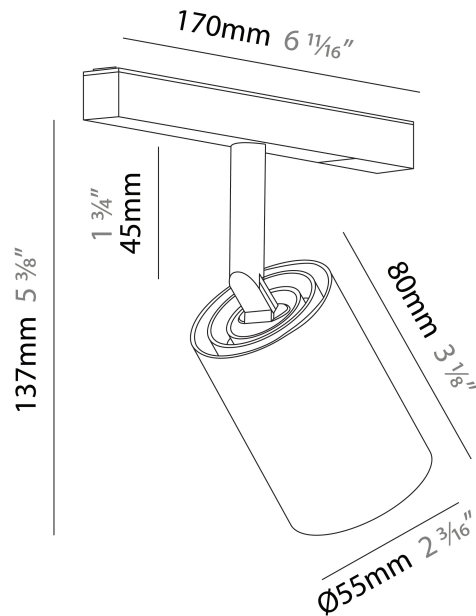

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T086-

DESCRIPTION

LEDline - Light Insert - 620mm/24 7/16" - 6.7W / 8W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 620
 Length (in): 24 7/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Weight (kg): 0.405
 Weight (lbs): 0.89
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.6 / 7.9
 Total Output Wattage (W): 6 / 7.2
 Dimming: 0-10V Dimming
 Driver Included: No

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 360 / 540
 Nominal Lumen (lm): 600 / 900
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

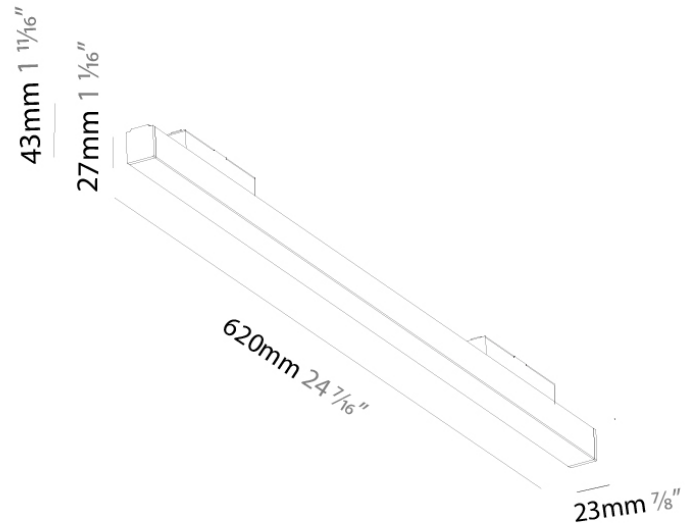

A3CLK30-SUS-SYS COMPONENTS

A3T087-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 820mm / 32 5/16" - 8.9W / 10.7W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack

Subseries: Ledline

Partner: Prolicht

Division: Architectural

Light Distribution: Direct

PHYSICAL

Shape: Rectangle

Length (mm): 820

Length (in): 32 5/16

Width (mm): 23

Width (in): 7/8

Height (mm): 43

Height (in): 1 11/16

Weight (kg): 0.531

Weight (lbs): 1.17

Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 8.8 / 10.6

Total Output Wattage (W): 8 / 9.6

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 480 / 720

Nominal Lumen (lm): 800 / 1200


CRI: >90 CRI

Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

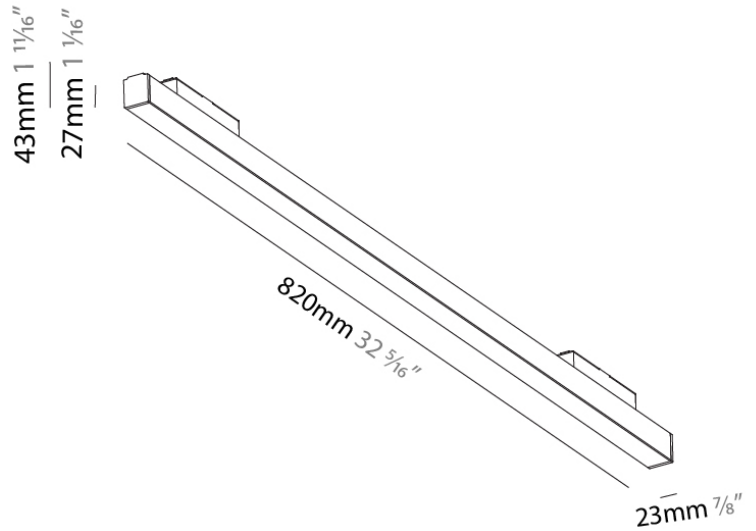

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T088-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1020mm / 40 3/16" - 11.1W / 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1020
 Length (in): 40 3/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Weight (kg): 0.655
 Weight (lbs): 1.44
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Input Wattage (W): 11.0 / 13.2
 Total Output Wattage (W): 10 / 12
 Driver Included: No

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 600 / 900
 Nominal Lumen (lm): 1000 / 1500
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

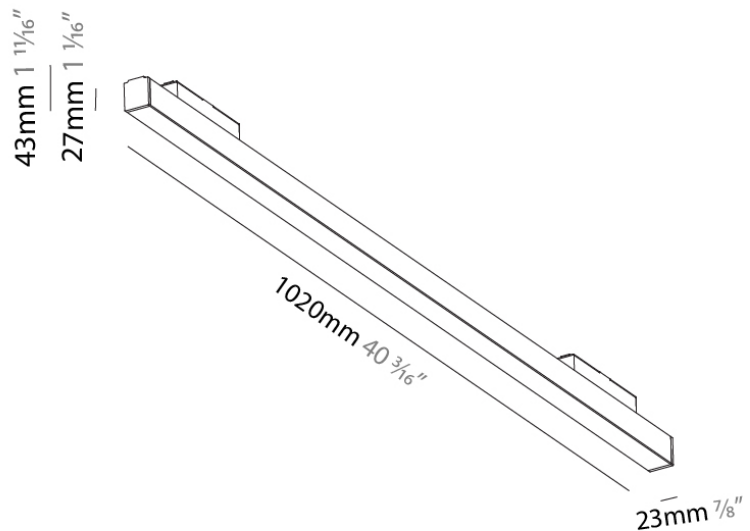

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T089-

DESCRIPTION

LED (Zhaga Standard)line - Light Insert - 1220mm / 48 1/16" - 13.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Clicktrack
 Subseries: Ledline
 Partner: Prolicht
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1220
 Length (in): 48 1/16
 Width (mm): 23
 Width (in): 7/8
 Height (mm): 43
 Height (in): 1 11/16
 Weight (kg): 0.764
 Weight (lbs): 1.684
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 13.2 / 15.8
 Total Output Wattage (W): 12 /
 Dimming: 0-10V Dimming
 Driver Included: No

LED

Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 1080
 Nominal Lumen (lm): 1200
 CRI: >90 CRI
 Upon Request: Special Color Temperature

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

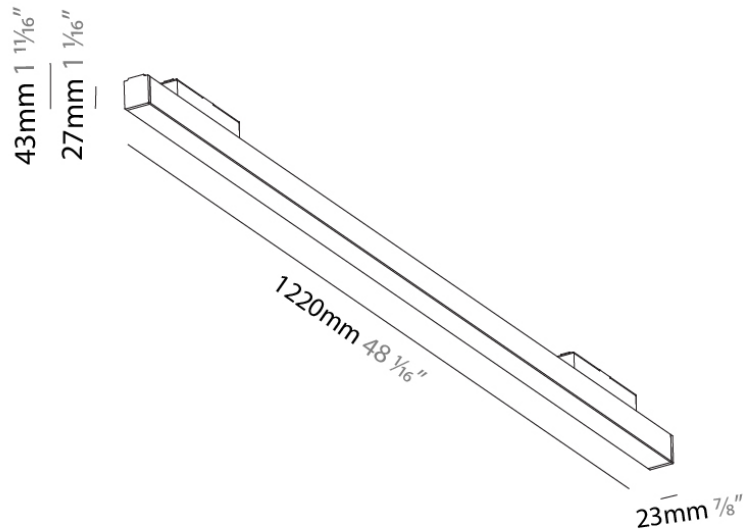

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

A3T090-

DESCRIPTION

Snooker - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - Max 510lm, Shine Ring, Cable Options, Beam Angle: 32°, 58°

GENERAL

Series: Snooker
 Subseries: Snooker Modular System
 Partner: Prolicht
 Division: Architectural
 Product Type: Spots
 Light Distribution: Downlight

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Max. Overall Height (mm): 2072
 Max. Overall Height (in): 81 ⁹/₁₆
 Weight (kg): 0.506
 Weight (lbs): 1.12
 Diffuser: Shine Ring 00-06
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Accent Finish: NOR / OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum Die Cast
 Cable Details: 2,00mm or 4,000mm cable in Black, White, Red, Orange, Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 270 / 290 / 304 / 310
 Nominal Lumen (lm): 448 / 483 / 504 / 514
 CRI: >90 CRI

OPTICAL



Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20
 Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

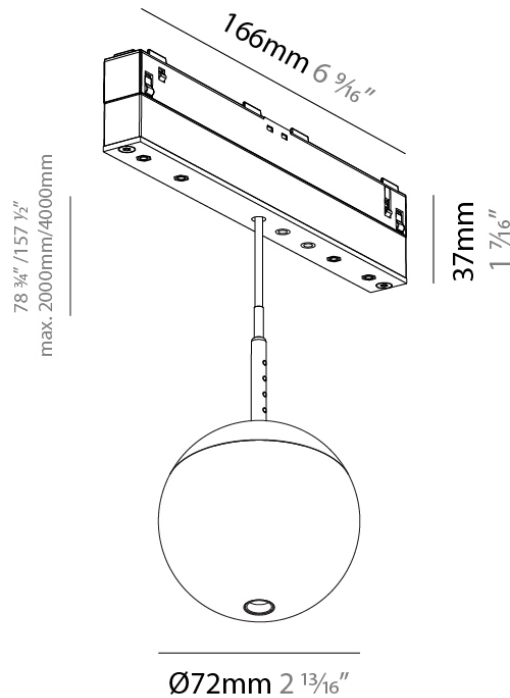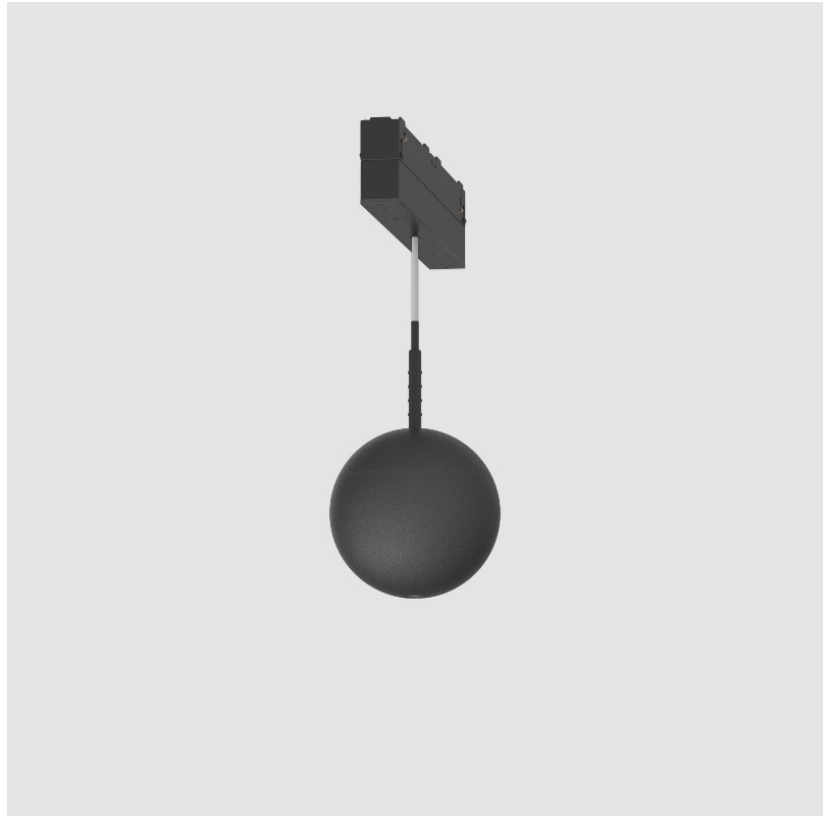

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T117

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" -
6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens
24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack

Subseries: Hangover Plug Standard (Track Insert)

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Spots

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Length (mm): 166

Length (in): 6 9/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Weight (kg): 0.2

Weight (lbs): 0.44

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.8

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 328 / 363 / 386

CRI: >90 CRI

Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com

IP Rating: IP20

Available for international specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

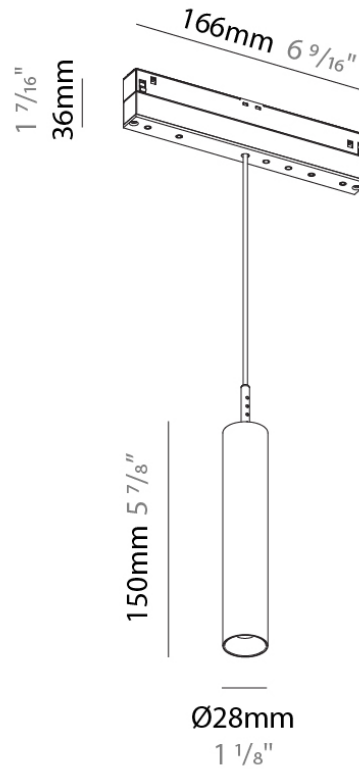

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T118-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Pendant
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

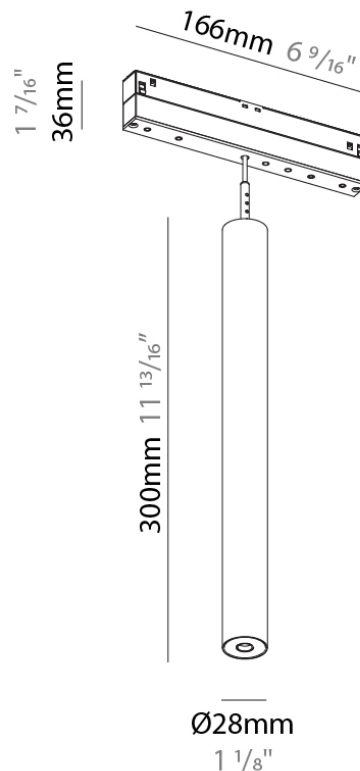

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T119-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Pendant
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

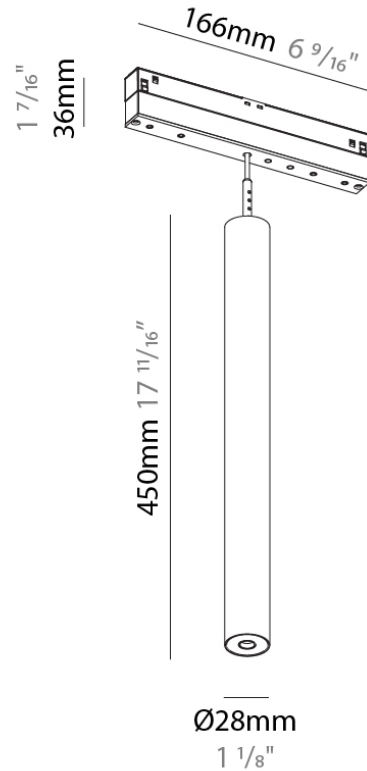

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T120-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Pendant
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Length (mm): 166
 Length (in): 6 5/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Weight (kg): 0.2
 Weight (lbs): 0.44
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 Zaneen Group Inc. © 2026, T 1800-388-3382, F 416-247-9319, www.zaneen.com
 IP Rating: IP20
 Available for international specifications by adding "INT" at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.
 In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

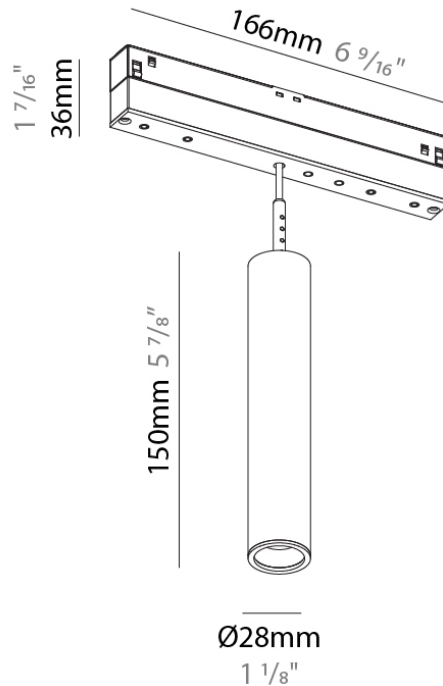

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T121-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32° / 58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Pendant
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

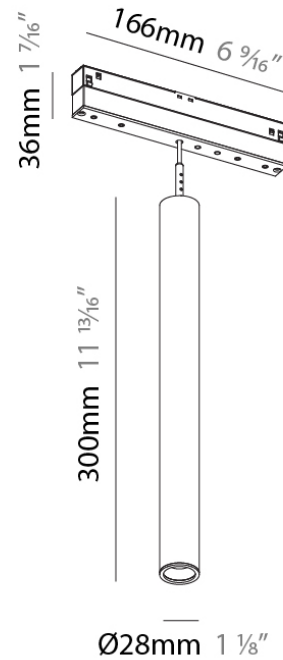

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T122-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Partner: Prolight
 Division: Architectural
 Installation: Track
 Product Type: Pendant
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 4000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

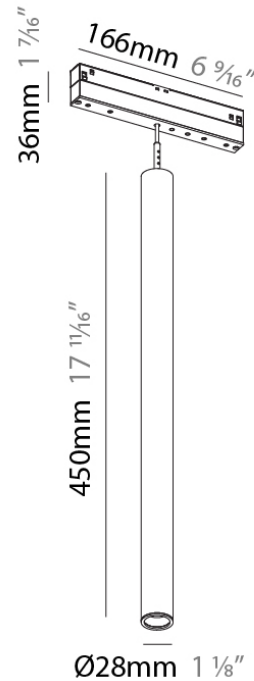

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T129-

DESCRIPTION

Hangover 40 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover _____

Subseries: Hangover 40 _____

Partner: Prolight _____

Division: Architectural _____

Installation: Track _____

Product Type: Downlight _____

Mounting Location: Ceiling _____

Light Distribution: Downlight _____

PHYSICAL

Aperture Sizes - Downlights: 1" _____

Shape: Cylinder _____

Diameter (mm): 40 _____

Diameter (in): 1 9/16 _____

Height (mm): 150 _____

Height (in): 5 7/8 _____

Max. Overall Height (mm): 2150 _____

Max. Overall Height (in): 84 5/8 _____

Weight (kg): 0.433 _____

Weight (lbs): 0.955 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 9.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (MA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 788 / 829 / 840 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____

Lamp Life (hrs): 50000 _____


OPTICAL

Reflector: 40 / 50 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

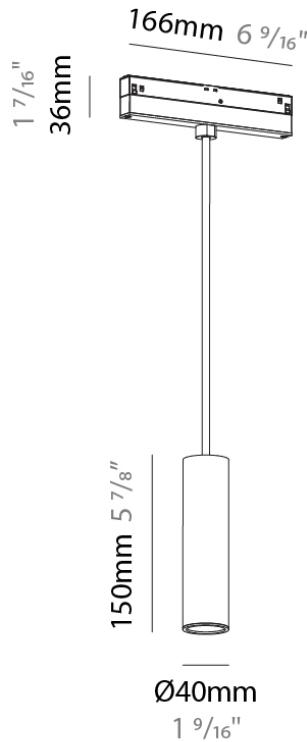

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T130-

DESCRIPTION

Hangover 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Downlight
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

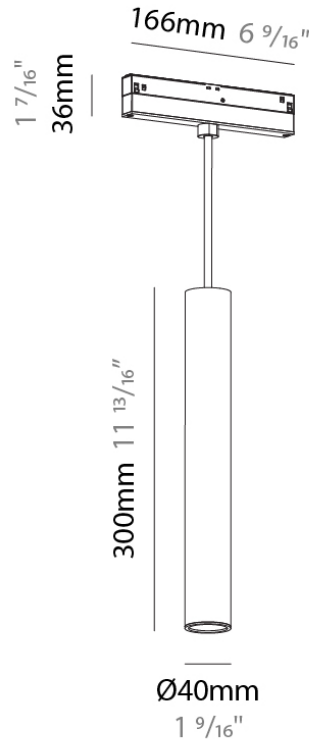

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T131-

DESCRIPTION

Hangover 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover _____

Subseries: Hangover 40 _____

Partner: Prolicht _____

Division: Architectural _____

Installation: Track _____

Product Type: Downlight _____

Mounting Location: Ceiling _____

Light Distribution: Downlight _____

PHYSICAL

Aperture Sizes - Downlights: 1" _____

Shape: Cylinder _____

Diameter (mm): 40 _____

Diameter (in): 1 9/16 _____

Height (mm): 450 _____

Height (in): 17 11/16 _____

Max. Overall Height (mm): 2450 _____

Max. Overall Height (in): 96 7/16 _____

Weight (kg): 0.856 _____

Weight (lbs): 1.887 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 9.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 788 / 829 / 840 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____


OPTICAL

Reflector: 40 / 50 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

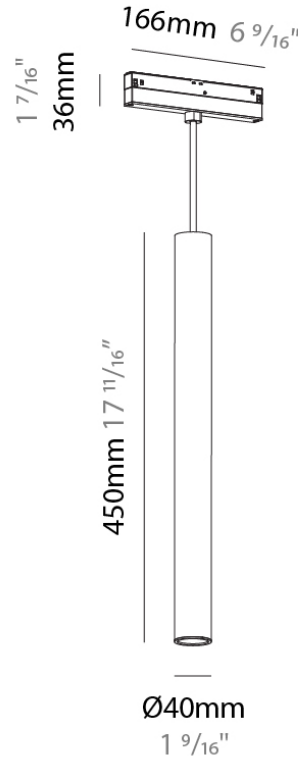

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T132-

DESCRIPTION

Hangover Plug 40 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40° / 50°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 40
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Downlight
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16"
 Height (mm): 150
 Height (in): 5 7/8"
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8"
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 8.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

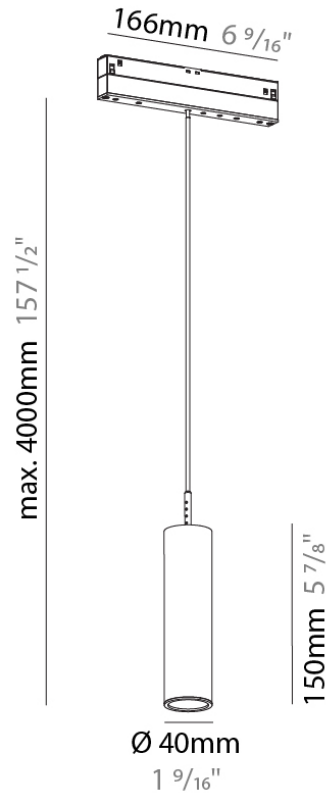

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T133-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 300

Height (in): 11 13/16

Max. Overall Height (mm): 2300

Max. Overall Height (in): 90 9/16

Weight (kg): 0.666

Weight (lbs): 1.468

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI


OPTICAL

Reflector: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

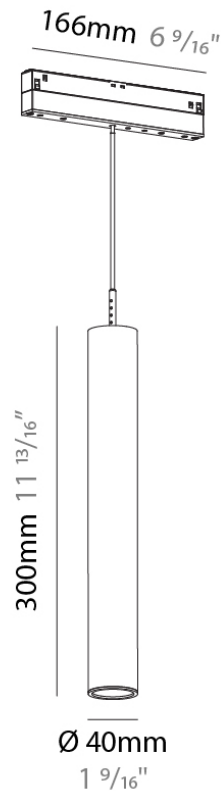

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T134-

DESCRIPTION

Hangover Plug 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16"

Height (mm): 450

Height (in): 17 11/16"

Max. Overall Height (mm): 2450

Max. Overall Height (in): 96 7/16"

Weight (kg): 0.856

Weight (lbs): 1.887

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

JP rating: IP20
Zaneen Group Inc. © 2026, T-1800-388-3382, F-416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T135-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
 Subseries: Hangover 75
 Partner: Prolight
 Division: Architectural
 Installation: Track
 Product Type: Downlight
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 8.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 898 / 944 / 956
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL


Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

JP rating: IP20
 Zaneen Group Inc. © 2026, T-1800-388-3382, F-416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

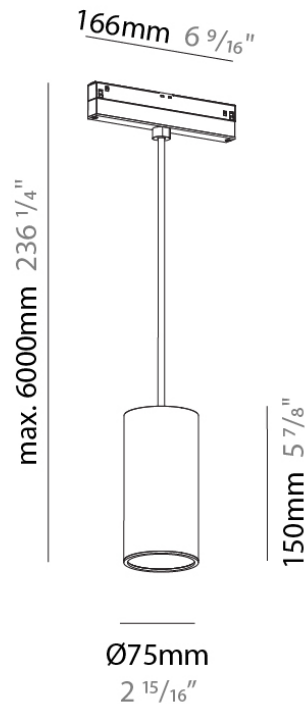

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T136-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover

Subseries: Hangover 75

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Aperture Sizes - Downlights: 2"

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16"

Height (mm): 150

Height (in): 5 7/8"

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8"

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20.8

Total Output Wattage (W): 19

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1729 - 1837

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

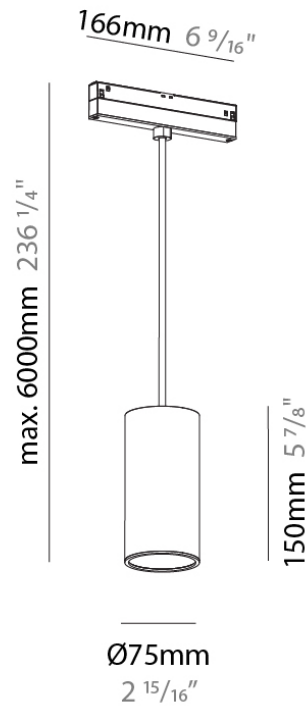

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T137-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover _____

Subseries: Hangover 75 _____

Partner: Prolicht _____

Division: Architectural _____

Installation: Track _____

Product Type: Downlight _____

Mounting Location: Ceiling _____

Light Distribution: Downlight _____

PHYSICAL

Aperture Sizes - Downlights: 2" _____

Shape: Cylinder _____

Diameter (mm): 75 _____

Diameter (in): 2 15/16 _____

Height (mm): 300 _____

Height (in): 11 13/16 _____

Max. Overall Height (mm): 2300 _____

Max. Overall Height (in): 90 9/16 _____

Weight (kg): 0.666 _____

Weight (lbs): 1.468 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 8.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (MA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 898 / 944 / 956 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____


OPTICAL

Reflector°: 18 / 36 / 52 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

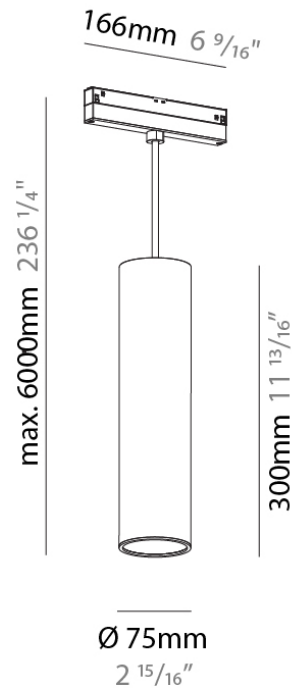

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T138-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
 Subseries: Hangover 75
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Downlight
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20.8
 Total Output Wattage (W): 19
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Input Voltage (V): 48
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 1729 - 1837
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

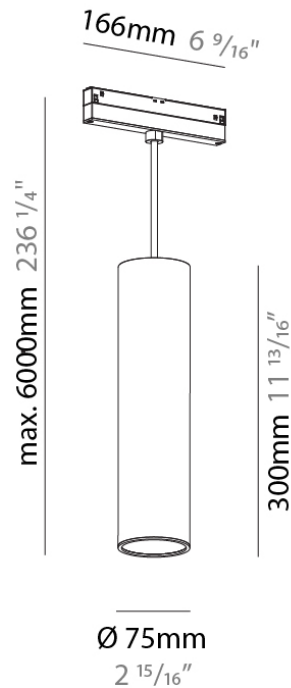

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T139-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - 6W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover

Subseries: Hangover Plug 75

Partner: Prolicht

Division: Architectural

Installation: Track

Product Type: Downlight

Mounting Location: Ceiling

Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 2"

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (MA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 385 / 408 / 442

Nominal Lumen (lm): 455.22 / 482 / 522.17

CRI: >90 CRI


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

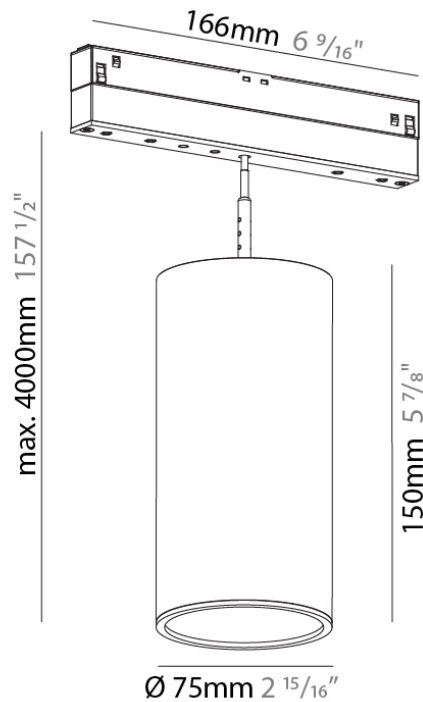

A3CLK30-SUS-SYS COMPONENTS TRACK

A3T140-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover _____

Subseries: Hangover Plug 75 _____

Partner: Prolicht _____

Division: Architectural _____

Installation: Track _____

Product Type: Downlight _____

Mounting Location: Ceiling _____

Light Distribution: Downlight _____

PHYSICAL

Aperture Sizes - Downlights: 2" _____

Shape: Cylinder _____

Diameter (mm): 75 _____

Diameter (in): 2 15/16 _____

Height (mm): 150 _____

Height (in): 5 7/8 _____

Max. Overall Height (mm): 2150 _____

Max. Overall Height (in): 84 5/8 _____

Weight (kg): 0.433 _____

Weight (lbs): 0.955 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 8.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 708 - 788 _____

CRI: >90 CRI _____

Lamp Life (hrs): 50000 _____


OPTICAL

Optic°: 9 / 24 / 39 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

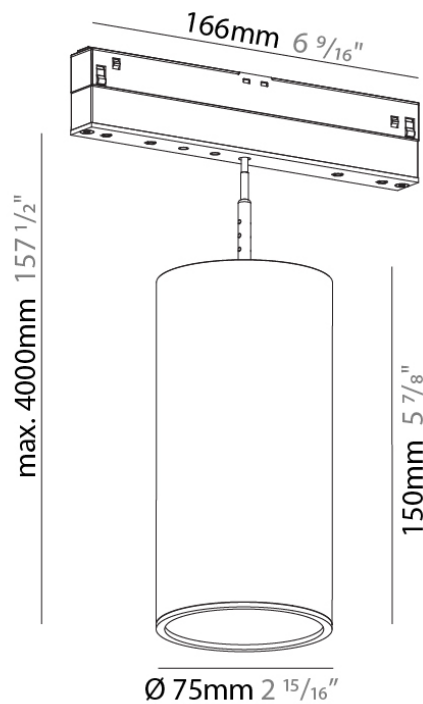

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK30-SUS-SYS COMPONENTS

ENCP50

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 670

Length (in): 26 ³/₈

Width (mm): 44

Width (in): 1 ³/₄

Height (mm): 38


Height (in): 1 ¹/₂

Gasket: 1554JGASKET

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

IP rating: IP20

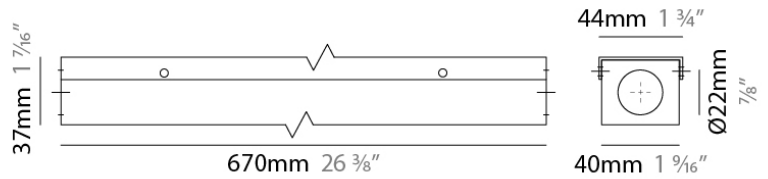

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)