

A3CLK50-TRI-SYS COMPONENTS

A380106-

DESCRIPTION

Hangover 75 - Indirect Diffuser

GENERAL

Series: Hangover

Subseries: Hangover 75

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 70

Diameter (in): 2 ³/₄

Fixture Finish: RED / ORG / YEL / GRN / BLU

Fixture Material: Acrylic


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



68mm 2 ¹/₁₆"

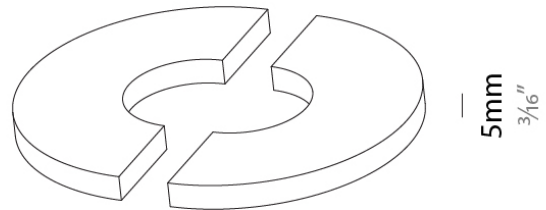

A3CLK50-TRI-SYS COMPONENTS

A38801

DESCRIPTION

Clicktrack 25 - Trimless - End Cap - Black

GENERAL



Series: Clicktrack
 Subseries: Clicktrack 25
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Length (mm): 68
 Length (in): 2 ¹¹/₁₆
 Width (mm): 9
 Width (in): 6/16
 Height (mm): 52
 Height (in): 2 ¹/₁₆
 Weight (kg): 0.026
 Weight (lbs): 0.057
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

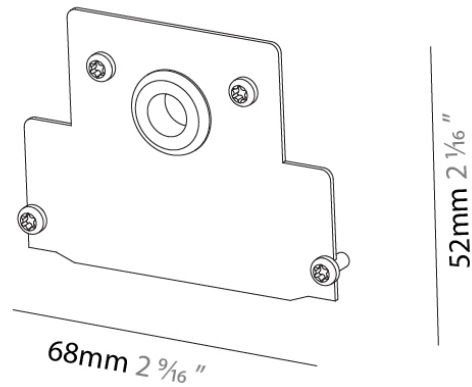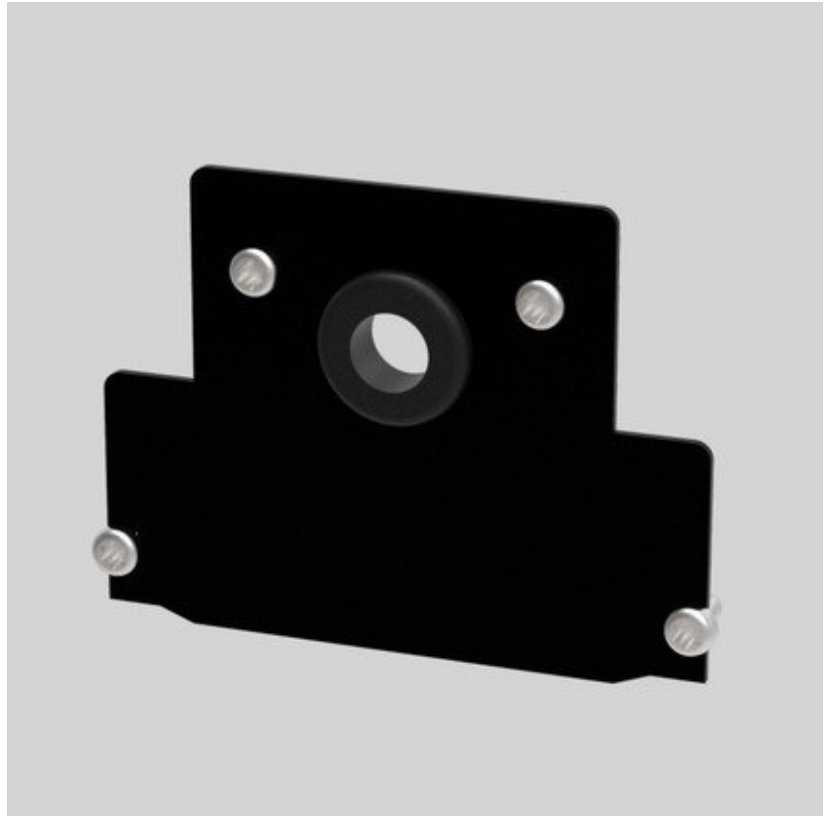

A3CLK50-TRI-SYS COMPONENTS

A38802

DESCRIPTION

Clicktrack 25 - Trimless - Linear Coupler - Black

GENERAL

Series: Clicktrack

Subseries: Clicktrack 25

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 142

Length (in): 5 ⁹/₁₆

Width (mm): 18

Width (in): 11/16

Height (mm): 16

Height (in): 10/16

Weight (kg): 0.02


Fixture Finish: BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

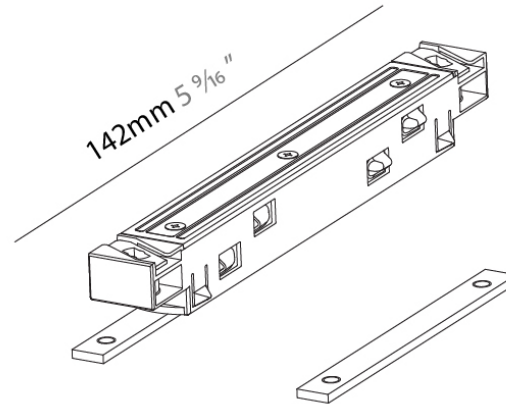

A3CLK50-TRI-SYS COMPONENTS

A38803

DESCRIPTION

Clicktrack - Trimless - 48V Power Feed - Black

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 25
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 143
 Length (in): 5 ¹⁰/₁₆
 Width (mm): 16
 Width (in): 10/16
 Height (mm): 18
 Height (in): 11/16
 Weight (kg): 0.042
 Weight (lbs): 0.09
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

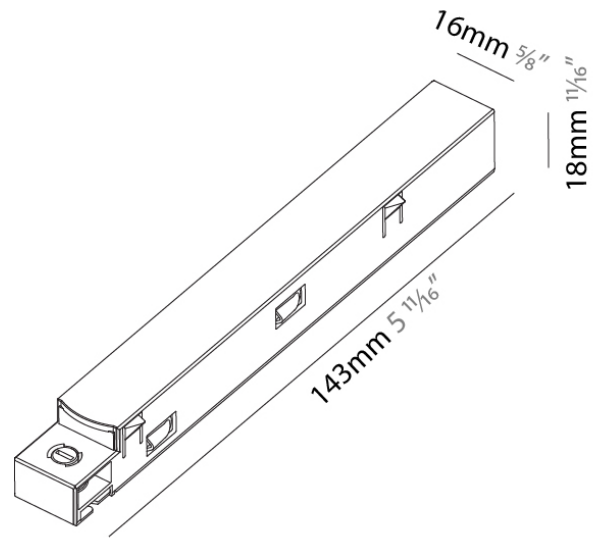

A3CLK50-TRI-SYS COMPONENTS TRIMLESS

A38810-

DESCRIPTION

Clicktrack 50 - Trimless - 1000mm / 2000mm / 3000mm -
 Aluminum Profile - Black - Ceiling thickness - 10 / 12.5 / 15

GENERAL


Series: Clicktrack _____
 Subseries: Clicktrack 50 _____
 Brand: Prolicht _____
 Division: Architectural _____
 Mounting Type: Trimless _____
 Mounting Location: Ceiling _____
 Subcategory: Profile _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 1000 _____
 Length (in): 39 3/8 _____
 Width (mm): 209 _____
 Width (in): 8 1/4 _____
 Height (mm): 108 _____
 Height (in): 4 1/4 _____
 Ceiling Thickness (mm): 10 / 12.5 / 15 _____
 Ceiling Thickness (in): 3/8 or 1/2 or 9/16 _____
 Fixture Finish: BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

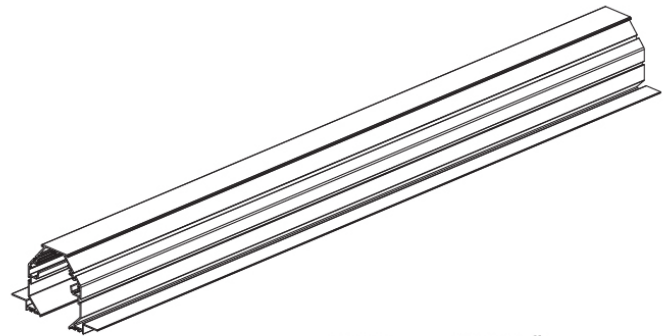

max. 3000mm 118 1/8 "



A3CLK50-TRI-SYS COMPONENTS

A38813

DESCRIPTION

Clicktrack 50 - Trimless - End Cap - Black

GENERAL




Series: Clicktrack
 Subseries: Clicktrack 50
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Length (mm): 145
 Length (in): 5 ¹¹/₁₆
 Width (mm): 9
 Width (in): 3/8
 Height (mm): 108
 Height (in): 4 ¹/₄
 Weight (kg): 0.1
 Weight (lbs): 0.22
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

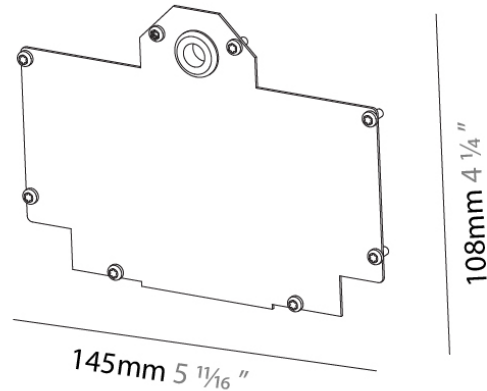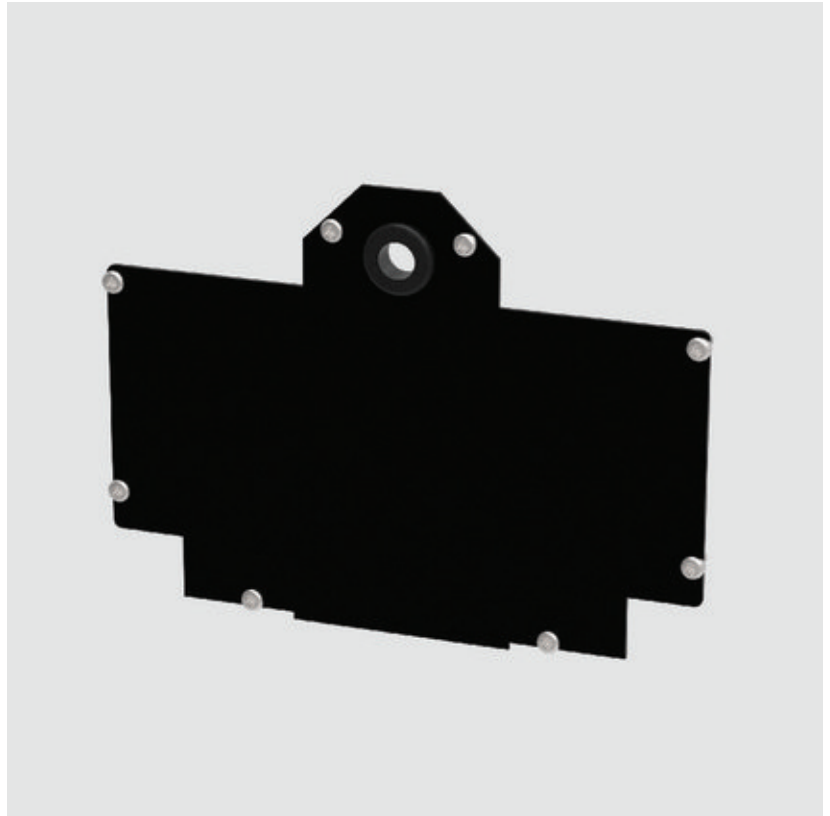

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK50-TRI-SYS COMPONENTS

A38814

DESCRIPTION

Clicktrack 50 - Trimless - Linear Coupler - Black

GENERAL

Series: Clicktrack

Subseries: Clicktrack 50

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 142

Length (in): 5 ⁹/₁₆

Width (mm): 18

Width (in): 11/16

Height (mm): 16

Height (in): 5/8

Weight (kg): 0.02

Weight (lbs): 0.044


Fixture Finish: BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

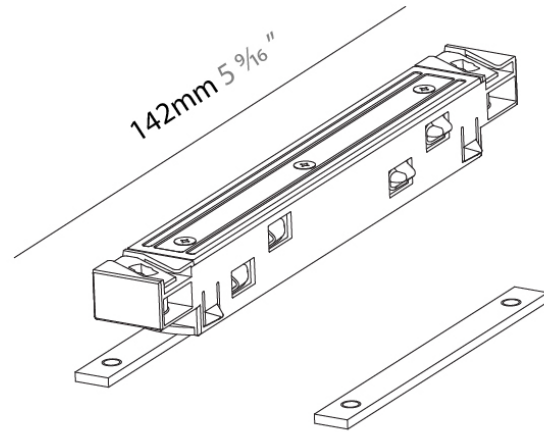

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS


A38815

DESCRIPTION
Clicktrack 50 - Trimless - 48V Power Feed - Black

GENERAL
Series: Clicktrack
Subseries: Clicktrack 50
Brand: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 143
Length (in): 5 5/8
Width (mm): 16
Width (in): 5/8
Height (mm): 18
Height (in): 11/16
Weight (kg): 0.042
Weight (lbs): 0.09
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

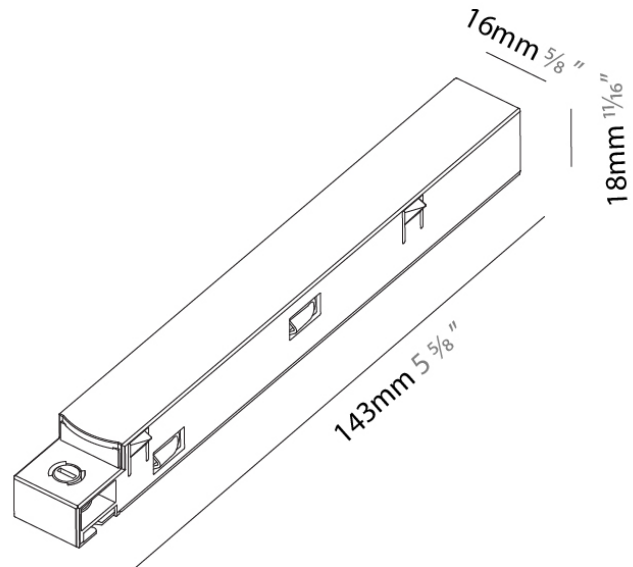

A3CLK50-TRI-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38816-

DESCRIPTION

Clicktrack 50 - Trimless - Corner Coupler 90° - Black

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 50
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Length (mm): 118
 Length (in): 4 5/8
 Width (mm): 118
 Width (in): 4 5/8
 Height (mm): 108
 Height (in): 4 1/4
 Weight (kg): 9.648
 Weight (lbs): 21 1/4
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

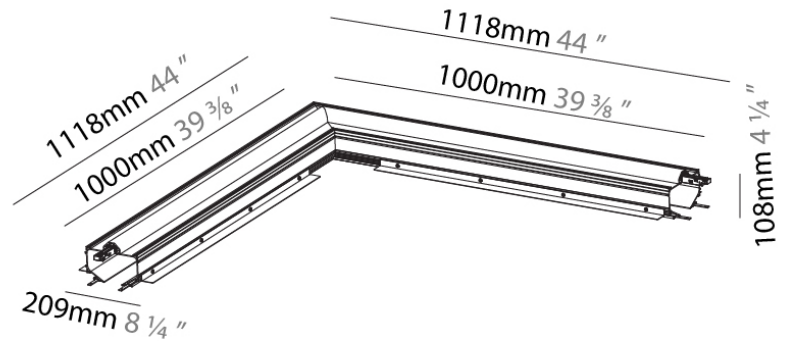

A3CLK50-TRI-SYS COMPONENTS

A38817

DESCRIPTION

2Look4 50 MagTrack - Trimless - Frame Alignment Kit

GENERAL


Series: Clicktrack
 Subseries: Clicktrack 50
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Length (mm): 160
 Length (in): 6 ⁵/₁₆
 Width (mm): 50
 Width (in): 1 ¹⁵/₁₆
 Height (mm): 19
 Height (in): 3/4
 Weight (kg): 0.067
 Weight (lbs): 0.15
 Fixture Finish: BLK
 Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

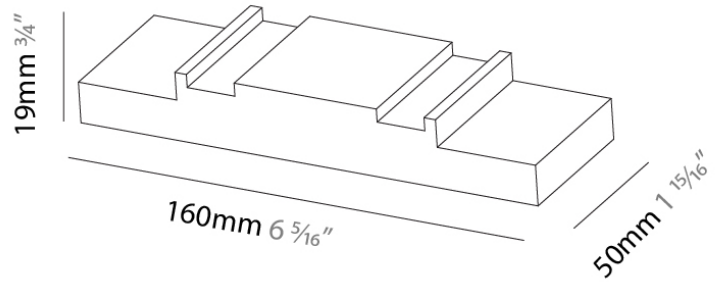

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS

A3T090-

DESCRIPTION

Snooker - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker
 Subseries: Snooker Modular System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Max. Overall Height (mm): 2072
 Max. Overall Height (in): 81 ⁹/₁₆
 Light Distribution: Downlight
 Weight (kg): 0.506
 Weight (lbs): 1.12
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 270 / 290 / 304 / 310
 Nominal Lumen (lm): 448 / 483 / 504 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

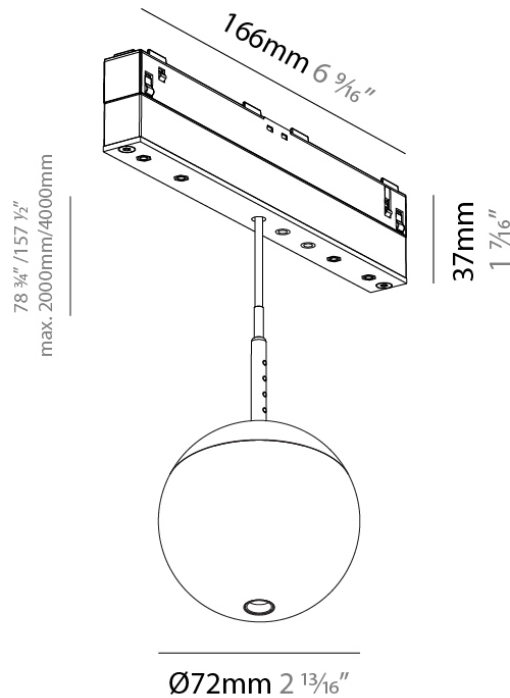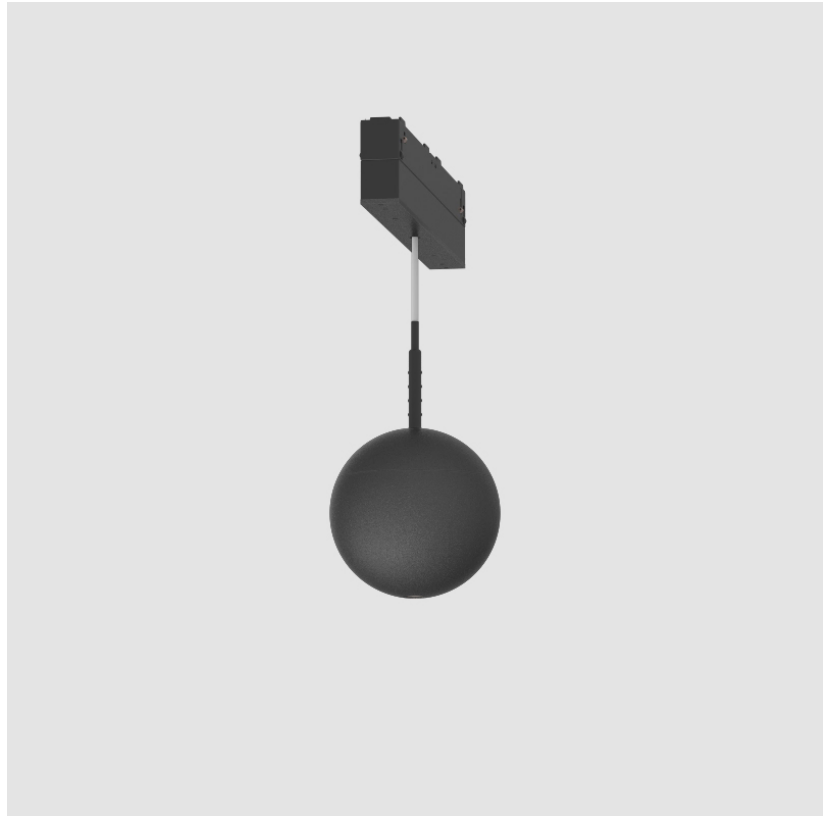

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS

A3T091-

DESCRIPTION

Snooker Shine - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Diffuser Shine Ring

GENERAL

Series: Snooker
 Subseries: Snooker Modular System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Max. Overall Height (mm): 2072
 Max. Overall Height (in): 81 ⁹/₁₆
 Light Distribution: Direct
 Weight (kg): 0.506
 Weight (lbs): 1.12
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 1.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 280 / 310 / 330
 Nominal Lumen (lm): 448.1 / 483.1 / 513.9
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

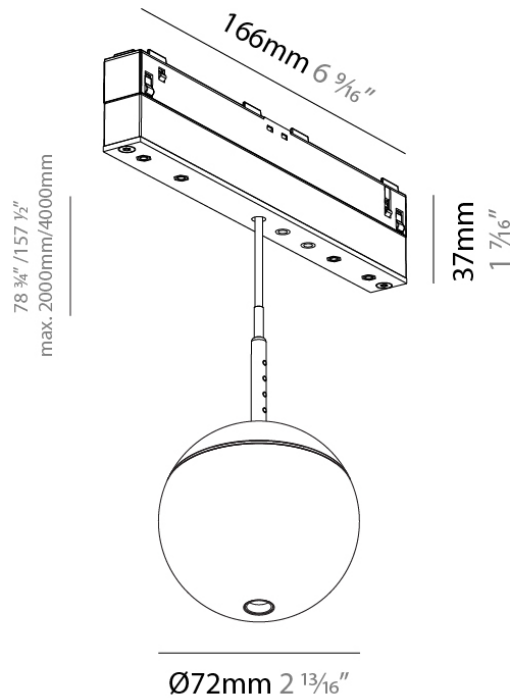

A3CLK50-TRI-SYS COMPONENTS

A3T092-

DESCRIPTION

Centriq - Track Head - 6.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Centriq _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Spots _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 40 _____
 Diameter (in): 1 ⁹/₁₆ _____
 Length (mm): 170 _____
 Length (in): 6 ¹¹/₁₆ _____
 Height (mm): 168 _____
 Height (in): 6 ⁵/₈ _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.127 _____
 Weight (lbs): 0.28 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 6.3 _____
 Total Output Wattage (W): 5.75 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Constant Current (MA): 490 _____
 Upon Request: 0-10Vdc dimming / DALI dimming _____

LED


Delivered Lumen Range: 100 - 499 lm _____
 Number of LEDs: 1 _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 360 / 390 / 420 _____
 Nominal Lumen (lm): 448.1 / 483.1 / 513.9 _____
 CRI: >90 CRI _____
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request) _____

OPTICAL

Reflector°: 10 _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

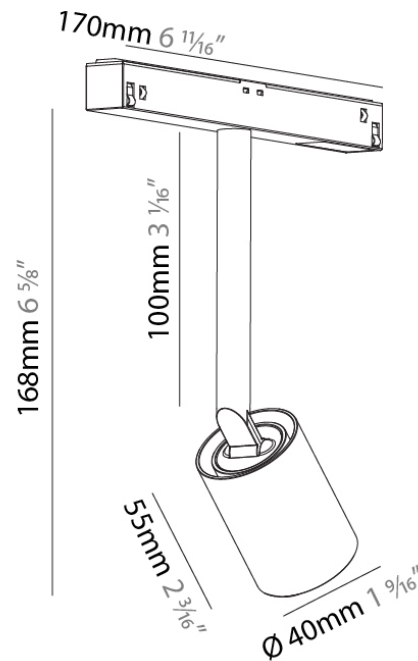

A3CLK50-TRI-SYS COMPONENTS

A3T093-

DESCRIPTION

Centriq - Track Head - 6.5W LED (Zhaga Standard) -
 2700K/3000K/4000K - Reflector 20°/31°/36°/40°/50°

GENERAL

Series: Centriq _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Spots _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 40 _____
 Diameter (in): 1 ⁹/₁₆ _____
 Length (mm): 170 _____
 Length (in): 6 ¹¹/₁₆ _____
 Height (mm): 168 _____
 Height (in): 6 ⁵/₈ _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.153 _____
 Weight (lbs): 0.337 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 6.5 _____
 Total Output Wattage (W): 5.9 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Constant Current (MA): 340 _____
 Upon Request: 0-10Vdc dimming / DALI dimming _____

LED


Delivered Lumen Range: 100 - 499 lm _____
 Number of LEDs: 1 _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 468 / 490 / 520 _____
 Nominal Lumen (lm): 732 / 769 / 780 _____
 CRI: >90 CRI _____
 Upon Request: Special Color Temperature ***3500K available in
 minimum quantities (larger quantities upon request) _____

OPTICAL

Reflector°: 20 / 40 / 50 _____
 Optic°: 31 / 36 _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

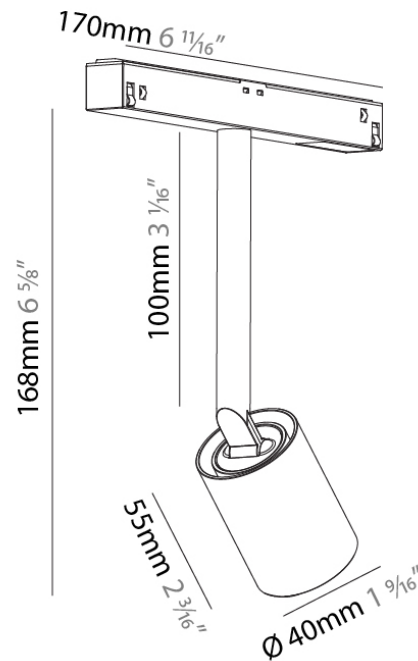

A3CLK50-TRI-SYS COMPONENTS

A3T094-

DESCRIPTION

Centriq - Track Head - 9.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 ³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 192
 Height (in): 7 ⁹/₁₆
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.549
 Weight (lbs): 1.21
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 9.25
 Total Output Wattage (W): 8.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 700
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 486 / 524 / 548
 Nominal Lumen (lm): 625.3 / 660.1 / 712.4
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 9
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

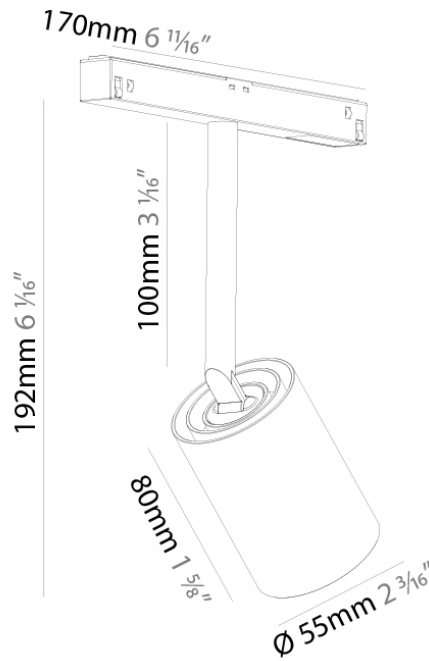

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK50-TRI-SYS COMPONENTS

A3T095-

DESCRIPTION

Centriq - Track Head - 11.53W LED - 2700K / 3000K / 4000K - 15°/17°/25°/33°/35°/46°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 3/16
 Length (mm): 170
 Length (in): 6 11/16
 Max. Overall Height (mm): 192
 Max. Overall Height (in): 7 9/16
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.557
 Weight (lbs): 1.23
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 11.53
 Total Output Wattage (W): 10.48
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 580
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 760 / 820
 Nominal Lumen (lm): 1196 / 1257 / 1275
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 17 / 33 / 46
 Optic°: 15 / 25 / 35
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

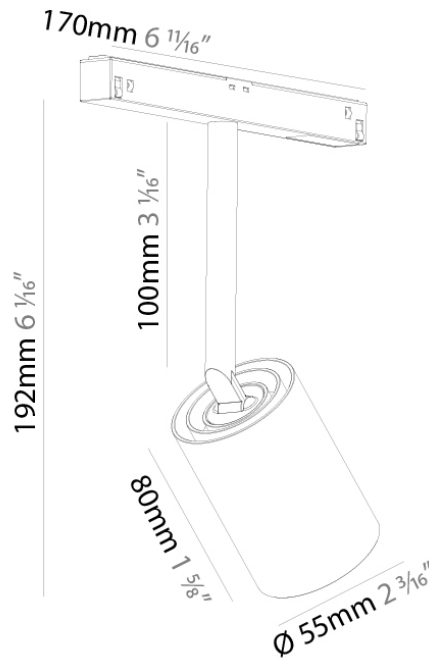

A3CLK50-TRI-SYS COMPONENTS

A3T096-

DESCRIPTION

Centriq Hollow - Track Head - 4.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 30
 Diameter (in): 1 ³/₁₆
 Length (mm): 170
 Length (in): 6 ¹¹/₁₆
 Height (mm): 80
 Height (in): 3 ⁷/₁₆
 Extension (mm): 33
 Extension (in): 1 ⁷/₁₆
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.1
 Weight (lbs): 0.22
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4.3
 Total Output Wattage (W): 3.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 340
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 250 / 270 / 290
 Nominal Lumen (lm): 343.9 / 359.9 / 391.8
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32
 Adjustability: 90° / 360°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

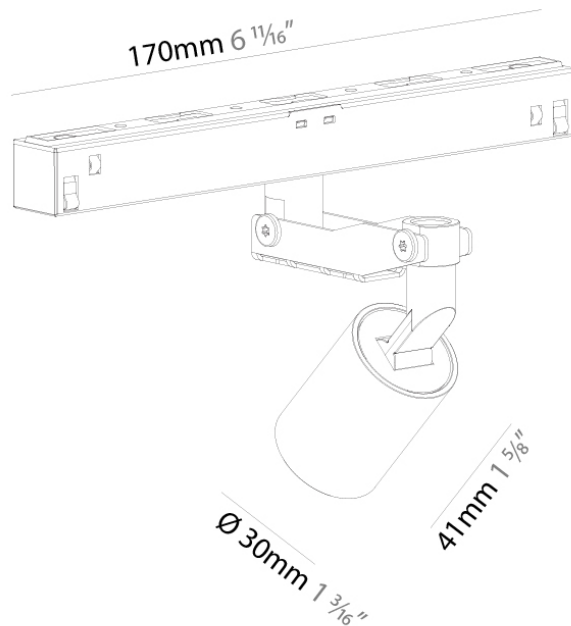

A3CLK50-TRI-SYS COMPONENTS

A3T097-

DESCRIPTION

Centriq - Track Head - 4.3W LED - 2700K / 3000K / 4000K - Lens 24° / 32°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 30
 Diameter (in): 1 3/16"
 Length (mm): 170
 Length (in): 6 11/16"
 Height (mm): 154
 Height (in): 6 1/16"
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.072
 Weight (lbs): 0.159
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 4.3
 Total Output Wattage (W): 3.9
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 340
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 250 / 270 / 290
 Nominal Lumen (lm): 343.9 / 359.9 / 391.8
 CRI: >90 CRI
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

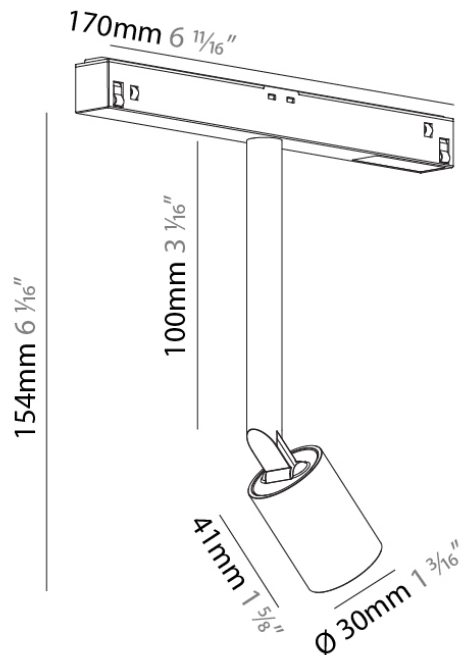

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T117

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Length (mm): 166
 Length (in): 6 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.2
 Weight (lbs): 0.44
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL



Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20
 Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

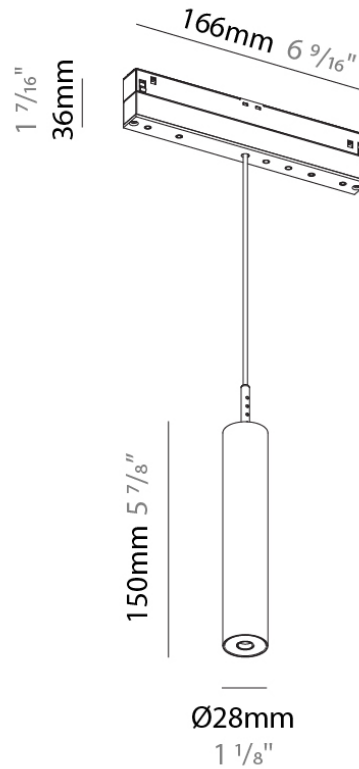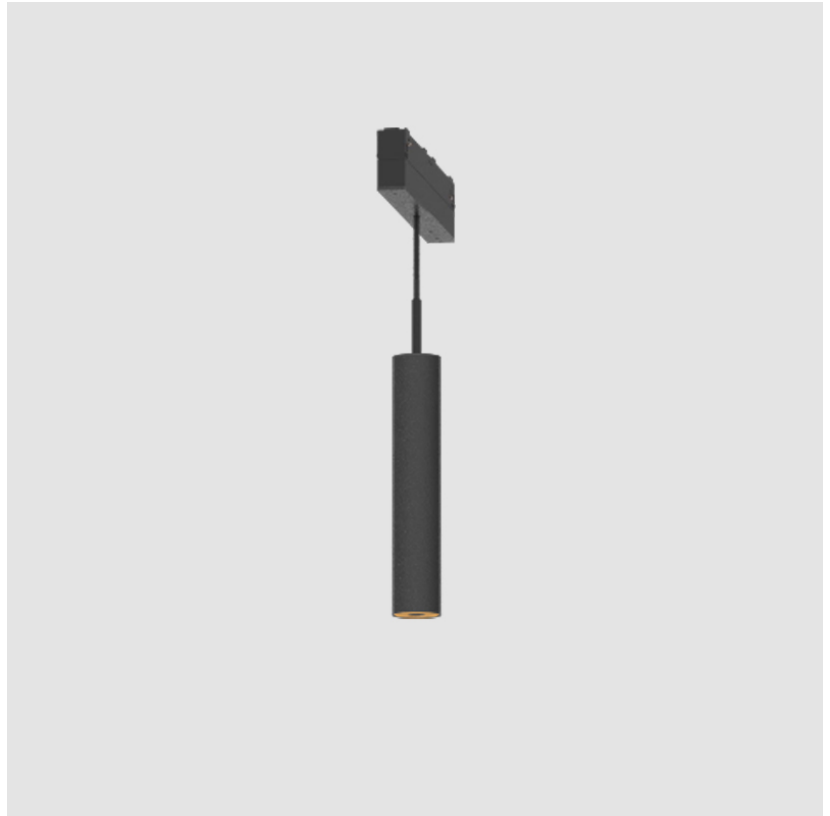

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T118-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

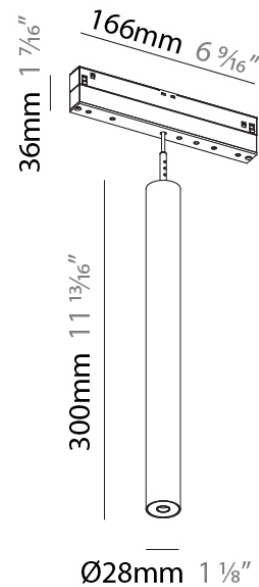

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T119-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/34°/55°/58°

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED



Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 34 / 55 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

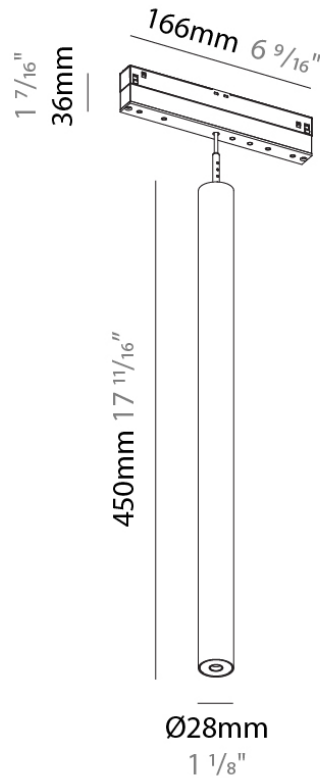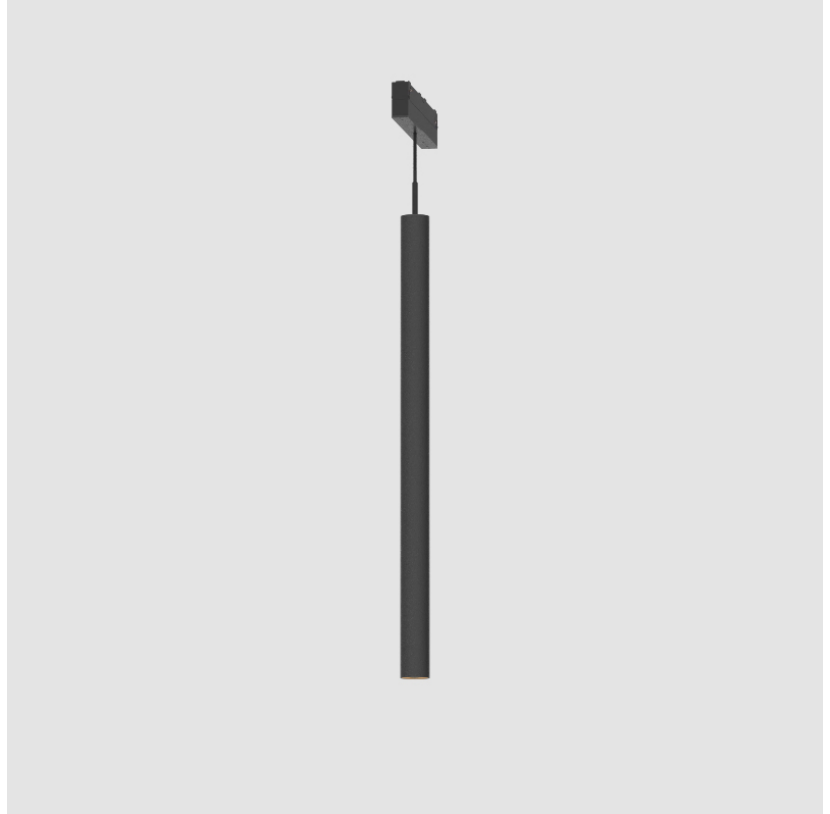

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T120-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Length (mm): 166
 Length (in): 6 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.2
 Weight (lbs): 0.44
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL


Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20
 Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

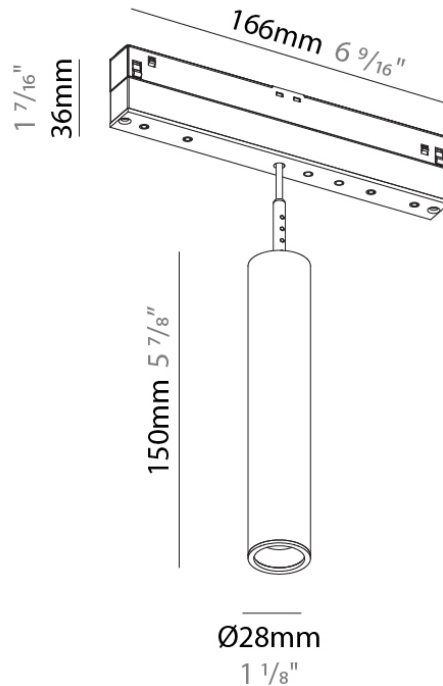

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T121-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack

Subseries: Hangover Plug Standard (Track Insert)

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 300

Height (in): 11 13/16

Max. Overall Height (mm): 2300

Max. Overall Height (in): 90 9/16

Light Distribution: Downlight

Weight (kg): 0.32

Weight (lbs): 0.706

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.8

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 328 / 363 / 386

CRI: >90 CRI

Upon Request: ***3500K available in minimum quantities (larger quantities upon request)


OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

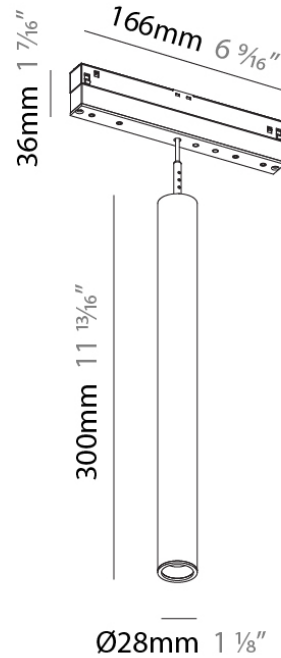

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T122-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/58° - Shine Ring

GENERAL

Series: Clicktrack
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Max. Overall Height (mm): 2450
 Max. Overall Height (in): 96 7/16
 Light Distribution: Downlight
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 CRI: >90 CRI
 Upon Request: ***3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Optic°: 24 / 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

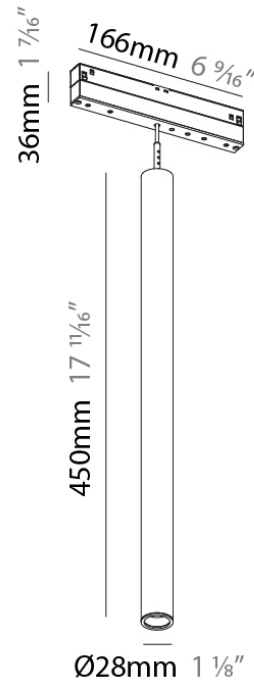

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T129-

DESCRIPTION

Hangover 40 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

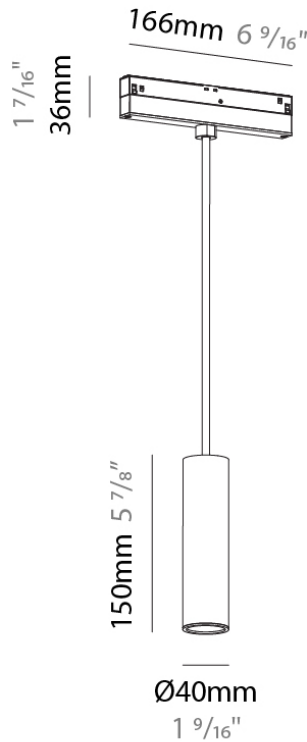

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T130-

DESCRIPTION

Hangover 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

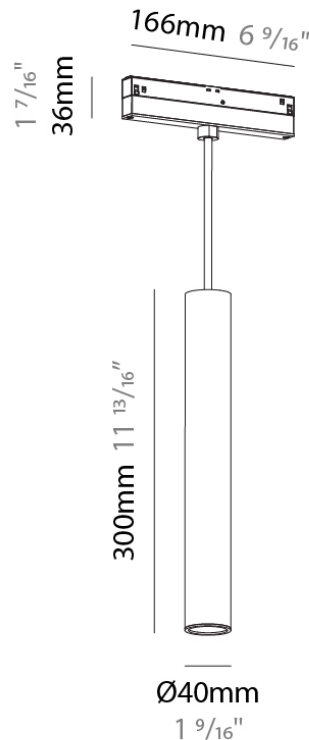

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T131-

DESCRIPTION

Hangover 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover _____

Subseries: Hangover 40 _____

Brand: Prolicht _____

Division: Architectural _____

Mounting Type: Track _____

Mounting Location: Ceiling _____

Subcategory: Downlight _____

PHYSICAL

Shape: Cylinder _____

Diameter (mm): 40 _____

Diameter (in): 1 9/16 _____

Height (mm): 450 _____

Height (in): 17 11/16 _____

Max. Overall Height (mm): 2450 _____

Max. Overall Height (in): 96 7/16 _____

Light Distribution: Downlight _____

Weight (kg): 0.856 _____

Weight (lbs): 1.887 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 9.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 788 / 829 / 840 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____


OPTICAL

Reflector°: 40 / 50 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

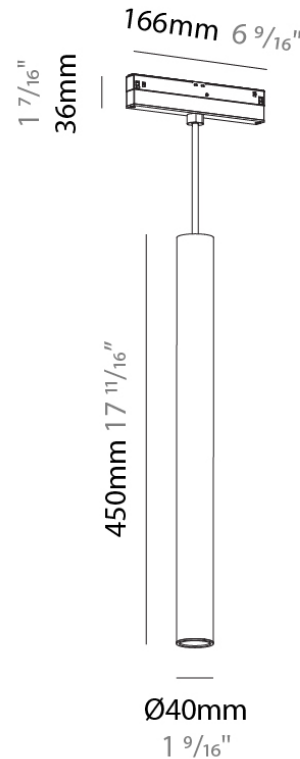

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T132-

DESCRIPTION

Hangover Plug 40 - Track Head - 150mm / 5 7/8" - 10W LED
(Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40° / 50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Downlight

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI


OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

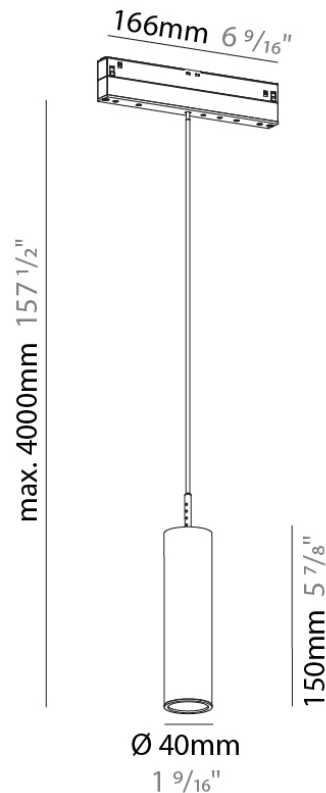

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T133-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover _____

Subseries: Hangover Plug 40 _____

Brand: Prolicht _____

Division: Architectural _____

Mounting Type: Track _____

Mounting Location: Ceiling _____

Subcategory: Downlight _____

PHYSICAL

Shape: Cylinder _____

Diameter (mm): 40 _____

Diameter (in): 1 9/16 _____

Height (mm): 300 _____

Height (in): 11 13/16 _____

Max. Overall Height (mm): 2300 _____

Max. Overall Height (in): 90 9/16 _____

Light Distribution: Downlight _____

Weight (kg): 0.666 _____

Weight (lbs): 1.468 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 8.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 788 / 829 / 840 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____


OPTICAL

Reflector°: 40 / 50 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

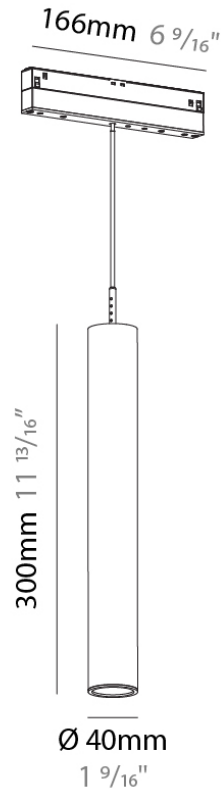

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T134-

DESCRIPTION

Hangover Plug 40 - Track Head - 450mm / 17 11/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 40°/50°

GENERAL

Series: Hangover

Subseries: Hangover Plug 40

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 450

Height (in): 17 11/16

Max. Overall Height (mm): 2450

Max. Overall Height (in): 96 7/16

Light Distribution: Downlight

Weight (kg): 0.856

Weight (lbs): 1.887

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 788 / 829 / 840

Nominal Lumen (lm): 1016 / 1068 / 1082

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

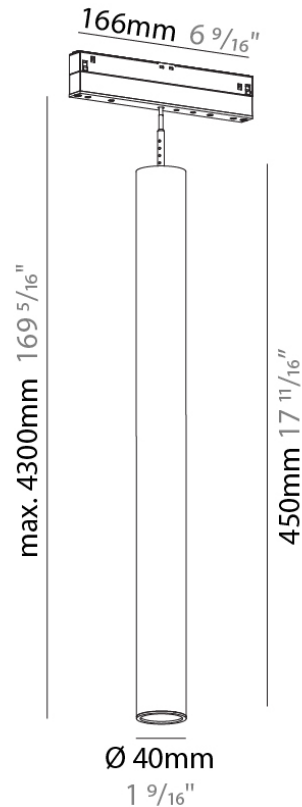

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T135-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover _____

Subseries: Hangover 75 _____

Brand: Prolicht _____

Division: Architectural _____

Mounting Type: Track _____

Mounting Location: Ceiling _____

Subcategory: Downlight _____

PHYSICAL

Shape: Cylinder _____

Diameter (mm): 75 _____

Diameter (in): 2 15/16 _____

Height (mm): 150 _____

Height (in): 5 7/8 _____

Max. Overall Height (mm): 2150 _____

Max. Overall Height (in): 84 5/8 _____

Light Distribution: Downlight _____

Weight (kg): 0.433 _____

Weight (lbs): 0.955 _____

Diffuser: Shine Ring 1-6 _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Fixture Material: Aluminum _____

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 10 _____

Total Output Wattage (W): 8.1 _____

Dimming: Non-Dimmable _____

Driver Included: No _____

Driver Location: Remote _____

Driver Type: Constant Voltage - Universal _____

Driver Class: Class 2 _____

Input Voltage (V): 48 _____

Constant Current (mA): 500 _____

Upon Request: 0-10Vdc dimming / DALI dimming _____

LED

Delivered Lumen Range: 500 - 999 lm _____

Number of LEDs: 1 _____

Color Temperature (°K): 2700 / 3000 / 4000 _____

Max. Delivered Lumen (lm): 898 / 944 / 956 _____

Nominal Lumen (lm): 1016 / 1068 / 1082 _____

CRI: >90 CRI _____

Lamp Life (hrs): 50000 _____


OPTICAL

Reflector°: 18 / 36 / 52 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

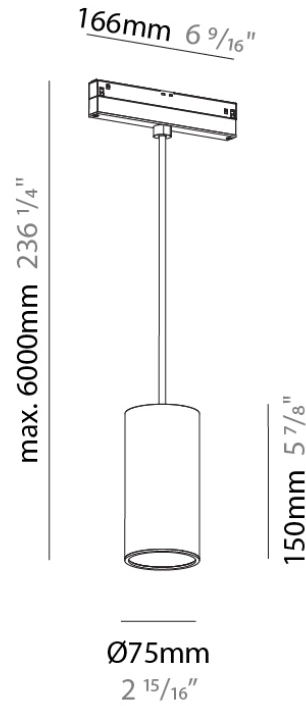

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T136-

DESCRIPTION

Hangover 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover

Subseries: Hangover 75

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Direct / Indirect

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20.8

Total Output Wattage (W): 19

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 1729 - 1837

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

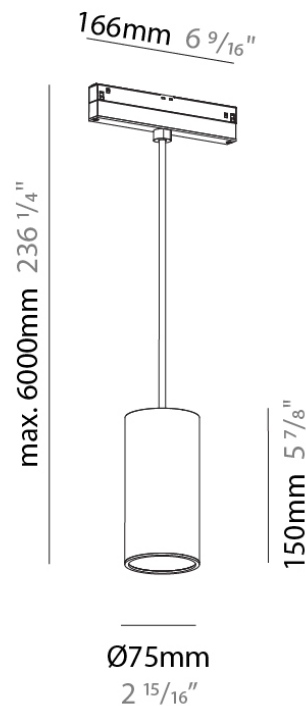

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T137-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
 Subseries: Hangover 75
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 9/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 8.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 898 / 944 / 956
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI

OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

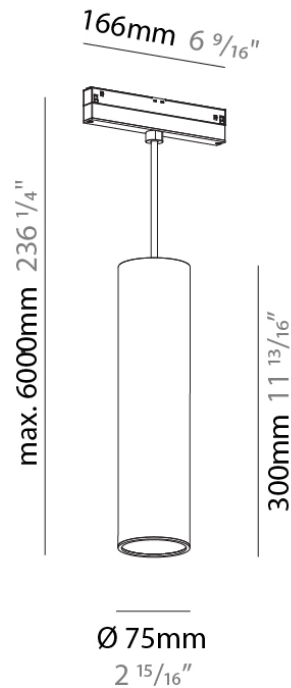

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T138-

DESCRIPTION

Hangover 75 - Track Head - 300mm / 11 13/16" - Dir / Ind - 20.8W LED (Zhaga Standard) - 2700K/3000K/4000K - Reflector 18°/36°/52°

GENERAL

Series: Hangover
 Subseries: Hangover 75
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 300
 Height (in): 11 13/16
 Max. Overall Height (mm): 2300
 Max. Overall Height (in): 90 3/16
 Light Distribution: Downlight
 Weight (kg): 0.666
 Weight (lbs): 1.468
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20.8
 Total Output Wattage (W): 19
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Type: Constant Voltage - Universal
 Input Voltage (V): 48
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 1000 - 1999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 1729 - 1837
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 18 / 36 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

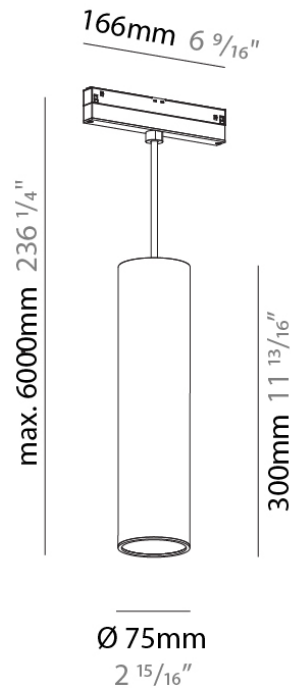

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T139-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - 6W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 75
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Max. Overall Height (mm): 2150
 Max. Overall Height (in): 84 5/8
 Light Distribution: Downlight
 Weight (kg): 0.433
 Weight (lbs): 0.955
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10Vdc dimming / DALI dimming

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 385 / 408 / 442
 Nominal Lumen (lm): 455.22 / 482 / 522.17
 CRI: >90 CRI

OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

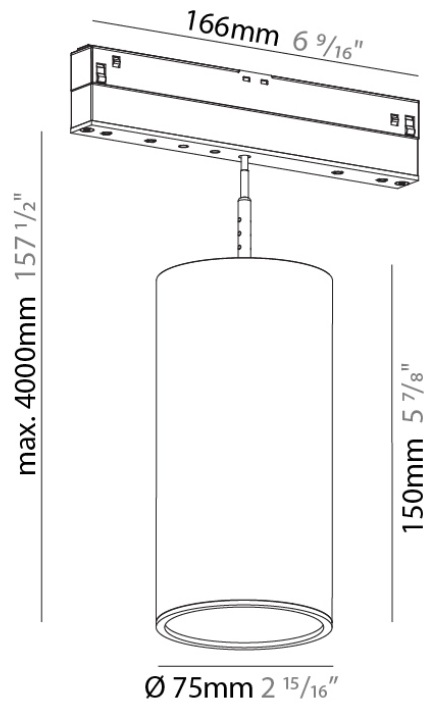

A3CLK50-TRI-SYS COMPONENTS TRACK

A3T140-

DESCRIPTION

Hangover Plug 75 - Track Head - 150mm / 5 7/8" - Dir / Ind - 10W LED (Zhaga Standard) - 2700K/3000K/4000K - Optics 9°/24°/39°

GENERAL

Series: Hangover

Subseries: Hangover Plug 75

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Max. Overall Height (mm): 2150

Max. Overall Height (in): 84 5/8

Light Distribution: Downlight

Weight (kg): 0.433

Weight (lbs): 0.955

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 6000mm Cable - Options: White / Black / Orange / Red

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 8.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10Vdc dimming / DALI dimming

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 708 - 788

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

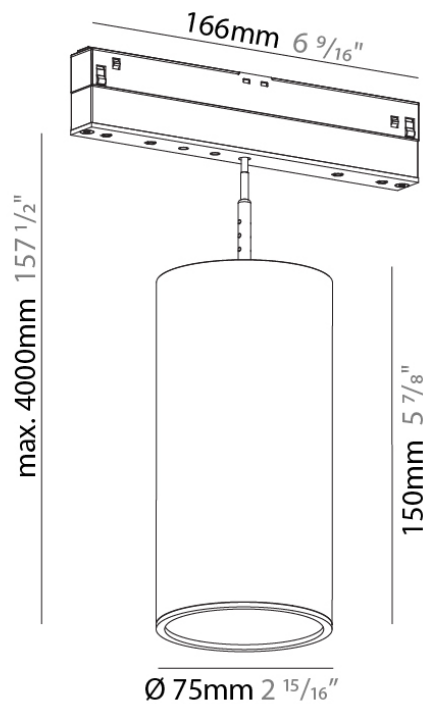

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CLK50-TRI-SYS COMPONENTS

ENCP50

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 670

Length (in): 26 ³/₈

Width (mm): 44

Width (in): 1 ³/₄

Height (mm): 38


Height (in): 1 ¹/₂

Gasket: 1554JGASKET

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

IP rating: IP20

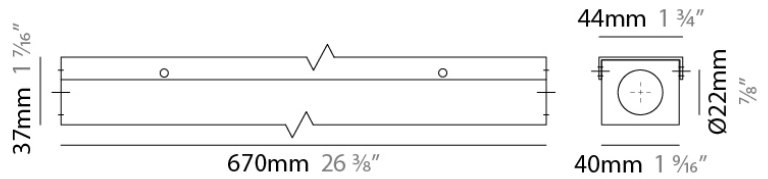

LEGEND

floor-mounted	pivotal	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
wall and ceiling: recessed and surface mounted	rotating	warm dim / natural dimming LED
ceiling-mounted and wall-mounted	illuminate tilted	rechargeable battery powered
wall-mounted	color of suspension cable	fixture with natural vivid LED (upon request)
omni-directional light distribution	length of suspension cable	color rendering index
direct light distribution	reflector degree selection	color temperature
direct/indirect light distribution	super spot	lumen (luminous flux)
indirect light distribution	lens	efficacy (lumens per watt)
asymmetric light distribution	lens pack	Unified Glare Rating (UGR) range from 5-40
aura light distribution	shine ring	marine grade (AISI 316 stainless steel)
round wall or ceiling cut-out	integrated shine ring with diffuser	walk on
square wall or ceiling cut-out	free individual colors 01-29	drive on
the supplied jig specifies the cutout dimensions	individual colors: 00 (free of charge), 01-25 (extra charge)	Dark Sky Compliance
minimum distance (meters) lamp - object	luminaire part to be colored (F1)	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
recessed depth	luminaire part to be colored (F2)	lamp protected against explosion
ceiling thickness in mm	luminaire part to be colored (F3)	blown glass using traditional methods by master glass blower
ceiling thickness selection	luminaire part to be colored (F4)	acoustic material
dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	luminaire part to be colored (F5)	protection class I, protection insulation
included or excluded LED driver/transformer/control gear	color of 3-circuit adaptor	protection class II, protection insulation
separately switchable	indirect diffuser	ETL Certified to UL and CSA Standards
sensor	direct diffuser	UL Certified to UL and CSA Standards
remote control	ball-proof (upon request)	CSA Certified to UL and CSA Standards
available upon request	accessory	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)