

A3CODE-SUR-SYS COMPONENTS TRACK

A3T187-BLK

DESCRIPTION

Minimal Track / Code System - Track Mask 5000mm - Black

GENERAL

Series: Minimal Track

Partner: Prolicht

Division: Architectural

Installation: Track

Mounting Location: Ceiling

PHYSICAL

Shape: Rectangle

Length (mm): 5000

Length (in): 196 7/8

Width (mm): 13

Width (in): 1/2

Height (mm): 7

Height (in): 1/4

Fixture Finish: BLK

Fixture Material: Rubber

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

NOTES

QUANTITY

DATE

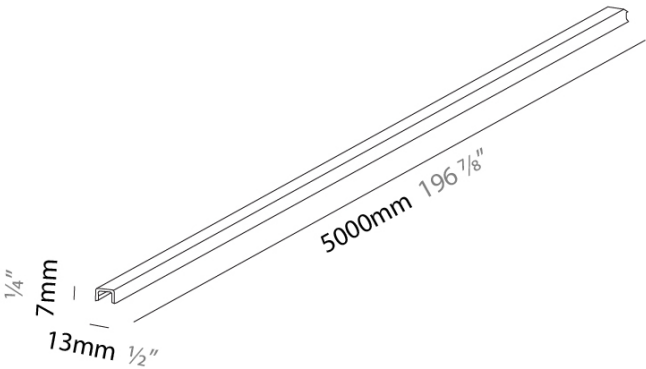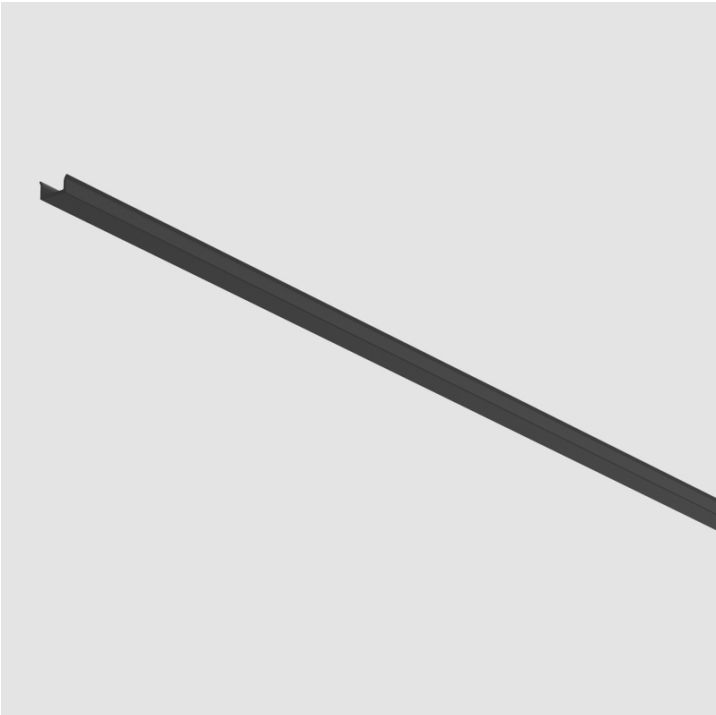

A3CODE-SUR-SYS COMPONENTS

A3T258-


DESCRIPTION
The Code System - DOT End Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

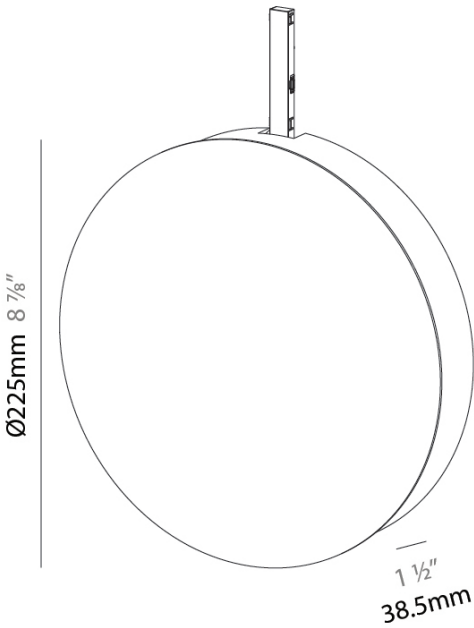

A3CODE-SUR-SYS COMPONENTS

A3T259-


DESCRIPTION
The Code System - DOT Middle Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

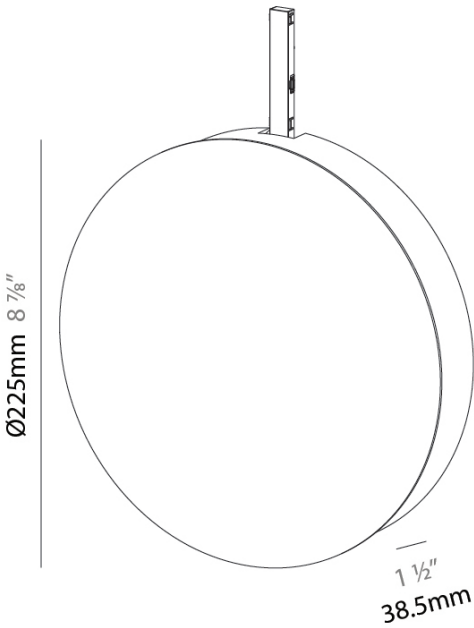

A3CODE-SUR-SYS COMPONENTS

A3T260-


DESCRIPTION
The Code System - DOT "L" Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

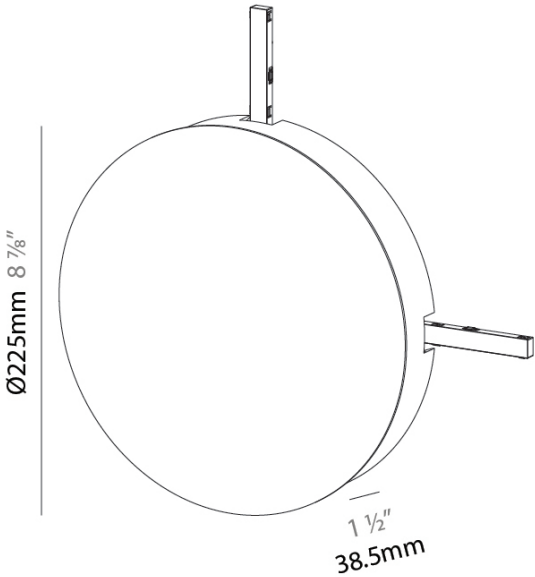

A3CODE-SUR-SYS COMPONENTS

A3T261-


DESCRIPTION
The Code System - DOT "T" Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

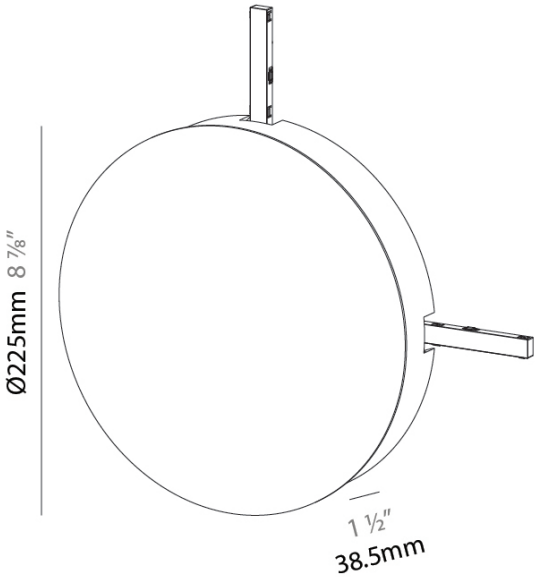

A3CODE-SUR-SYS COMPONENTS

A3T262-


DESCRIPTION
The Code System - DOT "X" Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

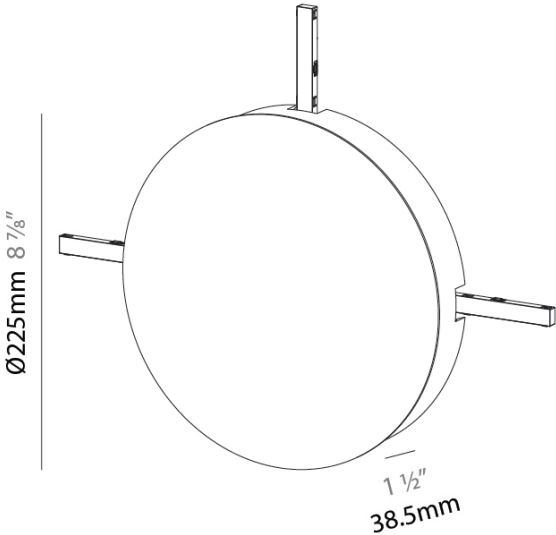

A3CODE-SUR-SYS COMPONENTS

A3T263-


DESCRIPTION
The Code System - Stand Alone Single Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

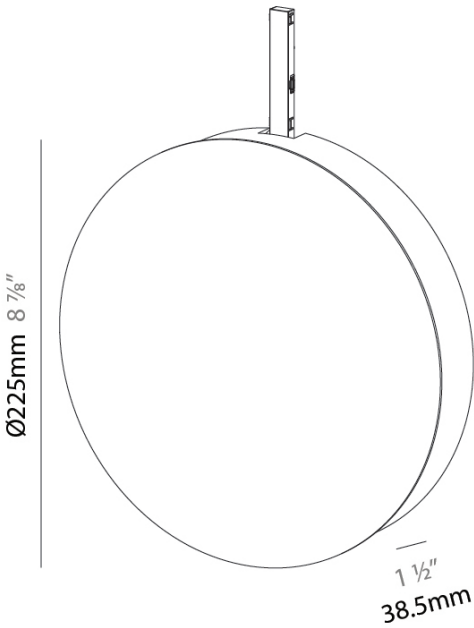

A3CODE-SUR-SYS COMPONENTS

A3T264-


DESCRIPTION
The Code System - Stand Alone Double Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 225
Diameter (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

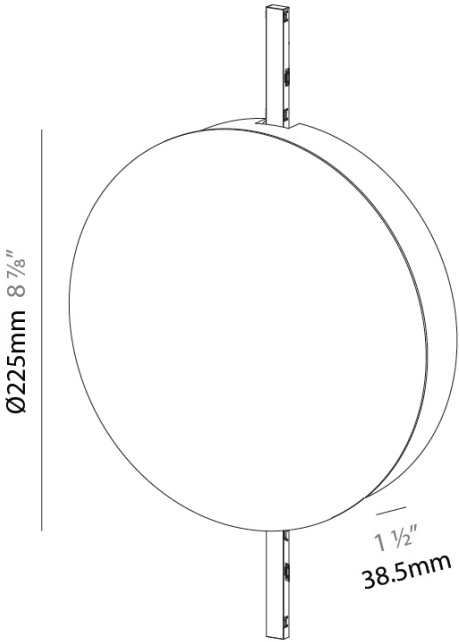

A3CODE-SUR-SYS COMPONENTS

A3T265-


DESCRIPTION
GRID End Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

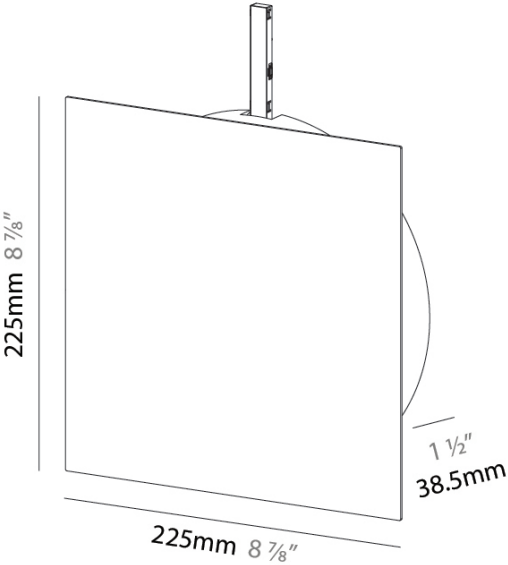

A3CODE-SUR-SYS COMPONENTS

A3T266-


DESCRIPTION
GRID Middle Power Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

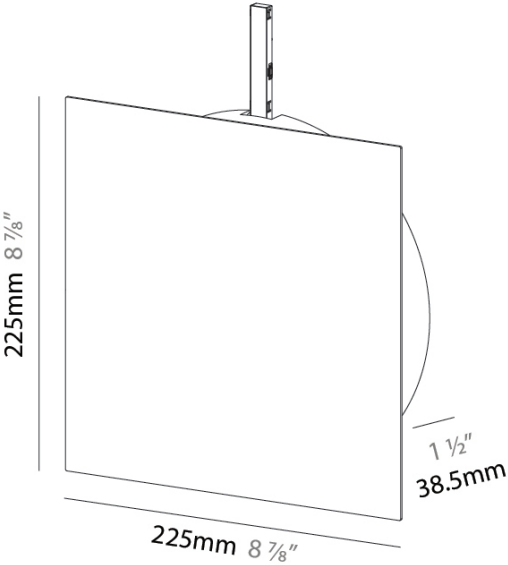

A3CODE-SUR-SYS COMPONENTS

A3T267-



DESCRIPTION
GRID "L" Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

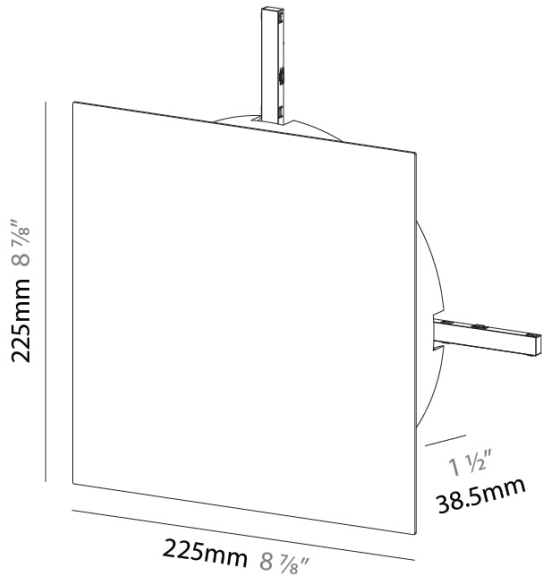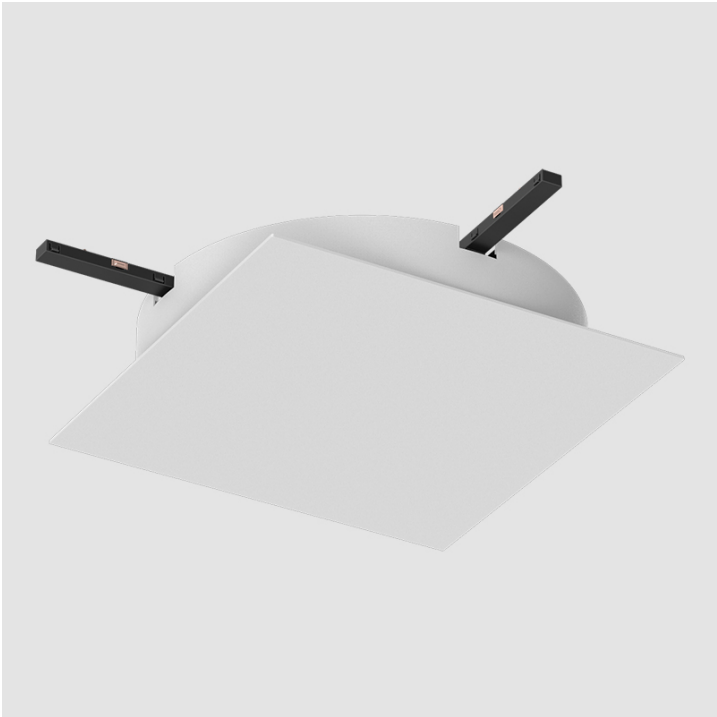

A3CODE-SUR-SYS COMPONENTS

A3T268-


DESCRIPTION
GRID "T" Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

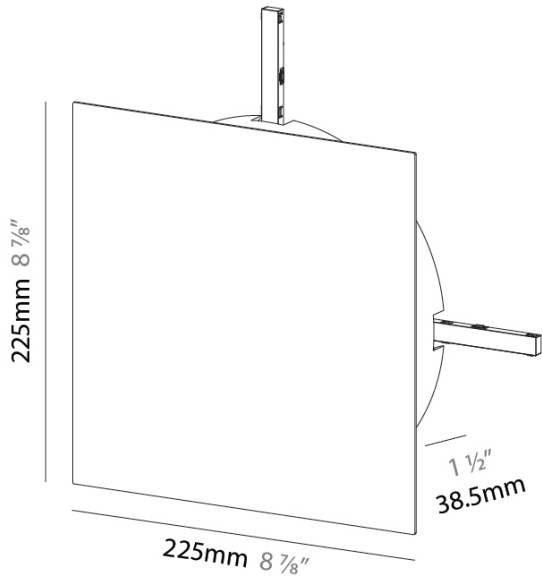

A3CODE-SUR-SYS COMPONENTS

A3T269-


DESCRIPTION
GRID "X" Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

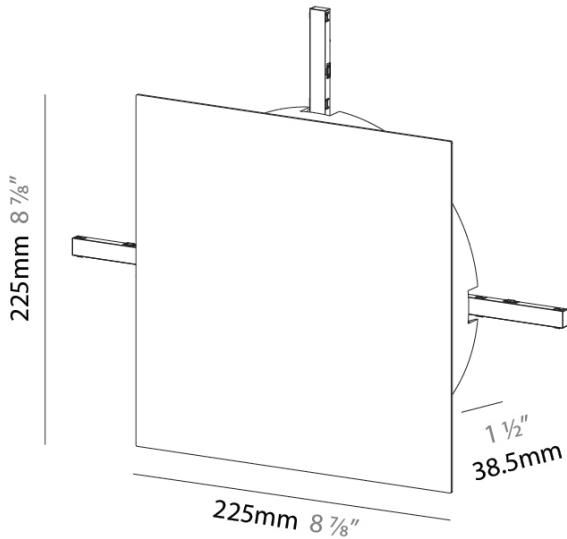

A3CODE-SUR-SYS COMPONENTS

A3T270-


DESCRIPTION
GRID Stand Alone Single Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

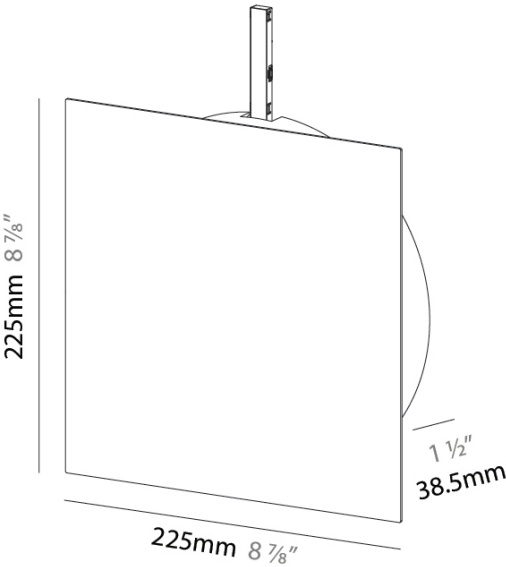

A3CODE-SUR-SYS COMPONENTS

A3T271-

DESCRIPTION
GRID Stand Alone Double Feed - 86W 48V - Dimmable

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Shape: Square
Length (mm): 225
Length (in): 8 7/8
Width (mm): 225
Width (in): 8 7/8
Height (mm): 39
Height (in): 1 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20



PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

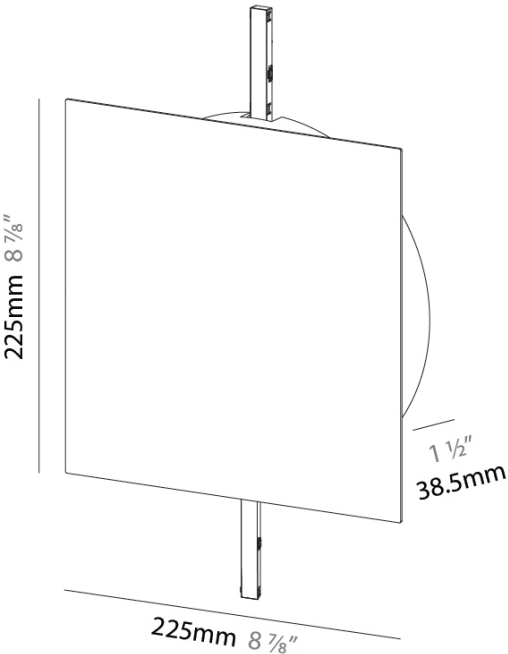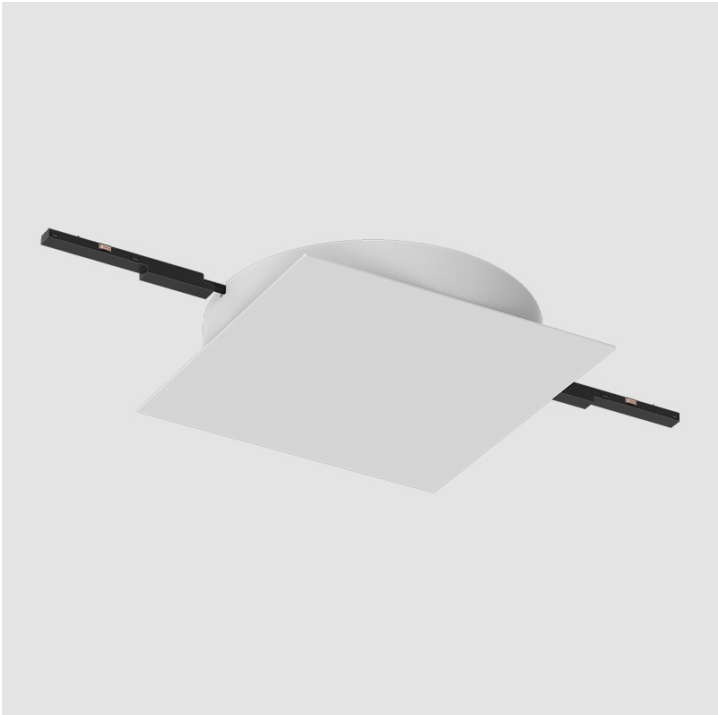

A3CODE-SUR-SYS COMPONENTS

A3T272

DESCRIPTION
DOT Direct - LED 2700K, 4W, 450lm, CRI90 - Black

GENERAL

Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Direct

PHYSICAL

Shape: Square
Diameter (mm): 200
Diameter (in): 7 7/8
Height (mm): 14
Height (in): 9/16
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4
Total Output Wattage (W): 3.6
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED

Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 450
Nominal Lumen (lm): 450
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 122

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

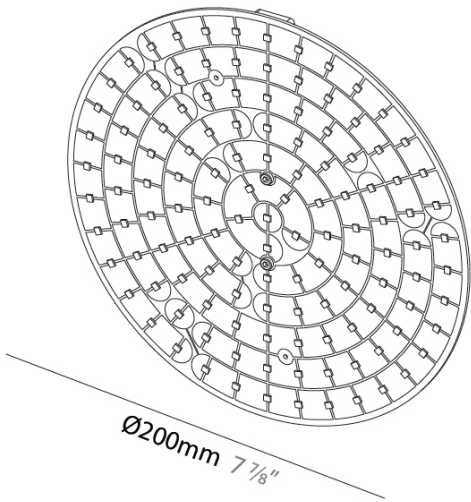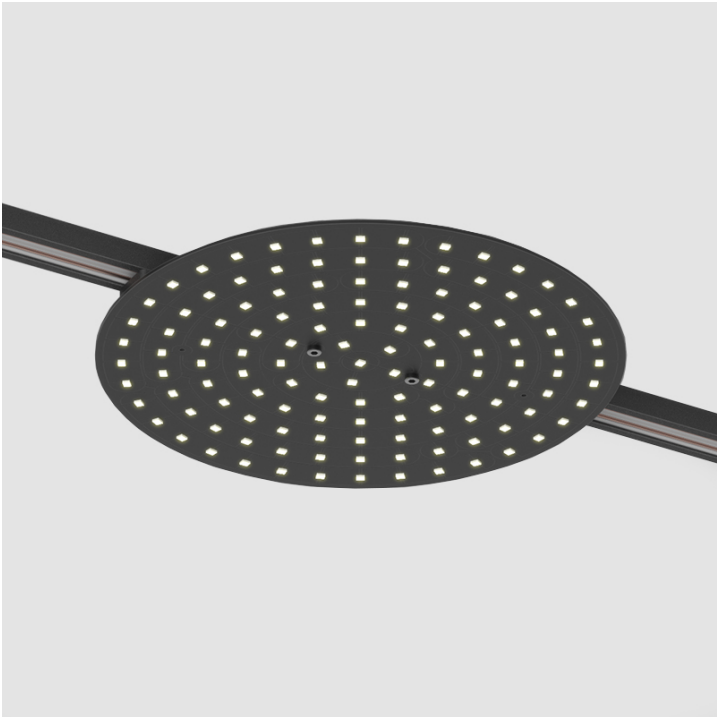

A3CODE-SUR-SYS COMPONENTS

A3T273

DESCRIPTION
DOT Standing - LED 2700K, 4W, 450lm, CRI90 - Black

GENERAL

Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Direct

PHYSICAL

Shape: Square
Diameter (mm): 200
Diameter (in): 7 7/8
Height (mm): 200
Height (in): 7 7/8
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4
Total Output Wattage (W): 3.6
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 450
Nominal Lumen (lm): 450
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 122

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

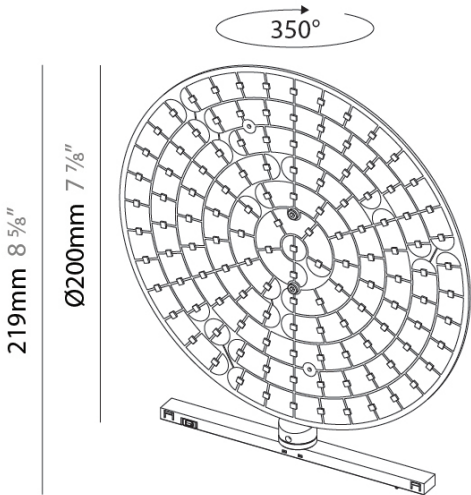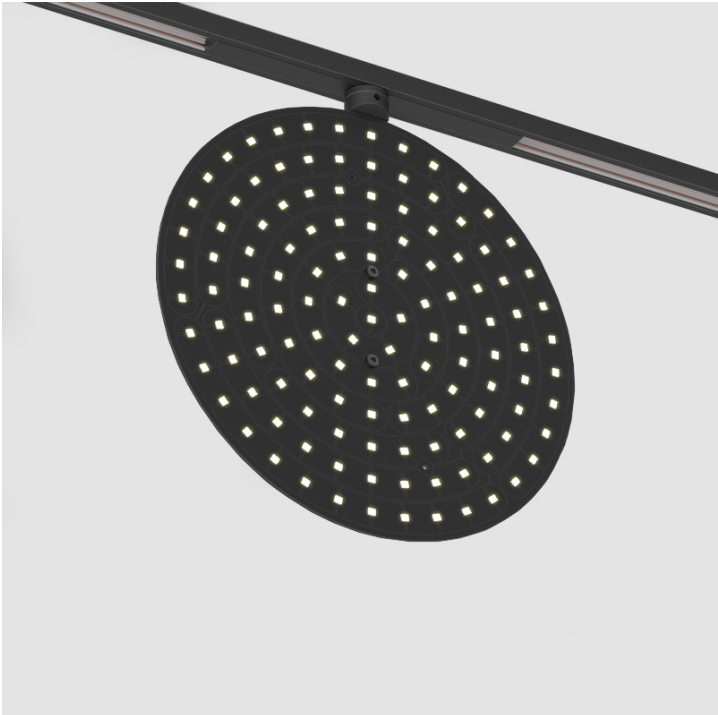

A3CODE-SUR-SYS COMPONENTS

A3T274

DESCRIPTION
DOT Indirect - LED 2700K, 5W, 450lm, CRI90 - Black

GENERAL

Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Direct

PHYSICAL

Shape: Square
Diameter (mm): 200
Diameter (in): 7 7/8
Height (mm): 14
Height (in): 9/16
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5
Total Output Wattage (W): 4.5
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 180

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

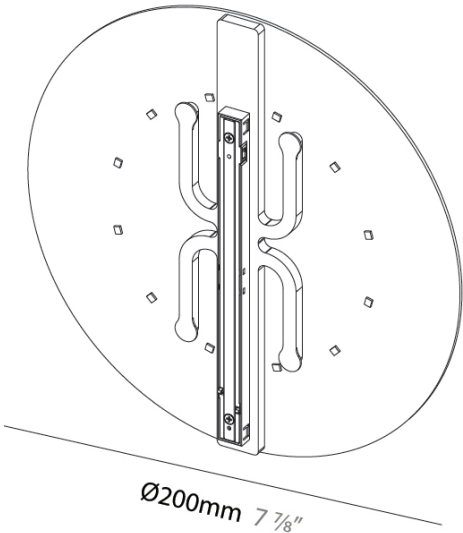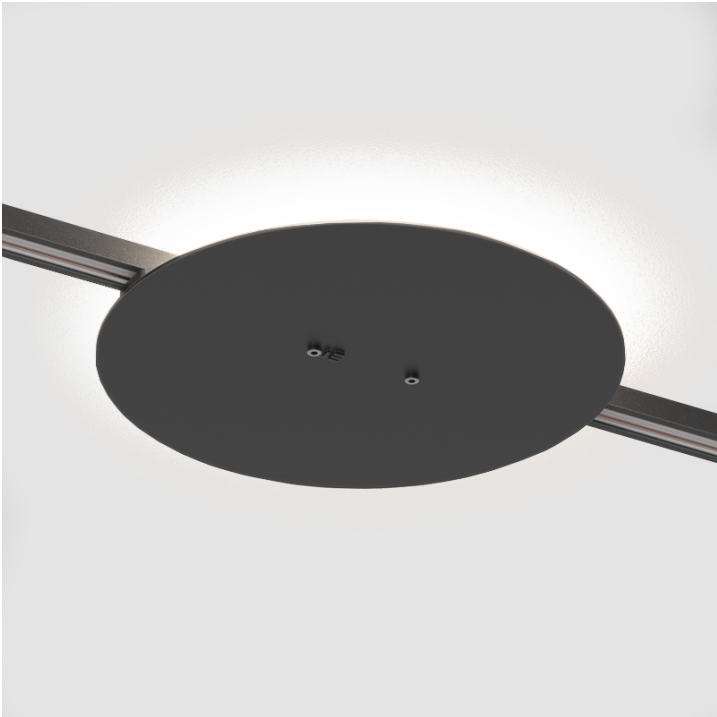

A3CODE-SUR-SYS COMPONENTS

A3T275

DESCRIPTION
Grid Direct - LED 2700K, 4W, 450lm, CRI90 - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Direct



PHYSICAL
Shape: Square
Length (mm): 210
Length (in): 8 1/16
Width (mm): 210
Width (in): 8 1/16
Height (mm): 14
Height (in): 9/16
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL
Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4
Total Output Wattage (W): 3.6
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED
Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 460
Nominal Lumen (lm): 460
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL
Beam Angle: 180

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

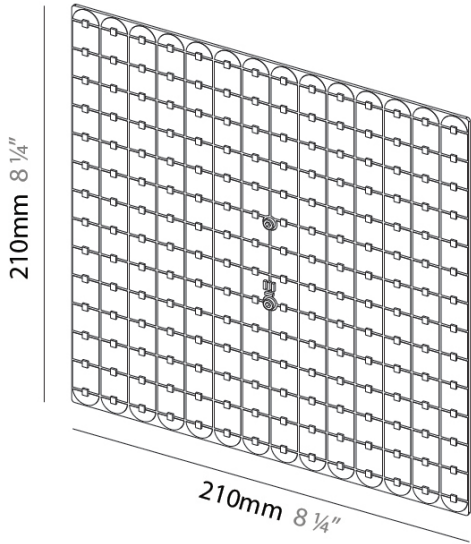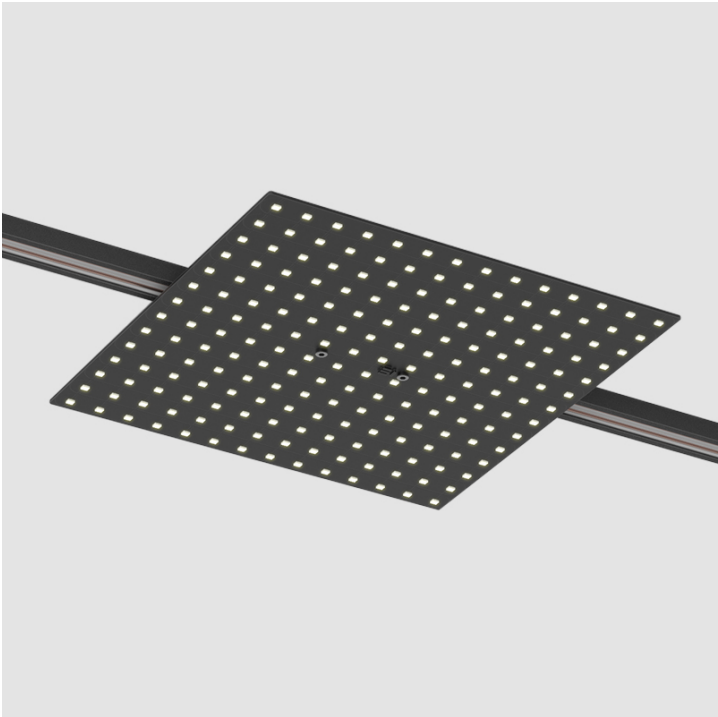

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CODE-SUR-SYS COMPONENTS

A3T276

DESCRIPTION
Grid Standing - LED 2700K, 4W, 450lm, CRI90 - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Direct



PHYSICAL
Shape: Square
Length (mm): 210
Length (in): 8 1/4
Width (mm): 210
Width (in): 8 1/4
Height (mm): 230
Height (in): 9 1/16
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL
Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4
Total Output Wattage (W): 3.6
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED
Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 460
Nominal Lumen (lm): 460
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL
Beam Angle: 122

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

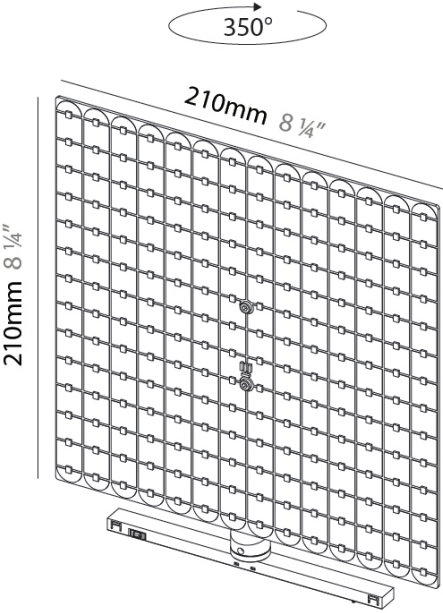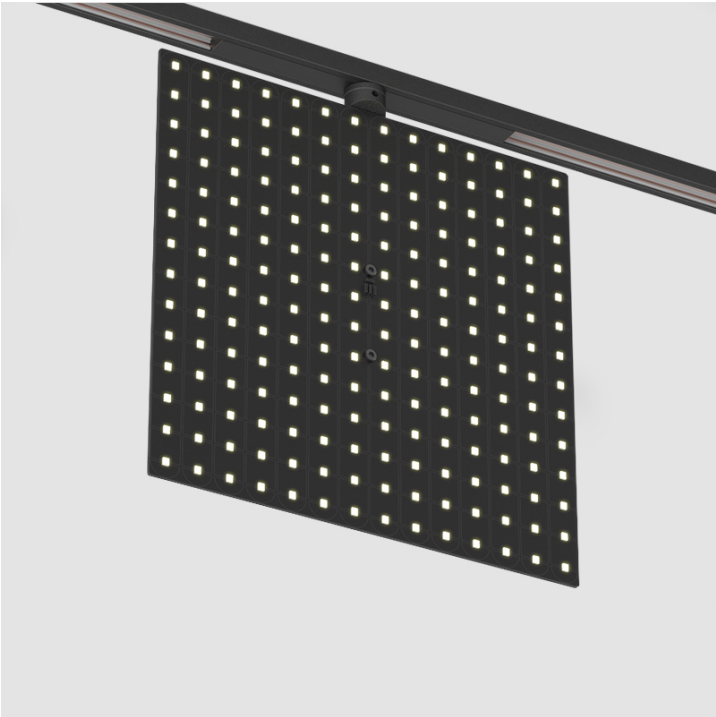

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3CODE-SUR-SYS COMPONENTS

A3T277

DESCRIPTION
Grid Indirect - LED 2700K, 5W, 400lm, CRI90 - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Indirect

PHYSICAL
Shape: Square
Length (mm): 210
Length (in): 8 1/4
Width (mm): 210
Width (in): 8 1/4
Height (mm): 14
Height (in): 9/16
Fixture Finish: BLK
Fixture Material: Aluminum



ELECTRICAL
Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5
Total Output Wattage (W): 4.5
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming

LED
Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL
Beam Angle: 122

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

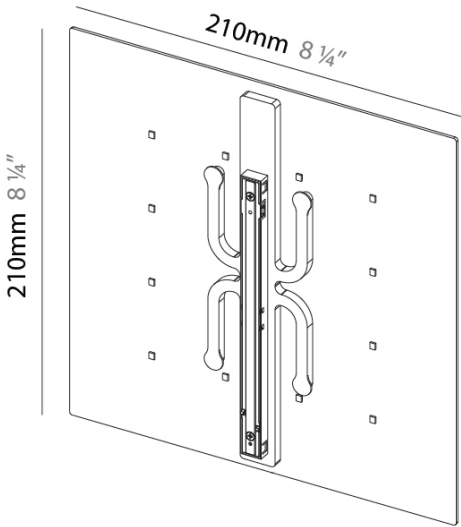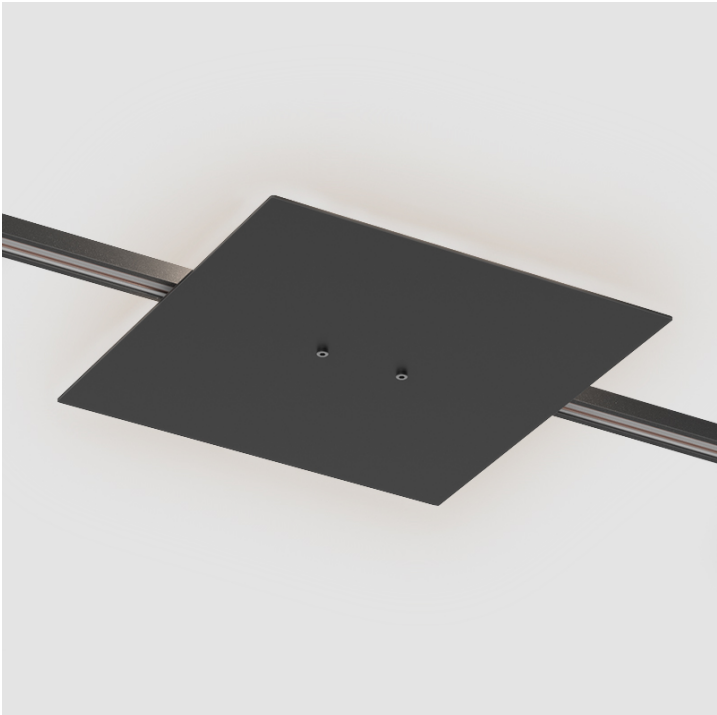

A3CODE-SUR-SYS COMPONENTS

A3T278

DESCRIPTION
DASH 2100mm - LED 2700K, 5W, 530lm, CRI90 - Black

GENERAL

Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Indirect

PHYSICAL

Shape: Curves
Length (mm): 2100
Length (in): 82 1/8
Width (mm): 19
Width (in): 3/4
Height (mm): 22
Height (in): 7/8
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 5
Total Output Wattage (W): 4.6
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Housing: ENCP12
Input Voltage (V): 48
Upon Request: 0-10V with EldoLED Bridge

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 530
Nominal Lumen (lm): 530
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 114

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

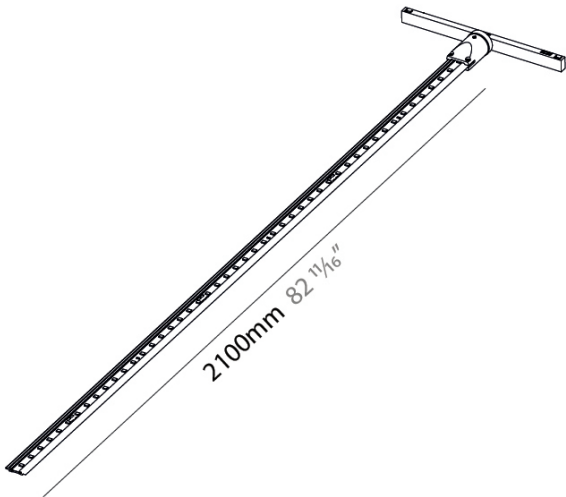

A3CODE-SUR-SYS COMPONENTS

A3T279

DESCRIPTION

DASH 4200mm - LED 2700K, 10W, 1060lm, CRI90 - Black

GENERAL

Series: Code System
Partner: Prolicht
Division: Architectural
Light Distribution: Indirect

PHYSICAL

Shape: Curves
Length (mm): 4200
Length (in): 165 3/8
Width (mm): 19
Width (in): 3/4
Height (mm): 22
Height (in): 7/8
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimming / DALI Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V with EldoLED Bridge

LED

Delivered Lumen Range: 500 - 1999 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 1060
Nominal Lumen (lm): 1060
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 114

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



A3CODE-SUR-SYS COMPONENTS

A3T280

DESCRIPTION
DASH 2 TRACK Connector - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Diameter (mm): 22
Diameter (in): 7/8
Height (mm): 42
Height (in): 1 5/8
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20


PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

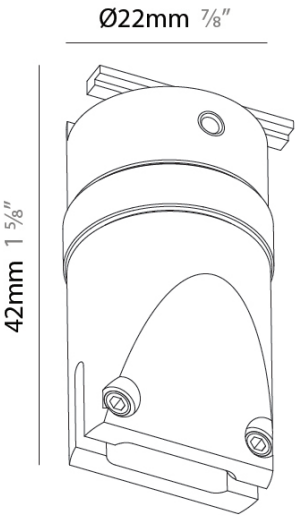

A3CODE-SUR-SYS COMPONENTS

A3T281


DESCRIPTION
DASH 2 DASH Connector - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Length (mm): 30
Length (in): 1 3/16
Width (mm): 23
Width (in): 7/8
Height (mm): 9
Height (in): 3/8
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

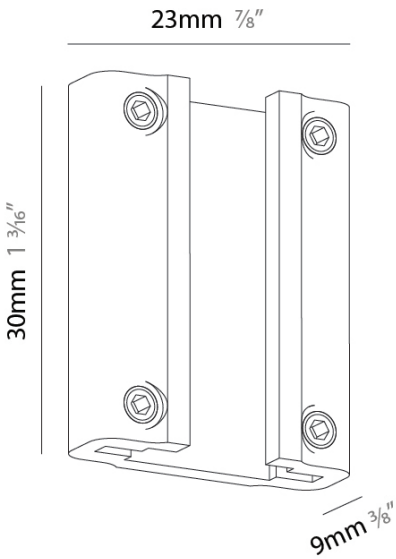

A3CODE-SUR-SYS COMPONENTS

A3T282

DESCRIPTION
DASH 2 SURFACE Connector - Black

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 33
Height (in): 1 5/16
Fixture Finish: BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20


PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

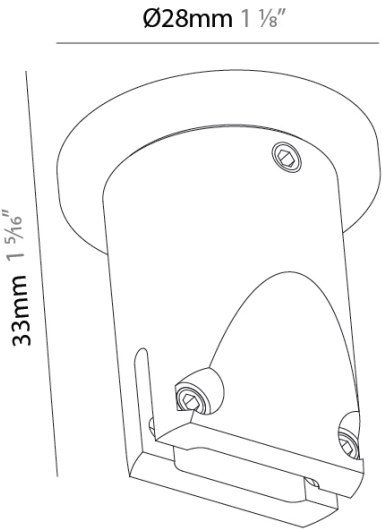

A3CODE-SUR-SYS COMPONENTS

A3T283

DESCRIPTION

DASH Anchor - Black

GENERAL

Series: Code System

Partner: Prolicht

Division: Architectural

PHYSICAL

Diameter (mm): 21

Diameter (in): 13/16

Height (mm): 55

Height (in): 2 3/16

Fixture Finish: BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

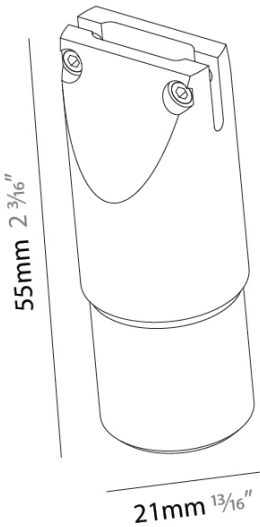

A3CODE-SUR-SYS COMPONENTS

A3T284


DESCRIPTION
DASH Anchor - Brass

GENERAL
Series: Code System
Partner: Prolicht
Division: Architectural

PHYSICAL
Diameter (mm): 21
Diameter (in): 13/16
Height (mm): 55
Height (in): 2 3/16
Fixture Finish: BRA
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

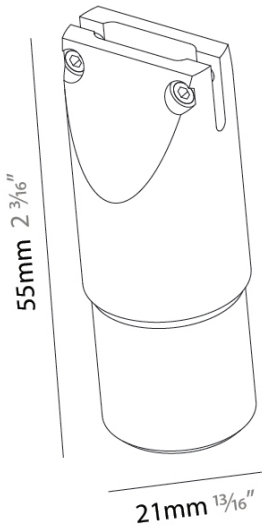

A3CODE-SUR-SYS COMPONENTS TRACK

A3T288-

DESCRIPTION

Imagine Micro Track Spot for Minimal Track / The Code System -
Ø23mm / 7/8" - 6W LED (Zhaga Standard) - 2700K / 3000K /
3500K / 4000K - Optics: 18° / 22° - Dimmable

GENERAL

Series: Imagine
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Adjustable

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 105
Height (in): 4 1/8
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
CHC / COM / ABZ / JAG / OBR / MOS / ROR / GMS
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming, DALI Dimming

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 110 / 119 / 124 / 127
Nominal Lumen (lm): 372 / 399 / 418 / 427
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic: 14
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

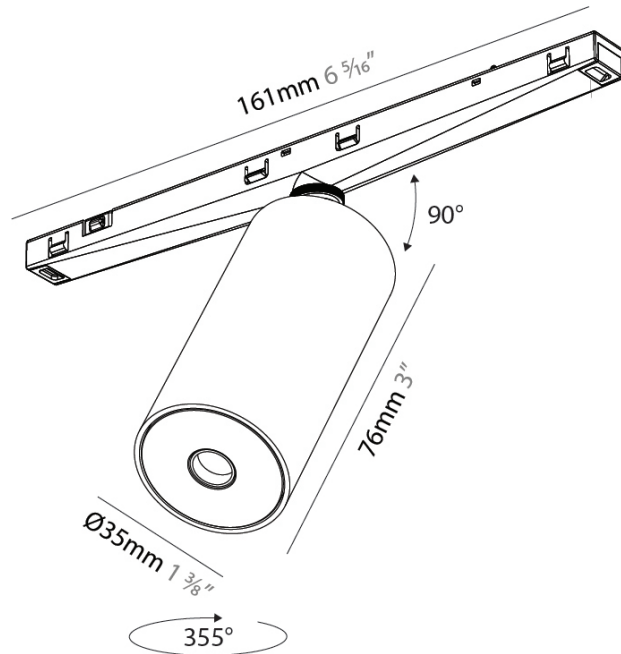

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)