

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3FI-SUS-SYS COMPONENTS

### A38991-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1140mm / 44 7/8" - 18W / 12.8W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80


**GENERAL**  
 Series: Bunga \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**  
 Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1140 \_\_\_\_\_  
 Length (in): 44 7/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 1.275 \_\_\_\_\_  
 Weight (lbs): 2.81 \_\_\_\_\_  
 Fixture Material: PMMA / Aluminum \_\_\_\_\_

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 18 \_\_\_\_\_  
 Total Output Wattage (W): 16 / 12.8 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 400 (3500K) \_\_\_\_\_

**LED**  
 Delivered Lumen Range: 2000 - 2999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 2210 / 2293 / 2340 \_\_\_\_\_  
 Nominal Lumen (lm): 2840 / 2940 / 3000 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

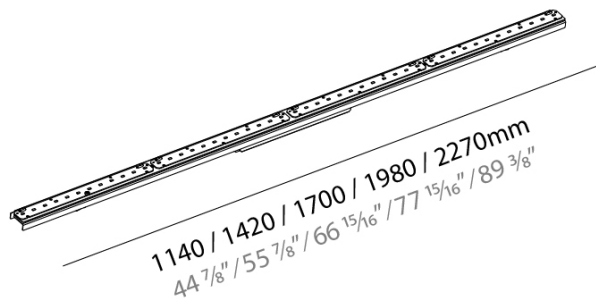

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A38992-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1420mm / 55 7/8" - 22.5W / 16W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80

**GENERAL**

Series: Bunga \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1420 \_\_\_\_\_  
 Length (in): 55 7/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 1.524 \_\_\_\_\_  
 Weight (lbs): 3.36 \_\_\_\_\_  
 Fixture Material: PMMA / Aluminum \_\_\_\_\_

**ELECTRICAL**



Input Wattage Range: 20 - 29 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 22.5 \_\_\_\_\_  
 Total Output Wattage (W): 20 / 16 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 500 (3500K) \_\_\_\_\_

**LED**

Delivered Lumen Range: 2000 - 2999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 2270 / 2862 / 2920 \_\_\_\_\_  
 Nominal Lumen (lm): 3550 / 3675 / 3750 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

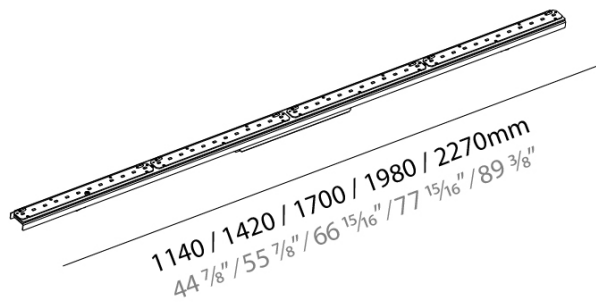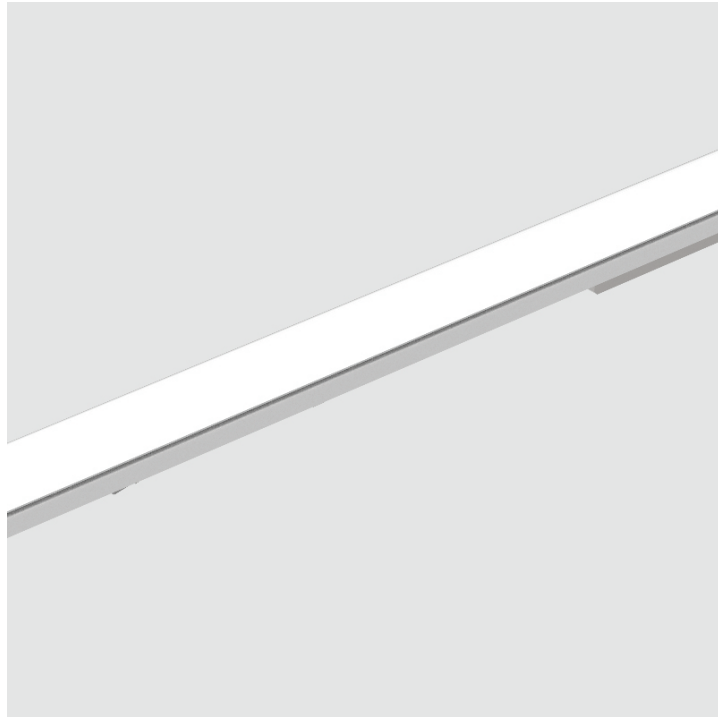

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3FI-SUS-SYS COMPONENTS

### A38993-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1700mm - 27W / 19.2W [O/P]  
 (3500K) - LED (Zhaga Standard) - 3000K / 3500K / 4000K CRI >80  
 LED (Zhaga Standard)

**GENERAL**

Series: Bunga \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1700 \_\_\_\_\_  
 Length (in): 66 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 <sup>7</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 <sup>3</sup>/<sub>8</sub> \_\_\_\_\_  
 Fixture Material: PMMA / Aluminum \_\_\_\_\_

**ELECTRICAL**


Input Wattage Range: 30 - 49 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 27 \_\_\_\_\_  
 Total Output Wattage (W): 24 / 19.2 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V  
 Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 600 (3500K) \_\_\_\_\_

**LED**

Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 3320 / 3440 / 3510 \_\_\_\_\_  
 Nominal Lumen (lm): 4260 / 4410 / 4500 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

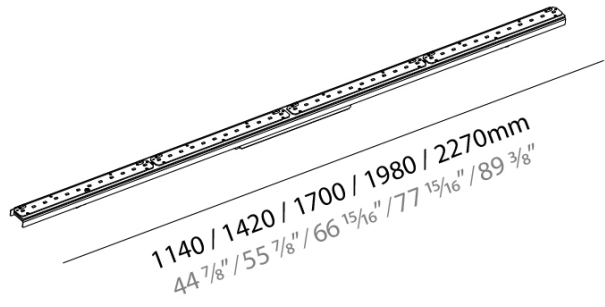

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A38994-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1980mm - 31.5W / 22.4W [O/P]  
 (3500K) - LED (Zhaga Standard) - 3000K / 3500K / 4000K CRI >80  
 LED (Zhaga Standard)

**GENERAL**

Series: Bunga \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1980 \_\_\_\_\_  
 Length (in): 77 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 <sup>7</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 <sup>3</sup>/<sub>8</sub> \_\_\_\_\_  
 Weight (kg): 2.016 \_\_\_\_\_  
 Weight (lbs): 4.44 \_\_\_\_\_  
 Fixture Material: PMMA / Aluminum \_\_\_\_\_

**ELECTRICAL**


Input Wattage Range: 30 - 49 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 31.5 \_\_\_\_\_  
 Total Output Wattage (W): 28 / 22.4 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V  
 Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 700 (3500K) \_\_\_\_\_

**LED**

Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 3870 / 4008 / 4090 \_\_\_\_\_  
 Nominal Lumen (lm): 4970 / 5145 / 5250 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

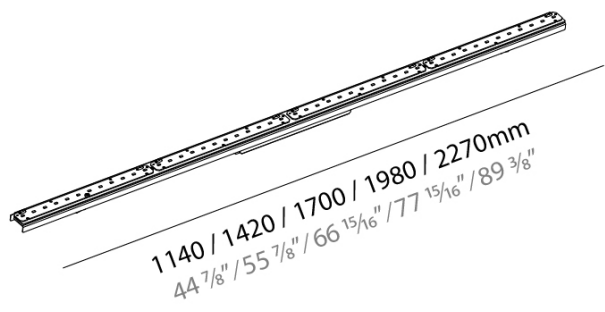

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A38995-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 2270mm / 89 3/8" - 36W / 25.6W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80

#### GENERAL

Series: Bunga \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 2270 \_\_\_\_\_  
 Length (in): 89 3/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 2.305 \_\_\_\_\_  
 Weight (lbs): 5.08 \_\_\_\_\_  
 Fixture Material: PMMA / Aluminum \_\_\_\_\_

#### ELECTRICAL


Input Wattage Range: 30 - 49 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 36 \_\_\_\_\_  
 Total Output Wattage (W): 32 / 25.6 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V  
 Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 400 (3500K) \_\_\_\_\_

#### LED

Delivered Lumen Range: 3000 - 4999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 4420 / 4577 / 4670 \_\_\_\_\_  
 Nominal Lumen (lm): 5680 / 5880 / 6000 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

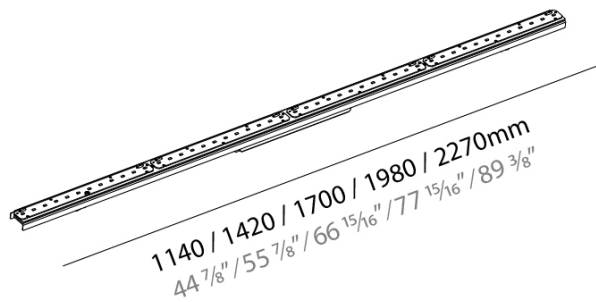

## A3FI-SUS-SYS COMPONENTS

### A39009-

**DESCRIPTION**  
Suspension Cable with Quick Release 6000mm


**GENERAL**

Partner: Prolight  
Division: Architectural

**PHYSICAL**

Diameter (mm): 19  
Length (mm): 6,000  
Width (mm): 65mm 2 9/16"  
Height (mm): 22  
Max. Overall Height (mm): 6,000

PROJECT
TYPE
NOTES
QUANTITY
DATE

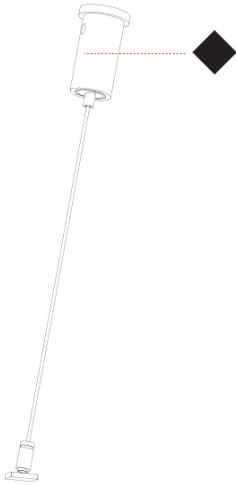

max. distance: 1800mm 70 7/8"



## A3FI-SUS-SYS COMPONENTS


### A39010-

**DESCRIPTION**  
Suspension Cable with Quick Release 2000mm

**GENERAL**  
Partner: Prolight  
Division: Architectural

**PHYSICAL**  
Diameter (mm): 19  
Length (mm): 2,000  
Height (mm): 22  
Max. Overall Height (mm): 2,000

PROJECT
TYPE
NOTES
QUANTITY
DATE

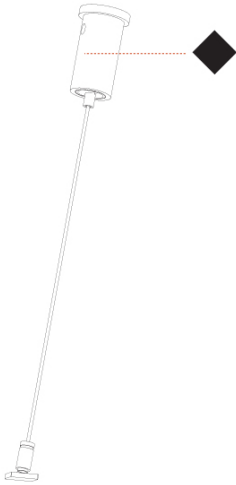

max. distance: 1800mm 70 7/8"



## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39013-

**DESCRIPTION**  
Suspension Power Feed 3x0.75, 2000mm

#### GENERAL

Partner: Prolight \_\_\_\_\_  
Division: Architectural \_\_\_\_\_


#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 120 \_\_\_\_\_  
Diameter (in): 4 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Length (mm): 2000 \_\_\_\_\_  
Length (in): 78 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Width (mm): 120 \_\_\_\_\_  
Width (in): 4 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Height (mm): 30 \_\_\_\_\_  
Height (in): 1 <sup>1</sup>/<sub>16</sub> \_\_\_\_\_  
Weight (kg): 0.3 \_\_\_\_\_  
Weight (lbs): 0.66 \_\_\_\_\_

Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

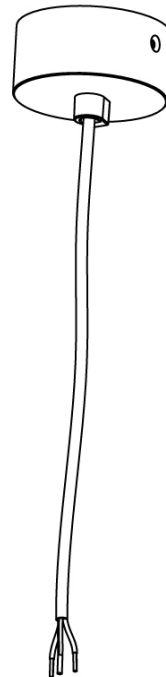

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39014-

**DESCRIPTION**  
Suspension Power Feed 5x0.75 - 2000mm

#### GENERAL


Partner: Prolicht  
Division: Architectural

#### PHYSICAL

Shape: Round  
Diameter (mm): 120  
Diameter (in): 4 <sup>3</sup>/<sub>4</sub>  
Length (mm): 2000  
Length (in): 78 <sup>3</sup>/<sub>4</sub>  
Width (mm): 120  
Width (in): 4 <sup>3</sup>/<sub>4</sub>  
Height (mm): 30  
Height (in): 1 <sup>1</sup>/<sub>16</sub>  
Weight (kg): 0.3  
Weight (lbs): 0.661  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

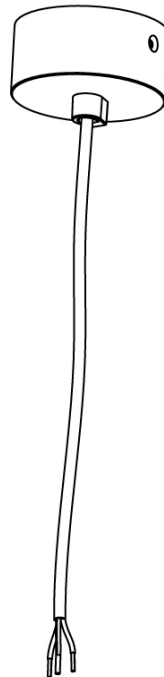

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A39015-

**DESCRIPTION**  
 Suspension Power Feed 4x0.75 2000mm 2 Circuits Phase Dimming

**GENERAL**


Partner: Prolight \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Round \_\_\_\_\_  
 Diameter (mm): 120 \_\_\_\_\_  
 Diameter (in): 4 3/4 \_\_\_\_\_  
 Length (mm): 6000 \_\_\_\_\_  
 Length (in): 236 1/4 \_\_\_\_\_  
 Width (mm): 120 \_\_\_\_\_  
 Width (in): 4 3/4 \_\_\_\_\_  
 Height (mm): 30 \_\_\_\_\_  
 Height (in): 1 1/16 \_\_\_\_\_  
 Weight (kg): 0.118 \_\_\_\_\_  
 Weight (lbs): 0.26 \_\_\_\_\_  
 Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
 RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
 BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

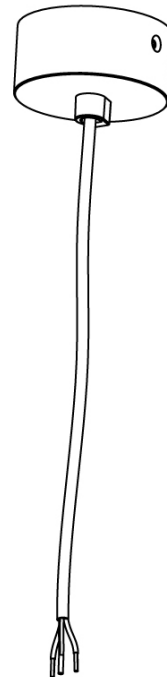

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39016-

**DESCRIPTION**  
Suspension Power Feed 3x0.75, 6000mm

#### GENERAL


Partner: Prolight \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 120 \_\_\_\_\_  
Diameter (in): 4 3/4 \_\_\_\_\_  
Length (mm): 6000 \_\_\_\_\_  
Length (in): 236 1/4 \_\_\_\_\_  
Width (mm): 120 \_\_\_\_\_  
Width (in): 4 3/4 \_\_\_\_\_  
Height (mm): 30 \_\_\_\_\_  
Height (in): 1 1/16 \_\_\_\_\_  
Weight (kg): 0.117 \_\_\_\_\_  
Weight (lbs): 0.258 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

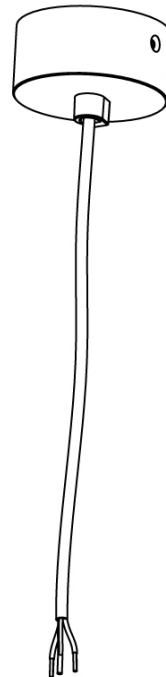

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39017-

**DESCRIPTION**  
Suspension Power Feed 5x0.75, 6000mm

#### GENERAL


Partner: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 120 \_\_\_\_\_  
Diameter (in): 4 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Length (mm): 6000 \_\_\_\_\_  
Length (in): 236 <sup>1</sup>/<sub>4</sub> \_\_\_\_\_  
Width (mm): 120 \_\_\_\_\_  
Width (in): 4 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Height (mm): 30 \_\_\_\_\_  
Height (in): 1 <sup>1</sup>/<sub>16</sub> \_\_\_\_\_  
Weight (kg): 0.117 \_\_\_\_\_  
Weight (lbs): 0.258 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

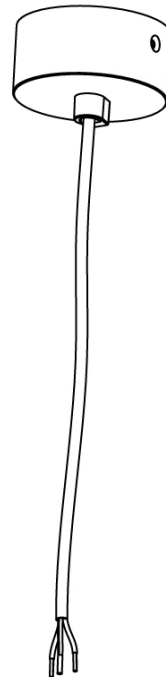

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A39018-

**DESCRIPTION**  
 Suspension Power Feed 4x0.75, 6000mm 2 Circuits Phase Dimming

**GENERAL**


Partner: Prolight \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Round \_\_\_\_\_  
 Diameter (mm): 81 \_\_\_\_\_  
 Diameter (in): 3 1/16 \_\_\_\_\_  
 Length (mm): 3 3/16 \_\_\_\_\_  
 Length (in): 236 1/4 \_\_\_\_\_  
 Width (mm): 81 \_\_\_\_\_  
 Width (in): 3 1/16 \_\_\_\_\_  
 Height (mm): 32 \_\_\_\_\_  
 Height (in): 1 1/4 \_\_\_\_\_  
 Weight (kg): 0.35 \_\_\_\_\_  
 Weight (lbs): 0.77 \_\_\_\_\_  
 Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

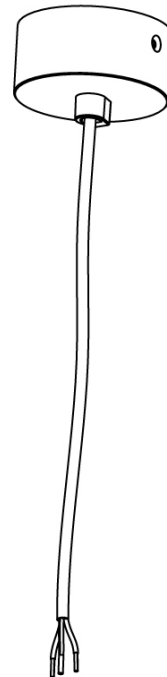

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A3982600

**DESCRIPTION**  
 Fino System - Surface/Suspension Opal Diffuser Per Meter - Max 3000mm / 118 1/8"

**GENERAL**


Series: Fino \_\_\_\_\_  
 Partner: Prolight \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Mounting Location: Ceiling \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1000 \_\_\_\_\_  
 Length (in): 39 3/8 \_\_\_\_\_  
 Width (mm): 62 \_\_\_\_\_  
 Width (in): 2 7/16 \_\_\_\_\_  
 Height (mm): 75 \_\_\_\_\_  
 Height (in): 2 15/16 \_\_\_\_\_  
 Weight (kg): 0.75 \_\_\_\_\_  
 Weight (lbs): 1.65 \_\_\_\_\_  
 Diffuser: PMMA - Opal \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

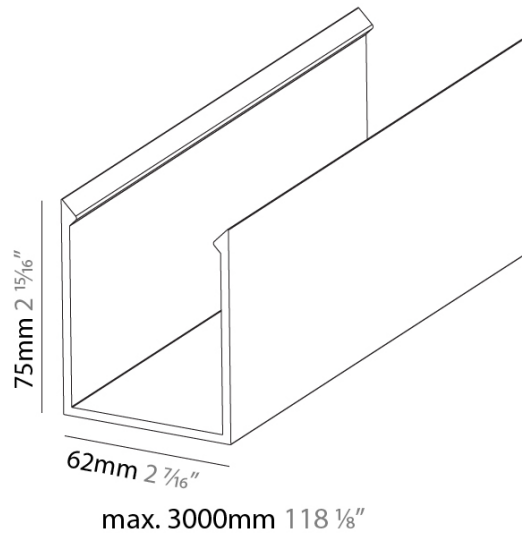

## A3FI-SUS-SYS COMPONENTS

### A39827-

**DESCRIPTION**  
 Fino System - Surface/Suspension End Cap (Colored)

**GENERAL**

Series: Fino  
 Partner: Prolicht  
 Division: Architectural



**PHYSICAL**

Shape: Rectangle  
 Length (mm): 65  
 Length (in): 2 5/16  
 Width (mm): 6  
 Width (in): 1/4  
 Height (mm): 76  
 Height (in): 3  
 Weight (kg): 0.112  
 Load Resistance (lbs): 0.25  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards  
 IP rating: IP20

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

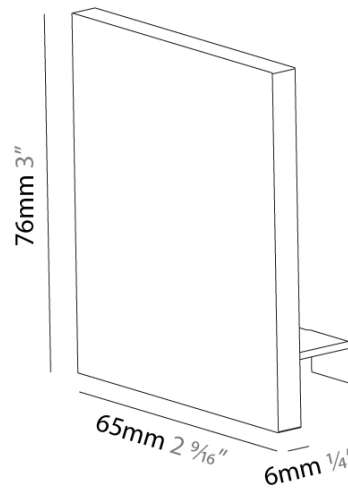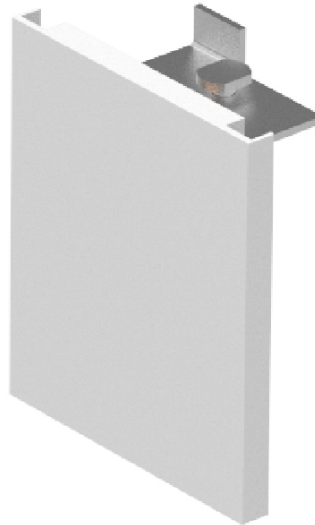

## A3FI-SUS-SYS COMPONENTS

### A3982800

**DESCRIPTION**  
Fino System - Surface / Suspension End Cap (Opal)

#### GENERAL

Series: Fino  
Partner: Prolicht  
Division: Architectural


#### PHYSICAL

Shape: Rectangle  
Length (mm): 56  
Length (in):  $2 \frac{3}{16}$   
Width (mm): 3  
Width (in):  $\frac{1}{8}$   
Height (mm): 72  
Height (in):  $2 \frac{13}{16}$   
Weight (kg): 0.03  
Weight (lbs): 0.66  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

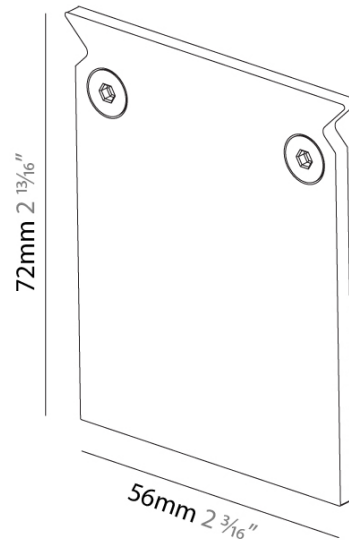

## A3FI-SUS-SYS COMPONENTS

### A3982900


**DESCRIPTION**  
 Fino System - Surface / Suspension Linear Coupler

**GENERAL**  
 Series: Fino  
 Partner: Prolicht  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 65  
 Length (in): 2 <sup>7</sup>/<sub>16</sub>  
 Width (mm): 10  
 Width (in): 3/8  
 Height (mm): 76  
 Height (in): 3  
 Weight (kg): 0.017  
 Weight (lbs): 0.37  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

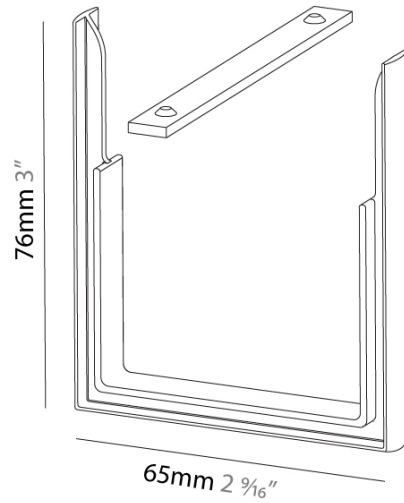

PROJECT \_\_\_\_\_






































































TYPE \_\_\_\_\_

NOTES \_\_\_\_\_











QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_











### LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)