

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3FI-SUS-SYS COMPONENTS

### A38991-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1140mm / 44 7/8" - 18W / 12.8W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80


**GENERAL**  
 Series: Bunga \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**  
 Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1140 \_\_\_\_\_  
 Length (in): 44 7/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 1.275 \_\_\_\_\_  
 Weight (lbs): 2.81 \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**  
 Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 18 \_\_\_\_\_  
 Total Output Wattage (W): 16 / 12.8 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 400 (3500K) \_\_\_\_\_

**LED**  
 Delivered Lumen Range: 2000 - 2999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 2210 / 2293 / 2340 \_\_\_\_\_  
 Nominal Lumen (lm): 2840 / 2940 / 3000 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

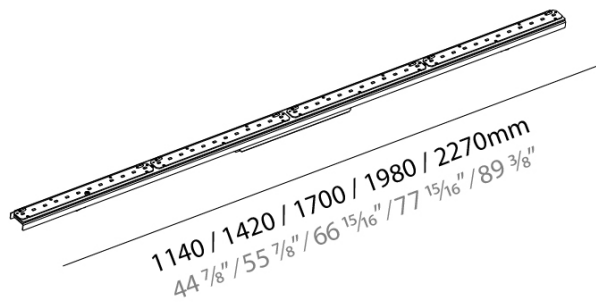

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A38992-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1420mm / 55 7/8" - 22.5W / 16W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80

**GENERAL**

Series: Bunga \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1420 \_\_\_\_\_  
 Length (in): 55 7/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 1.524 \_\_\_\_\_  
 Weight (lbs): 3.36 \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**


Input Wattage Range: 20 - 29 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 22.5 \_\_\_\_\_  
 Total Output Wattage (W): 20 / 16 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V  
 Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 500 (3500K) \_\_\_\_\_

**LED**

Delivered Lumen Range: 2000 - 2999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 2270 / 2862 / 2920 \_\_\_\_\_  
 Nominal Lumen (lm): 3550 / 3675 / 3750 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

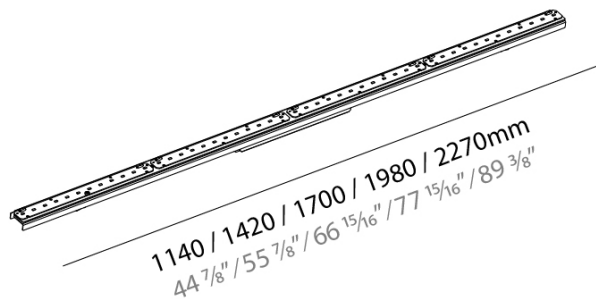

## A3FI-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### A38993-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1700mm - 27W / 19.2W [O/P]  
 (3500K) - LED (Zhaga Standard) - 3000K / 3500K / 4000K CRI >80  
 LED (Zhaga Standard)

**GENERAL**

Series: Bunga  
 Brand: Prolicht  
 Division: Architectural

**PHYSICAL**

Shape: Rectangle  
 Length (mm): 1700  
 Length (in): 66 <sup>15</sup>/<sub>16</sub>  
 Width (mm): 36  
 Width (in): 1 <sup>1</sup>/<sub>16</sub>  
 Height (mm): 60  
 Height (in): 2 <sup>3</sup>/<sub>8</sub>  
 Fixture Material: Aluminum

**ELECTRICAL**


Input Wattage Range: 30 - 49 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 27  
 Total Output Wattage (W): 24 / 19.2 (3500K)  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - 120 / 277Vac  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Constant Current (mA): 350 / 600 (3500K)

**LED**

Color Temperature (°K): 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 3320 / 3440 / 3510  
 Nominal Lumen (lm): 4260 / 4410 / 4500  
 CRI: >80 CRI  
 Lamp Life (hrs): 50000

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards  
 IP rating: IP20

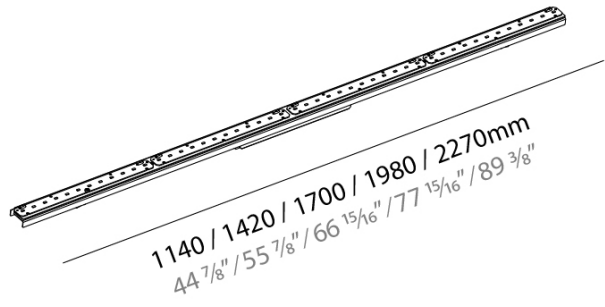

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A38994-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 1980mm - 31.5W / 22.4W [O/P]  
 (3500K) - LED (Zhaga Standard) - 3000K / 3500K / 4000K CRI >80  
 LED (Zhaga Standard)

#### GENERAL

Series: Bunga \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1980 \_\_\_\_\_  
 Length (in): 77 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 <sup>7</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 <sup>3</sup>/<sub>8</sub> \_\_\_\_\_  
 Weight (kg): 2.016 \_\_\_\_\_  
 Weight (lbs): 4.44 \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL



Input Wattage Range: 30 - 49 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 31.5 \_\_\_\_\_  
 Total Output Wattage (W): 28 / 22.4 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 700 (3500K) \_\_\_\_\_

#### LED

Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 3870 / 4008 / 4090 \_\_\_\_\_  
 Nominal Lumen (lm): 4970 / 5145 / 5250 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

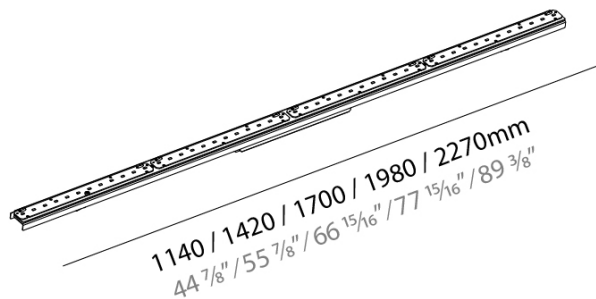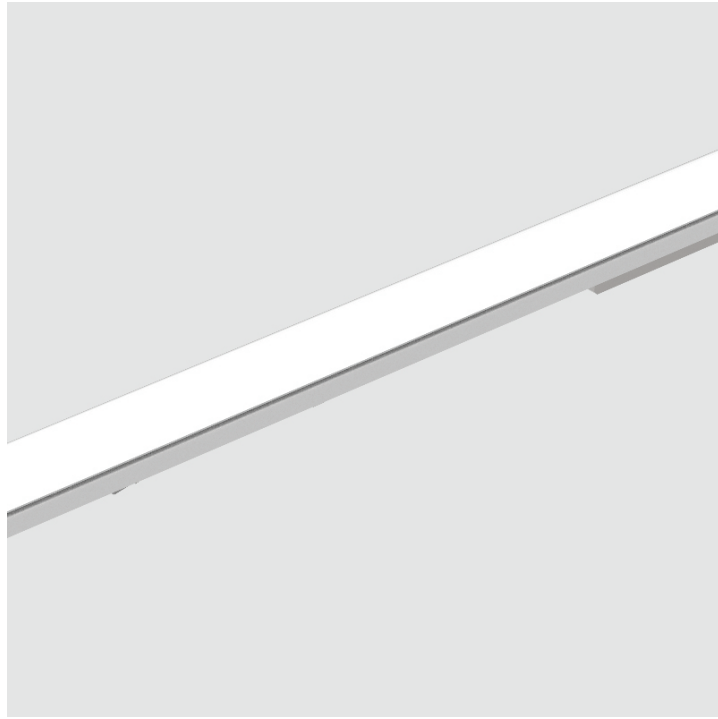

## A3FI-SUS-SYS COMPONENTS

### A38995-

**DESCRIPTION**  
 Bunga / Fino System - Insert - 2270mm / 89 3/8" - 36W / 25.6W  
 [O/P] (3500K) LED (Zhaga Standard) - 3000K / 3500K / 4000K -  
 CRI >80

**GENERAL**

Series: Bunga \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 2270 \_\_\_\_\_  
 Length (in): 89 3/8 \_\_\_\_\_  
 Width (mm): 36 \_\_\_\_\_  
 Width (in): 1 1/16 \_\_\_\_\_  
 Height (mm): 60 \_\_\_\_\_  
 Height (in): 2 3/8 \_\_\_\_\_  
 Weight (kg): 2.305 \_\_\_\_\_  
 Weight (lbs): 5.08 \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**



Input Wattage Range: 30 - 49 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 36 \_\_\_\_\_  
 Total Output Wattage (W): 32 / 25.6 (3500K) \_\_\_\_\_  
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V  
 Dimming \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120 / 277Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 - 277 \_\_\_\_\_  
 Constant Current (mA): 350 / 400 (3500K) \_\_\_\_\_

**LED**

Delivered Lumen Range: 3000 - 4999 lm \_\_\_\_\_  
 Color Temperature (°K): 3000 / 3500 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 4420 / 4577 / 4670 \_\_\_\_\_  
 Nominal Lumen (lm): 5680 / 5880 / 6000 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

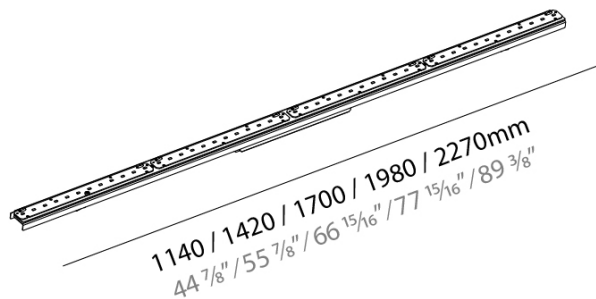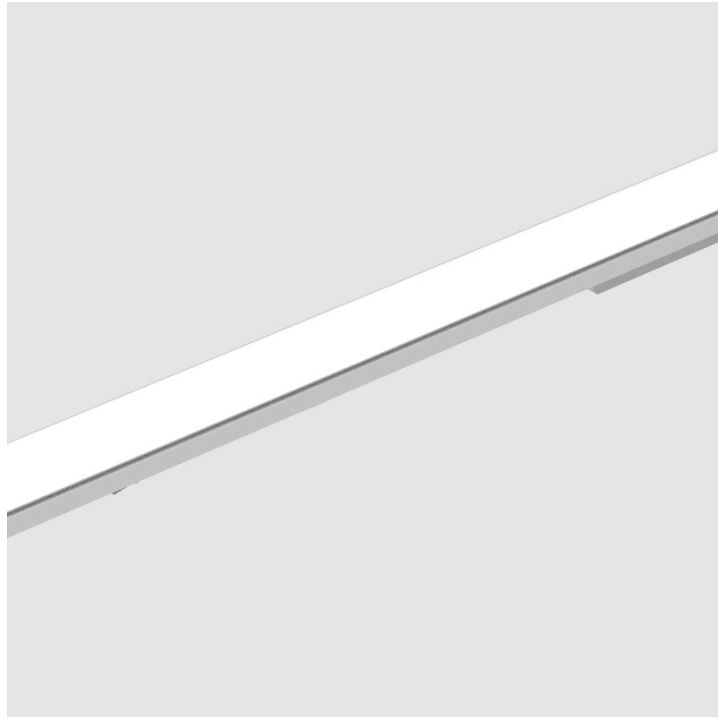

## A3FI-SUS-SYS COMPONENTS

### A39009-

**DESCRIPTION**  
Suspension Cable with Quick Release 6000mm


**GENERAL**

Brand: Prolicht  
Division: Architectural

**PHYSICAL**

Diameter (mm): 19  
Length (mm): 6,000  
Width (mm): 65mm 2 9/16"  
Height (mm): 22  
Max. Overall Height (mm): 6,000

PROJECT
TYPE
NOTES
QUANTITY
DATE

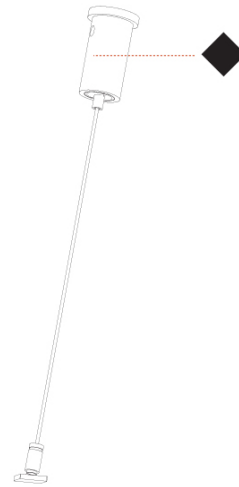

max. distance: 1800mm 70 7/8"



## A3FI-SUS-SYS COMPONENTS


### A39010-

**DESCRIPTION**  
Suspension Cable with Quick Release 2000mm

**GENERAL**  
Brand: Prolicht  
Division: Architectural

**PHYSICAL**  
Diameter (mm): 19  
Length (mm): 2,000  
Height (mm): 22  
Max. Overall Height (mm): 2,000

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

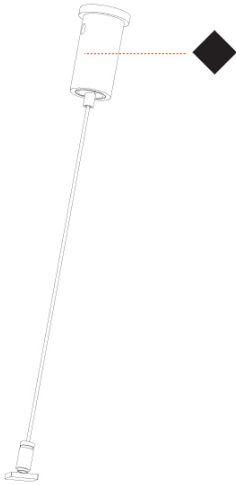

max. distance: 1800mm 70 7/8"



## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39013-

**DESCRIPTION**  
Suspension Power Feed 3x0.75, 2000mm

#### GENERAL


Brand: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 114 \_\_\_\_\_  
Diameter (in): 4 1/2 \_\_\_\_\_  
Length (mm): 2000 \_\_\_\_\_  
Length (in): 78 3/4 \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 1/16 \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 1/4 \_\_\_\_\_  
Weight (kg): 0.3 \_\_\_\_\_  
Weight (lbs): 0.66 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

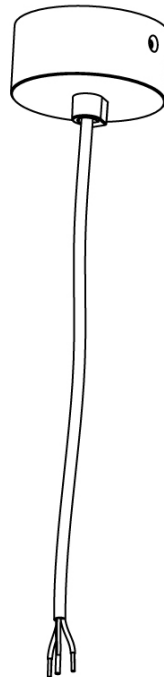



## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39014-

**DESCRIPTION**  
Suspension Power Feed 5x0.75 - 2000mm

#### GENERAL


Brand: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 114 \_\_\_\_\_  
Diameter (in): 4 1/2 \_\_\_\_\_  
Length (mm): 2000 \_\_\_\_\_  
Length (in): 78 3/4 \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 1/16 \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 1/4 \_\_\_\_\_  
Weight (kg): 0.3 \_\_\_\_\_  
Weight (lbs): 0.661 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

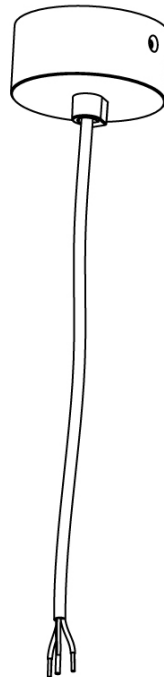

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A39015-

**DESCRIPTION**  
Suspension Power Feed 4x0.75 2000mm 2 Circuits Phase Dimming

**GENERAL**


Brand: Prolight \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

**PHYSICAL**

Shape: Round \_\_\_\_\_  
Diameter (mm): 114 \_\_\_\_\_  
Diameter (in): 4 1/2 \_\_\_\_\_  
Length (mm): 6000 \_\_\_\_\_  
Length (in): 236 1/4 \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 3/16 \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 1/4 \_\_\_\_\_  
Weight (kg): 0.118 \_\_\_\_\_  
Weight (lbs): 0.26 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

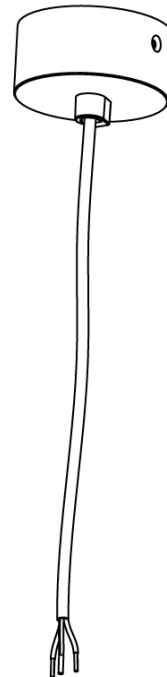

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39016-

**DESCRIPTION**  
Suspension Power Feed 3x0.75, 6000mm

#### GENERAL


Brand: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 114 \_\_\_\_\_  
Diameter (in): 4 1/4 \_\_\_\_\_  
Length (mm): 6000 \_\_\_\_\_  
Length (in): 236 3/4 \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 3/16 \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 1/4 \_\_\_\_\_  
Weight (kg): 0.117 \_\_\_\_\_  
Weight (lbs): 0.258 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

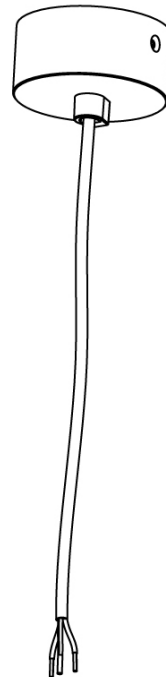

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

### A39017-

**DESCRIPTION**  
Suspension Power Feed 5x0.75, 6000mm

#### GENERAL


Brand: Prolicht \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 81 \_\_\_\_\_  
Diameter (in): 3 <sup>3</sup>/<sub>16</sub> \_\_\_\_\_  
Length (mm): 6000 \_\_\_\_\_  
Length (in): 236 <sup>1</sup>/<sub>4</sub> \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 <sup>3</sup>/<sub>16</sub> \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 <sup>1</sup>/<sub>4</sub> \_\_\_\_\_  
Weight (kg): 0.117 \_\_\_\_\_  
Weight (lbs): 0.258 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

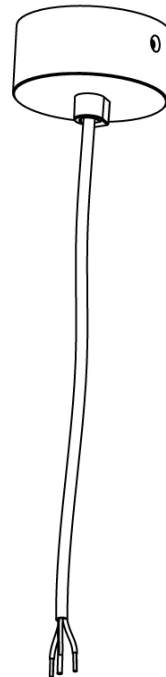

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

## A3FI-SUS-SYS COMPONENTS

### A39018-

**DESCRIPTION**  
Suspension Power Feed 4x0.75, 6000mm 2 Circuits Phase Dimming

#### GENERAL


Brand: Prolight \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
Diameter (mm): 81 \_\_\_\_\_  
Diameter (in): 3 3/16 \_\_\_\_\_  
Length (mm): 3 3/16 \_\_\_\_\_  
Length (in): 236 1/4 \_\_\_\_\_  
Width (mm): 81 \_\_\_\_\_  
Width (in): 3 3/16 \_\_\_\_\_  
Height (mm): 32 \_\_\_\_\_  
Height (in): 1 1/4 \_\_\_\_\_  
Weight (kg): 0.35 \_\_\_\_\_  
Weight (lbs): 0.77 \_\_\_\_\_  
Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /  
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS /  
ROR \_\_\_\_\_  
Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

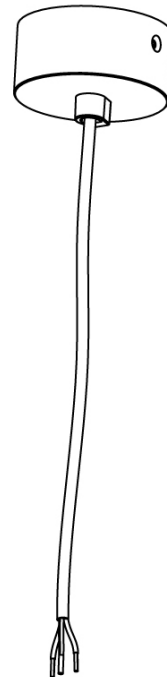

## A3FI-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### A3982600

**DESCRIPTION**  
 Fino System - Surface/Suspension Opal Diffuser Per Meter - Max  
 3000mm / 118 1/8"

**GENERAL**


Series: Fino \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Mounting Location: Ceiling \_\_\_\_\_

**PHYSICAL**

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 1000 \_\_\_\_\_  
 Length (in): 39 3/8 \_\_\_\_\_  
 Width (mm): 62 \_\_\_\_\_  
 Width (in): 2 7/16 \_\_\_\_\_  
 Height (mm): 75 \_\_\_\_\_  
 Height (in): 2 15/16 \_\_\_\_\_  
 Weight (kg): 0.75 \_\_\_\_\_  
 Weight (lbs): 1.65 \_\_\_\_\_  
 Diffuser: PMMA - Opal \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

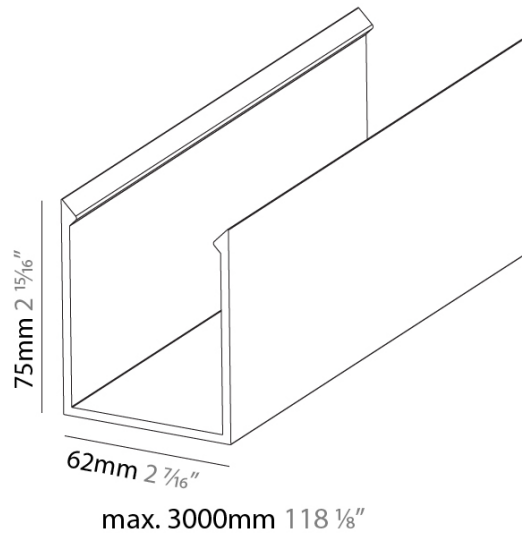

## A3FI-SUS-SYS COMPONENTS

### A39827-

**DESCRIPTION**  
 Fino System - Surface/Suspension End Cap (Colored)

**GENERAL**

Series: Fino  
 Brand: Prolicht  
 Division: Architectural



**PHYSICAL**

Shape: Rectangle  
 Length (mm): 65  
 Length (in): 2 5/16  
 Width (mm): 6  
 Width (in): 1/4  
 Height (mm): 76  
 Height (in): 3  
 Weight (kg): 0.112  
 Load Resistance (lbs): 0.25  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards  
 IP rating: IP20

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

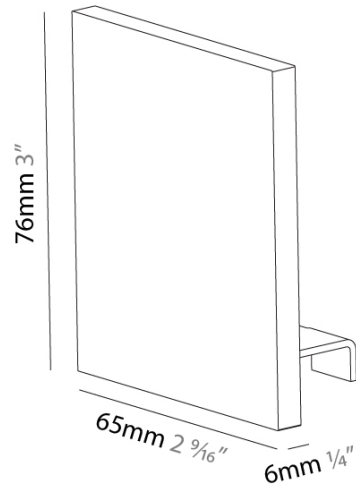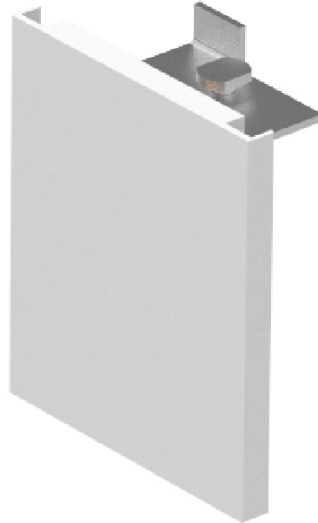

## A3FI-SUS-SYS COMPONENTS

### A3982800

**DESCRIPTION**  
Fino System - Surface / Suspension End Cap (Opal)

#### GENERAL

Series: Fino  
Brand: Prolicht  
Division: Architectural


#### PHYSICAL

Shape: Rectangle  
Length (mm): 56  
Length (in):  $2 \frac{3}{16}$   
Width (mm): 3  
Width (in):  $\frac{1}{8}$   
Height (mm): 72  
Height (in):  $2 \frac{13}{16}$   
Weight (kg): 0.03  
Weight (lbs): 0.66  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

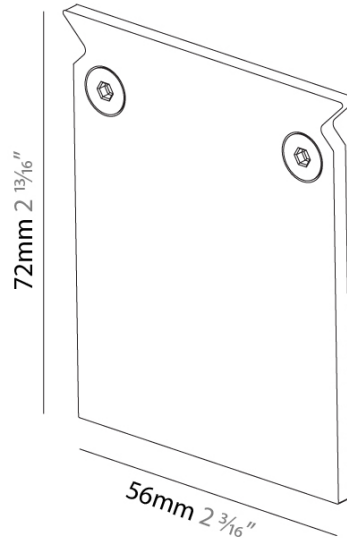



## A3FI-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


### A3982900

**DESCRIPTION**  
 Fino System - Surface / Suspension Linear Coupler

**GENERAL**  
 Series: Fino  
 Brand: Prolicht  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 65  
 Length (in): 2 <sup>7</sup>/<sub>16</sub>  
 Width (mm): 10  
 Width (in): 3/8  
 Height (mm): 76  
 Height (in): 3  
 Weight (kg): 0.017  
 Weight (lbs): 0.37  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

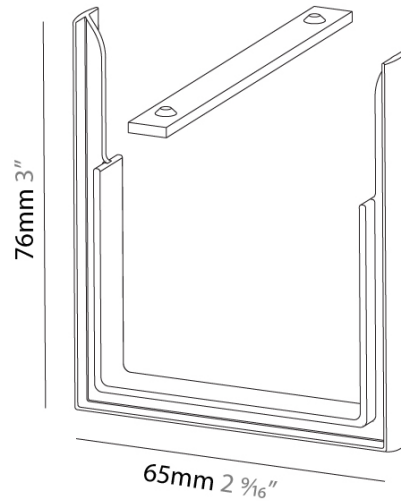











PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_











### LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

### IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)