

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3G50-SUS-SYS COMPONENTS SUSPENSION

A30850-

DESCRIPTION

G-50 Channel | Gravity Lift - Suspension Profile - 1000mm / 39 3/8" / 2000mm / 78 3/4" / 3000mm / 118 1/8"

GENERAL

Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Ceiling
 Subcategory: Profile

PHYSICAL


Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 3/8"
 Width (mm): 48
 Width (in): 1 7/8"
 Height (mm): 135
 Height (in): 5 5/16"
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast
 Cable Details: 2,000mm or 6,000mm Transparent Cable

ELECTRICAL

Dimming: 0-10V Dimming
 Input Voltage (V): 120 - 277
 Constant Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

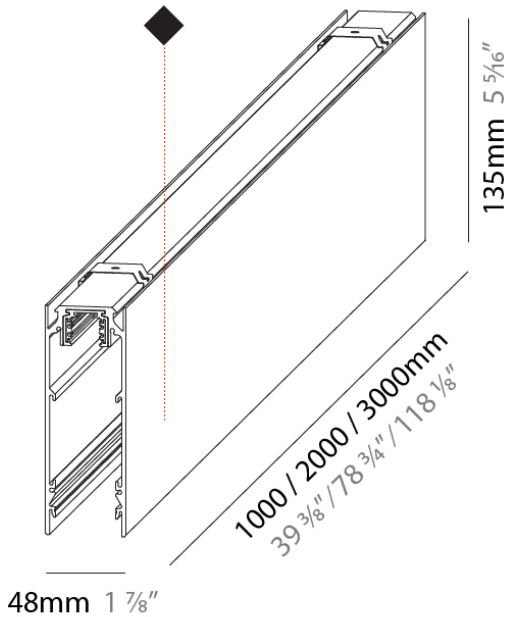

A3G50-SUS-SYS COMPONENTS

A380041-

DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/ 58°

GENERAL

Series: Hangover
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Light Distribution: Downlight
 Weight (kg): 0.451
 Weight (lbs): 0.99
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2,000mm or 4,000mm Cable - Black

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 120

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 Nominal Lumen (lm): 448 / 483 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature

OPTICAL

Optic°: 24 / 32 / 58
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

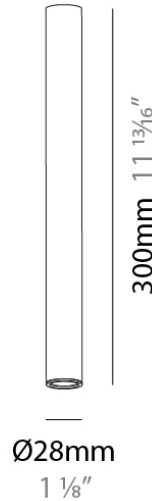

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS

A380042-

DESCRIPTION

Hangover Plug - Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/ 58° -

GENERAL

Series: Hangover
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Light Distribution: Downlight
 Weight (kg): 0.468
 Weight (lbs): 1.03
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.8
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 120
 Constant Current (MA): 500

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 363 / 386
 Nominal Lumen (lm): 448 / 483 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature

OPTICAL

Optic°: 24 / 32 / 58
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

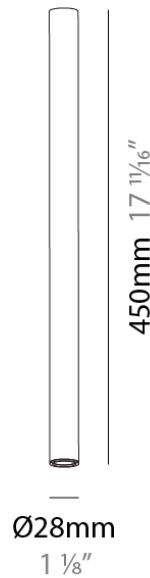

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS

A380043-

DESCRIPTION

Hangover Plug Decor - Blank Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" -

GENERAL

Series: Hangover
Subseries: Hangover Plug Standard (Track Insert)
Brand: Prolicht
Division: Architectural

PHYSICAL



Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 300
Height (in): 11 13/16
Weight (kg): 0.32
Weight (lbs): 0.706
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

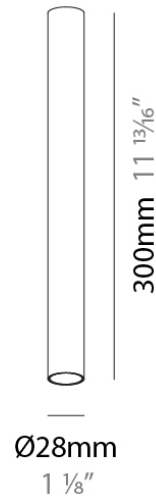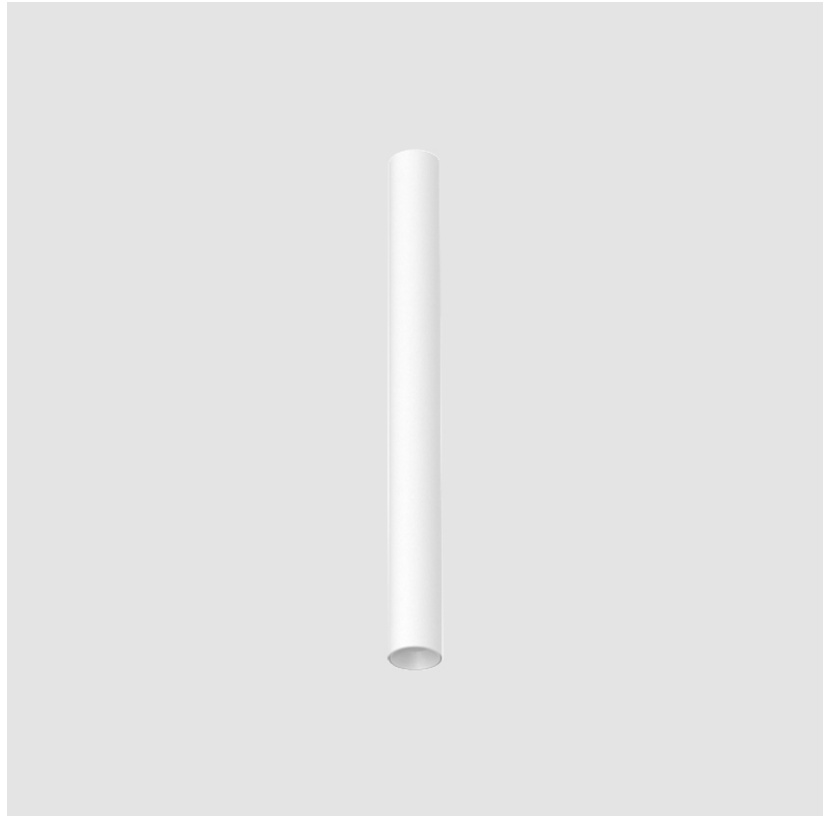

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS

A380044-

DESCRIPTION

Hangover Plug Decor - Blank Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" -

GENERAL

Series: Hangover
 Subseries: Hangover Plug Standard (Track Insert)
 Brand: Prolicht
 Division: Architectural

PHYSICAL


Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Weight (kg): 0.32
 Weight (lbs): 0.706
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

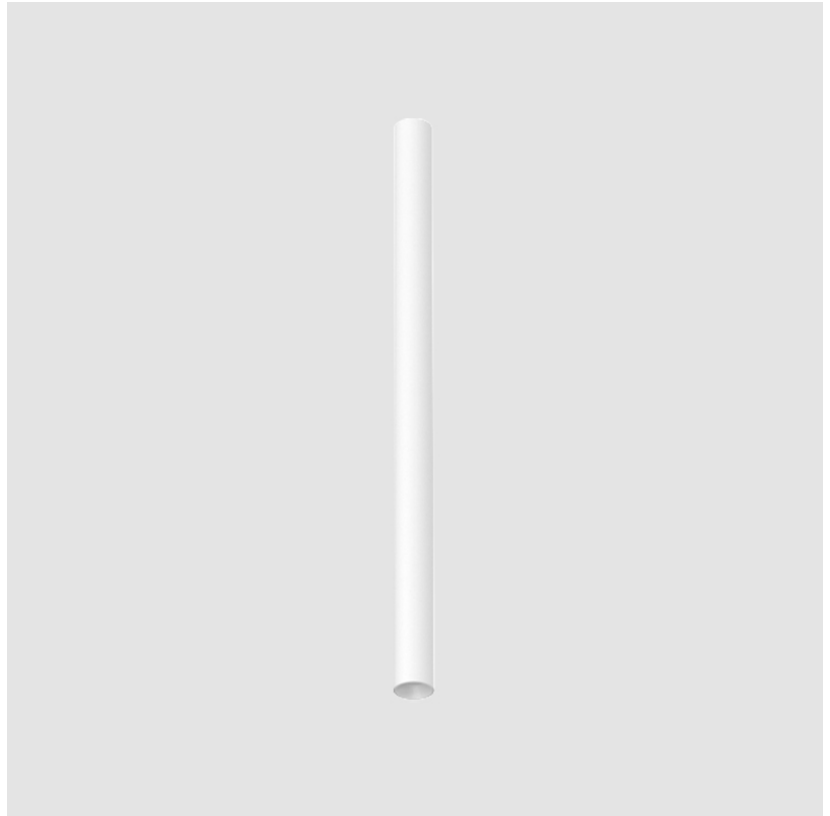

A3G50-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A380085-

DESCRIPTION

G-50 Channel Suspension Cable Kit 2000mm

GENERAL

Series: Snooker

Brand: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 2000

Length (in): 78 3/4

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A

A3G50-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


A380106-

DESCRIPTION
Hangover 75 - Indirect Diffuser

GENERAL
Series: Hangover
Subseries: Hangover 75
Brand: Prolicht
Division: Architectural

PHYSICAL
Shape: Round
Diameter (mm): 70
Diameter (in): 2 ¾
Fixture Finish: RED / ORG / YEL / GRN / BLU
Fixture Material: Acrylic

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

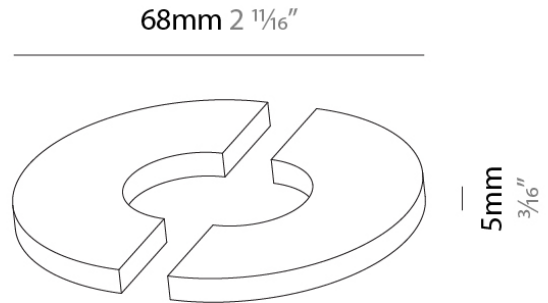

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS SURFACE

A380107-

DESCRIPTION

Hangover Plug 40 - 150mm / 5 7/8" - 10.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector 40° / 50°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Light Distribution: Downlight
 Weight (kg): 0.452
 Weight (lbs): 9.96
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10.9
 Total Output Wattage (W): 10
 Dimming: 0-10V Dimming
 Driver Included: No
 Input Voltage (V): 48

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

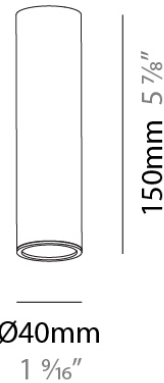

A3G50-SUS-SYS COMPONENTS SURFACE

A380108-

DESCRIPTION

Hangover Plug 40 - Track Head - 300mm / 11 13/16" - 10W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector - 40°/50°

GENERAL

Series: Hangover
 Subseries: Hangover Plug 40
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Ceiling
 Subcategory: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Light Distribution: Downlight
 Weight (kg): 0.463
 Weight (lbs): 1.02
 Diffuser: Shine Ring 1-6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10.9
 Total Output Wattage (W): 10
 Dimming: 0-10V Dimming
 Driver Included: No
 Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 788 / 829 / 840
 Nominal Lumen (lm): 1016 / 1068 / 1082
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Reflector°: 40 / 50

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20



A3G50-SUS-SYS COMPONENTS SURFACE

A380111-

DESCRIPTION

Hangover Plug 75 - Track Head -150mm / 5 7/8" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens 9° / 24° / 39°

GENERAL

Series: Hangover

Subseries: Hangover Plug 75

Brand: Prolicht

Division: Architectural

Mounting Type: Surface

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Downlight

Weight (kg): 0.532

Weight (lbs): 1.17

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.6

Total Output Wattage (W): 6

Dimming: 0-10V Dimming

Driver Included: No

Input Voltage (V): 48

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 385 / 408 / 442

Nominal Lumen (lm): 455.22 / 482 / 522.17

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 9 / 24 / 39

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

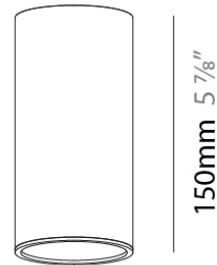

Ø75mm
2 15/16"

150mm
5 7/8"



A3G50-SUS-SYS COMPONENTS

A380364-

DESCRIPTION

Hangover Plug - Insert for Hypro 40 Recessed Ø28mm / 1 1/8" x 150mm / 5 7/8" - LED 6W Max. - 2700K / 3000K / 3500K / 4000K - CRI90 - Non-Dimming - Shine Ring, Optic: 22° / 33° / 66°

GENERAL

Series: Hangover _____

Brand: Prolicht _____

Division: Architectural _____

PHYSICAL

Shape: Cylinder _____

Diameter (mm): 28 _____

Diameter (in): 1 1/8 _____

Height (mm): 150 _____

Height (in): 5 7/8 _____

Light Distribution: Direct _____

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____

Accent Finish: OPL / YEL / ORA / RED / BLU / GRN _____

Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____

Lamp Type: LED (Zhaga Standard) _____

Input Wattage (W): 6 _____

Total Output Wattage (W): 5.4 _____

Dimming: Non-Dimmable / 0-10V Dimming _____

Driver Included: No _____

Driver Location: External _____

Driver Type: Constant Current - 120Vac _____

Driver Class: Class 2 _____

Input Voltage (V): 120 _____

Constant Current (mA): 500 _____

LED

Delivered Lumen Range: 100 - 499 lm _____

Color Temperature (°K): 2700 / 3000 / 3500 / 4000 _____

Max. Delivered Lumen (lm): 404 / 427 / 454 / 463 _____

Nominal Lumen (lm): 461 / 487 / 517 / 528 _____

CRI: >90 CRI _____

Lamp Life (hrs): 50000 _____

OPTICAL

Optic°: 22 / 33 / 66 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____



Ø28mm
1 1/8"



A3G50-SUS-SYS COMPONENTS

A38818-

DESCRIPTION

Snooker Decor - Track - Blank Globe -

GENERAL

Series: Snooker

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 ¹³/₁₆

Height (mm): 72

Height (in): 2 ¹³/₁₆

Weight (kg): 0.733

Weight (lbs): 1.62


Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

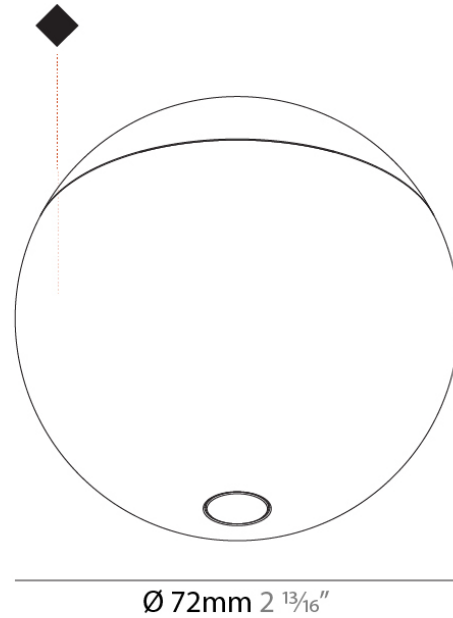

A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38837

DESCRIPTION

G-50 Channel | Gravity Lift - Connector Device

GENERAL



Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 180
 Length (in): 7 1/16
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 52
 Height (in): 2 1/16
 Weight (kg): 0.135
 Weight (lbs): 0.3
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

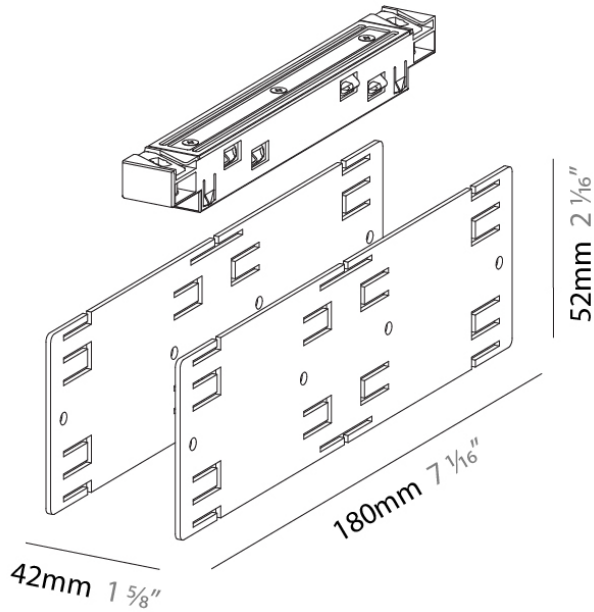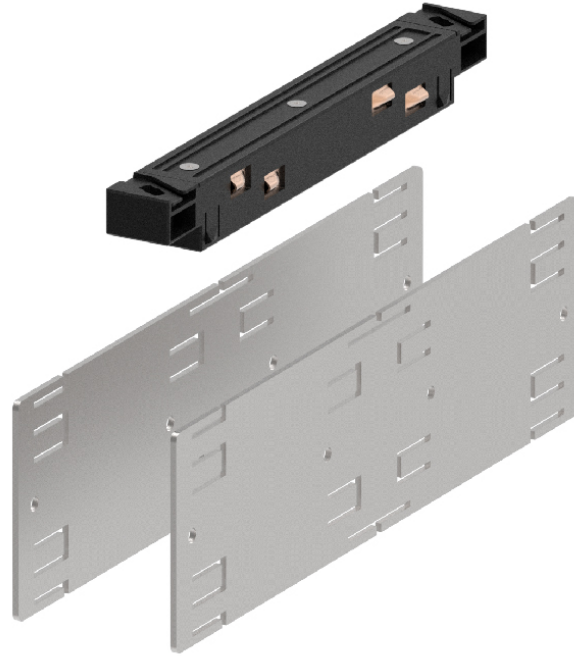

A3G50-SUS-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

A38838-

DESCRIPTION

G-50 Channel | Gravity Lift - Supplier Unit 150W Track 48V

GENERAL

Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL


Shape: Rectangle
 Length (mm): 336
 Length (in): 13 1/4
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 1.325
 Weight (lbs): 2 15/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Plastic

ELECTRICAL

Total Output Wattage (W): 96
 Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

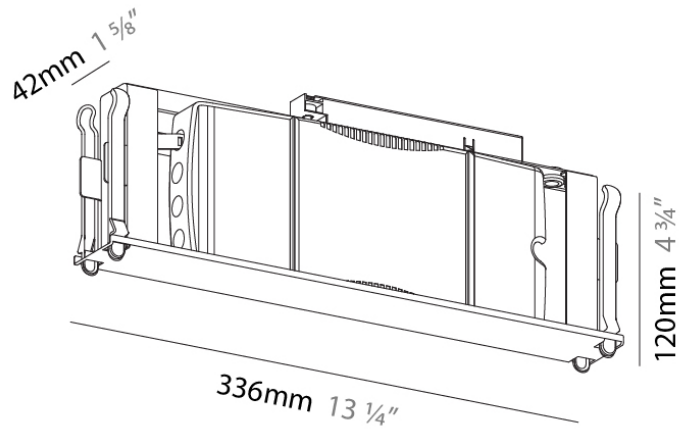

A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38839-

DESCRIPTION

G-50 Channel | Gravity Lift - Power Supply Unit c/w Remote 96W, 0-10V Dimming Driver + Bridge - for 48Vdc Track - Trimless

GENERAL

Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL


Shape: Rectangle
 Length (mm): 336
 Length (in): 13 1/4
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 1.325
 Weight (lbs): 2 15/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 100 - 149 W
 Lamp Type: LED
 Input Wattage (W): 100
 Total Output Wattage (W): 96
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Voltage - 120-277Vac
 Driver Class: Class 2
 Input Voltage (V): Universal
 Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

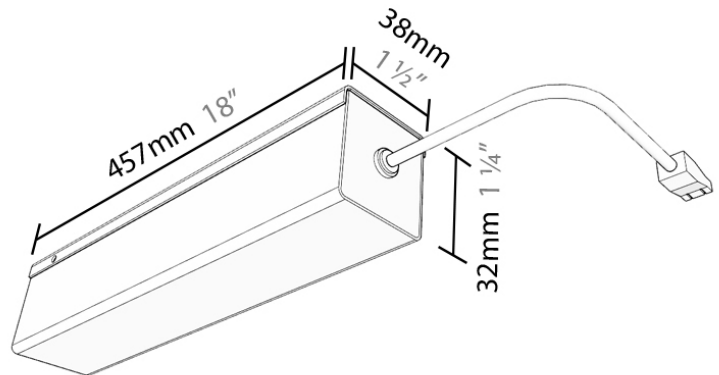

A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A38840-

DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (non-dimming)

GENERAL

Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 350
 Length (in): 13 3/4
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 0.587
 Weight (lbs): 1.29

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum



ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

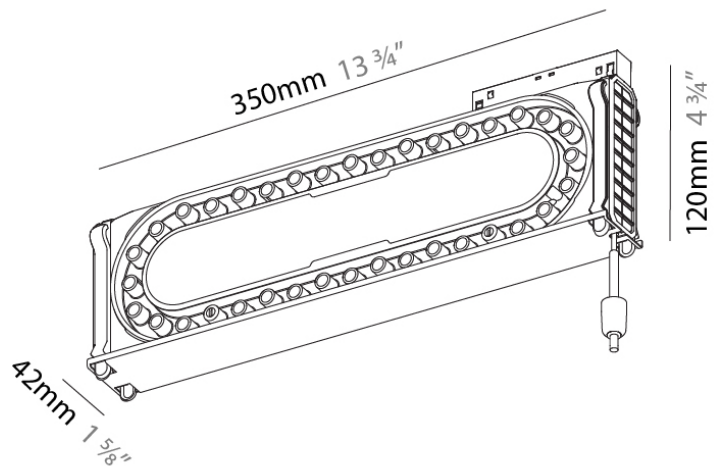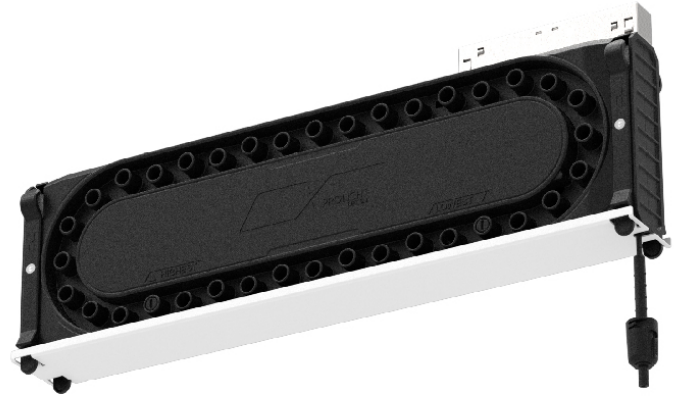

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3G50-SUS-SYS COMPONENTS

A38841-

DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (0-10V Dimmable)

GENERAL

Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 350
 Length (in): 13 3/4
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 0.601
 Weight (lbs): 1.32
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Dimming: 0-10V Dimming

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

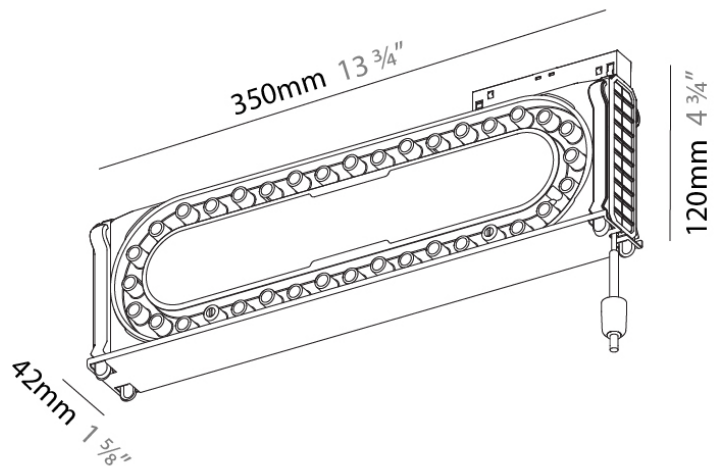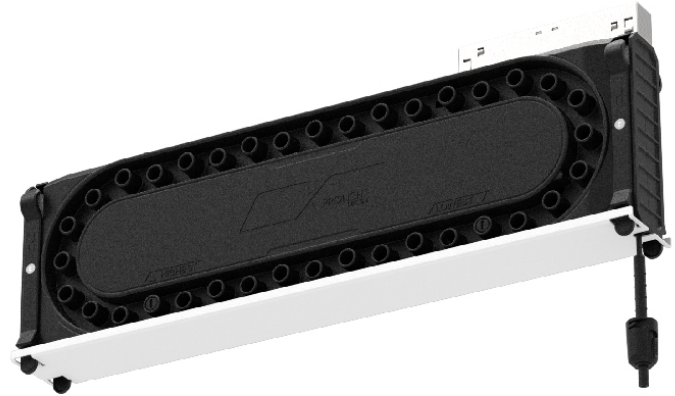

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS

A38842-

DESCRIPTION

G-50 Channel | Gravity Lift - Mechanical Gravity Lift for G-50

GENERAL



Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 350
 Length (in): 13 3/4
 Width (mm): 42
 Width (in): 1 5/8
 Height (mm): 105
 Height (in): 4 1/8
 Weight (kg): 0.582
 Weight (lbs): 1.28
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

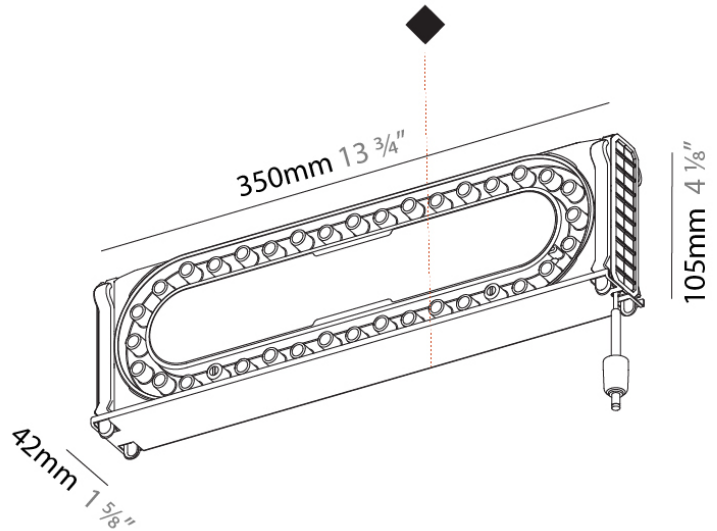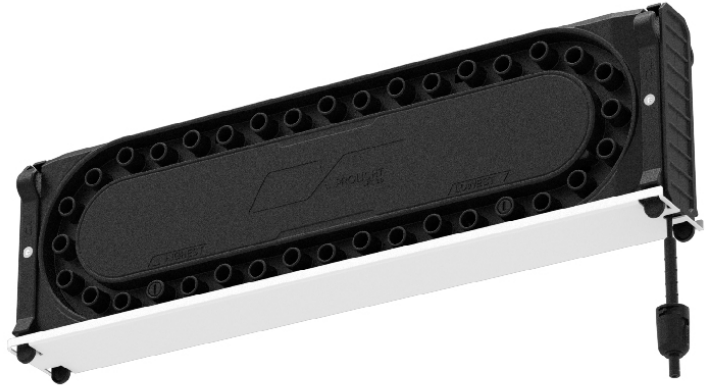

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3G50-SUS-SYS COMPONENTS

A38862-

DESCRIPTION

Snooker - Track- Suspension Insert for Gravity Lift - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

GENERAL

Series: Snooker
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Light Distribution: Downlight
 Weight (kg): 0.733
 Weight (lbs): 1.62
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.5
 Total Output Wattage (W): 5.8
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 48
 Constant Current (MA): 500

LED



Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 270 / 290 / 310
 Nominal Lumen (lm): 448 / 483 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Beam Angle: 55
 Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

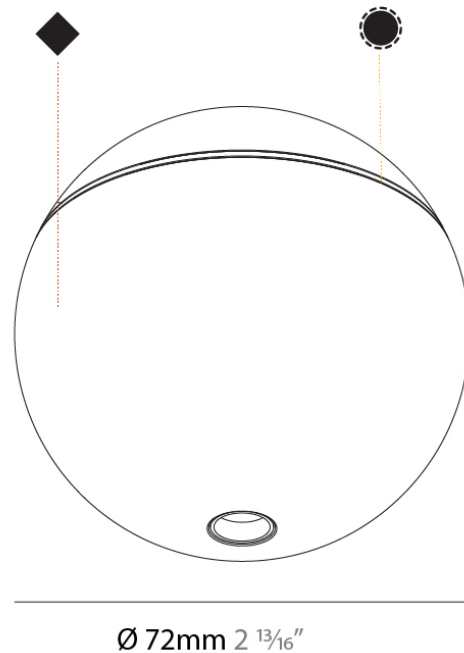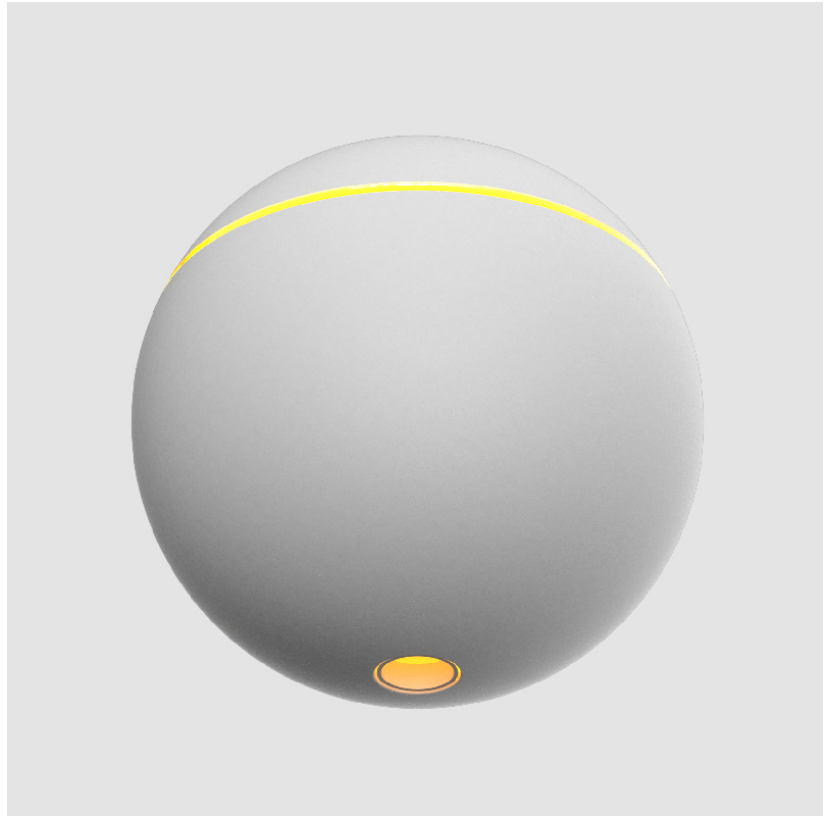

A3G50-SUS-SYS COMPONENTS

A38866-

DESCRIPTION

Snooker - G-Board - Suspension Insert - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K including Cable

GENERAL

Series: Snooker
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Light Distribution: Downlight
 Weight (kg): 0.733
 Weight (lbs): 1.6
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.5
 Total Output Wattage (W): 5.8
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 48
 Constant Current (mA): 500

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 270 / 290 / 310
 Nominal Lumen (lm): 448 / 483 / 514
 CRI: >90 CRI
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Beam Angle: 55
 Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

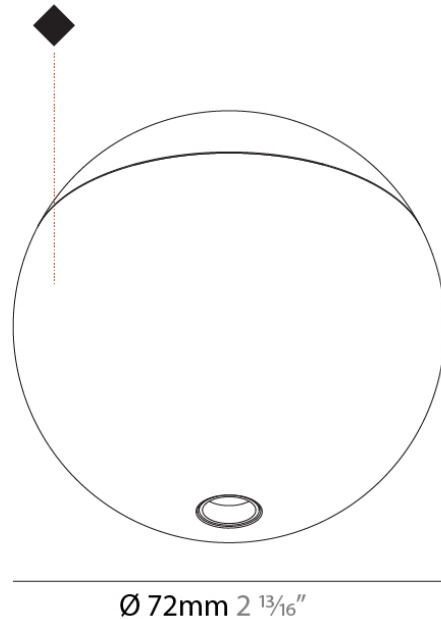

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3G50-SUS-SYS COMPONENTS

A38947-

DESCRIPTION

G-50 Channel | Gravity Lift - Surface Profile - End Plate 1 pair -

GENERAL


Series: Snooker
 Subseries: Snooker G-50 Channel for Gravity Lift
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 48
 Length (in): 1 7/8
 Width (mm): 13
 Width (in): 1/2
 Height (mm): 135
 Height (in): 5 5/16
 Weight (kg): 0.55
 Weight (lbs): 1.21
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

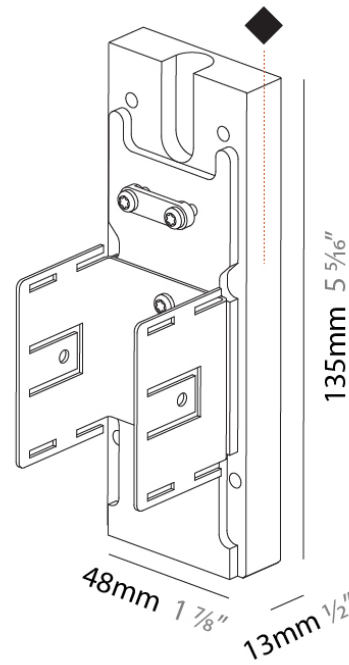

A3G50-SUS-SYS COMPONENTS

A3T100-

DESCRIPTION

Centriq - Track Head - 4.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens: 24°/32°

GENERAL

Series: Centriq _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Spots _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 30 _____
 Diameter (in): 1 5/16 _____
 Height (mm): 186 _____
 Height (in): 7 5/16 _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.078 _____
 Weight (lbs): 0.17 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 4.4 _____
 Total Output Wattage (W): 4 _____
 Dimming: 0-10V Dimming _____
 Driver Included: No _____
 Driver Location: External _____
 Input Voltage (V): 120 _____

LED


Delivered Lumen Range: 100 - 499 lm _____
 Number of LEDs: 1 _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 260 / 270 / 290 _____
 Nominal Lumen (lm): 344 / 360 / 392 _____
 CRI: >90 CRI _____
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request) _____

OPTICAL

Optic°: 24 / 32 _____
 Adjustability: Rotational 360°; Tilt 90° _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

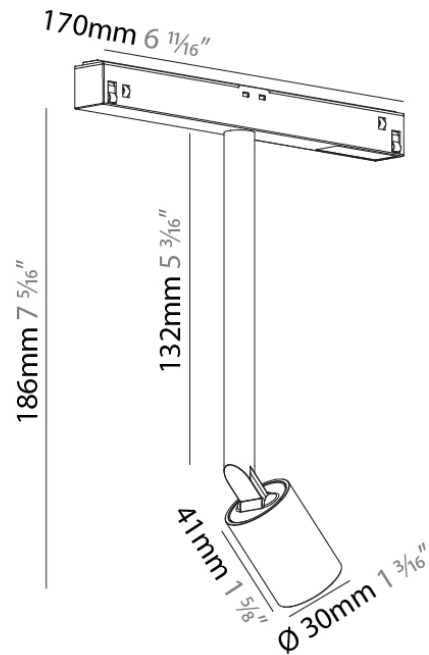

A3G50-SUS-SYS COMPONENTS

A3T101-

DESCRIPTION

Centriq - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Spots _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 40 _____
 Diameter (in): 1 ⁹/₁₆ _____
 Height (mm): 200 _____
 Height (in): 7 ⁷/₈ _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.132 _____
 Weight (lbs): 0.29 _____
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 6.5 _____
 Total Output Wattage (W): 5.8 _____
 Dimming: 0-10V Dimming _____
 Driver Included: No _____
 Driver Location: External _____
 Input Voltage (V): 120 _____

LED


Delivered Lumen Range: 100 - 499 lm _____
 Number of LEDs: 1 _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 360 / 390 / 420 _____
 Nominal Lumen (lm): 448 / 483 / 514 _____
 CRI: >90 CRI _____
 Upon Request: Special Color Temperature ***3500K available in minimum quantities (larger quantities upon request) _____

OPTICAL

Reflector°: 10 _____
 Adjustability: Rotational 360°; Tilt 90° _____
 Upon Request: Special Beam Angles _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

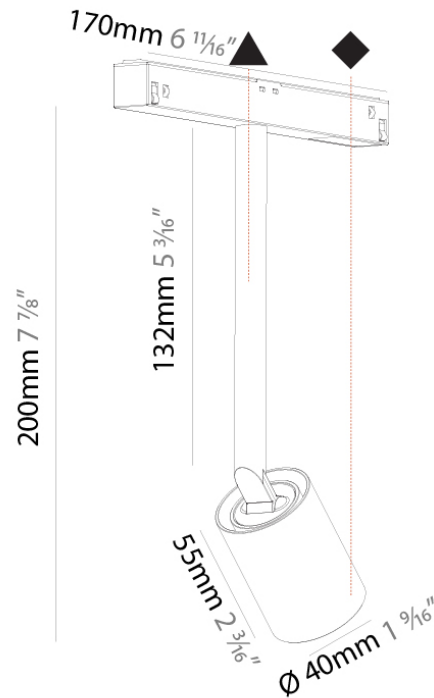

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3G50-SUS-SYS COMPONENTS

A3T102-

DESCRIPTION

Centriq - Track Head - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 200
 Height (in): 7 7/8
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.159
 Weight (lbs): 0.35
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.5
 Total Output Wattage (W): 5.9
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 120

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 468 / 490 / 520
 Nominal Lumen (lm): 732 / 769 / 780
 CRI: >90 CRI
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 20 / 31 / 36 / 40 / 50
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

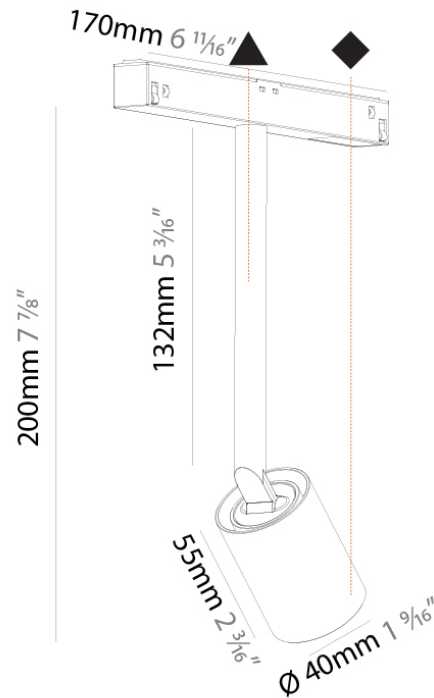

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3G50-SUS-SYS COMPONENTS

A3T103-

DESCRIPTION

Centriq - Track Head - 9.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 ³/₁₆
 Height (mm): 224
 Height (in): 8 ¹³/₁₆
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.554
 Weight (lbs): 1.22
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 9.2
 Total Output Wattage (W): 8.4
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 120

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 486 / 534 / 548
 Nominal Lumen (lm): 625 / 660 / 712
 CRI: >80 CRI
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 9
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

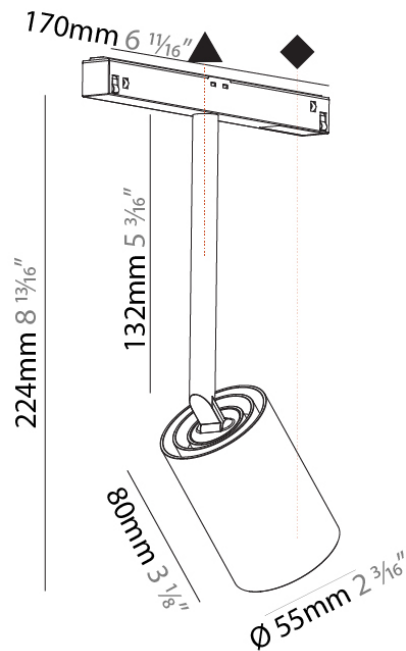

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3G50-SUS-SYS COMPONENTS

A3T104-

DESCRIPTION

Centriq - Track Head - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

GENERAL

Series: Centriq
 Brand: Prolicht
 Division: Architectural
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 55
 Diameter (in): 2 ³/₁₆
 Height (mm): 224
 Height (in): 8 ¹³/₁₆
 Light Distribution: Adjustable / Direct
 Weight (kg): 0.562
 Weight (lbs): 1.24
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.0
 Total Output Wattage (W): 10.6
 Dimming: 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Input Voltage (V): 120

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 720 / 760 / 820
 Nominal Lumen (lm): 1196 / 1257 / 1275
 CRI: >90 CRI
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

OPTICAL

Reflector°: 15 / 17 / 25 / 33 / 35 / 46
 Adjustability: Rotational 360°; Tilt 90°
 Upon Request: Special Beam Angles

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

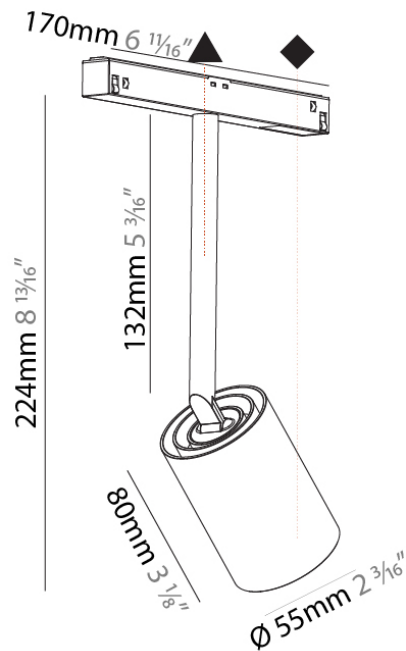

LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)