

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3G50-SUS-SYS COMPONENTS SUSPENSION

### A30850-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Suspension Profile - 1000mm / 39 3/8" / 2000mm / 78 3/4" / 3000mm / 118 1/8"

#### GENERAL

Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Suspension  
 Product Type: Pendant  
 Mounting Location: Ceiling

#### PHYSICAL


Shape: Rectangle  
 Length (mm): 1000 / 2000 / 3000  
 Length (in): 39 3/8"  
 Width (mm): 48  
 Width (in): 1 7/8"  
 Height (mm): 135  
 Height (in): 5 5/16"  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum Die Cast  
 Cable Details: 2,000mm or 6,000mm Transparent Cable

#### ELECTRICAL

Dimming: 0-10V Dimming  
 Input Voltage (V): 120 - 277  
 Constant Voltage (V): 48

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

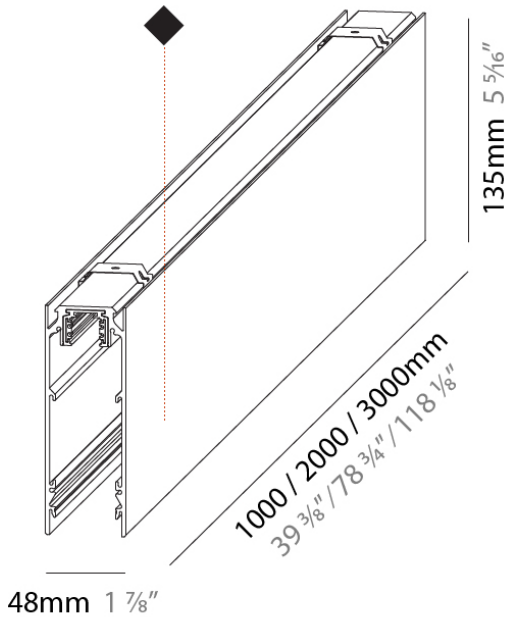

## A3G50-SUS-SYS COMPONENTS

### A380041-

#### DESCRIPTION

Hangover Plug Shine - Track Head - 28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Lens 24°/32°/ 58°

#### GENERAL

Series: Hangover

Subseries: Hangover Plug Standard (Track Insert)

Partner: Prolicht

Division: Architectural

Light Distribution: Downlight

#### PHYSICAL

Aperture Sizes - Downlights: 1"

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 350

Height (in): 13 3/4

Weight (kg): 0.451

Weight (lbs): 0.99

Diffuser: Shine Ring 1-6

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2,000mm or 4,000mm Cable - Black

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.8

Dimming: 0-10V Dimming

Driver Included: No

Driver Location: External

Input Voltage (V): 120

#### LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 328 / 363 / 386

Nominal Lumen (lm): 448 / 483 / 514

CRI: >90 CRI

Upon Request: Special Color Temperature

#### OPTICAL

Optic°: 24 / 32 / 58

Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3G50-SUS-SYS COMPONENTS

### A380044-

#### DESCRIPTION

Hangover Plug Decor - Blank Track Head - 28mm / 1 1/8" x 450mm / 17 11/16" -

#### GENERAL

Series: Hangover  
 Subseries: Hangover Plug Standard (Track Insert)  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL

Aperture Sizes - Downlights: 1"  
 Shape: Cylinder  
 Diameter (mm): 28  
 Diameter (in): 1 1/8  
 Height (mm): 450  
 Height (in): 17 11/16  
 Weight (kg): 0.32  
 Weight (lbs): 0.706  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Lamp Type: LED (Zhaga Standard)

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20



## A3G50-SUS-SYS COMPONENTS

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

### A380085-

#### DESCRIPTION

G-50 Channel Suspension Cable Kit 2000mm

#### GENERAL

Series: Snooker

Partner: Prolicht

Division: Architectural

#### PHYSICAL

Length (mm): 2000

Length (in): 78 3/4

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A

## A3G50-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


### A380106-

**DESCRIPTION**  
Hangover 75 - Indirect Diffuser

**GENERAL**  
Series: Hangover  
Subseries: Hangover 75  
Partner: Prolicht  
Division: Architectural

**PHYSICAL**  
Shape: Round  
Diameter (mm): 70  
Diameter (in): 2 ¾  
Fixture Finish: RED / ORG / YEL / GRN / BLU  
Fixture Material: Acrylic

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

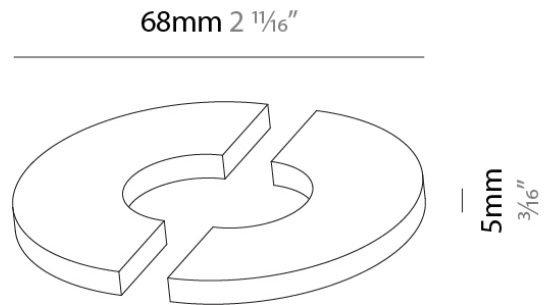

## A3G50-SUS-SYS COMPONENTS SURFACE

### A380107-

#### DESCRIPTION

Hangover Plug 40 - 150mm / 5 7/8" - 10.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector 40° / 50°

#### GENERAL

Series: Hangover  
 Subseries: Hangover Plug 40  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Surface  
 Product Type: Downlight  
 Mounting Location: Ceiling  
 Light Distribution: Downlight

#### PHYSICAL

Aperture Sizes - Downlights: 1"  
 Shape: Cylinder  
 Diameter (mm): 40  
 Diameter (in): 1 9/16  
 Height (mm): 150  
 Height (in): 5 7/8  
 Weight (kg): 0.452  
 Weight (lbs): 9.96  
 Diffuser: Shine Ring 1-6  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 10.9  
 Total Output Wattage (W): 10  
 Dimming: 0-10V Dimming  
 Driver Included: No  
 Input Voltage (V): 48

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 788 / 829 / 840  
 Nominal Lumen (lm): 1016 / 1068 / 1082  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Reflector°: 40 / 50

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

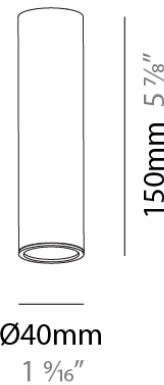

## A3G50-SUS-SYS COMPONENTS SURFACE

### A380111-

#### DESCRIPTION

Hangover Plug 75 - Track Head -150mm / 5 7/8" - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens 9° / 24° / 39°

#### GENERAL

Series: Hangover  
 Subseries: Hangover Plug 75  
 Partner: Prolicht  
 Division: Architectural  
 Installation: Surface  
 Product Type: Downlight  
 Mounting Location: Ceiling  
 Light Distribution: Downlight

#### PHYSICAL

Aperture Sizes - Downlights: 2"  
 Shape: Cylinder  
 Diameter (mm): 75  
 Diameter (in): 2 15/16  
 Height (mm): 150  
 Height (in): 5 7/8  
 Weight (kg): 0.532  
 Weight (lbs): 1.17  
 Diffuser: Shine Ring 1-6  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.6  
 Total Output Wattage (W): 6  
 Dimming: 0-10V Dimming  
 Driver Included: No  
 Input Voltage (V): 48

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 385 / 408 / 442  
 Nominal Lumen (lm): 455.22 / 482 / 522.17  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Optic°: 9 / 24 / 39

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

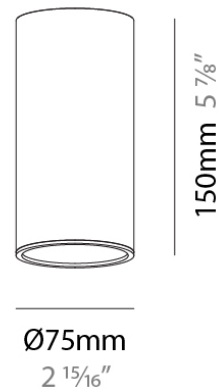

## A3G50-SUS-SYS COMPONENTS

### A38818-

#### DESCRIPTION

Snooker Decor - Track - Blank Globe -

#### GENERAL

Series: Snooker

Partner: Prolicht

Division: Architectural

#### PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 <sup>13</sup>/<sub>16</sub>

Height (mm): 72

Height (in): 2 <sup>13</sup>/<sub>16</sub>

Weight (kg): 0.733

Weight (lbs): 1.62


Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

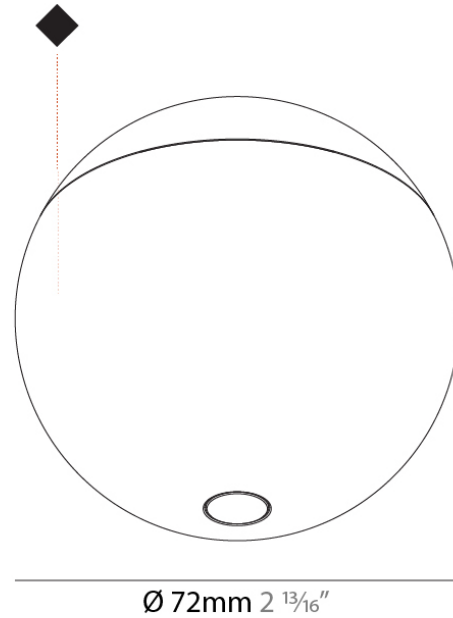

## A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



### A38837

**DESCRIPTION**  
G-50 Channel | Gravity Lift - Connector Device

**GENERAL**  
Series: Snooker  
Subseries: Snooker G-50 Channel for Gravity Lift  
Partner: Prolicht  
Division: Architectural  
Product Type: Linear Profiles

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 180  
Length (in): 7 1/16  
Width (mm): 42  
Width (in): 1 5/8  
Height (mm): 52  
Height (in): 2 1/16  
Weight (kg): 0.135  
Weight (lbs): 0.3  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
Fixture Material: Plastic

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

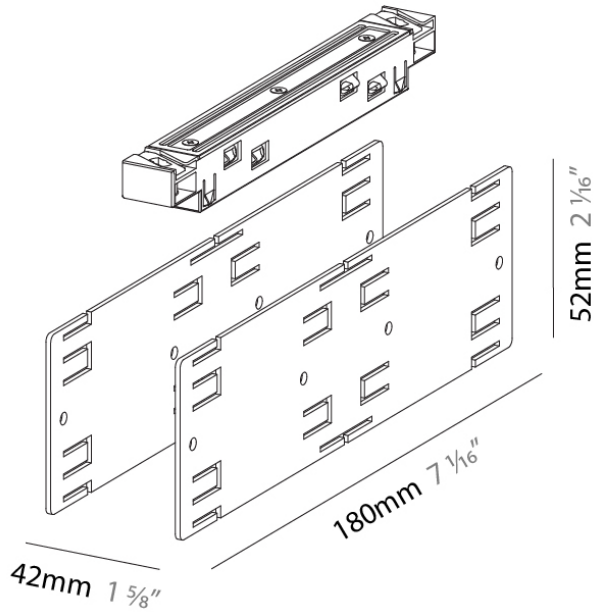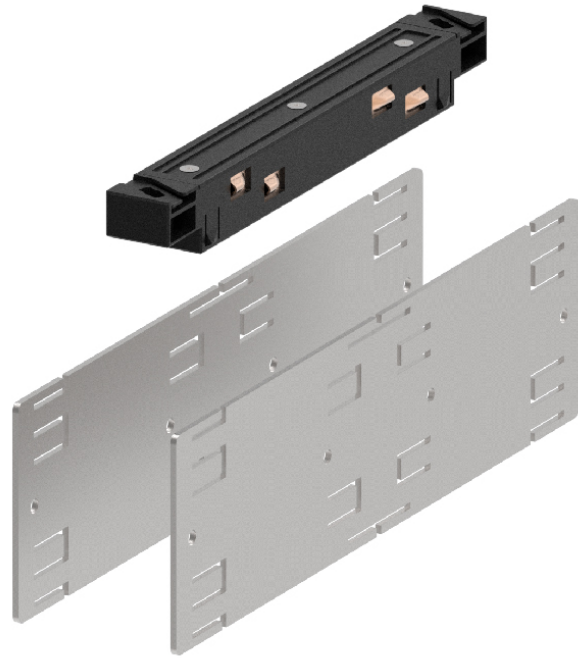

## A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

### A38838-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Supplier Unit 150W Track 48V

#### GENERAL

Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL


Shape: Rectangle  
 Length (mm): 336  
 Length (in): 13 1/4  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 120  
 Height (in): 4 3/4  
 Weight (kg): 1.325  
 Weight (lbs): 2 15/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Plastic

#### ELECTRICAL

Total Output Wattage (W): 96  
 Input Voltage (V): 48

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

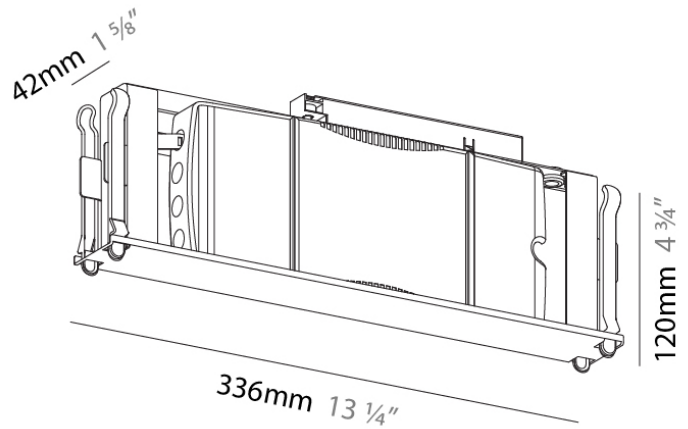

## A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

### A38839-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Power Supply Unit c/w Remote 96W, 0-10V Dimming Driver + Bridge - for 48Vdc Track - Trimless

#### GENERAL

Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL


Shape: Rectangle  
 Length (mm): 336  
 Length (in): 13 1/4  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 120  
 Height (in): 4 3/4  
 Weight (kg): 1.325  
 Weight (lbs): 2 15/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 100 - 149 W  
 Lamp Type: LED  
 Input Wattage (W): 100  
 Total Output Wattage (W): 96  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - 120-277Vac  
 Driver Class: Class 2  
 Input Voltage (V): Universal  
 Output Voltage (V): 48

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

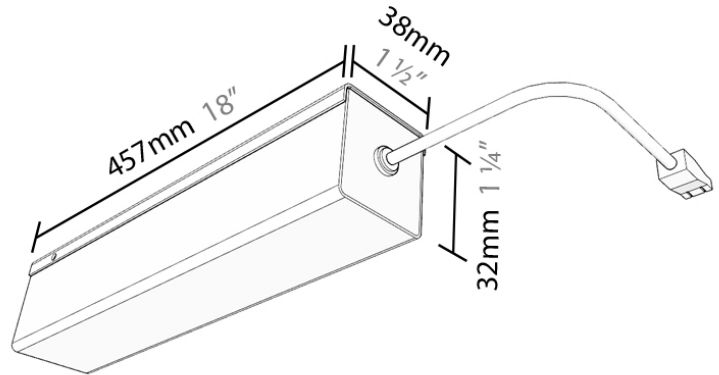

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3G50-SUS-SYS COMPONENTS

### A38840-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (non-dimming)

#### GENERAL

Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 350  
 Length (in): 13 3/4  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 120  
 Height (in): 4 3/4  
 Weight (kg): 0.587  
 Weight (lbs): 1.29

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum



#### ELECTRICAL

Dimming: Non-Dimmable

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

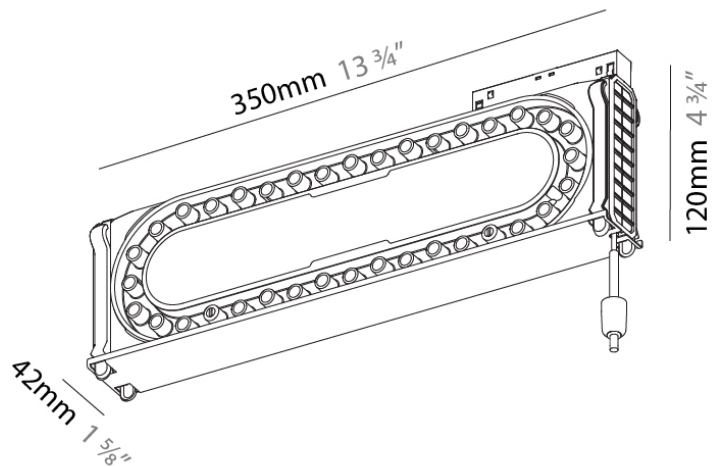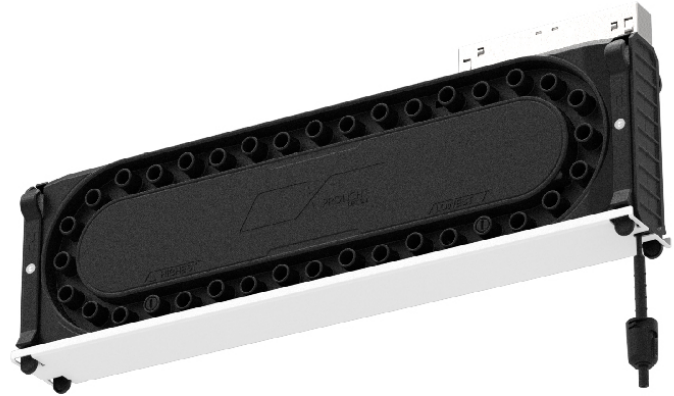

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3G50-SUS-SYS COMPONENTS

### A38841-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Gravity Lift 48V 500mA (0-10V Dimmable)

#### GENERAL

Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL



Shape: Rectangle  
 Length (mm): 350  
 Length (in): 13 3/4  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 120  
 Height (in): 4 3/4  
 Weight (kg): 0.601  
 Weight (lbs): 1.32  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: 0-10V Dimming

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

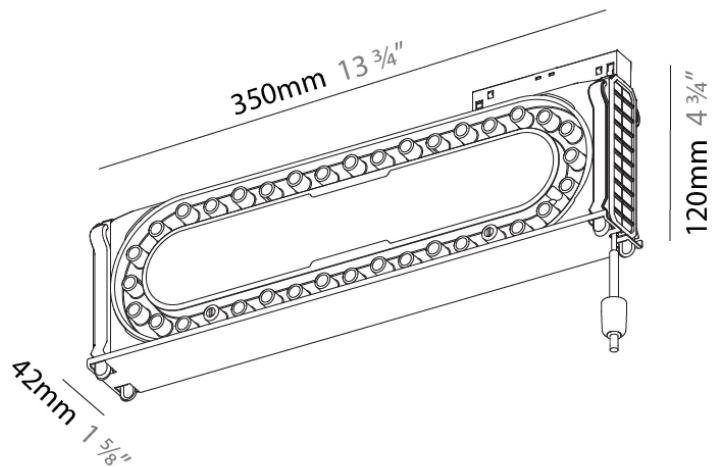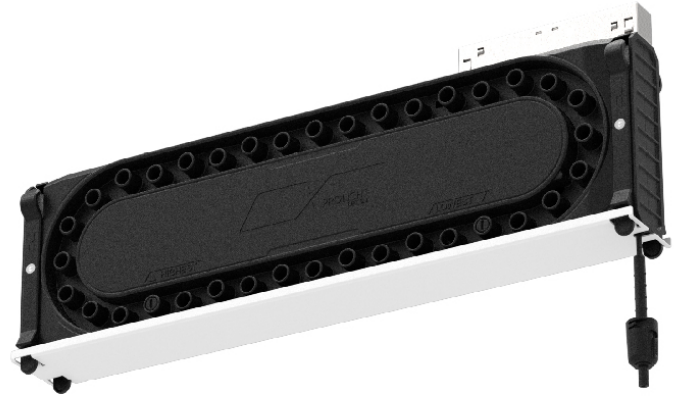

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3G50-SUS-SYS COMPONENTS

### A38842-

#### DESCRIPTION

G-50 Channel | Gravity Lift - Mechanical Gravity Lift for G-50

#### GENERAL


Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 350  
 Length (in): 13 3/4  
 Width (mm): 42  
 Width (in): 1 5/8  
 Height (mm): 105  
 Height (in): 4 1/8  
 Weight (kg): 0.582  
 Weight (lbs): 1.28  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

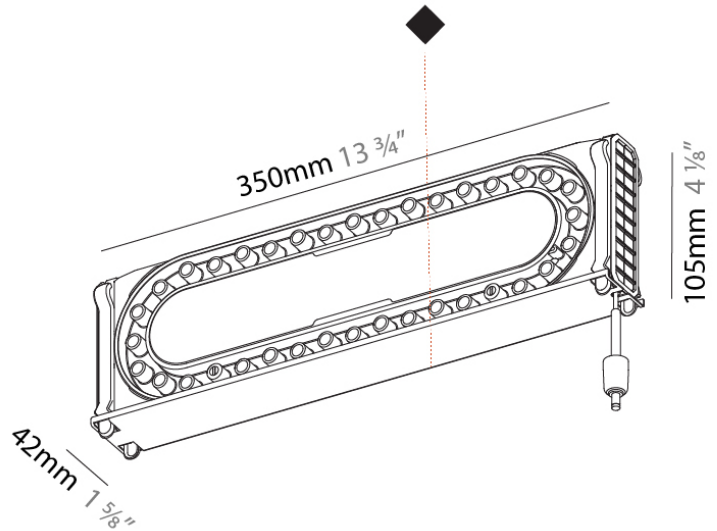

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3G50-SUS-SYS COMPONENTS

### A38862-

#### DESCRIPTION

Snooker - Track- Suspension Insert for Gravity Lift - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K

#### GENERAL

Series: Snooker \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Light Distribution: Downlight \_\_\_\_\_

#### PHYSICAL

Shape: Round \_\_\_\_\_  
 Diameter (mm): 72 \_\_\_\_\_  
 Diameter (in): 2 <sup>13</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 72 \_\_\_\_\_  
 Height (in): 2 <sup>13</sup>/<sub>16</sub> \_\_\_\_\_  
 Weight (kg): 0.733 \_\_\_\_\_  
 Weight (lbs): 1.62 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum Die Cast \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 1 - 9 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 6.5 \_\_\_\_\_  
 Total Output Wattage (W): 5.8 \_\_\_\_\_  
 Dimming: 0-10V Dimming \_\_\_\_\_  
 Driver Included: No \_\_\_\_\_  
 Driver Location: External \_\_\_\_\_  
 Input Voltage (V): 48 \_\_\_\_\_  
 Constant Current (MA): 500 \_\_\_\_\_

#### LED



Delivered Lumen Range: 100 - 499 lm \_\_\_\_\_  
 Number of LEDs: 1 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 270 / 290 / 310 \_\_\_\_\_  
 Nominal Lumen (lm): 448 / 483 / 514 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request) \_\_\_\_\_

#### OPTICAL

Beam Angle: 55 \_\_\_\_\_  
 Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

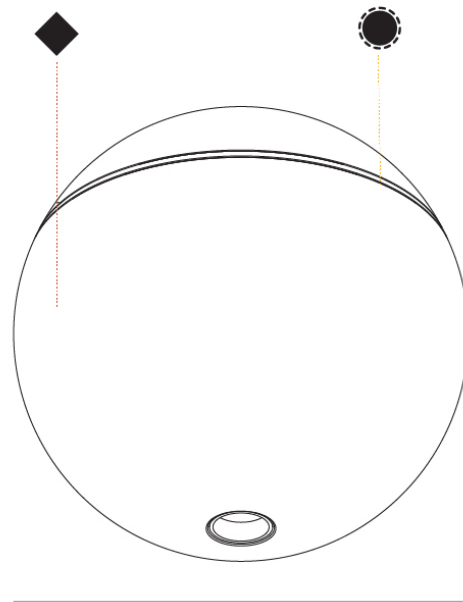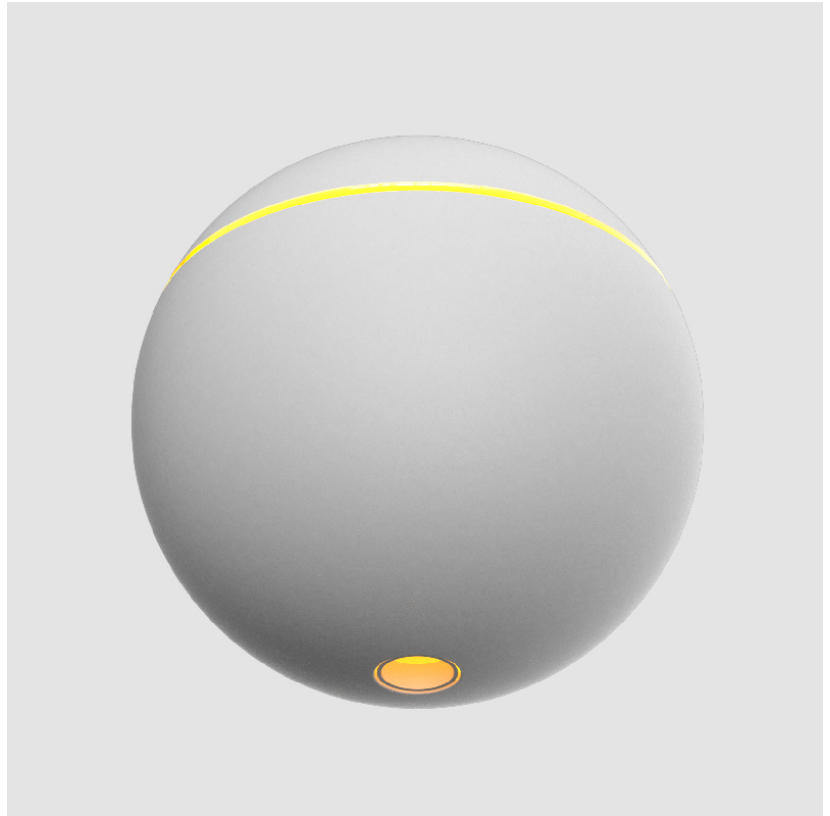

Ø 72mm 2 <sup>13</sup>/<sub>16</sub>''



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3G50-SUS-SYS COMPONENTS

### A38866-

#### DESCRIPTION

Snooker - G-Board - Suspension Insert - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K including Cable

#### GENERAL

Series: Snooker  
 Partner: Prolicht  
 Division: Architectural  
 Light Distribution: Downlight

#### PHYSICAL

Shape: Round  
 Diameter (mm): 72  
 Diameter (in): 2 13/16  
 Height (mm): 72  
 Height (in): 2 13/16  
 Weight (kg): 0.733  
 Weight (lbs): 1.6  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.5  
 Total Output Wattage (W): 5.8  
 Driver Included: No  
 Driver Location: External  
 Input Voltage (V): 48  
 Constant Current (mA): 500

#### LED



Delivered Lumen Range: 100 - 499 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 270 / 290 / 310  
 Nominal Lumen (lm): 448 / 483 / 514  
 CRI: >90 CRI  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

#### OPTICAL

Beam Angle: 55  
 Upon Request: 55° Beam Angle: Dual Focus lens technology - very low UGR

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

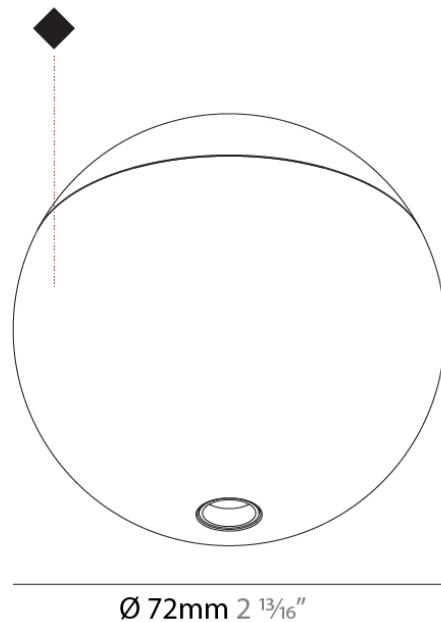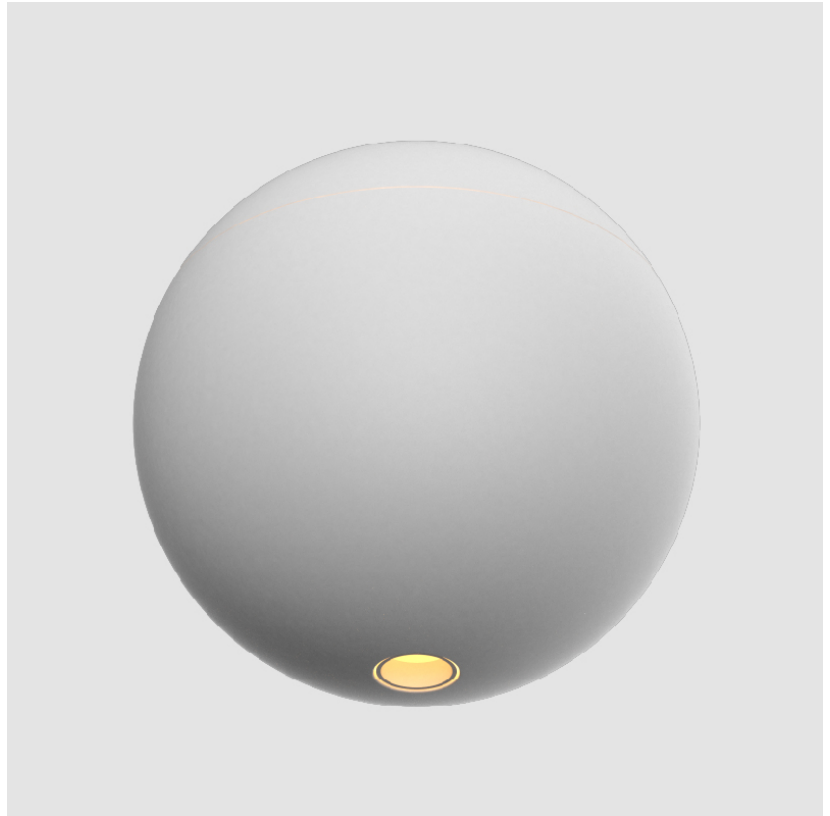

## A3G50-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


### A38947-

**DESCRIPTION**  
 G-50 Channel | Gravity Lift - Surface Profile - End Plate 1 pair -

**GENERAL**  
 Series: Snooker  
 Subseries: Snooker G-50 Channel for Gravity Lift  
 Partner: Prolicht  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 48  
 Length (in): 1 7/8  
 Width (mm): 13  
 Width (in): 1/2  
 Height (mm): 135  
 Height (in): 5 5/16  
 Weight (kg): 0.55  
 Weight (lbs): 1.21  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

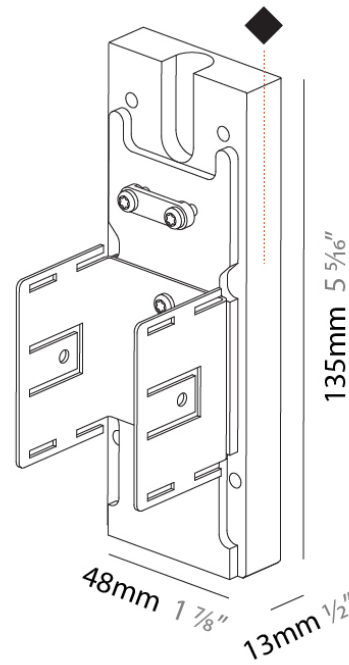

## A3G50-SUS-SYS COMPONENTS

### A3T100-

#### DESCRIPTION

Centriq - Track Head - 4.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Lens: 24°/32°

#### GENERAL

Series: Centriq \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Product Type: Spots \_\_\_\_\_  
 Light Distribution: Adjustable \_\_\_\_\_

#### PHYSICAL

Aperture Sizes - Downlights: 1" \_\_\_\_\_  
 Shape: Cylinder \_\_\_\_\_  
 Diameter (mm): 30 \_\_\_\_\_  
 Diameter (in): 1 5/8 \_\_\_\_\_  
 Height (mm): 186 \_\_\_\_\_  
 Height (in): 7 5/16 \_\_\_\_\_  
 Weight (kg): 0.078 \_\_\_\_\_  
 Weight (lbs): 0.17 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 1 - 9 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 4.4 \_\_\_\_\_  
 Total Output Wattage (W): 4 \_\_\_\_\_  
 Dimming: 0-10V Dimming \_\_\_\_\_  
 Driver Included: No \_\_\_\_\_  
 Driver Location: External \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_

#### LED


Delivered Lumen Range: 100 - 499 lm \_\_\_\_\_  
 Number of LEDs: 1 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 260 / 270 / 290 \_\_\_\_\_  
 Nominal Lumen (lm): 344 / 360 / 392 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request) \_\_\_\_\_

#### OPTICAL

Optic°: 24 / 32 \_\_\_\_\_  
 Adjustability: Rotational 360°; Tilt 90° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

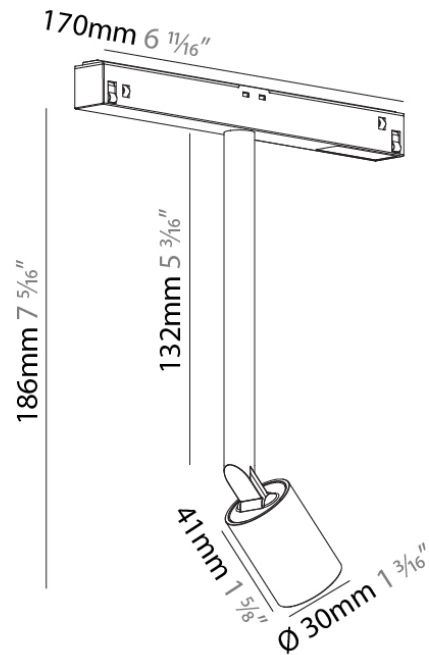

## A3G50-SUS-SYS COMPONENTS

### A3T101-

#### DESCRIPTION

Centriq - Track Head - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

#### GENERAL

Series: Centriq  
 Partner: Prolicht  
 Division: Architectural  
 Product Type: Spots  
 Light Distribution: Adjustable

#### PHYSICAL

Aperture Sizes - Downlights: 1"  
 Shape: Cylinder  
 Diameter (mm): 40  
 Diameter (in): 1 9/16  
 Height (mm): 200  
 Height (in): 7 7/8  
 Weight (kg): 0.132  
 Weight (lbs): 0.29  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.5  
 Total Output Wattage (W): 5.8  
 Dimming: 0-10V Dimming  
 Driver Included: No  
 Driver Location: External  
 Input Voltage (V): 120

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 360 / 390 / 420  
 Nominal Lumen (lm): 448 / 483 / 514  
 CRI: >90 CRI  
 Upon Request: Special Color Temperature \*\*\*3500K available in minimum quantities (larger quantities upon request)

#### OPTICAL

Reflector: 10  
 Adjustability: Rotational 360°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

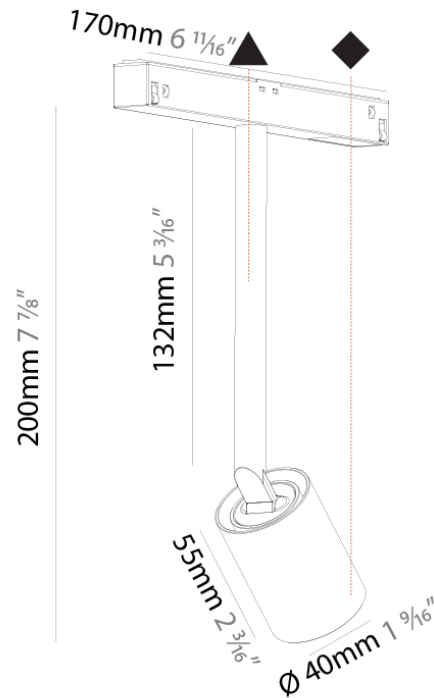

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3G50-SUS-SYS COMPONENTS

### A3T102-

#### DESCRIPTION

Centriq - Track Head - 6.6W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - Reflector: 20°/31°/36°/40°/50°

#### GENERAL

Series: Centriq  
 Partner: Prolicht  
 Division: Architectural  
 Product Type: Spots  
 Light Distribution: Adjustable

#### PHYSICAL

Aperture Sizes - Downlights: 1"  
 Shape: Cylinder  
 Diameter (mm): 40  
 Diameter (in): 1 9/16  
 Height (mm): 200  
 Height (in): 7 7/8  
 Weight (kg): 0.159  
 Weight (lbs): 0.35  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.5  
 Total Output Wattage (W): 5.9  
 Dimming: 0-10V Dimming  
 Driver Included: No  
 Driver Location: External  
 Input Voltage (V): 120

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 468 / 490 / 520  
 Nominal Lumen (lm): 732 / 769 / 780  
 CRI: >90 CRI  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request)

#### OPTICAL

Reflector°: 20 / 31 / 36 / 40 / 50  
 Adjustability: Rotational 360°; Tilt 90°  
 Upon Request: Special Beam Angles

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

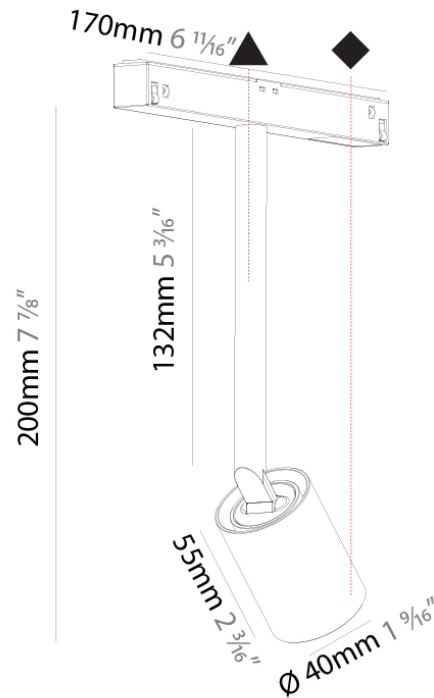

## A3G50-SUS-SYS COMPONENTS

### A3T103-

#### DESCRIPTION

Centriq - Track Head - 9.3W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable

#### GENERAL

Series: Centriq \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Product Type: Spots \_\_\_\_\_  
 Light Distribution: Adjustable \_\_\_\_\_

#### PHYSICAL

Aperture Sizes - Downlights: 2" \_\_\_\_\_  
 Shape: Cylinder \_\_\_\_\_  
 Diameter (mm): 55 \_\_\_\_\_  
 Diameter (in): 2 <sup>3</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 224 \_\_\_\_\_  
 Height (in): 8 <sup>13</sup>/<sub>16</sub> \_\_\_\_\_  
 Weight (kg): 0.554 \_\_\_\_\_  
 Weight (lbs): 1.22 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 1 - 9 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 9.2 \_\_\_\_\_  
 Total Output Wattage (W): 8.4 \_\_\_\_\_  
 Dimming: 0-10V Dimming \_\_\_\_\_  
 Driver Included: No \_\_\_\_\_  
 Driver Location: External \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_

#### LED


Delivered Lumen Range: 500 - 999 lm \_\_\_\_\_  
 Number of LEDs: 1 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 486 / 534 / 548 \_\_\_\_\_  
 Nominal Lumen (lm): 625 / 660 / 712 \_\_\_\_\_  
 CRI: >80 CRI \_\_\_\_\_  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request) \_\_\_\_\_

#### OPTICAL

Reflector: 9 \_\_\_\_\_  
 Adjustability: Rotational 360°; Tilt 90° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

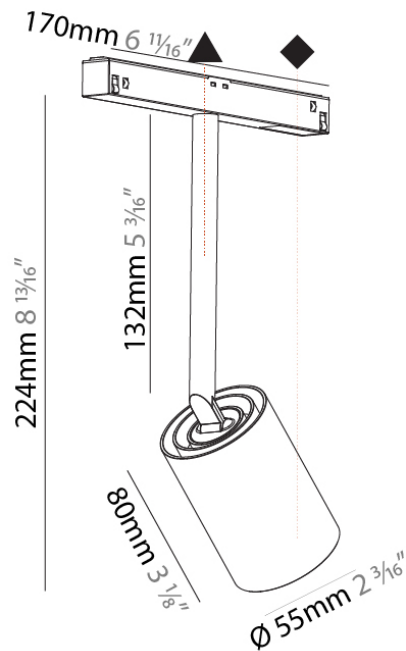

## A3G50-SUS-SYS COMPONENTS

### A3T104-

#### DESCRIPTION

Centriq - Track Head - 12.1W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Dimmable - 15° / 17° / 25° / 33° / 35° / 46°

#### GENERAL

Series: Centriq \_\_\_\_\_  
 Partner: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Product Type: Spots \_\_\_\_\_  
 Light Distribution: Adjustable \_\_\_\_\_

#### PHYSICAL

Aperture Sizes - Downlights: 2" \_\_\_\_\_  
 Shape: Cylinder \_\_\_\_\_  
 Diameter (mm): 55 \_\_\_\_\_  
 Diameter (in): 2 <sup>3</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 224 \_\_\_\_\_  
 Height (in): 8 <sup>13</sup>/<sub>16</sub> \_\_\_\_\_  
 Weight (kg): 0.562 \_\_\_\_\_  
 Weight (lbs): 1.24 \_\_\_\_\_  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED (Zhaga Standard) \_\_\_\_\_  
 Input Wattage (W): 12.0 \_\_\_\_\_  
 Total Output Wattage (W): 10.6 \_\_\_\_\_  
 Dimming: 0-10V Dimming \_\_\_\_\_  
 Driver Included: No \_\_\_\_\_  
 Driver Location: External \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_

#### LED


Delivered Lumen Range: 500 - 999 lm \_\_\_\_\_  
 Number of LEDs: 1 \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 / 4000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 720 / 760 / 820 \_\_\_\_\_  
 Nominal Lumen (lm): 1196 / 1257 / 1275 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Upon Request: Special Color Temperature 3500K available in minimum quantities (larger quantities upon request) \_\_\_\_\_

#### OPTICAL

Reflector°: 15 / 17 / 25 / 33 / 35 / 46 \_\_\_\_\_  
 Adjustability: Rotational 360°; Tilt 90° \_\_\_\_\_  
 Upon Request: Special Beam Angles \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

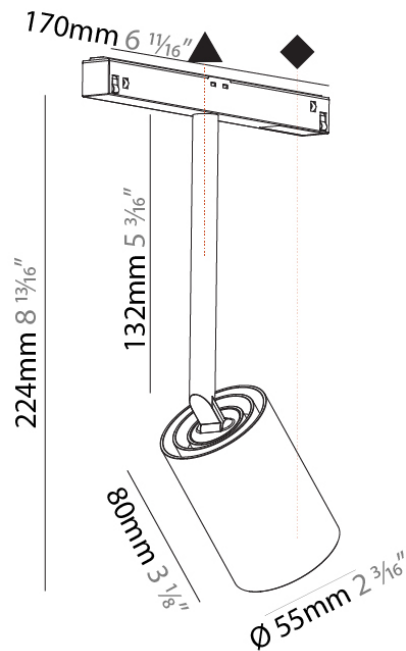











### LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

### IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)