

A3JB-SUR-SYS COMPONENTS

A3T349

DESCRIPTION

Just Black System - Surface Track 1,000mm / 39 3/8"

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 1000

Length (in): 39 3/8"

Width (mm): 11

Width (in): 7/16"

Height (mm): 15



Height (in): 9/16"

Fixture Finish: BLK

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

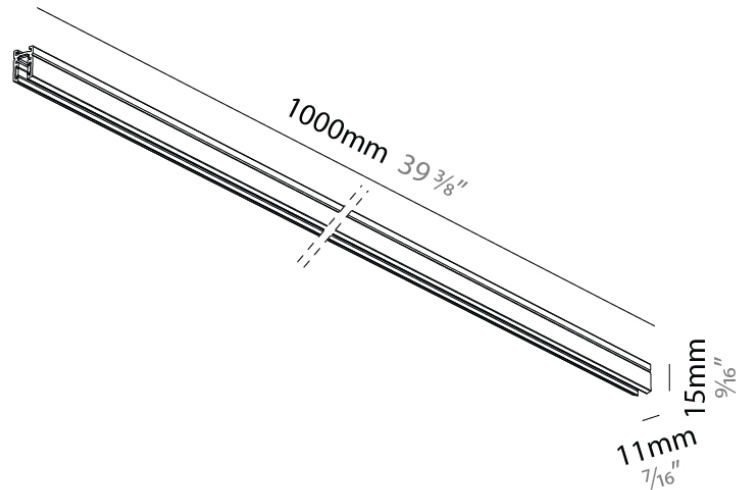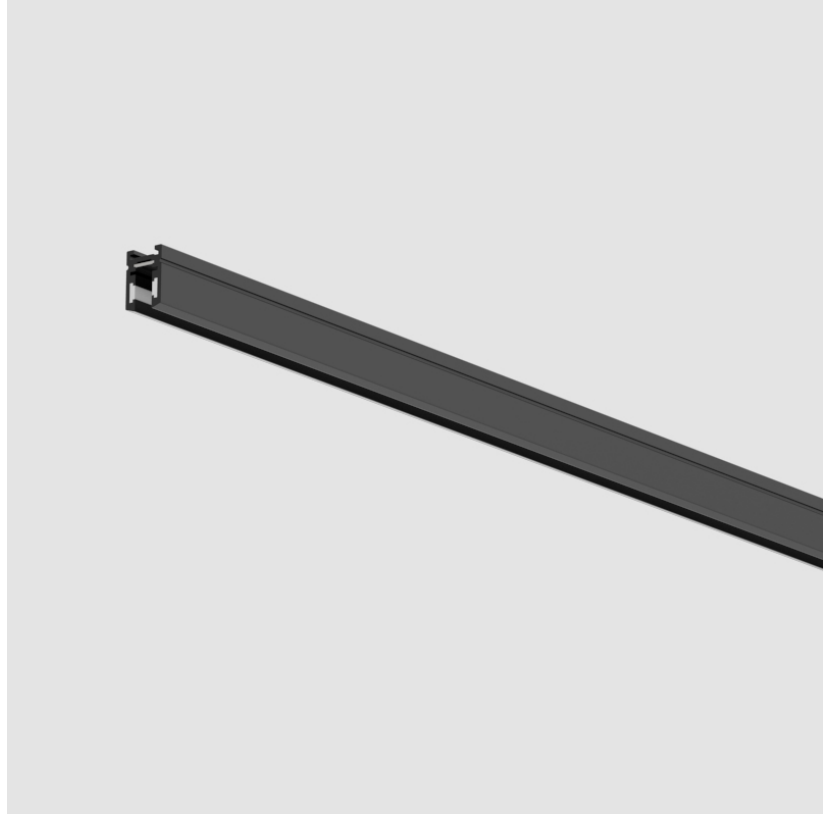

A3JB-SUR-SYS COMPONENTS

A3T350

DESCRIPTION

Just Black - Surface Track 2,000mm / 78 3/4"

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 2000

Length (in): 78 3/4

Width (mm): 11

Width (in): 7/16

Height (mm): 15

Height (in): 9/16

Fixture Finish: BLK



ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

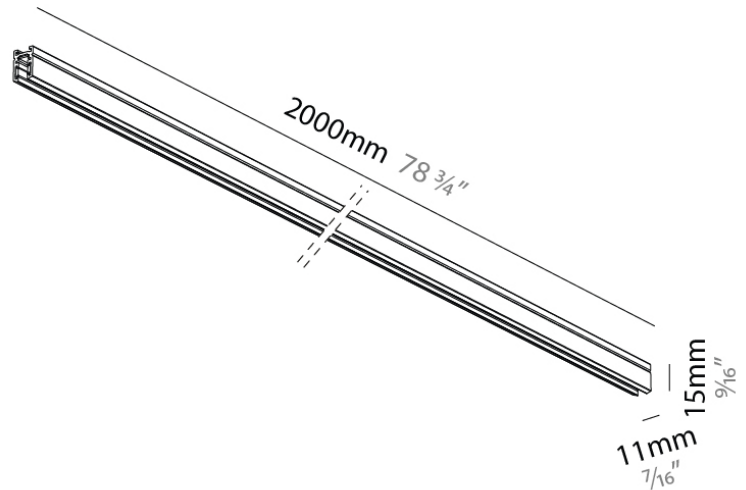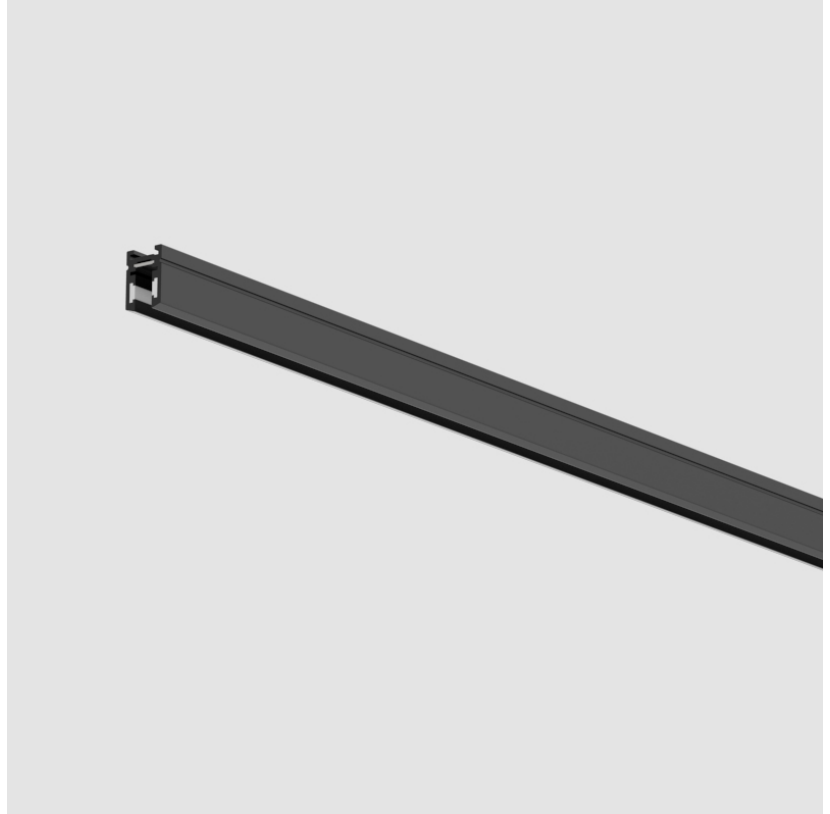

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3JB-SUR-SYS COMPONENTS

A3T351

DESCRIPTION

Just Black System- Surface Track Arc Ø300mm

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL


Length (mm): 346
 Length (in): 13 5/16
 Width (mm): 15
 Width (in): 9/16
 Height (mm): 15
 Height (in): 9/16
 Fixture Finish: BLK

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

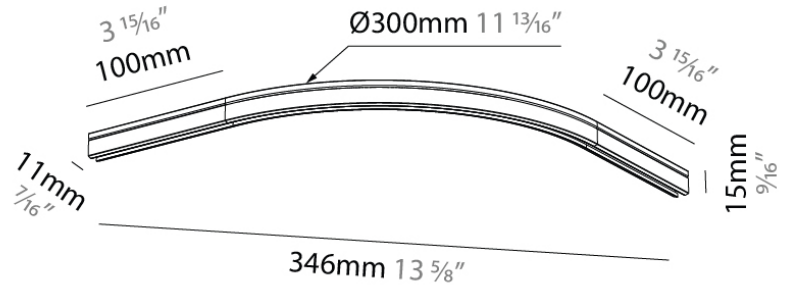

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3JB-SUR-SYS COMPONENTS

A3T352

DESCRIPTION

Just Black System - Surface Track Arc Ø600mm

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 405

Length (in): 15 ¹⁵/₁₆

Width (mm): 405

Width (in): 15 ¹⁵/₁₆

Height (mm): 15

Height (in): 9/16

Fixture Finish: BLK


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

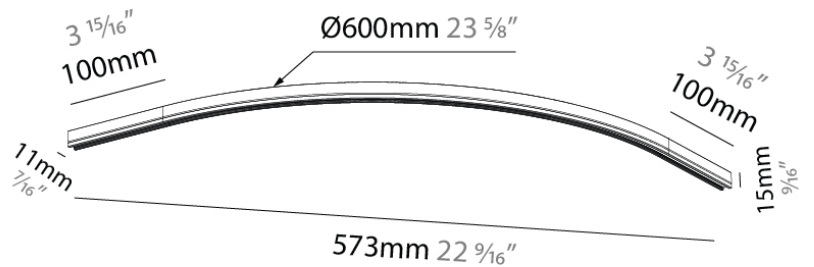

A3JB-SUR-SYS COMPONENTS

A3T353

DESCRIPTION

Just Black System - Surface Track Arc Ø900mm

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL


Length (mm): 555
 Length (in): 21 ⁷/₈
 Width (mm): 555
 Width (in): 21 ⁷/₈
 Height (mm): 15
 Height (in): 9/16
 Fixture Finish: BLK

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

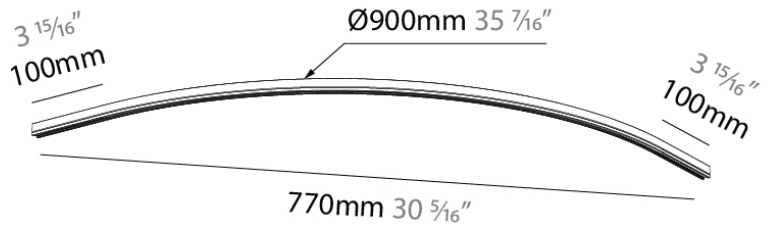

A3JB-SUR-SYS COMPONENTS

A3T357

DESCRIPTION

Just Black - Surface Endcap Set of 2 pieces.

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 7

Length (in): 1/4

Width (mm): 11

Width (in): 7/16

Height (mm): 15

Height (in): 9/16

Fixture Finish: BLK


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

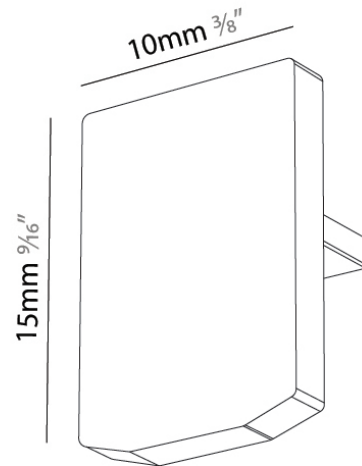

A3JB-SUR-SYS COMPONENTS

A3T360

DESCRIPTION

Just Black - Surface Corner Connector 90°

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL


Length (mm): 30
 Length (in): 1 ¹³/₁₆
 Width (mm): 30
 Width (in): 1 ¹³/₁₆
 Height (mm): 15
 Height (in): 9/16
 Fixture Finish: BLK

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

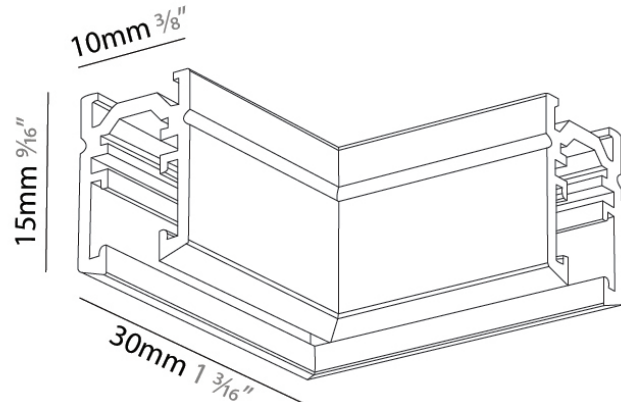

A3JB-SUR-SYS COMPONENTS

A3T364

DESCRIPTION

Just Black System - Surface/Suspension Metal Connector Sheet
(2 pieces)

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 50

Length (in): 1 ¹⁵/₁₆"

Width (mm): 3

Width (in): 1/8


Height (mm): 9

Height (in): 3/8

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

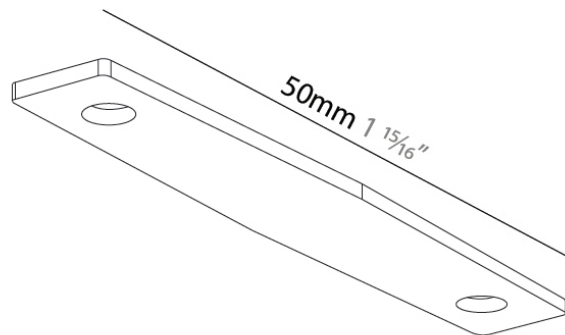

A3JB-SUR-SYS COMPONENTS

A3T365

DESCRIPTION

Just Black - Surface Ceiling-Wall Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 30

Length (in): 1 ¹³/₁₆

Width (mm): 11

Width (in): 7/16

Height (mm): 15

Height (in): 9/16

Fixture Finish: BLK


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

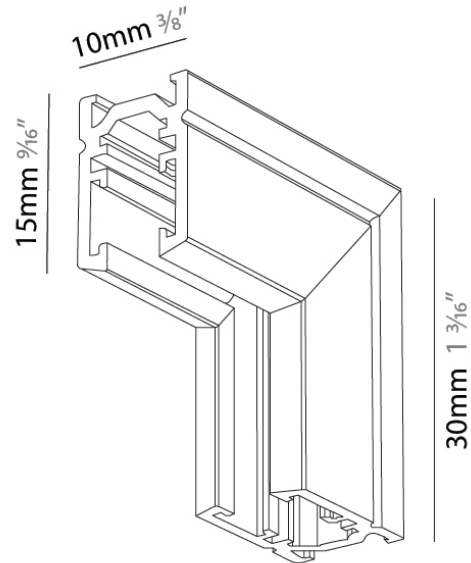

A3JB-SUR-SYS COMPONENTS

A3T369

DESCRIPTION

Just Black - Wall Ceiling Cable Loop

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 30

Height (in): 1 3/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

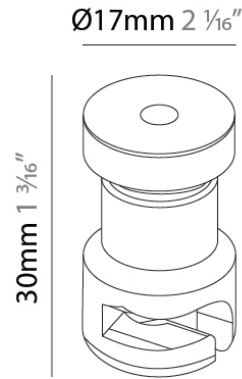

A3JB-SUR-SYS COMPONENTS

A3T370

DESCRIPTION

Just Black - Wall Ceiling Cable Roller

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 75

Height (in): 2 15/16

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



Ø17mm 2 1/16"



A3JB-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T371

DESCRIPTION

Just Black - Suspended Roller

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 80

Height (in): 3 1/8

ELECTRICAL

Dimming: Non-Dimmable


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



Ø17mm 2 1/16"

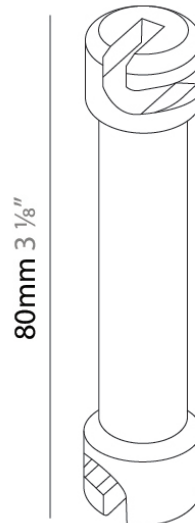

A3JB-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T372

DESCRIPTION

Just Black - Track Midfeed

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 46

Length (in): 1 ¹³/₁₆

Width (mm): 10

Width (in): 3/8

Height (mm): 5

Height (in): 3/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

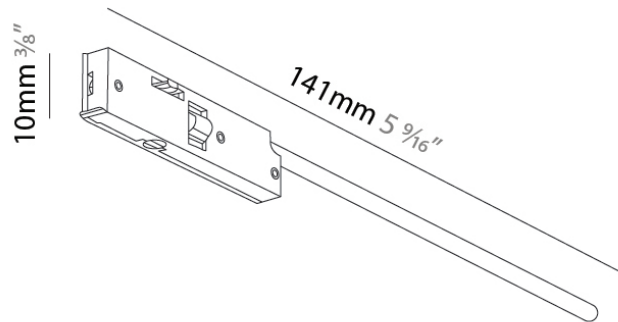

A

A3JB-SUR-SYS COMPONENTS

A3T373

DESCRIPTION

Just Black - Track Flexible Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 105

Length (in): 4 1/8

Width (mm): 5

Width (in): 3/16

Height (mm): 11

Height (in): 7/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

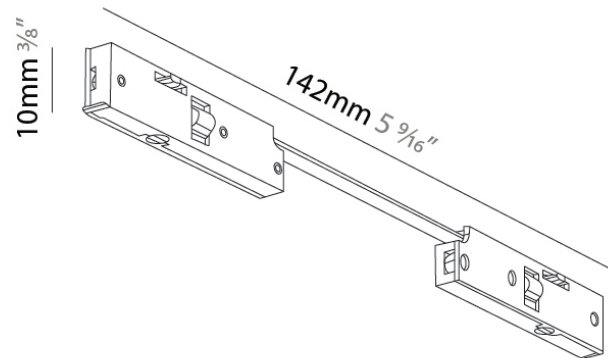

A3JB-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T374

DESCRIPTION

Just Black - Track Linear Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 68

Length (in): 2 ¹¹/₁₆

Width (mm): 5

Width (in): 3/16

Height (mm): 11

Height (in): 7/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

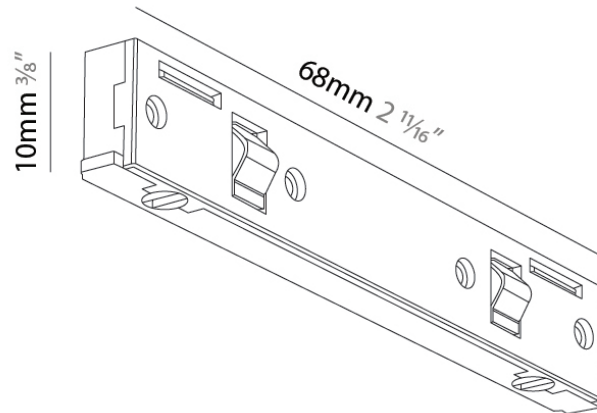

A3JB-SUR-SYS COMPONENTS

A3T376

DESCRIPTION

Just Black System - Bilo Insert - LED 3W, 3000K, 88lm - Non Dimming

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Diameter (mm): 60
 Diameter (in): 2 ³/₈
 Height (mm): 60
 Height (in): 2 ³/₈
 Light Distribution: Omnidirectional
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 3
 Total Output Wattage (W): 2.7
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 88
 Nominal Lumen (lm): 200
 CRI: >92 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 180
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

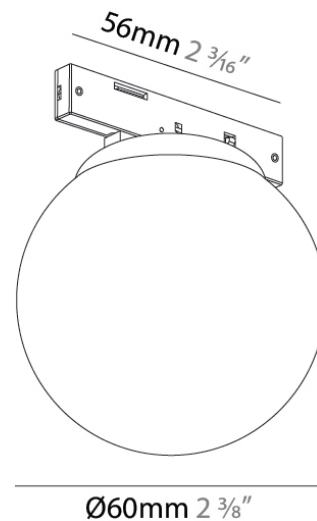

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3JB-SUR-SYS COMPONENTS

A3T377

DESCRIPTION

Just Black System - Flexline Insert - 890mm, LED 7W, 142lm, 2700K

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Length (mm): 890
 Length (in): 35 7/16
 Width (mm): 5
 Width (in): 3/16
 Height (mm): 10
 Height (in): 3/8
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 7
 Total Output Wattage (W): 6.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED



Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700
 Max. Delivered Lumen (lm): 142
 Nominal Lumen (lm): 172
 CRI: >95 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 110
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

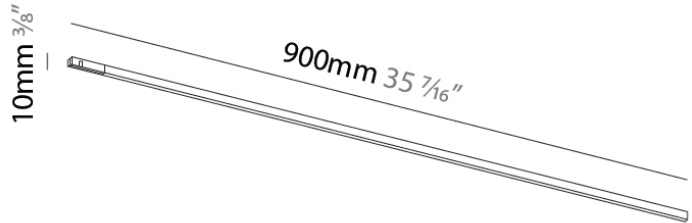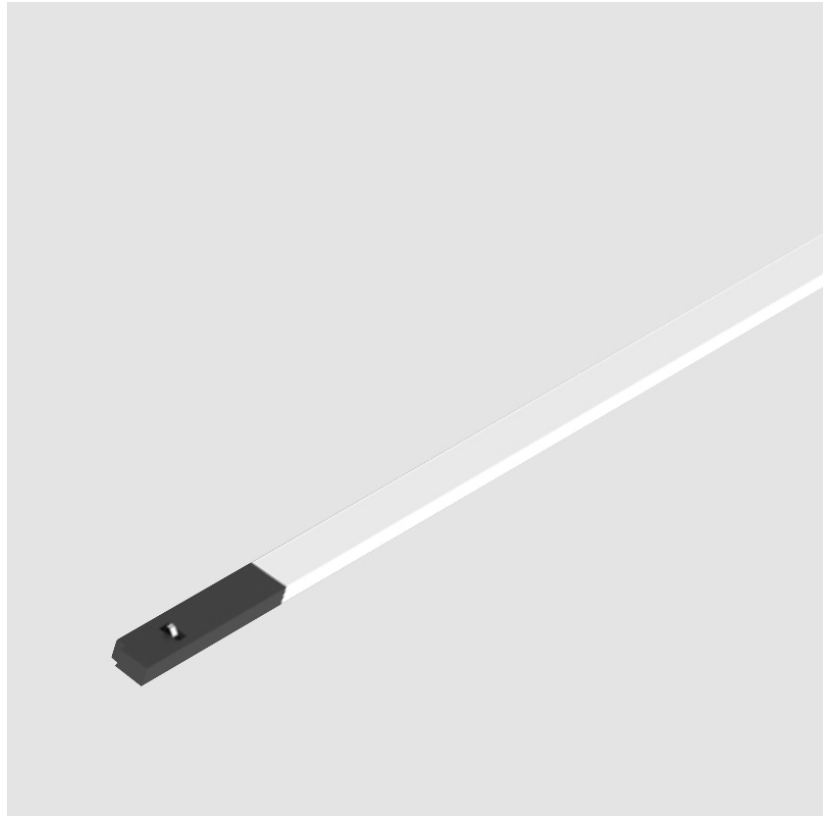

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3JB-SUR-SYS COMPONENTS

A3T378

DESCRIPTION

Just Black System - Flexline Insert - 1890mm, LED 14W, 300lm, 2700K

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Length (mm): 1890
 Length (in): 74 ⁷/₁₆
 Width (mm): 5
 Width (in): 3/16
 Height (mm): 10
 Height (in): 3/8
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED



Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700
 Max. Delivered Lumen (lm): 300
 Nominal Lumen (lm): 300
 CRI: >95 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 110
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

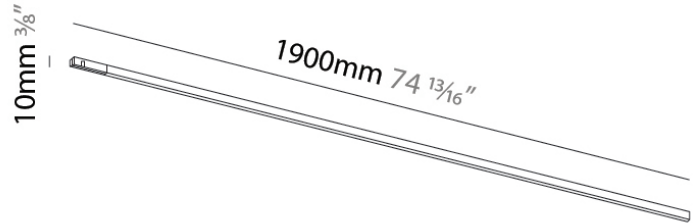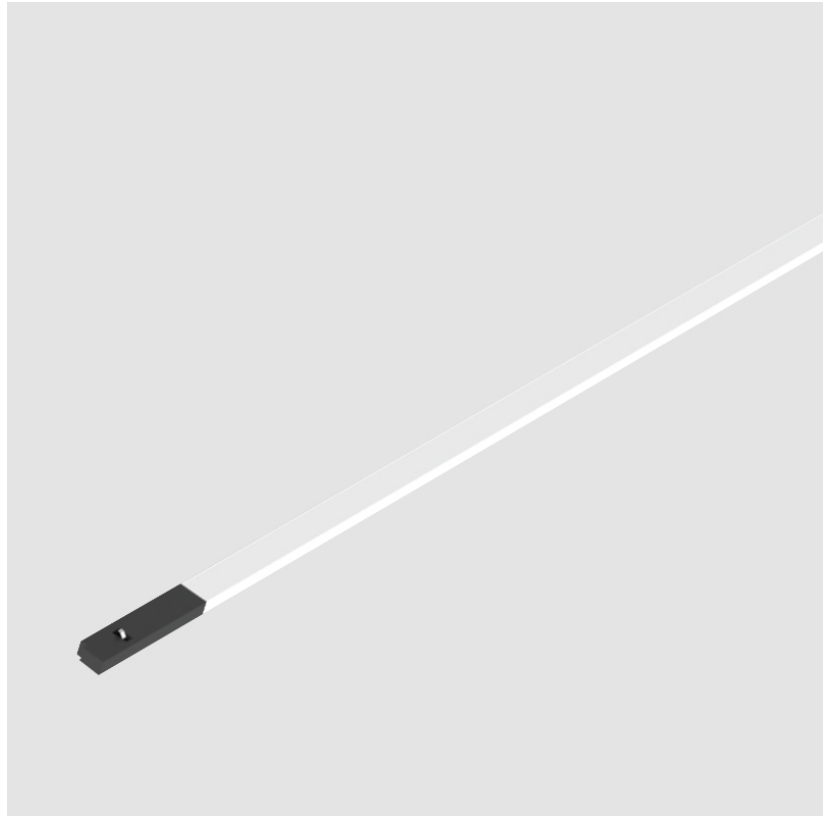

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3JB-SUR-SYS COMPONENTS

A3T379

DESCRIPTION

Just Black System - Flute Insert - LED 6W, 3000K, 407lm - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Diameter (mm): 70
 Diameter (in): 2 ¾
 Height (mm): 225
 Height (in): 8 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 469
 Nominal Lumen (lm): 407
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 26
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

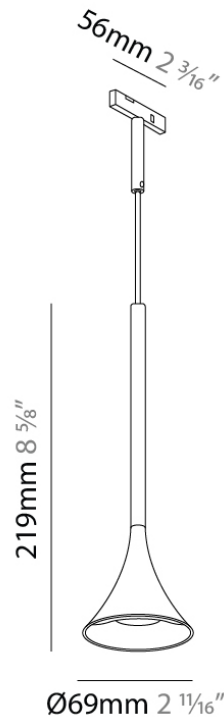

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3JB-SUR-SYS COMPONENTS

A3T380

DESCRIPTION

Just Black System - Hangover Insert - LED 3W, 3000K, 144lm - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Diameter (mm): 18
 Diameter (in): 11/16
 Height (mm): 300
 Height (in): 11 13/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Dali Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 144
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 22
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

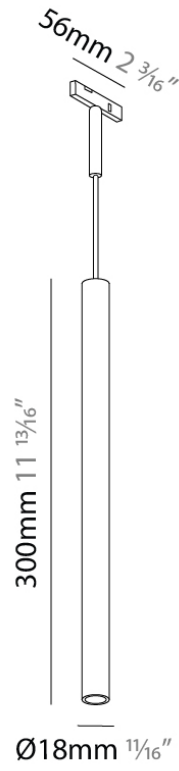

A3JB-SUR-SYS COMPONENTS

A3T381

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 138lm, Beam 18° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 25
 Diameter (in): 1
 Height (mm): 48
 Height (in): 1 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 138
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 18
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

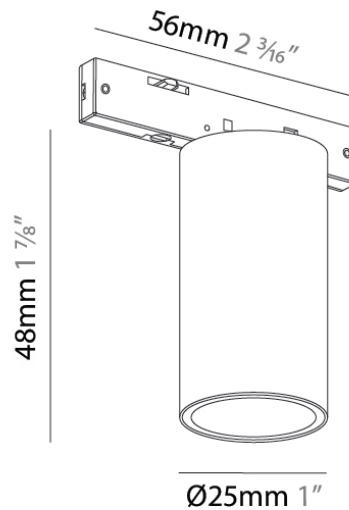

A3JB-SUR-SYS COMPONENTS

A3T382

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 136lm, Beam 22° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 25
 Diameter (in): 1
 Height (mm): 48
 Height (in): 1 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 136
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 22
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

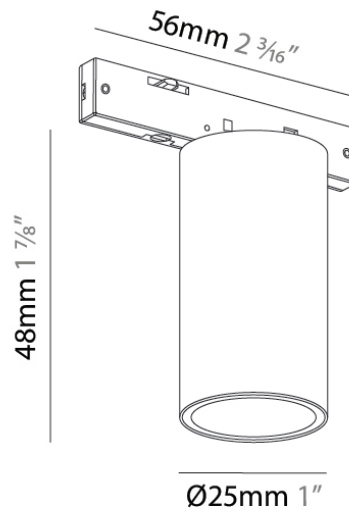

A3JB-SUR-SYS COMPONENTS

A3T383

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 136lm, Beam 32° - Non Dimmable

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Shape: Cylinder

Diameter (mm): 25

Diameter (in): 1

Height (mm): 48

Height (in): 1 7/8

Light Distribution: Direct

Fixture Finish: BLK

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 3

Total Output Wattage (W): 2.8

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 24

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 3000

Max. Delivered Lumen (lm): 124

Nominal Lumen (lm): 168

CRI: >90 CRI

Lamp Life (hrs): 80000

OPTICAL


Beam Angle: 32

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

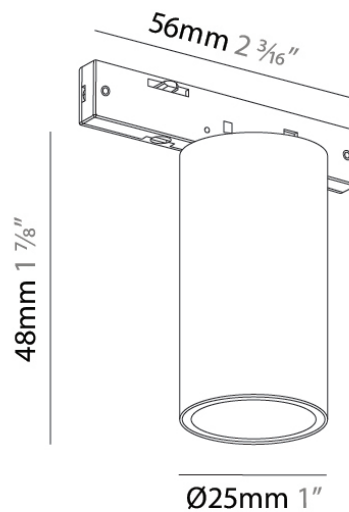

A3JB-SUR-SYS COMPONENTS

A3T384-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 298lm, Beam 20° - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 83
 Height (in): 3 1/4
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 298
 Nominal Lumen (lm): 469
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 20
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

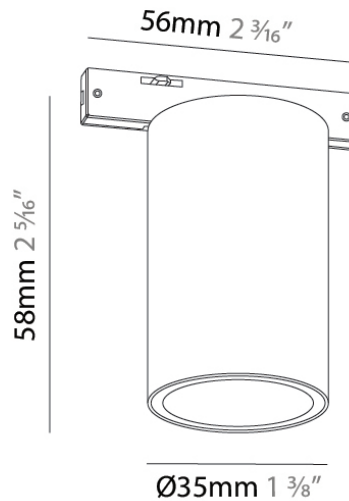

A3JB-SUR-SYS COMPONENTS

A3T385-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 343lm, Beam 26° - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 83
 Height (in): 3 1/4
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 343
 Nominal Lumen (lm): 469
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 26
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

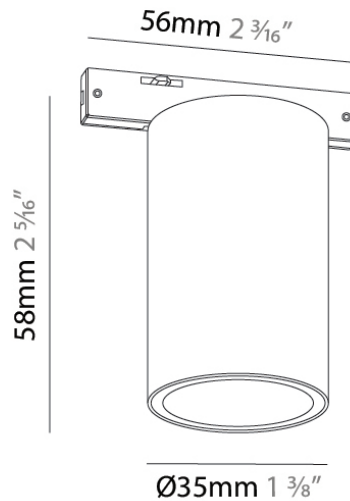

A3JB-SUR-SYS COMPONENTS

A3T386-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 364lm, Beam 34° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 ³/₈
 Height (mm): 83
 Height (in): 3 ¹/₄
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 364
 Nominal Lumen (lm): 469
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 34
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

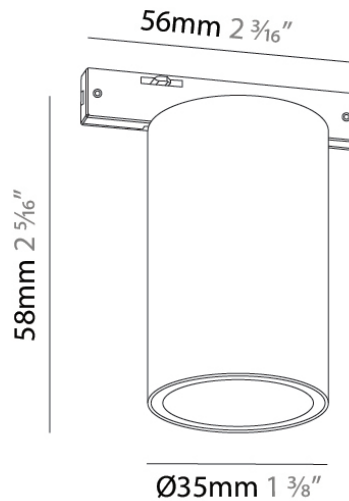

A3JB-SUR-SYS COMPONENTS

A3T387-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 492lm, Beam 18° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 ¾
 Height (mm): 63
 Height (in): 2 ½
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 429
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 18
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

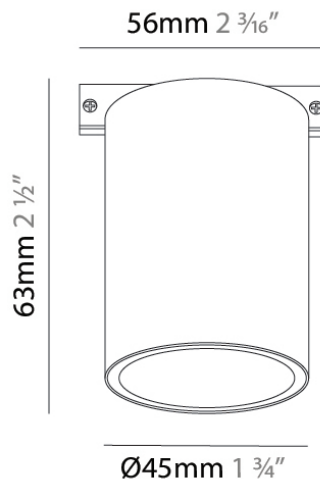

A3JB-SUR-SYS COMPONENTS

A3T388-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 533lm, Beam 20° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 ¾
 Height (mm): 63
 Height (in): 2 ½
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 533
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 20
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

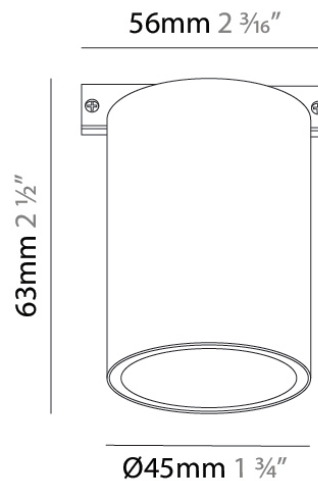

A3JB-SUR-SYS COMPONENTS

A3T389-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 504lm, Beam 30° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 ¾
 Height (mm): 63
 Height (in): 2 ½
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 504
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 30
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

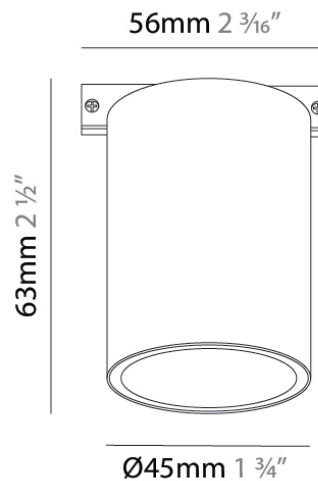

A3JB-SUR-SYS COMPONENTS

A3T390-

DESCRIPTION

Just Black System - Invader Insert Ø60mm - LED 5W, 3000K, 411lm, Beam 26° - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 60
 Diameter (in): 2 ³/₈
 Height (mm): 43
 Height (in): 1 ¹¹/₁₆
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 5
 Total Output Wattage (W): 4.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 411
 Nominal Lumen (lm): 451
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 26
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

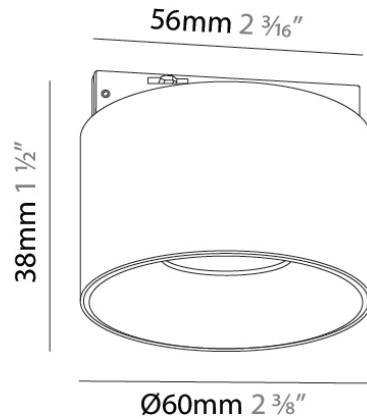

A3JB-SUR-SYS COMPONENTS

A3T391

DESCRIPTION

Just Black System - Ledline Insert - 600mm, LED 13W, 600lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 600
 Length (in): 23 ⁵/₈
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 13
 Total Output Wattage (W): 11.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED



Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 600
 Nominal Lumen (lm): 600
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 92
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

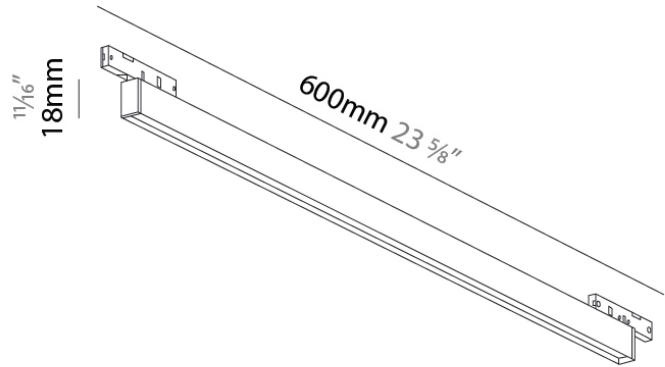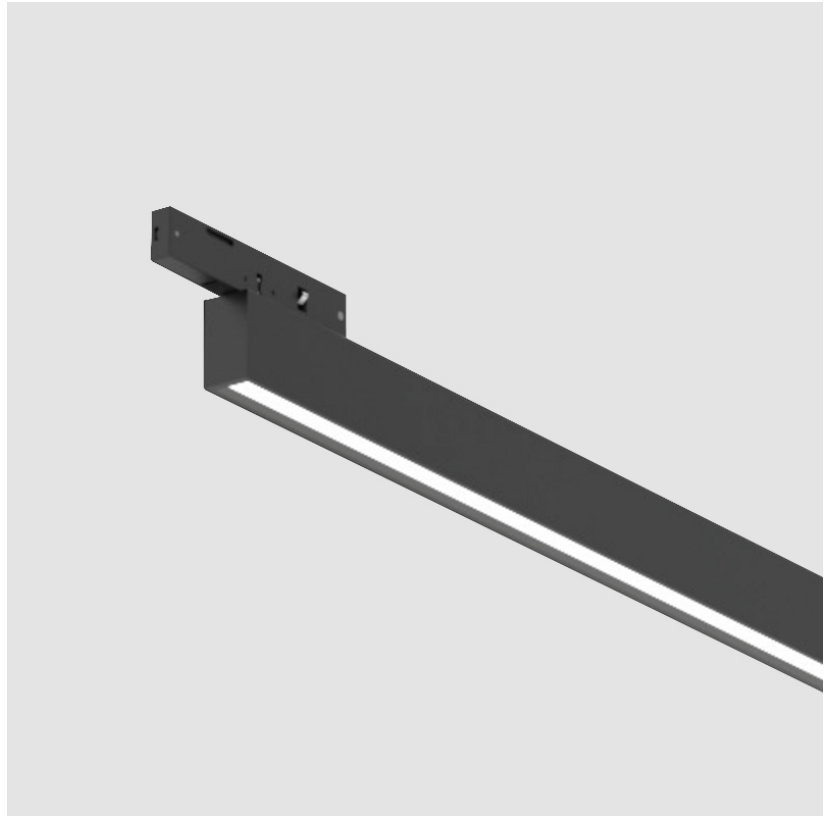

A3JB-SUR-SYS COMPONENTS

A3T392

DESCRIPTION

Just Black System - Ledline Insert - 900mm, LED 20W, 900lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 900
 Length (in): 35 7/16
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 20
 Total Output Wattage (W): 18.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 900
 Nominal Lumen (lm): 900
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 92
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

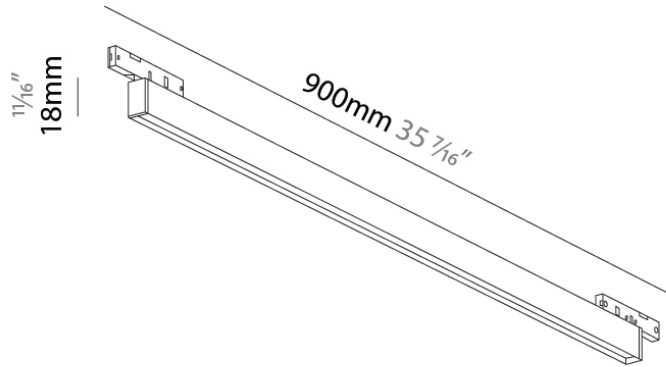

A3JB-SUR-SYS COMPONENTS

A3T393

DESCRIPTION

Just Black System - Magiq Insert - 200mm, LED 9W, 420lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 196
 Length (in): 7 11/16
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 420
 Nominal Lumen (lm): 420
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 32
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

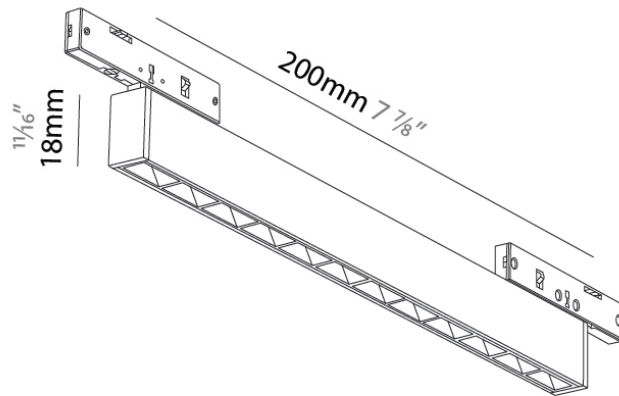

A3JB-SUR-SYS COMPONENTS

A3T394

DESCRIPTION

Just Black System - Magiq Insert - 300mm, LED 14W, 632lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 292
 Length (in): 11 1/2
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 632
 Nominal Lumen (lm): 633
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 34
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

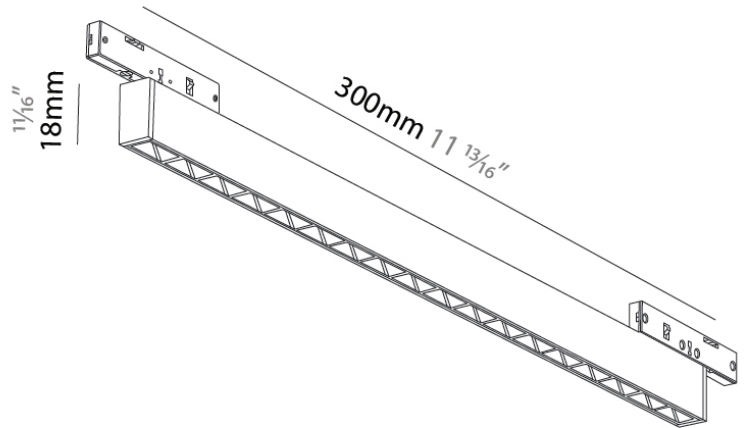

A3JB-SUR-SYS COMPONENTS

A3T395

DESCRIPTION

Just Black System - Sign Insert - Ø138mm, LED 15W, 1050lm, 3000K - Non Dimmable - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 138
 Diameter (in): 5 ⁷/₁₆
 Height (mm): 34
 Height (in): 1 ⁵/₁₆
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 15
 Total Output Wattage (W): 13.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 1050
 Nominal Lumen (lm): 1050
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 96
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

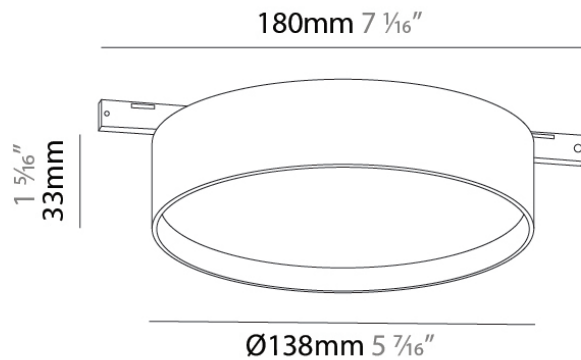

A3JB-SUR-SYS COMPONENTS

A3T397

DESCRIPTION

Just Black - Track Driver 100W ON/OFF

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 295

Length (in): $11 \frac{5}{8}$

Width (mm): 43

Width (in): $1 \frac{11}{16}$

Height (mm): 30

Height (in): $1 \frac{3}{16}$

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3JB-SUR-SYS COMPONENTS

A3T399

DESCRIPTION

Just Black System - Surface Track Arc Ø1200mm 90°

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL


Length (mm): 555
 Length (in): 21 ⁷/₈
 Width (mm): 555
 Width (in): 21 ⁷/₈
 Height (mm): 15
 Height (in): 9/16
 Fixture Finish: BLK

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

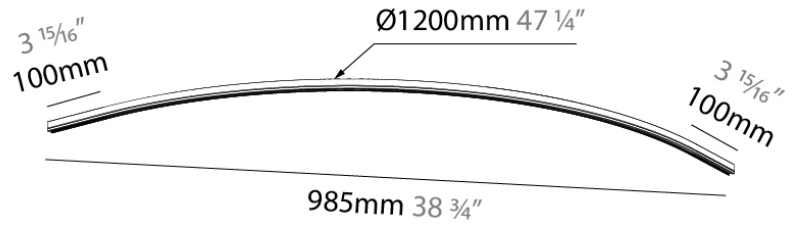

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)