

A3JB-SUS-SYS COMPONENTS

A3T354

DESCRIPTION

Just Black System - Suspended Track Round 1,000mm

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 1000

Length (in): 39 ³/₈"


Height (mm): 20

Height (in): 13/16

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

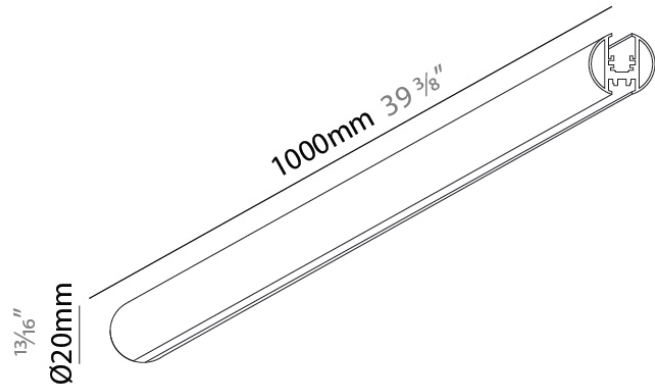

A3JB-SUS-SYS COMPONENTS

A3T355

DESCRIPTION

Just Black - Suspended Track Round 2,000mm

GENERAL

Series: Just Black System _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Modular _____

PHYSICAL


Length (mm): 2000 _____
 Length (in): 78 3/4 _____
 Width (mm): 20 _____
 Width (in): 13/16 _____

ELECTRICAL

Dimming: Non-Dimmable _____

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
 IP rating: IP20 _____

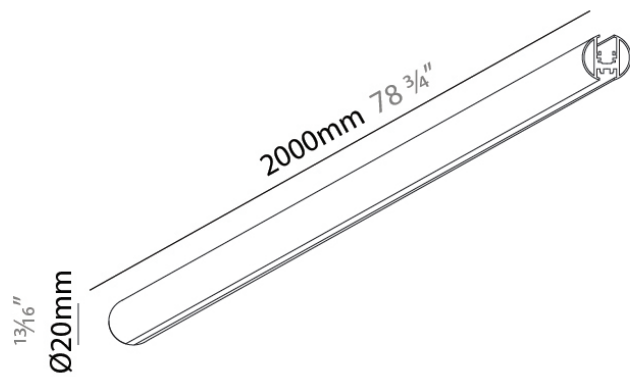

A3JB-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T358

DESCRIPTION

Just Black - Endcap Set 2 pieces.

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 20

Diameter (in): 13/16

Height (mm): 14

Height (in): 9/16

Fixture Finish: BLK



ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

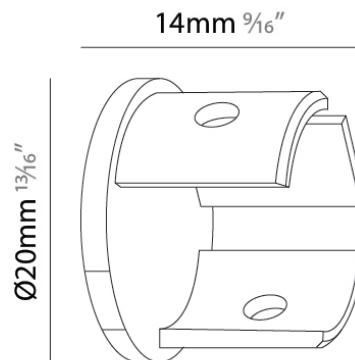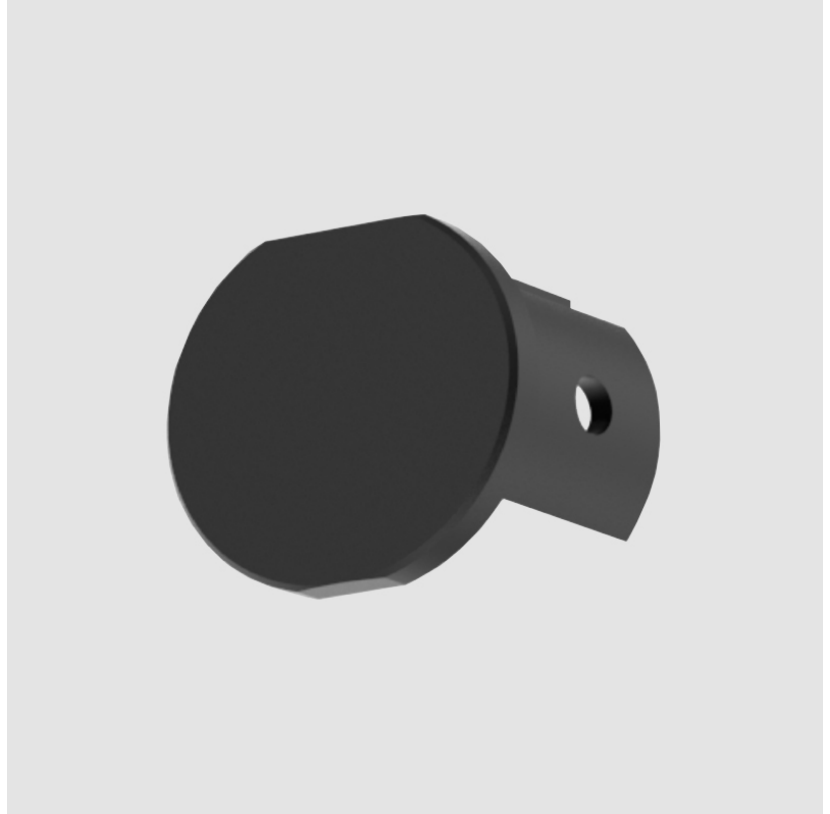

A3JB-SUS-SYS COMPONENTS

A3T361

DESCRIPTION

Just Black System - Suspension Corner Connector 90°

GENERAL


Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Length (mm): 35
 Length (in): 1 ³/₈
 Width (mm): 35
 Width (in): 1 ³/₈
 Height (mm): 18
 Height (in): 11/16
 Fixture Finish: BLK

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

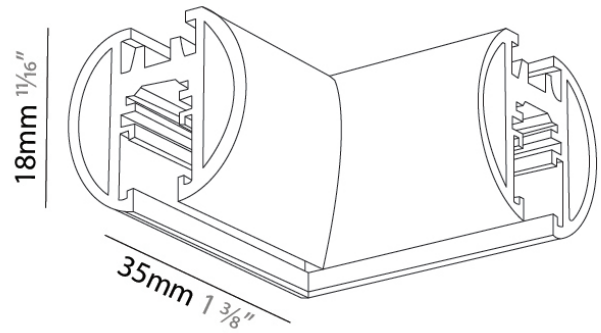

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A3JB-SUS-SYS COMPONENTS

A3T364

DESCRIPTION

Just Black System - Surface/Suspension Metal Connector Sheet
(2 pieces)

GENERAL


Series: Just Black System
Brand: Prolicht
Division: Architectural
Subcategory: Modular

PHYSICAL

Length (mm): 50
Length (in): 1 ¹⁵/₁₆"
Width (mm): 3
Width (in): 1/8
Height (mm): 9
Height (in): 3/8

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

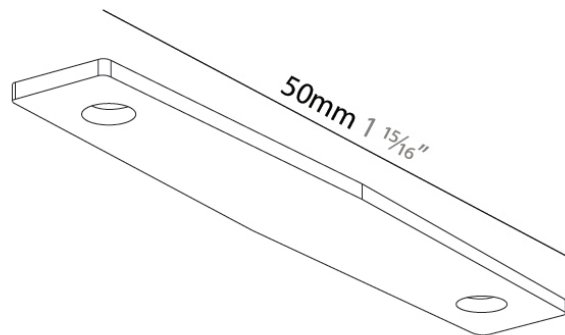

A3JB-SUS-SYS COMPONENTS

A3T366

DESCRIPTION

Just Black System - Suspension Track Wall Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 38

Diameter (in): 1 1/2

Height (mm): 120


Height (in): 4 3/4

Fixture Finish: BLK

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

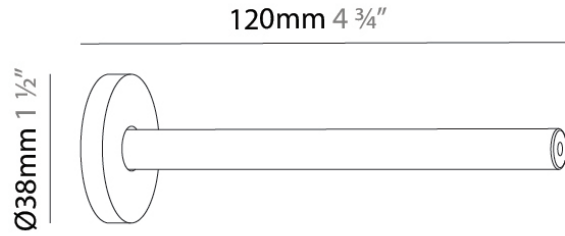

A3JB-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T367

DESCRIPTION

Just Black System - Suspension Track Base Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 52

Diameter (in): 2 1/16"

Height (mm): 25


Height (in): 1

Fixture Finish: BLK

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

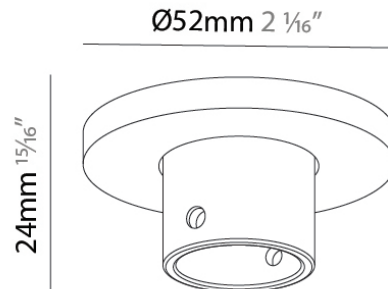

A3JB-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T368

DESCRIPTION

Just Black - Suspended Cable Sets 2 pieces

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

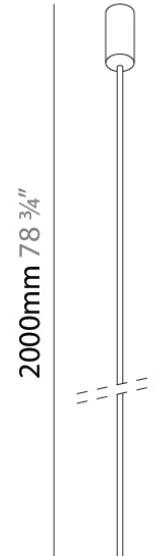

A3JB-SUS-SYS COMPONENTS

A3T369

DESCRIPTION

Just Black - Wall Ceiling Cable Loop

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 30

Height (in): 1 3/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

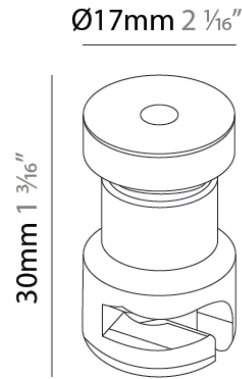

A3JB-SUS-SYS COMPONENTS

A3T370

DESCRIPTION

Just Black - Wall Ceiling Cable Roller

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 75

Height (in): 2 15/16

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



Ø17mm 2 1/16"

75mm 2 15/16"



A3JB-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A3T371

DESCRIPTION

Just Black - Suspended Roller

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 80

Height (in): 3 1/8

ELECTRICAL

Dimming: Non-Dimmable


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



Ø17mm 2 1/16"

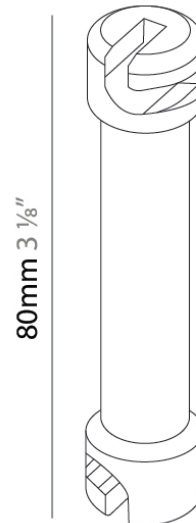

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A3JB-SUS-SYS COMPONENTS

A3T372

DESCRIPTION

Just Black - Track Midfeed

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 46

Length (in): 1 ¹³/₁₆

Width (mm): 10

Width (in): 3/8

Height (mm): 5

Height (in): 3/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

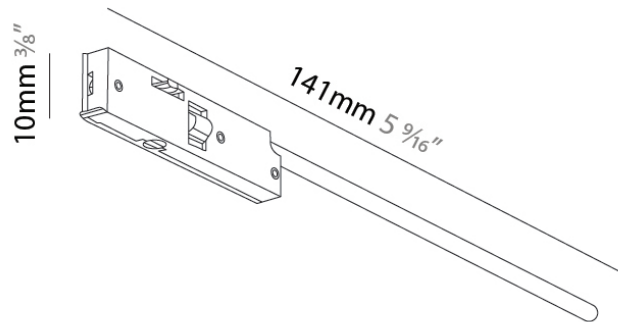

A

A3JB-SUS-SYS COMPONENTS

A3T373

DESCRIPTION

Just Black - Track Flexible Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 105

Length (in): 4 1/8

Width (mm): 5

Width (in): 3/16

Height (mm): 11

Height (in): 7/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

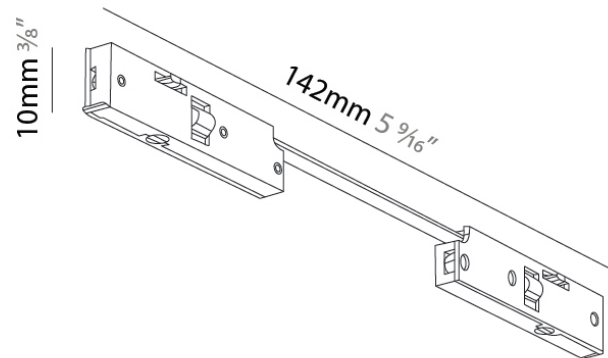

A3JB-SUS-SYS COMPONENTS

A3T374

DESCRIPTION

Just Black - Track Linear Connector

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 68

Length (in): 2 ¹¹/₁₆

Width (mm): 5

Width (in): 3/16

Height (mm): 11

Height (in): 7/16


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

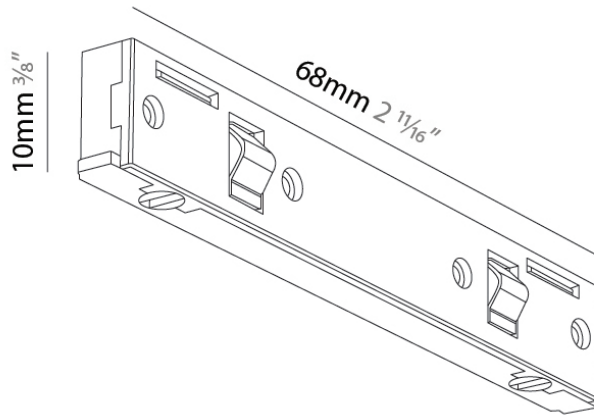

A3JB-SUS-SYS COMPONENTS

A3T376

DESCRIPTION

Just Black System - Bilo Insert - LED 3W, 3000K, 88lm - Non Dimming

GENERAL

Series: Just Black System _____
 Brand: Prolicht _____
 Division: Architectural _____
 Subcategory: Modular _____

PHYSICAL

Shape: Sphere _____
 Diameter (mm): 60 _____
 Diameter (in): 2 ³/₈ _____
 Height (mm): 60 _____
 Height (in): 2 ³/₈ _____
 Light Distribution: Omnidirectional _____
 Diffuser: PMMA - Opal _____
 Fixture Finish: BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED _____
 Input Wattage (W): 3 _____
 Total Output Wattage (W): 2.7 _____
 Dimming: Non-Dimmable _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 24 _____

LED


Color Temperature (°K): 3000 _____
 Max. Delivered Lumen (lm): 88 _____
 Nominal Lumen (lm): 200 _____
 CRI: >92 CRI _____
 Lamp Life (hrs): 80000 _____

OPTICAL

Beam Angle: 180 _____
 Adjustability: Fixed _____

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
 IP rating: IP20 _____

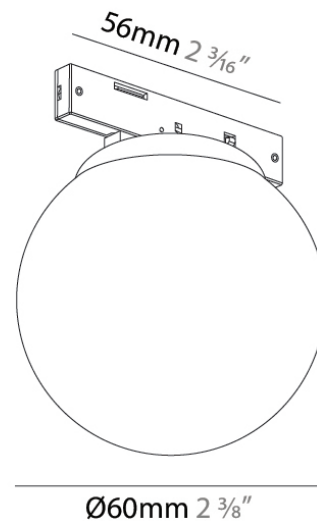

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3JB-SUS-SYS COMPONENTS

A3T377

DESCRIPTION

Just Black System - Flexline Insert - 890mm, LED 7W, 142lm, 2700K

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Length (mm): 890
 Length (in): 35 7/16
 Width (mm): 5
 Width (in): 3/16
 Height (mm): 10
 Height (in): 3/8
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 7
 Total Output Wattage (W): 6.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED



Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700
 Max. Delivered Lumen (lm): 142
 Nominal Lumen (lm): 172
 CRI: >95 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 110
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

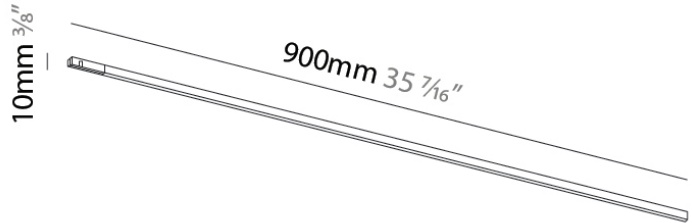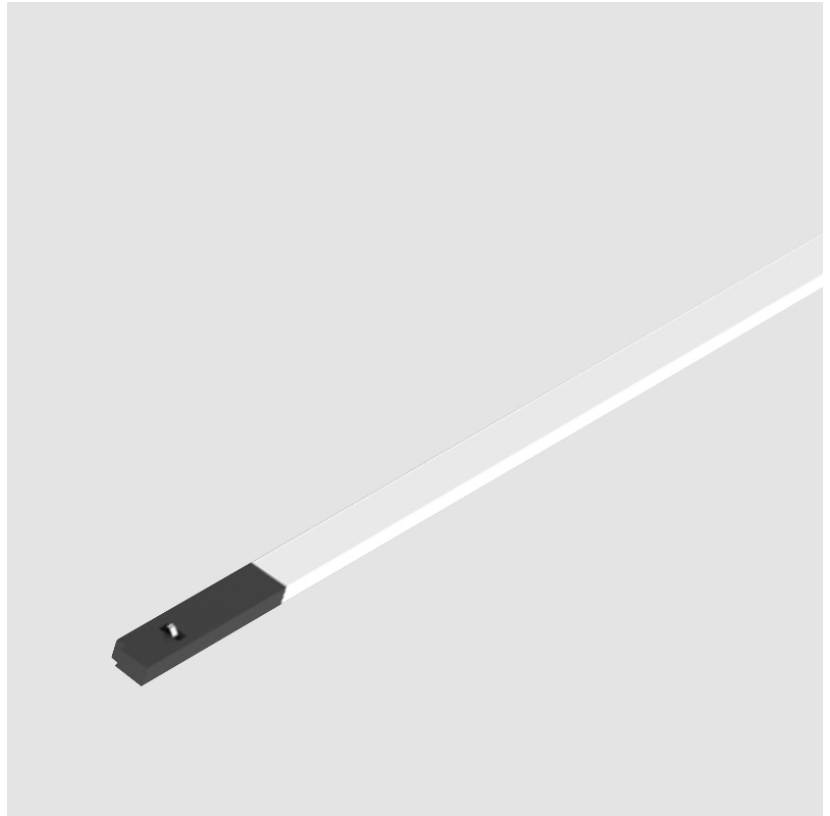

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3JB-SUS-SYS COMPONENTS

A3T378

DESCRIPTION

Just Black System - Flexline Insert - 1890mm, LED 14W, 300lm, 2700K

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Length (mm): 1890
 Length (in): 74 ⁷/₁₆
 Width (mm): 5
 Width (in): 3/16
 Height (mm): 10
 Height (in): 3/8
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED



Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700
 Max. Delivered Lumen (lm): 300
 Nominal Lumen (lm): 300
 CRI: >95 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 110
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

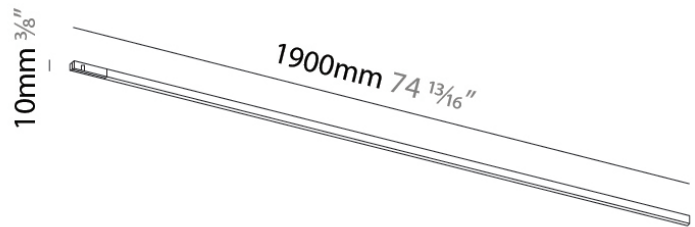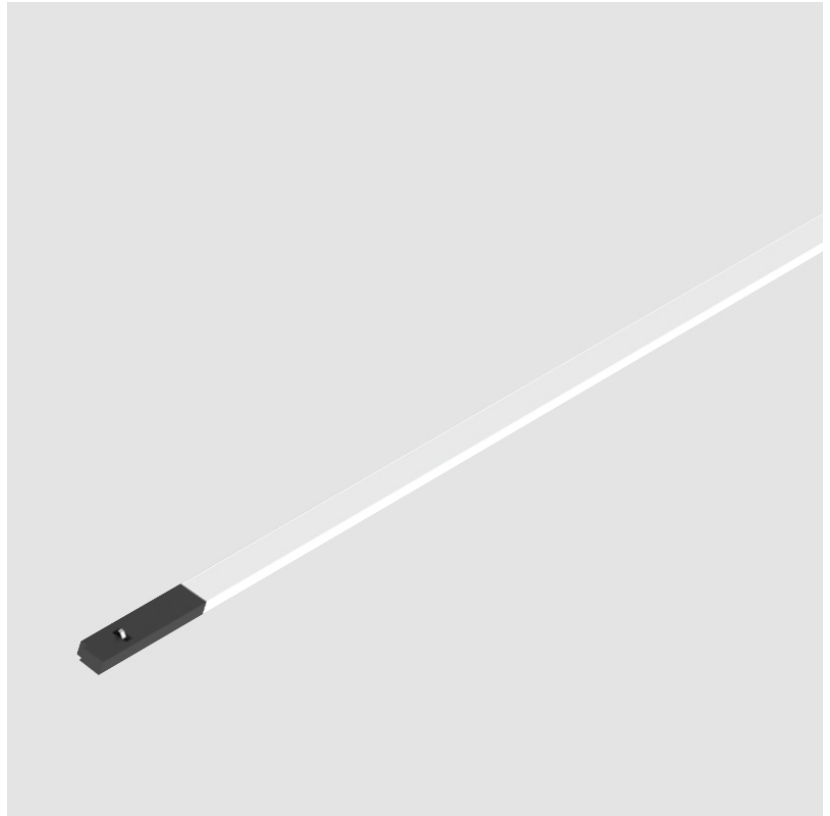

A3JB-SUS-SYS COMPONENTS

A3T379

DESCRIPTION

Just Black System - Flute Insert - LED 6W, 3000K, 407lm - Non Dimmable

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Shape: Sphere

Diameter (mm): 70

Diameter (in): 2 ¾

Height (mm): 225

Height (in): 8 7/8

Light Distribution: Direct

Fixture Finish: BLK

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED

Input Wattage (W): 6

Total Output Wattage (W): 5.5

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 24

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 3000

Max. Delivered Lumen (lm): 469

Nominal Lumen (lm): 407

CRI: >90 CRI

Lamp Life (hrs): 80000

OPTICAL


Beam Angle: 26

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

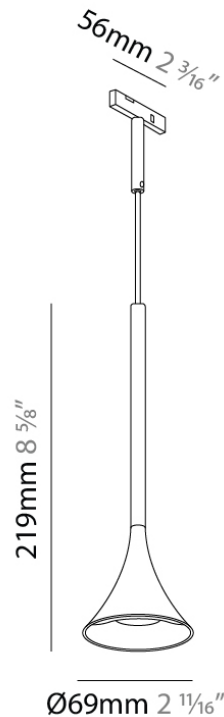

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3JB-SUS-SYS COMPONENTS

A3T380

DESCRIPTION

Just Black System - Hangover Insert - LED 3W, 3000K, 144lm - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Diameter (mm): 18
 Diameter (in): 11/16
 Height (mm): 300
 Height (in): 11 13/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Dali Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 144
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 22
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

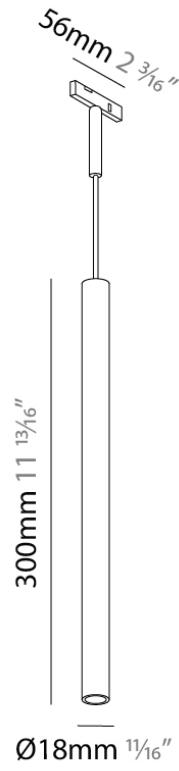

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3JB-SUS-SYS COMPONENTS

A3T381

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 138lm, Beam 18° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 25
 Diameter (in): 1
 Height (mm): 48
 Height (in): 1 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 138
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 18
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

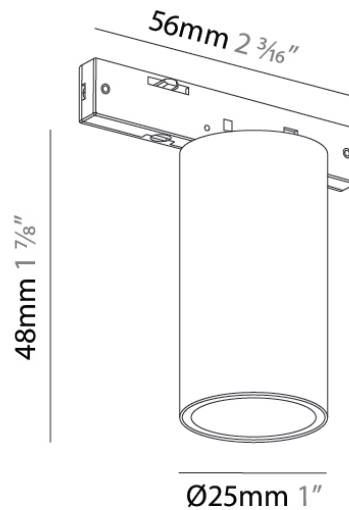

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3JB-SUS-SYS COMPONENTS

A3T382

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 136lm, Beam 22° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 25
 Diameter (in): 1
 Height (mm): 48
 Height (in): 1 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 136
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 22
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

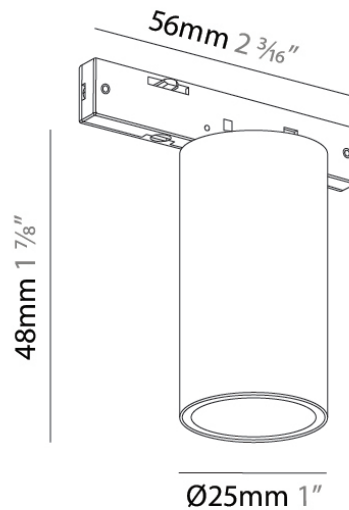

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3JB-SUS-SYS COMPONENTS

A3T383

DESCRIPTION

Just Black System - Imagine Insert Ø25mm - LED 3W, 3000K, 136lm, Beam 32° - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 25
 Diameter (in): 1
 Height (mm): 48
 Height (in): 1 7/8
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 3
 Total Output Wattage (W): 2.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 124
 Nominal Lumen (lm): 168
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 32
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

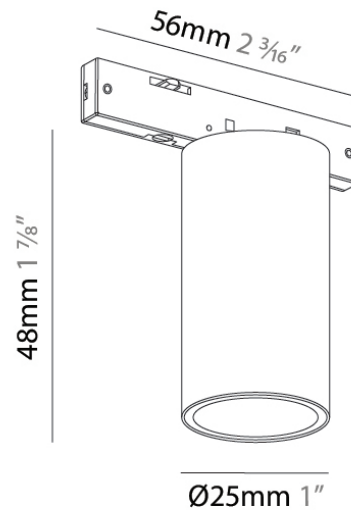

A3JB-SUS-SYS COMPONENTS

A3T384-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 298lm, Beam 20° - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 83
 Height (in): 3 1/4
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 298
 Nominal Lumen (lm): 469
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 20
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

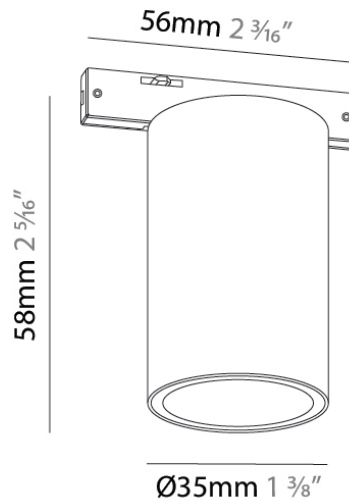

A3JB-SUS-SYS COMPONENTS

A3T385-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 343lm, Beam 26° - Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 83
 Height (in): 3 1/4
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 6
 Total Output Wattage (W): 5.5
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 343
 Nominal Lumen (lm): 469
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 26
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

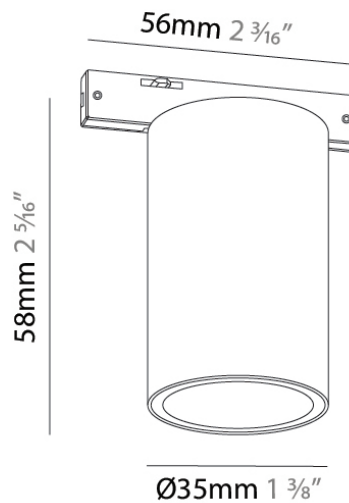

A3JB-SUS-SYS COMPONENTS

A3T386-

DESCRIPTION

Just Black System - Imagine Insert Ø35mm - LED 6W, 3000K, 364lm, Beam 34° - Non Dimmable

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Shape: Cylinder

Diameter (mm): 35

Diameter (in): 1 ³/₈

Height (mm): 83

Height (in): 3 ¹/₄

Light Distribution: Direct

Fixture Finish: BLK

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED

Input Wattage (W): 6

Total Output Wattage (W): 5.5

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 24

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 3000

Max. Delivered Lumen (lm): 364

Nominal Lumen (lm): 469

CRI: >90 CRI

Lamp Life (hrs): 80000

OPTICAL


Beam Angle: 34

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

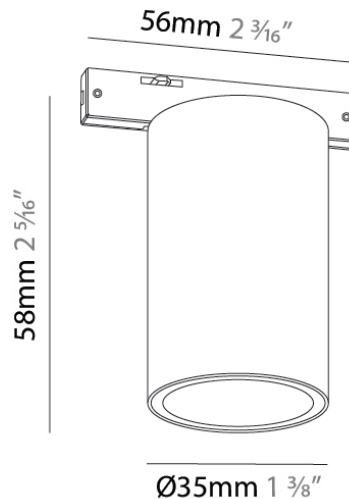

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3JB-SUS-SYS COMPONENTS

A3T387-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 492lm, Beam 18° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 3/4
 Height (mm): 63
 Height (in): 2 1/2
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 429
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 18
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

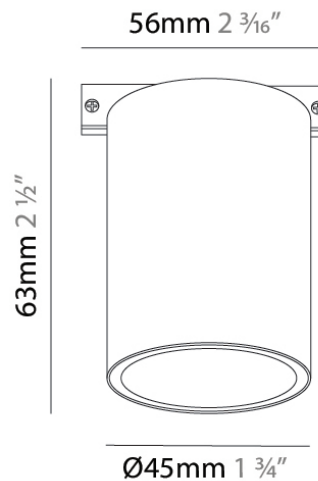

A3JB-SUS-SYS COMPONENTS

A3T388-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 533lm, Beam 20° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 ¾
 Height (mm): 63
 Height (in): 2 ½
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 533
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 20
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

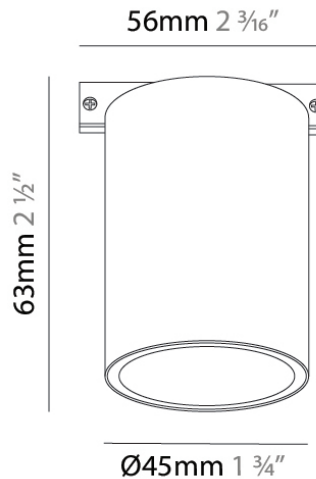

A3JB-SUS-SYS COMPONENTS

A3T389-

DESCRIPTION

Just Black System - Imagine Insert Ø45mm - LED 9W, 3000K, 504lm, Beam 30° -Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 ¾
 Height (mm): 63
 Height (in): 2 ½
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 504
 Nominal Lumen (lm): 720
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 30
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

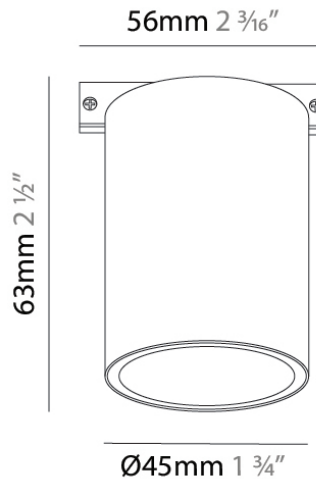

A3JB-SUS-SYS COMPONENTS

A3T390-

DESCRIPTION

Just Black System - Invader Insert Ø60mm - LED 5W, 3000K, 411lm, Beam 26° - Dimmable

GENERAL

Series: Just Black System
Brand: Prolicht
Division: Architectural
Subcategory: Modular

PHYSICAL

Shape: Cylinder
Diameter (mm): 60
Diameter (in): 2 ³/₈
Height (mm): 43
Height (in): 1 ¹¹/₁₆
Light Distribution: Direct
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5
Total Output Wattage (W): 4.5
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 411
Nominal Lumen (lm): 451
CRI: >90 CRI
Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 26
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

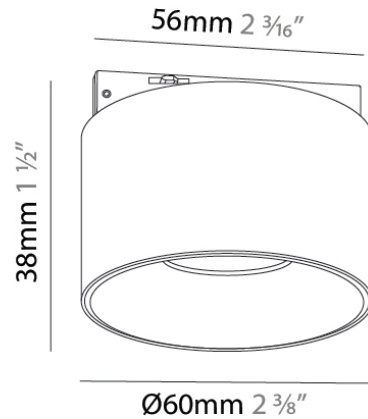

A3JB-SUS-SYS COMPONENTS

A3T391

DESCRIPTION

Just Black System - Ledline Insert - 600mm, LED 13W, 600lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 600
 Length (in): 23 5/8
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 13
 Total Output Wattage (W): 11.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 600
 Nominal Lumen (lm): 600
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 92
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

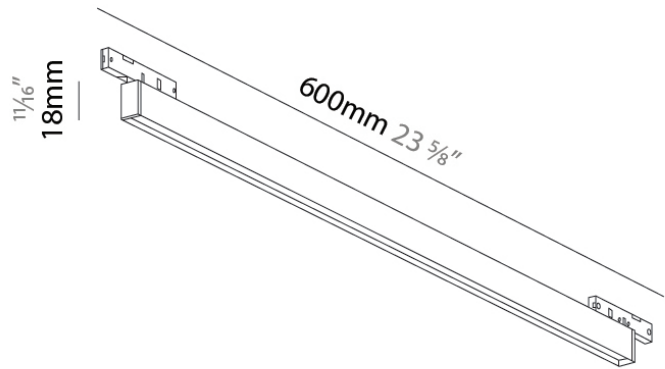

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3JB-SUS-SYS COMPONENTS

A3T392

DESCRIPTION

Just Black System - Ledline Insert - 900mm, LED 20W, 900lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 900
 Length (in): 35 7/16
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 20
 Total Output Wattage (W): 18.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 900
 Nominal Lumen (lm): 900
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 92
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

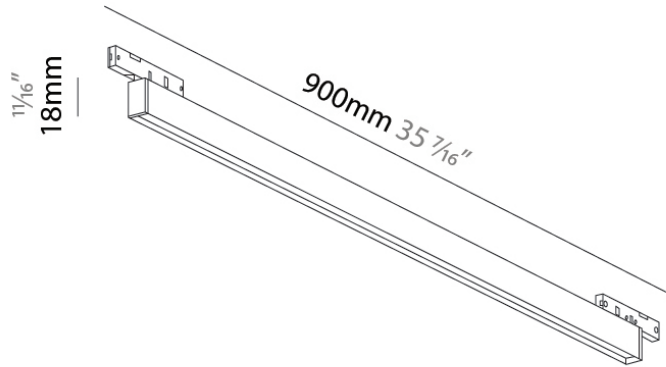

A3JB-SUS-SYS COMPONENTS

A3T393

DESCRIPTION

Just Black System - Magiq Insert - 200mm, LED 9W, 420lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 196
 Length (in): 7 11/16
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 420
 Nominal Lumen (lm): 420
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 32
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

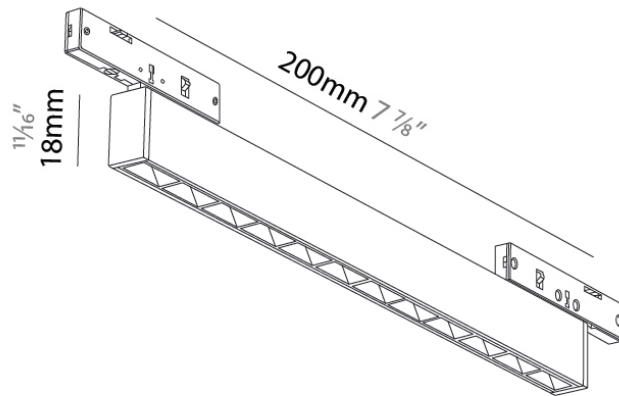

A3JB-SUS-SYS COMPONENTS

A3T394

DESCRIPTION

Just Black System - Magiq Insert - 300mm, LED 14W, 632lm, 3000K - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 292
 Length (in): 11 1/2
 Width (mm): 10
 Width (in): 3/8
 Height (mm): 18
 Height (in): 11/16
 Light Distribution: Direct
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 14
 Total Output Wattage (W): 12.7
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 632
 Nominal Lumen (lm): 633
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 34
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

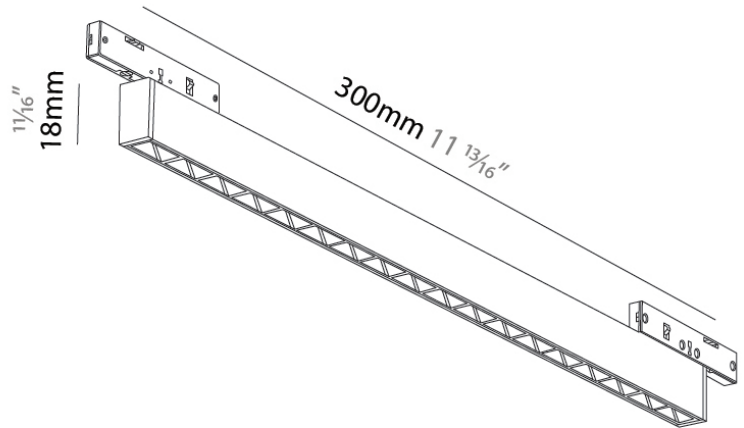

A3JB-SUS-SYS COMPONENTS

A3T395

DESCRIPTION

Just Black System - Sign Insert - Ø138mm, LED 15W, 1050lm, 3000K - Non Dimmable - Non Dimmable

GENERAL

Series: Just Black System
 Brand: Prolicht
 Division: Architectural
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 138
 Diameter (in): 5 7/16
 Height (mm): 34
 Height (in): 1 5/16
 Light Distribution: Direct
 Diffuser: PMMA - Opal
 Fixture Finish: BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 15
 Total Output Wattage (W): 13.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 24

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 1050
 Nominal Lumen (lm): 1050
 CRI: >90 CRI
 Lamp Life (hrs): 80000

OPTICAL

Beam Angle: 96
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

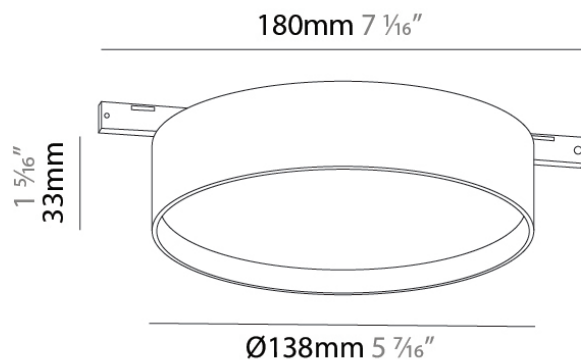

A3JB-SUS-SYS COMPONENTS

A3T397

DESCRIPTION

Just Black - Track Driver 100W ON/OFF

GENERAL

Series: Just Black System

Brand: Prolicht

Division: Architectural

Subcategory: Modular

PHYSICAL

Length (mm): 295

Length (in): $11 \frac{5}{8}$

Width (mm): 43

Width (in): $1 \frac{11}{16}$

Height (mm): 30

Height (in): $1 \frac{3}{16}$

ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



LEGEND

| | | |
|--|--|--|
|  floor-mounted |  pivotable |  special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  wall and ceiling: recessed and surface mounted |  rotating |  warm dim / natural dimming LED |
|  ceiling-mounted and wall-mounted |  illuminate tilted |  rechargeable battery powered |
|  wall-mounted |  color of suspension cable |  fixture with natural vivid LED (upon request) |
|  omni-directional light distribution |  length of suspension cable |  color rendering index |
|  direct light distribution |  reflector degree selection |  color temperature |
|  direct/indirect light distribution |  super spot |  lumen (luminous flux) |
|  indirect light distribution |  lens |  efficacy (lumens per watt) |
|  asymmetric light distribution |  lens pack |  Unified Glare Rating (UGR) range from 5-40 |
|  aura light distribution |  shine ring |  marine grade (AISI 316 stainless steel) |
|  round wall or ceiling cut-out |  integrated shine ring with diffuser |  walk on |
|  square wall or ceiling cut-out |  free individual colors 01-29 |  drive on |
|  the supplied jig specifies the cutout dimensions |  individual colors: 00 (free of charge), 01-25 (extra charge) |  Dark Sky Compliance |
|  minimum distance (meters) lamp - object |  luminaire part to be colored (F1) |  Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  recessed depth |  luminaire part to be colored (F2) |  lamp protected against explosion |
|  ceiling thickness in mm |  luminaire part to be colored (F3) |  blown glass using traditional methods by master glass blower |
|  ceiling thickness selection |  luminaire part to be colored (F4) |  acoustic material |
|  dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  luminaire part to be colored (F5) |  protection class I, protection insulation |
|  included or excluded LED driver/transformer/control gear |  color of 3-circuit adaptor |  protection class II, protection insulation |
|  separately switchable |  indirect diffuser |  ETL Certified to UL and CSA Standards |
|  sensor |  direct diffuser |  UL Certified to UL and CSA Standards |
|  remote control |  ball-proof (upon request) |  CSA Certified to UL and CSA Standards |
|  available upon request |  accessory |  Certified for North American Standards |

IP RATING

| | |
|--|--|
|  IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  IP65 | protected against ingress of dust protected against jets of water |
|  IP66 | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  IP67 | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|--|---|
|  IK01 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  IK03 | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  IK06 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  IK08 | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |