

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380203-

DESCRIPTION

Minimal Track - Disq Round Aura Cover

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 135

Diameter (in): 5 5/16

Height (mm): 5

Height (in): 3/16

Weight (kg): 0.023

Weight (lbs): 0.051



Fixture Finish: YEL / ORA / RED / BLU / GRN

Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

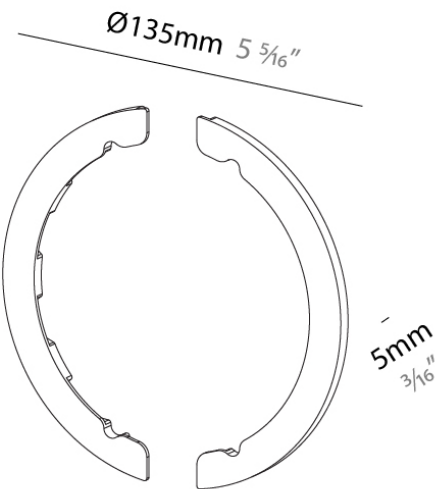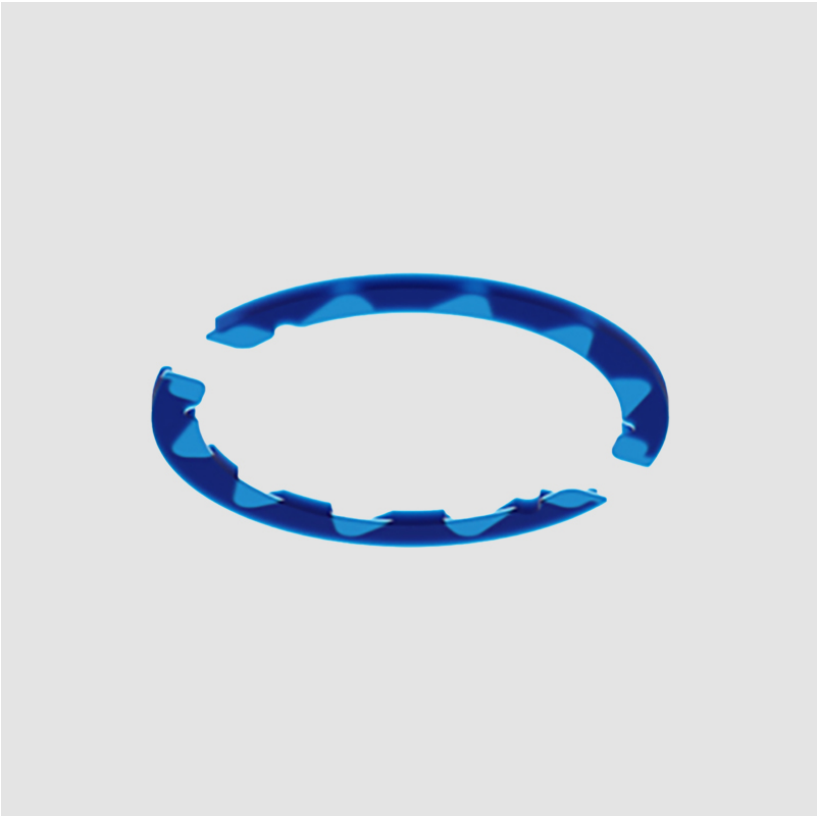

A3MINTRK-SUR-SYS COMPONENTS

A380204-

DESCRIPTION

Minimal Track - Disq Square Aura Cover

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Square

Length (mm): 144

Length (in): 5 11/16

Width (mm): 58

Width (in): 2 3/16

Height (mm): 5

Height (in): 3/16

Weight (kg): 0.023

Weight (lbs): 0.051

Fixture Finish: YEL / ORA / RED / BLU / GRN


Fixture Material: Plastic

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

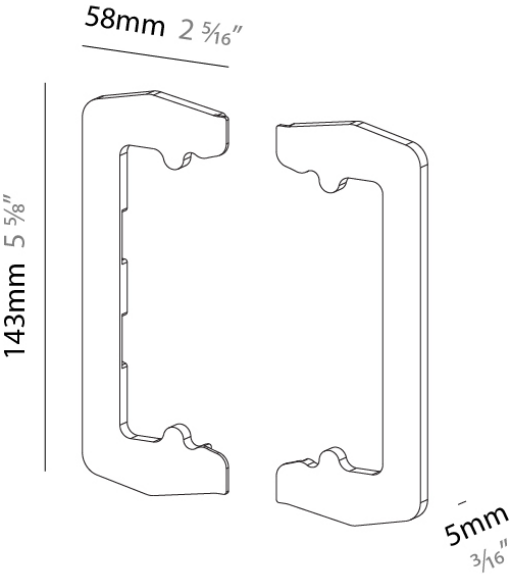

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380205-

DESCRIPTION

Snooker Insert for Minimal Track - 6.5W LED (Zhaga Standard) - 455lm, 48Vdc, CRI90 (DALI Dimming Only) - Optic: 32°/58° - Cable Options

GENERAL

Series: Snooker
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13⁄16
Height (mm): 71
Height (in): 2 13⁄16
Light Distribution: Direct
Weight (kg): 0.26
Weight (lbs): 0.04
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.5
Total Output Wattage (W): 6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

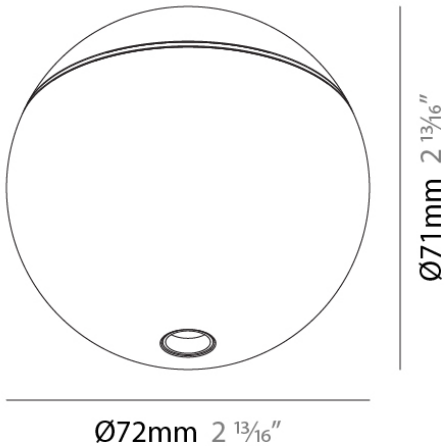

A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380206-

DESCRIPTION

Hangover Plug Ø28 - 150mm LED (Zhaga Standard) 6.5W Max.  
446lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 150  
Height (in): 5 7/8  
Light Distribution: Direct  
Weight (kg): 0.124  
Weight (lbs): 0.273  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI/0-10V Dimming with bridge

LED



Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 377-389 / 400-412 / 433-446  
Nominal Lumen (lm): 455  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 26 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

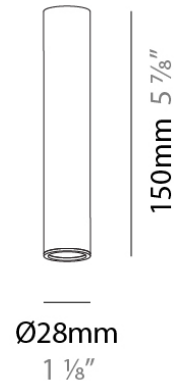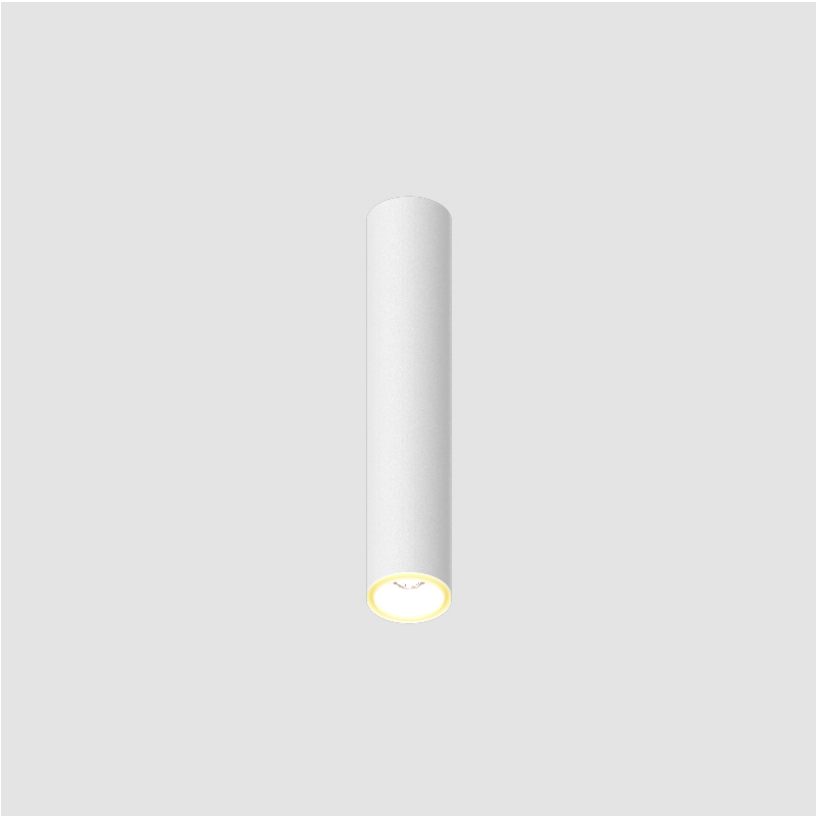



A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380207-

DESCRIPTION

Hangover Plug Ø28 - 300mm LED (Zhaga Standard) 6.5W Max.  
446lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1⁄8  
Height (mm): 300  
Height (in): 11 13⁄16  
Light Distribution: Direct  
Weight (kg): 0.24  
Weight (lbs): 0.529  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 377-389 / 400-412 / 433-446  
Nominal Lumen (lm): 455 / 482 / 522  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 26 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

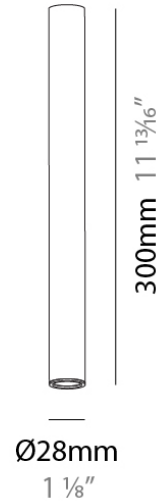

A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380208-

DESCRIPTION

Hangover Plug Ø28 - 450mm LED (Zhaga Standard) 6.5W Max. 446lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1⁄8  
Height (mm): 450  
Height (in): 17 11⁄16  
Light Distribution: Direct  
Weight (kg): 0.355  
Weight (lbs): 0.783  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 500  
Upon Request: DALI

LED



Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 377-389 / 400-412 / 433-446  
Nominal Lumen (lm): 455 / 482 / 522  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 26 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

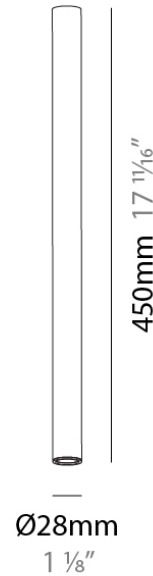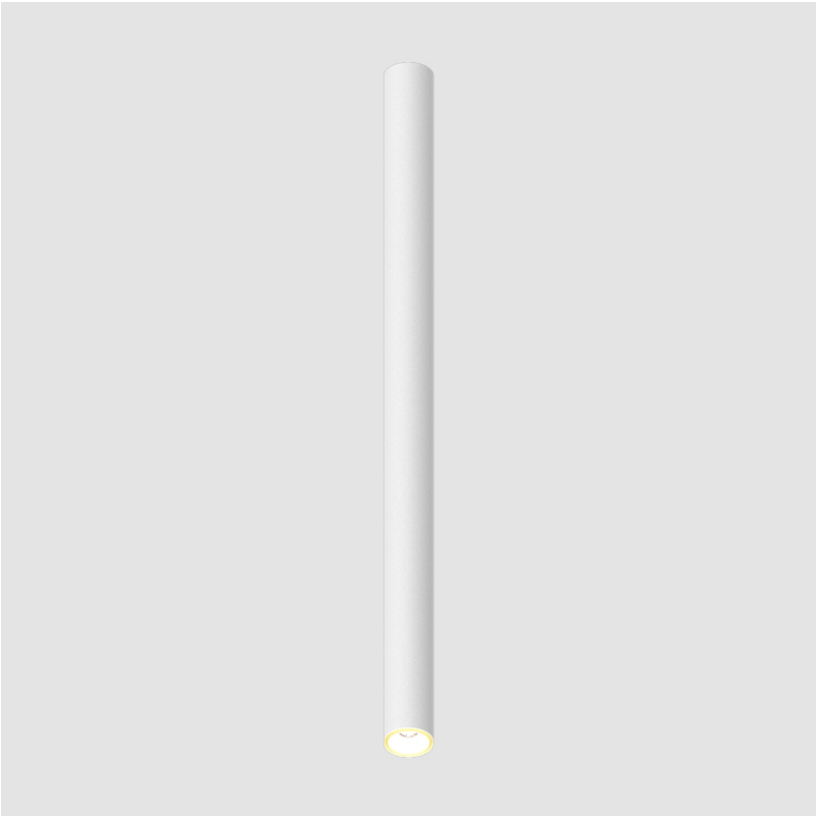

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380209-

DESCRIPTION

Hangover Plug Ø28 Micro Dot - 150mm LED (Zhaga Standard)  
6.5W Max. 352lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 150  
Height (in): 5 7/8  
Light Distribution: Direct  
Weight (kg): 0.124  
Weight (lbs): 0.273  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 500  
Upon Request: DALI

LED

Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 280-307 / 297-325 / 322 - 352  
Nominal Lumen (lm): 455.22 / 482 / 522.17  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 32 / 58  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



PROJECT
TYPE
NOTES
QUANTITY
DATE

A380210-

DESCRIPTION

Hangover Plug Ø28 Micro Dot - 300mm LED (Zhaga Standard)  
6.5W Max. 352lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1/8  
Height (mm): 300  
Height (in): 11 13/16  
Light Distribution: Direct  
Weight (kg): 0.24  
Weight (lbs): 0.529  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 280-307 / 297-325 / 322 - 352  
Nominal Lumen (lm): 455.22 / 482 / 522.17  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 26 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

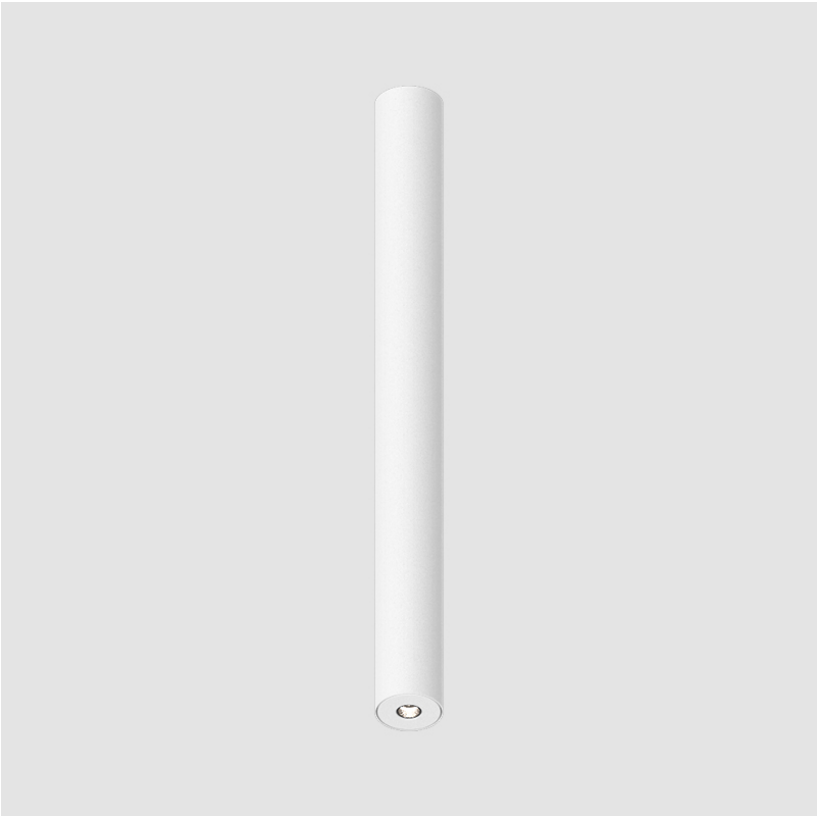

A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380211-

DESCRIPTION

Hangover Plug Ø28 Micro Dot - 450mm LED (Zhaga Standard)  
6.5W Max. 352lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 28  
Diameter (in): 1 1⁄8  
Height (mm): 450  
Height (in): 17 11⁄16  
Light Distribution: Direct  
Weight (kg): 0.355  
Weight (lbs): 0.783  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 280-307 / 297-325 / 322 - 352  
Nominal Lumen (lm): 455.22 / 482 / 522.17  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 33 / 66  
Beam Angle: 26 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

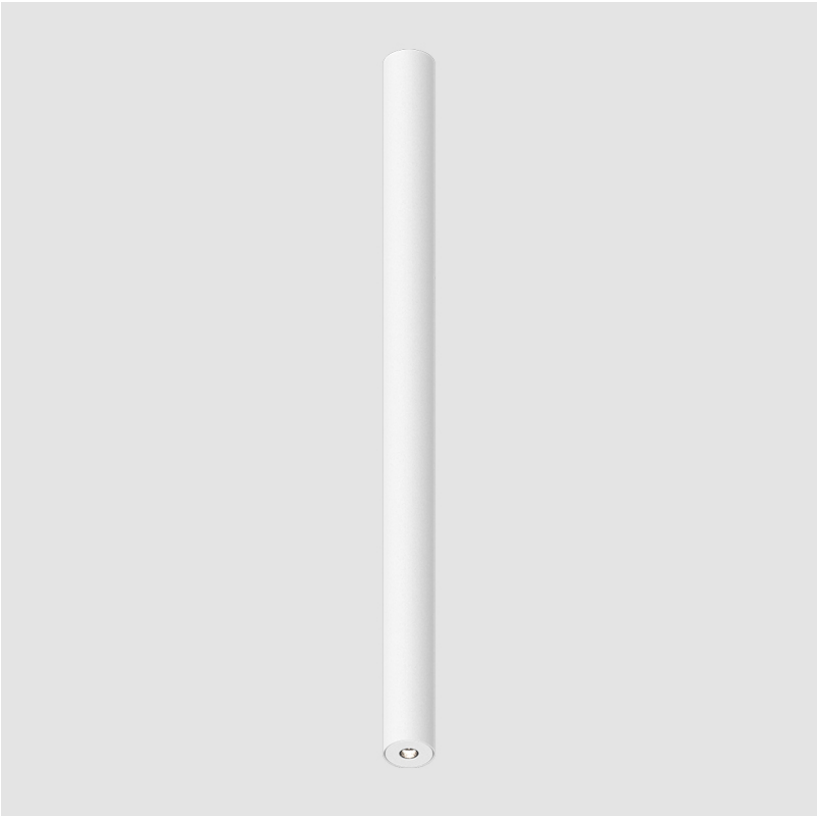

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380212-

DESCRIPTION

Hangover Plug Ø40 - 150mm LED (Zhaga Standard) 9W Max.  
868lm, 48Vdc, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 150  
Height (in): 5 7/8  
Light Distribution: Direct  
Weight (kg): 0.293  
Weight (lbs): 0.646  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 9  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 752 - 782 / 787 - 818 / 834 - 868  
Nominal Lumen (lm): 969.41 / 1014 / 1075.27  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 44 / 55  
Beam Angle: 40 / 52  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

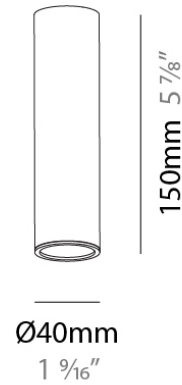

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380214-

DESCRIPTION

Plug Connector - 2000mm or 4000mm Cable

GENERAL

Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL


Length (mm): 151
Length (in): 5 15⁄16
Width (mm): 19
Width (in): 3⁄4
Height (mm): 52
Height (in): 2 1⁄16
Max. Overall Height (mm): 2052 / 4052
Max. Overall Height (in): 80 13⁄16
Weight (kg): 0.112
Weight (lbs): 0.247
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Accent Finish: BLK / WHI / ORA / RED / GRN
Fixture Material: Aluminum
Cable Details: 2000mm / 78 3⁄4" or 4000 / 157 1⁄2" Cable

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

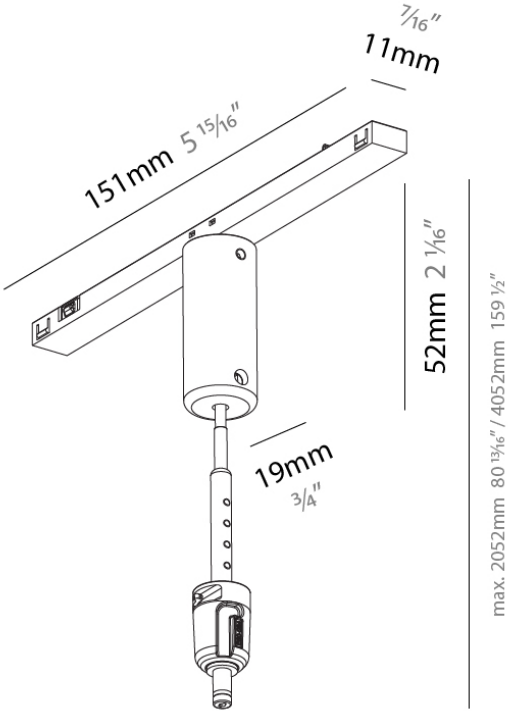

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380215-

DESCRIPTION

Plug Connector - 10000mm Cable

GENERAL

Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL


Length (mm): 151
Length (in): 5 15⁄16
Width (mm): 19
Width (in): 3⁄4
Height (mm): 52
Height (in): 2 1⁄16
Max. Overall Height (mm): 10052
Max. Overall Height (in): 395 3⁄4
Weight (kg): 0.112
Weight (lbs): 0.247
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum
Cable Details: 10,000mm / 393 11⁄16" Cable - Black

OPTICAL

Adjustability: Fixed
----------------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

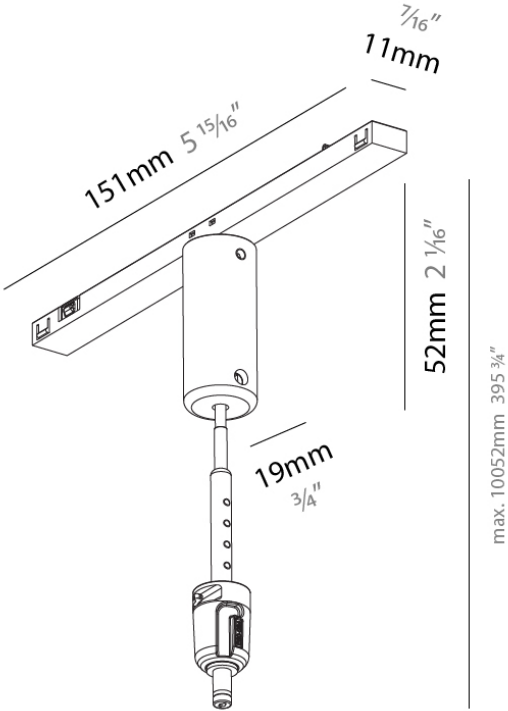



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380216-

DESCRIPTION

Plug Connector - 1100mm Cable

GENERAL

Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL


Length (mm): 151
Length (in): 5 15/16
Width (mm): 19
Width (in): 3/4
Height (mm): 52
Height (in): 2 1/16
Max. Overall Height (mm): 1152
Max. Overall Height (in): 45 3/8
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum
Cable Details: 1100mm / 43 5/16" Cable - Black

OPTICAL

Adjustability: Fixed
----------------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

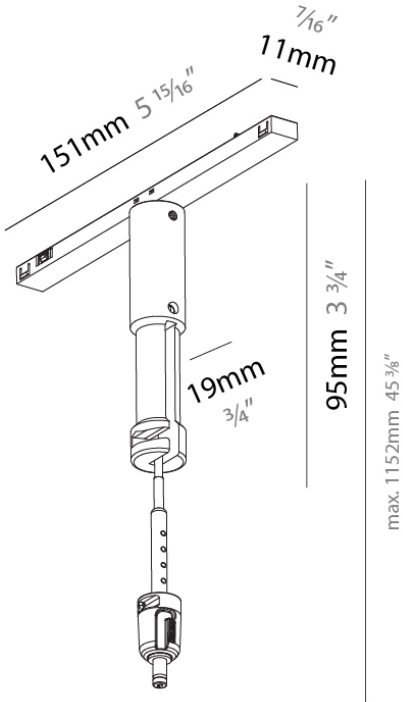

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380596-

DESCRIPTION

Microline Insert L=672mm, LED 8W, max. 429lm, CRI90

GENERAL

Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall / Ceiling
Subcategory: Modular

PHYSICAL

Shape: Rectangle
Length (mm): 674
Length (in): 26 9/16
Width (mm): 11
Width (in): 7/16
Height (mm): 7
Height (in): 1/4
Light Distribution: Direct
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 9.79
Total Output Wattage (W): 7.26
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 48
Upon Request: Dali/ 0-10V Dimming

LED



Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 386
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116
-----------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

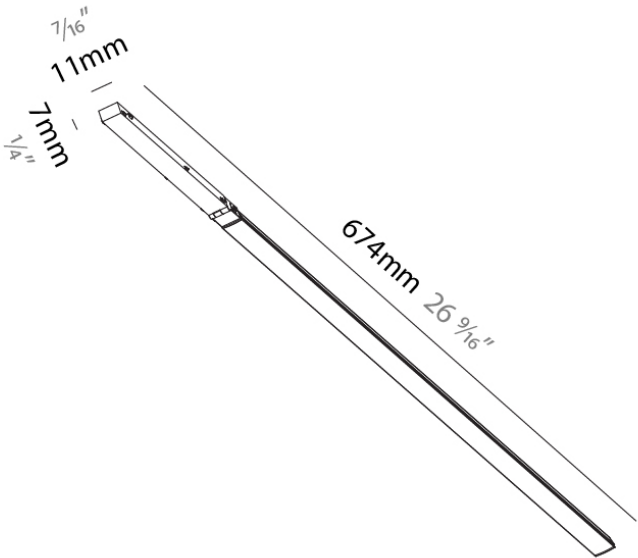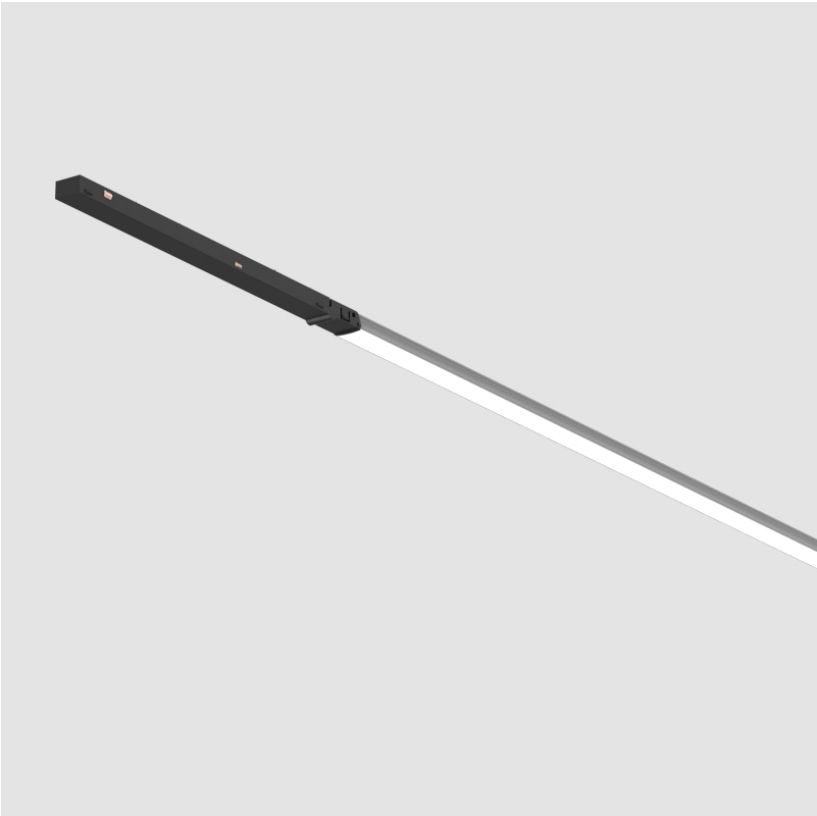

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380597-

DESCRIPTION

Microline Insert for Minimal Track Surface - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

GENERAL

Series: Microline  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface  
Mounting Location: Wall / Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Rectangle  
Length (mm): 1174  
Length (in): 46 1/4  
Width (mm): 11  
Width (in): 7/16  
Height (mm): 7  
Height (in): 1/4  
Light Distribution: Direct  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 15.8  
Total Output Wattage (W): 14.4  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48  
Upon Request: Dali/ 0-10V Dimming

LED



Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000  
Max. Delivered Lumen (lm): 772  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

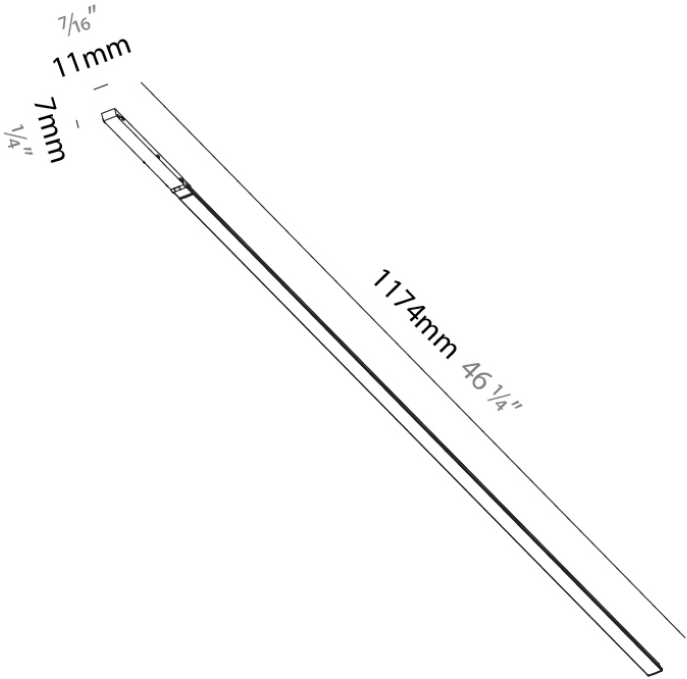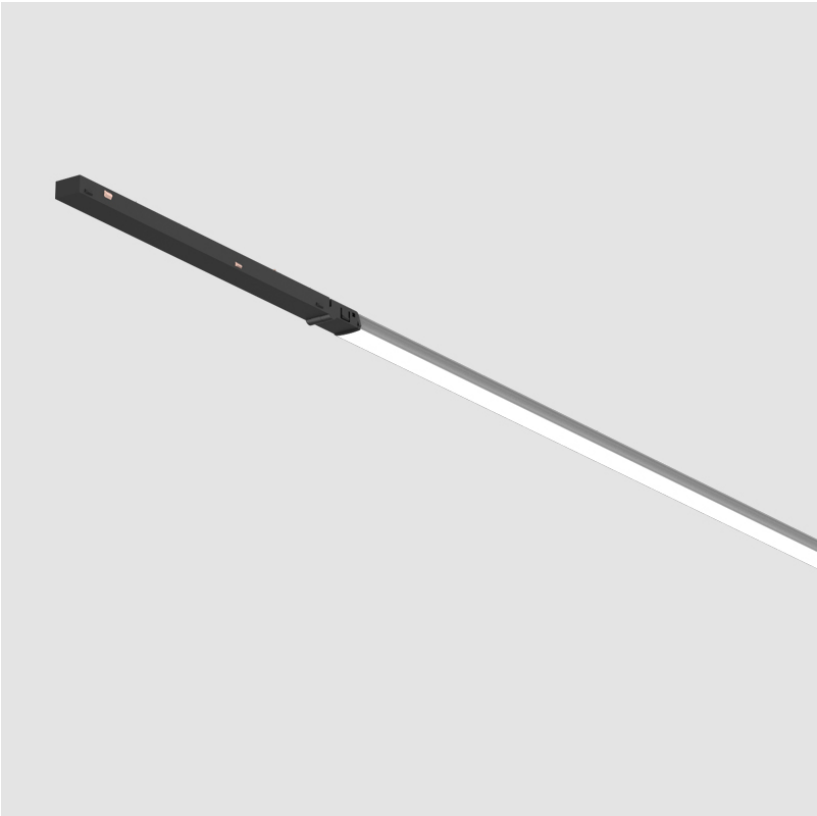

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380598-

DESCRIPTION

Microline Insert for Minimal Track Surface L=1670mm / 65 3/4",  
LED 24W, max. 1158lm, CRI90

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface  
Mounting Location: Wall / Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1674  
Length (in): 65 7/8  
Width (mm): 11  
Width (in): 7/16  
Height (mm): 7  
Height (in): 1/4  
Light Distribution: Direct  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 24  
Total Output Wattage (W): 21.8  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48  
Upon Request: Dali/ 0-10V Dimming

LED



Delivered Lumen Range: 1000 - 1999 lm  
Color Temperature (°K): 2700 / 3000  
Max. Delivered Lumen (lm): 1158  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

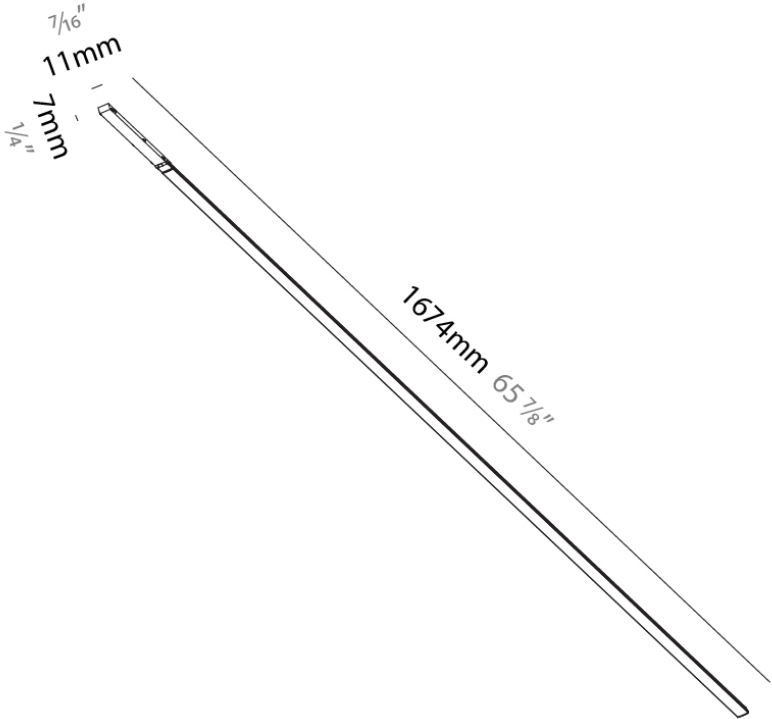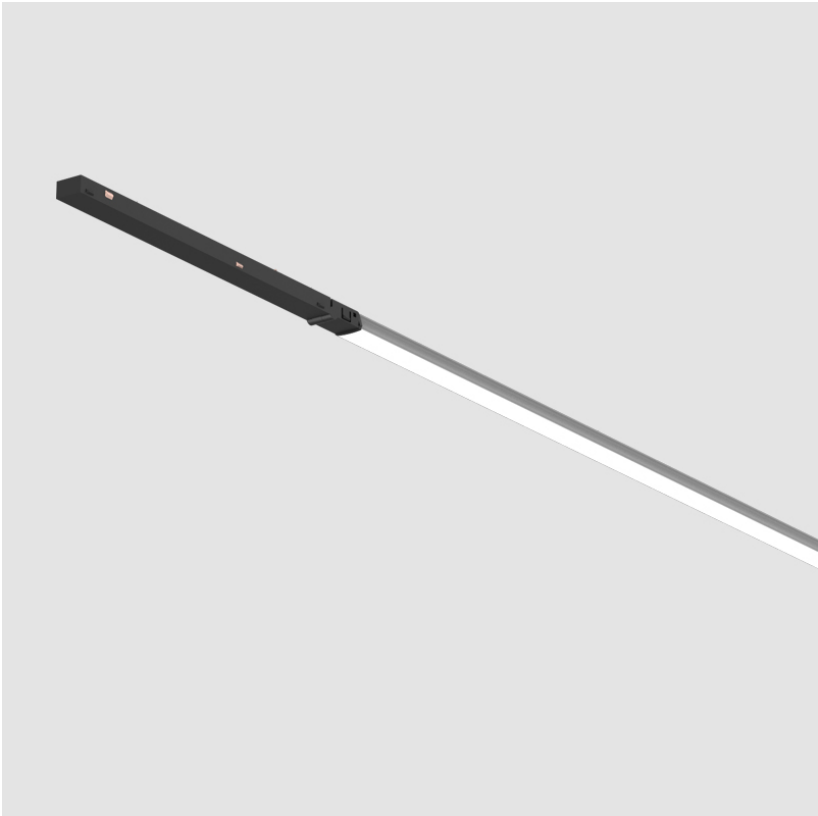

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380601-

DESCRIPTION

Hangover Plug Ø40 - 450mm LED (Zhaga Standard) 9W Max.  
868lm, 48Vdc, CRI90

GENERAL

Series: Hangover Plug  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 40  
Diameter (in): 1 9/16  
Height (mm): 450  
Height (in): 17 11/16  
Light Distribution: Direct  
Weight (kg): 0.481  
Weight (lbs): 1.06  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 9  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 695 / 726 / 755 / 770  
Nominal Lumen (lm): 969 / 1014 / 1054 / 1075  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 40 / 52  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

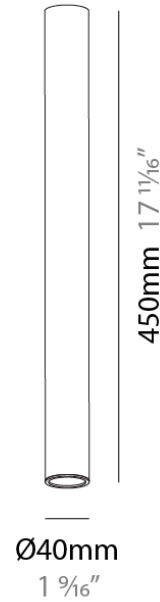

A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380602-

DESCRIPTION

Hangover Plug Ø75 - 150mm LED 9.8W Max. 951lm, 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 75  
Diameter (in): 2 15⁄16  
Height (mm): 150  
Height (in): 5 7⁄8  
Light Distribution: Direct  
Weight (kg): 0.481  
Weight (lbs): 1.06  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 9.8  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 857 / 896 / 932 / 951  
Nominal Lumen (lm): 969 / 1014 / 1054 / 1075  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 18 / 36 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

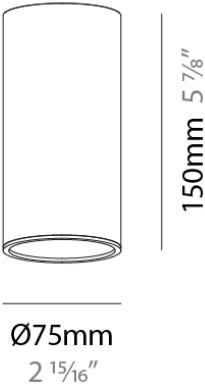

A3MINTRK-SUR-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380603-

DESCRIPTION

Hangover Plug Suspension Direct/Indirect Ø75 - 150mm LED  
9.8W Max. 1829lm, 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90  
- Shine Ring - Optics: 18° / 36° / 56° (Plug Connector not included  
- See Compnents)

GENERAL

Series: Hangover Plug  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 75  
Diameter (in): 2 15⁄16  
Height (mm): 150  
Height (in): 5 7⁄8  
Light Distribution: Direct / Indirect  
Weight (kg): 0.481  
Weight (lbs): 1.06  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 19.5  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 500 - 999 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 1757 / 1789 / 1796 / 1833  
Nominal Lumen (lm): 2370 / 2476 / 2510 / 2561  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 18 / 36 / 56  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

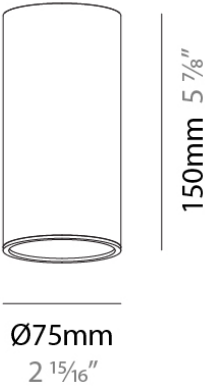

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380604-

DESCRIPTION

Magiq Micro for Minimal TracK - 5.5W LED (Zhaga Standard) - 2700K / 3000K / 3500K Max. 365lm, Beam Angle 54

GENERAL

Series: Magiq Micro  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track

PHYSICAL

Shape: Rectangle  
Length (mm): 300  
Length (in): 11 13/16  
Width (mm): 11  
Width (in): 7/16  
Height (mm): 7  
Height (in): 1/4  
Light Distribution: Direct  
Fixture Finish: BLK / WHI  
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED  
Input Wattage (W): 7.5  
Total Output Wattage (W): 5  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48  
Upon Request: Dali/ 0-10V Dimming

LED


Color Temperature (°K): 2700 / 3000 / 3500  
Max. Delivered Lumen (lm): 338 / 365  
Nominal Lumen (lm): 400  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 54

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

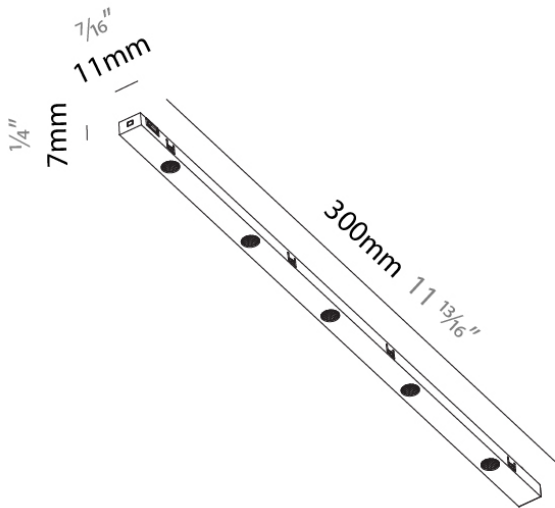



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380605-

DESCRIPTION

Minimal Track Surface Snooker - 6.5W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - 48Vdc - Chrome - CRI90 (DALI Dimming Only) - Optic: 32°/58°

GENERAL

Series: Snooker Metal  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Round  
Diameter (mm): 72  
Diameter (in): 2 13/16  
Height (mm): 71  
Height (in): 2 13/16  
Light Distribution: Direct  
Weight (kg): 0.26  
Weight (lbs): 0.04  
Fixture Finish: CHR  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 6  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 283 / 328 / 349 / 356  
Nominal Lumen (lm): 460 / 487 / 517 / 528  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

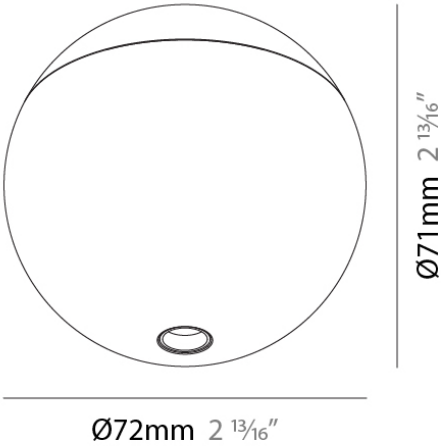

A3MINTRK-SUR-SYS COMPONENTS TRACK

A380606-

DESCRIPTION

Snooker Insert for Minimal Track Surface - 6.5W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K - 48Vdc - Chrome - CRI90 (DALI Dimming Only) - Shine Ring - Optic: 32°/58°

GENERAL

Series: Snooker Metal  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Round  
Diameter (mm): 72  
Diameter (in): 2 13/16  
Height (mm): 71  
Height (in): 2 13/16  
Light Distribution: Direct  
Weight (kg): 0.26  
Weight (lbs): 0.04  
Fixture Finish: CHR  
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 6.5  
Total Output Wattage (W): 6  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - 120/277Vac  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (mA): 500  
Upon Request: DALI

LED

Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
Max. Delivered Lumen (lm): 283 / 328 / 349 / 356  
Nominal Lumen (lm): 460 / 487 / 517 / 528  
CRI: >90 CRI  
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58  
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

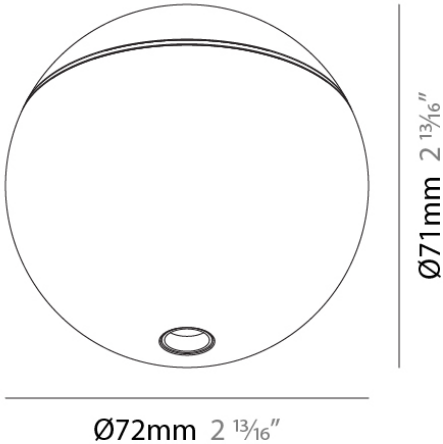

A3MINTRK-SUR-SYS COMPONENTS TRACK

A380611-

DESCRIPTION

Melt Mini Insert for Minimal Track Surface Ø280mm/11" x 270mm/10 5/8" - 6.2W LED - 3000K, 48Vdc, CRI90 - Diffuser: Smoke - 44lm, Chrome - 158lm, Gold - 235lm, Copper - 220lm - Cable Options

GENERAL

Series: Melt Mini  
Subseries: Melt Mini  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Round  
Diameter (mm): 280  
Diameter (in): 11  
Height (mm): 270  
Height (in): 10 5/8  
Light Distribution: Omnidirectional  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Holder Finish: WHI / BLK  
Accent Finish: NOF / COP / MIR / SSS  
Fixture Material: Glass / Metal  
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green  
Upon Request: 1,000mm and 10,000mm Black Cable Available

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 8

LED

Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 3000  
Max. Delivered Lumen (lm): Max 235  
Nominal Lumen (lm): 885  
CRI: >90 CRI  
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380758-

DESCRIPTION

Disq Round for Minimal Track Surface, LED (Zhaga Standard):  
5.1W LED (Zhaga Standard) - 2700K - 400lm - 48V (DALI Dimming  
Only) - Dibond Cover

GENERAL

Series: Disq Round
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Round
Diameter (mm): 206
Diameter (in): 8 1/8
Height (mm): 19
Height (in): 3/4
Light Distribution: Indirect
Weight (kg): 0.3
Weight (lbs): 0.66
Fixture Finish: COP / MIR / SST
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 5.1
Total Output Wattage (W): 4.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 96
Upon Request: DALI

LED



Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 180
-----------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

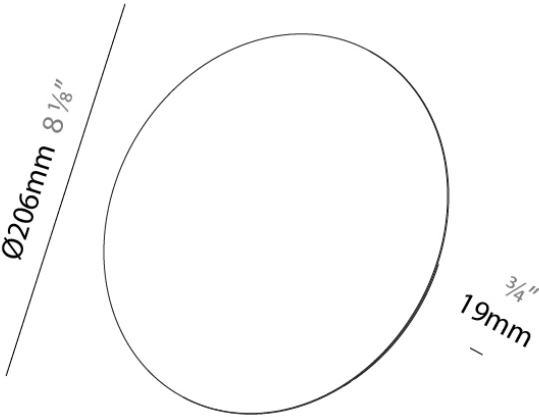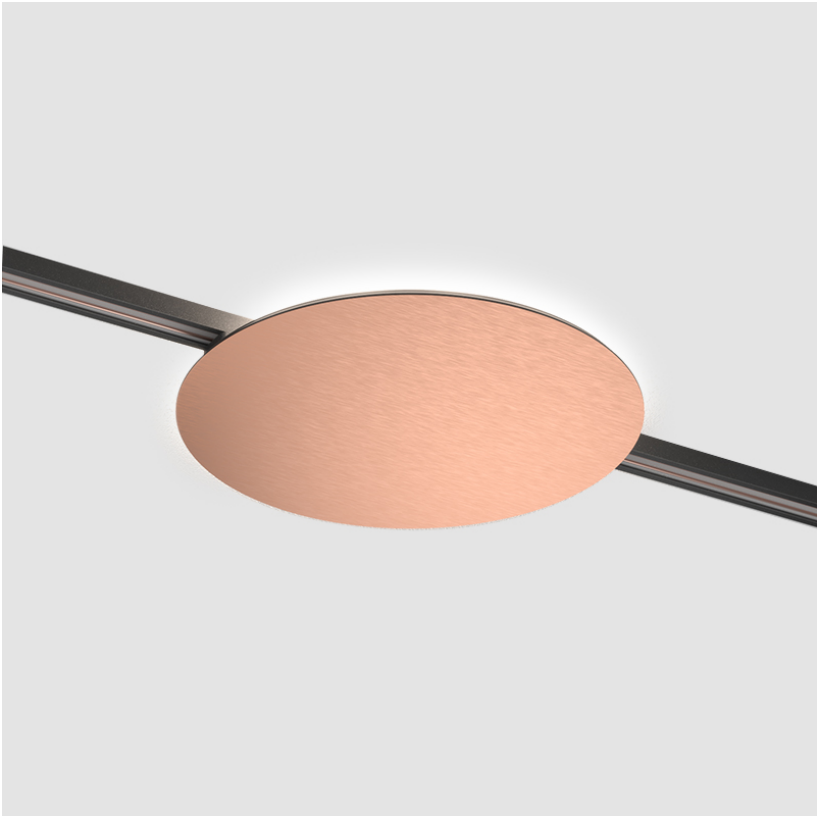

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380759-

DESCRIPTION

Disq Round for Minimal Round, LED (Zhaga Standard): 5.1W LED (Zhaga Standard) - 2700K - 400lm - 48V (DALI DIM Only) - Powder Coat Colors

GENERAL

Series: Disq Round
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Round
Diameter (mm): 206
Diameter (in): 8 1/8
Height (mm): 17
Height (in): 11/16
Light Distribution: Indirect
Weight (kg): 0.3
Weight (lbs): 0.66
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 5.1
Total Output Wattage (W): 4.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 96
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 180
-----------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

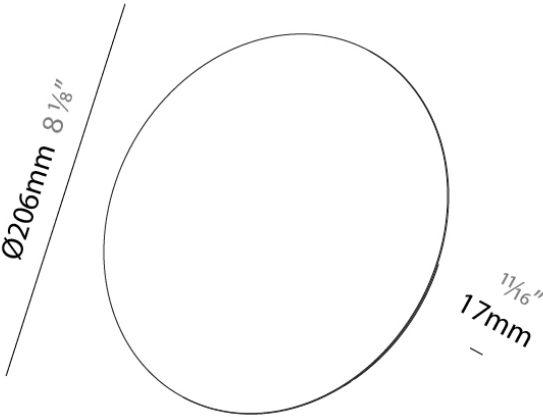

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380760-

DESCRIPTION

Disq Square for Minimal Track Surface, LED (Zhaga Standard):  
5.1W LED (Zhaga Standard) - 2700K - 400lm - 48V (DALI DIM Only) - DiBond Cover

GENERAL

Series: Disq Square
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Round
Length (mm): 216
Length (in): 8 ½
Width (mm): 216
Width (in): 8 ½
Height (mm): 17
Height (in): 11/16
Light Distribution: Indirect
Weight (kg): 0.307
Weight (lbs): 0.677
Fixture Finish: COP / MIR / SST
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 5.1
Total Output Wattage (W): 4.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 96
Upon Request: DALI

LED



Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 180
-----------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

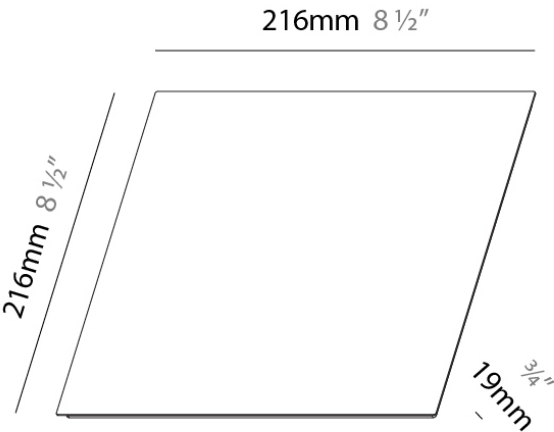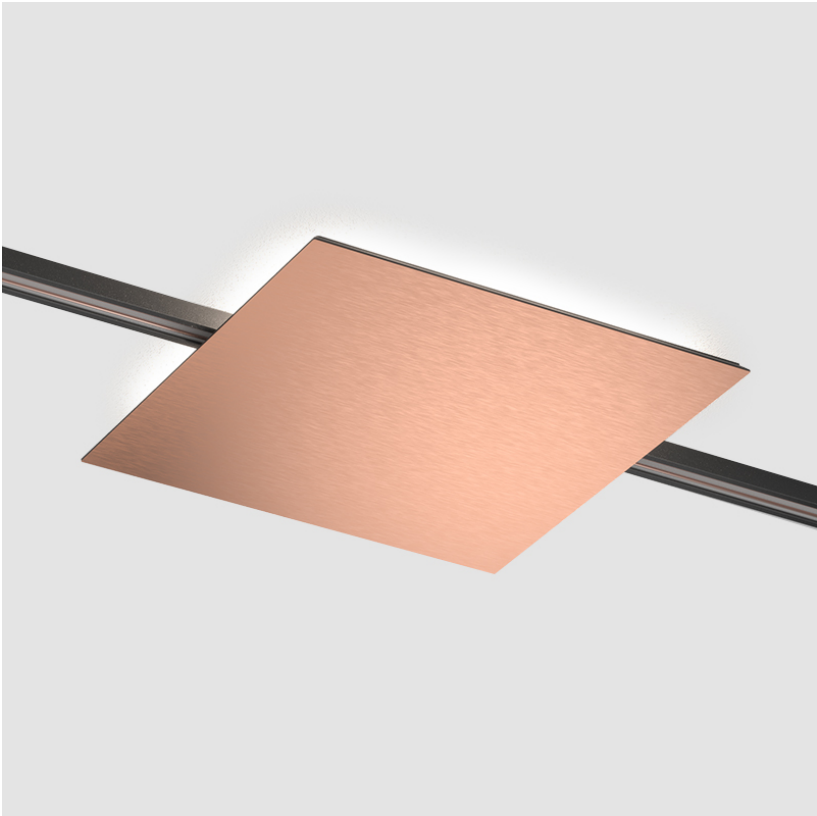

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380761-

DESCRIPTION

Disq Square for Minimal Track Surface, LED (Zhaga Standard):  
5.1W LED (Zhaga Standard) - 2700K - 400lm - 48V (DALI DIM  
Only) - Powder Coat Colors

GENERAL

Series: Disq Square
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL

Shape: Round
Length (mm): 216
Length (in): 8 ½
Width (mm): 216
Width (in): 8 ½
Height (mm): 17
Height (in): 11/16
Light Distribution: Indirect
Weight (kg): 0.4
Weight (lbs): 0.88
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 5.1
Total Output Wattage (W): 4.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - 120/277Vac
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 96
Upon Request: DALI

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700
Max. Delivered Lumen (lm): 400
Nominal Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 180
-----------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

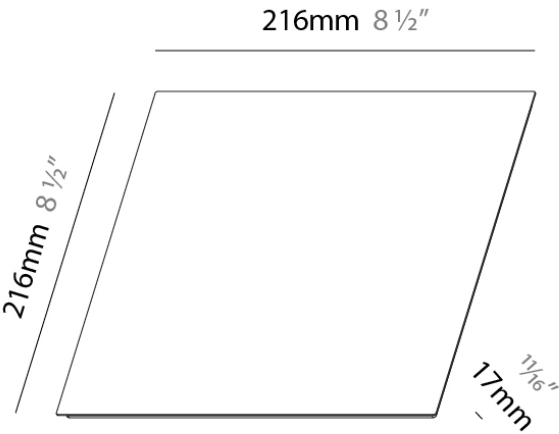

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T141-

DESCRIPTION

Minimal Track - Profile - 1000mm / 2000mm / 3000mm -  
Aluminum Profile - Black or White

GENERAL


Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Surface  
Mounting Location: Wall / Ceiling  
Subcategory: Profile

PHYSICAL

Shape: Rectangle  
Length (mm): 1000 / 2000 / 3000  
Length (in): 39 3/8  
Width (mm): 19  
Width (in): 3/4  
Height (mm): 10  
Height (in): 3/8  
Fixture Finish: BLK / WHI  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

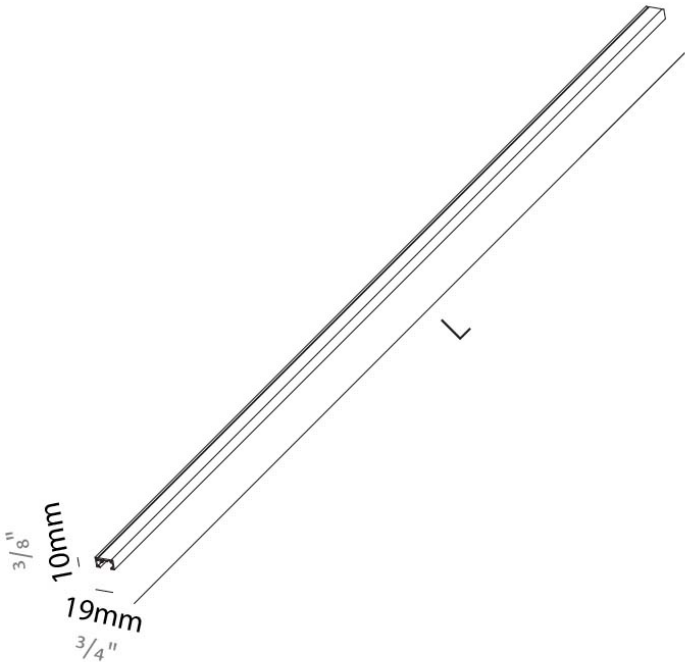



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T142-

DESCRIPTION

Minimal Track Wall / Ceiling Cable Loop

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL


Diameter (mm): 17  
Diameter (in): 11/16  
Height (mm): 30  
Height (in): 1 3/16  
Weight (kg): 0.01  
Weight (lbs): 0.022  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

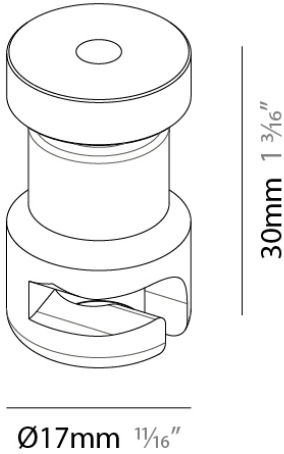

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3T143-

DESCRIPTION

Minimal Track Suspended Cable Roller

GENERAL

Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular

PHYSICAL


Diameter (mm): 17
Diameter (in): 11/16
Height (mm): 75
Height (in): 2 15/16
Weight (kg): 0.02
Weight (lbs): 0.044
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed
----------------------

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

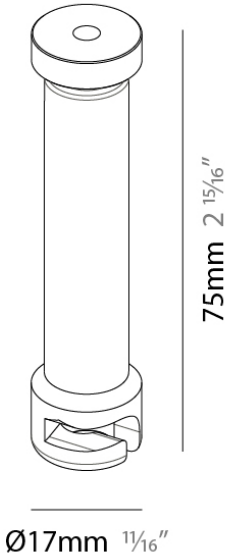

A3MINTRK-SUR-SYS COMPONENTS

A3T151-

DESCRIPTION

Minimal Track - Driver Box for End Feed - 48Vdc - Max 96W - Non-dimming - 120/277Vac

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 240  
Length (in): 9 7/16  
Width (mm): 70  
Width (in): 2 3/4  
Height (mm): 32  
Height (in): 1 1/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Total Output Wattage (W): 96  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

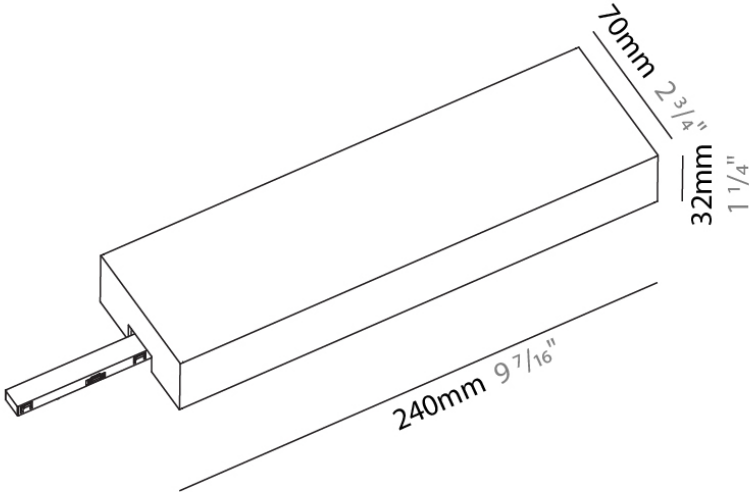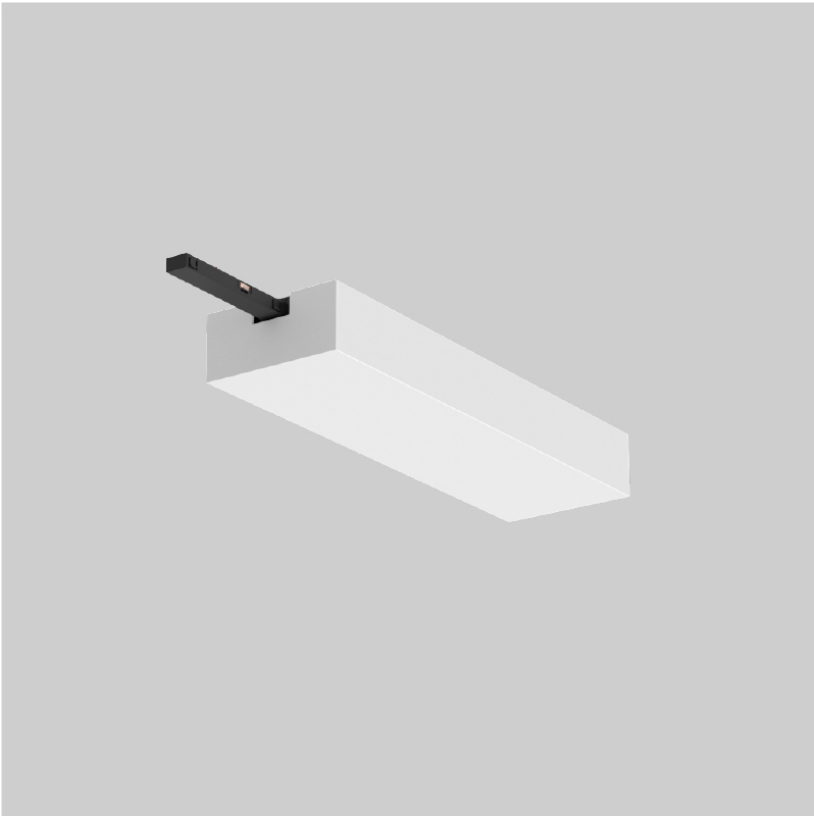

A3MINTRK-SUR-SYS COMPONENTS

A3T152-

DESCRIPTION

Minimal Track - Driver Box for Central Feed - 48Vdc - Max 96W - Non-dimming - 120/277Vac

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 240  
Length (in): 9 7/16  
Width (mm): 70  
Width (in): 2 3/4  
Height (mm): 32  
Height (in): 1 1/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Total Output Wattage (W): 96  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

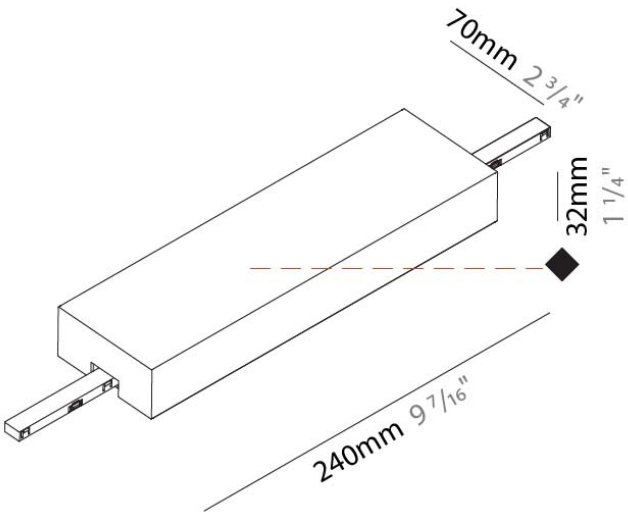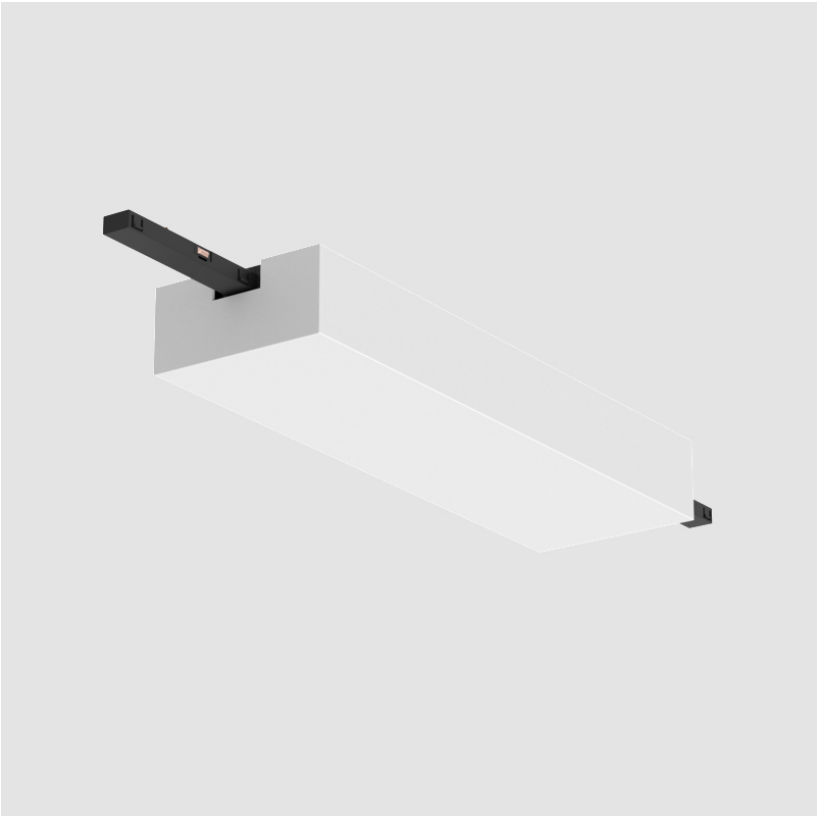

A3MINTRK-SUR-SYS COMPONENTS

A3T153

DESCRIPTION

Minimal Track - Remote InstalLED (Zhaga Standard) Dali-Driver - 48Vdc - max 96W

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Length (mm): 252  
Length (in): 9 15/16  
Width (mm): 28  
Width (in): 1 1/8  
Height (mm): 20  
Height (in): 13/16  
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Total Output Wattage (W): 96  
Dimming: Dali Dimming  
Driver Included: Yes  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48



LED

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

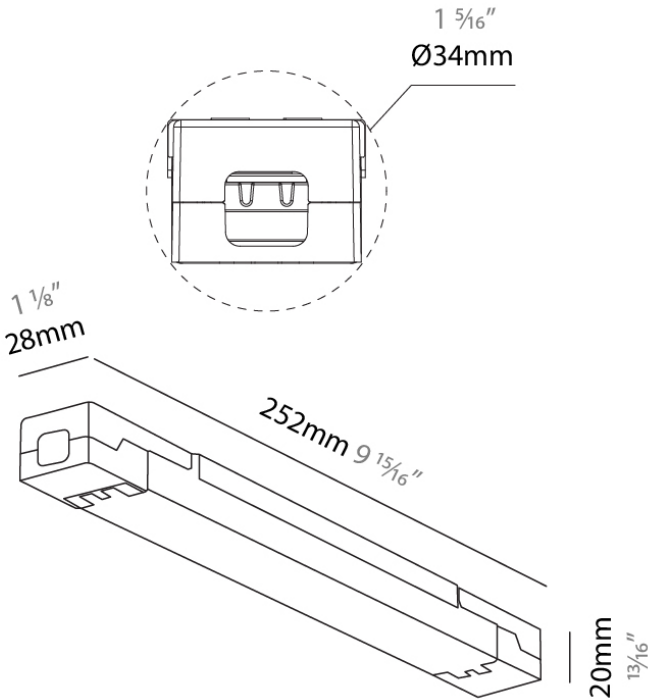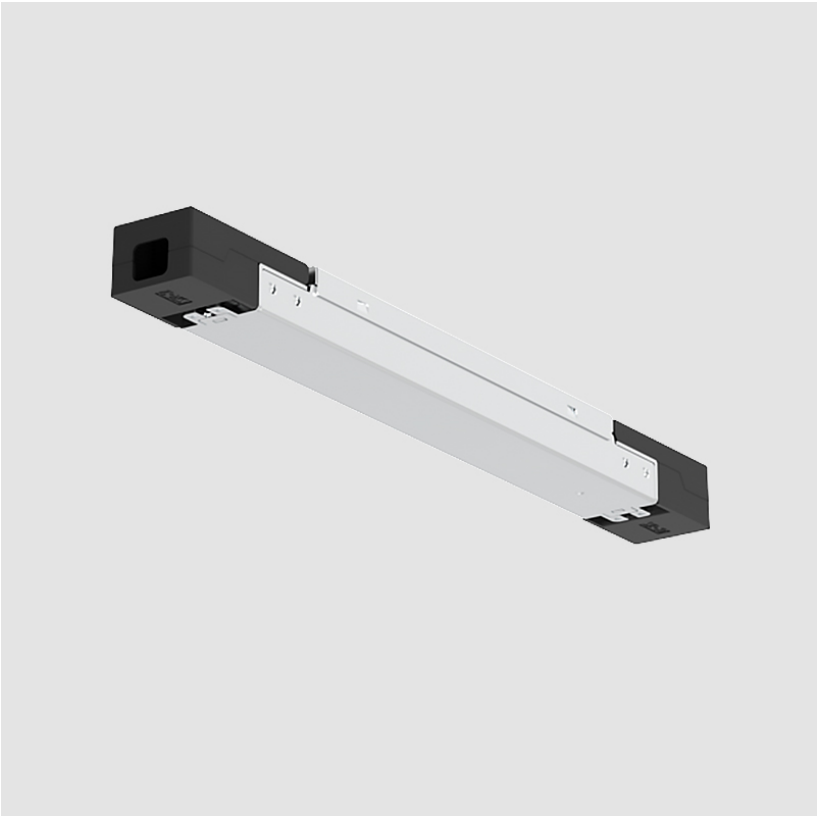

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T156-

DESCRIPTION

Imagine Micro 48V - Minimal Track - 3.7W LED (Zhaga Standard)  
- 2700K / 3000K / 4000K - Optics: 22° / 33° - Dali Dimmable only

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 23  
Diameter (in): 7/8  
Height (mm): 50  
Height (in): 1 15/16  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.06  
Weight (lbs): 0.13  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 3.9  
Total Output Wattage (W): 3.73  
Dimming: Dali Dimming  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 300

LED


Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 202-205 / 217 - 221 / 232 - 236  
Nominal Lumen (lm): 270 / 290 / 310  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 22 / 33  
Beam Angle: 18 / 22  
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

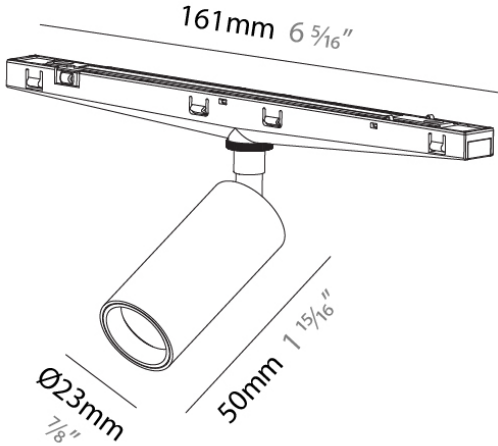

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T157-

DESCRIPTION

Imagine Micro 48V - Minimal Track - 8.58W LED (Zhaga Standard) - 2700K / 3000K / 4000K - Optics: 18° / 28°

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Shape: Cylinder  
Diameter (mm): 35  
Diameter (in): 1 3⁄8  
Height (mm): 76  
Height (in): 3  
Light Distribution: Adjustable / Direct  
Weight (kg): 0.163  
Weight (lbs): 0.40  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 8.8  
Total Output Wattage (W): 8.59  
Dimming: Dali Dimming  
Driver Included: No  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 48  
Constant Current (MA): 700

LED


Color Temperature (°K): 2700 / 3000 / 4000  
Max. Delivered Lumen (lm): 720  
CRI: >90 CRI  
Lamp Life (hrs): 50000

OPTICAL

Optic°: 22 / 33  
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

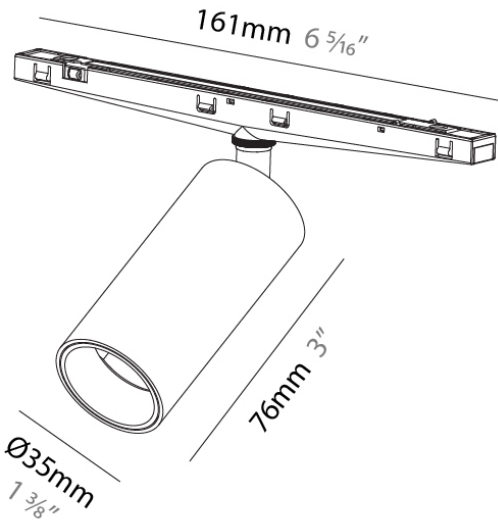

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T188-

DESCRIPTION

Minimal Track / Code System - Curved Track Ø=800mm / 45° - Black

GENERAL



Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling

PHYSICAL

Shape: Curves  
Diameter (mm): 800  
Diameter (in): 31 1/2  
Length (mm): 285  
Length (in): 11 1/4  
Width (mm): 130  
Width (in): 5 1/8  
Height (mm): 10  
Height (in): 3/8  
Weight (kg): 0.141  
Weight (lbs): 0.022  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

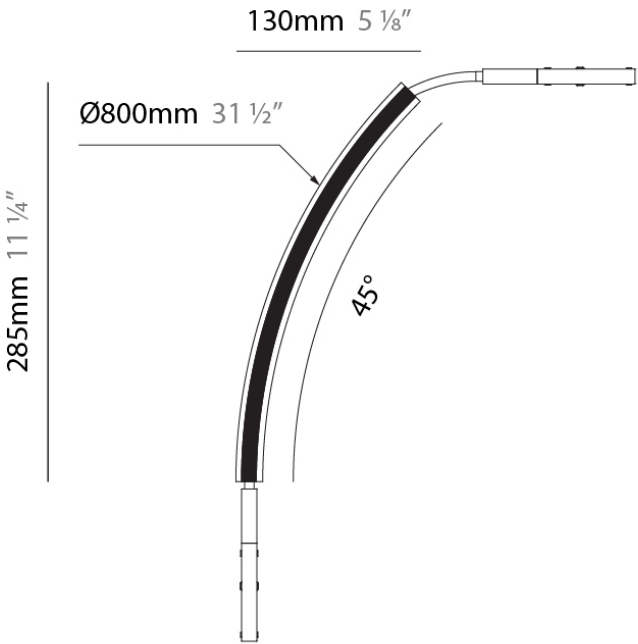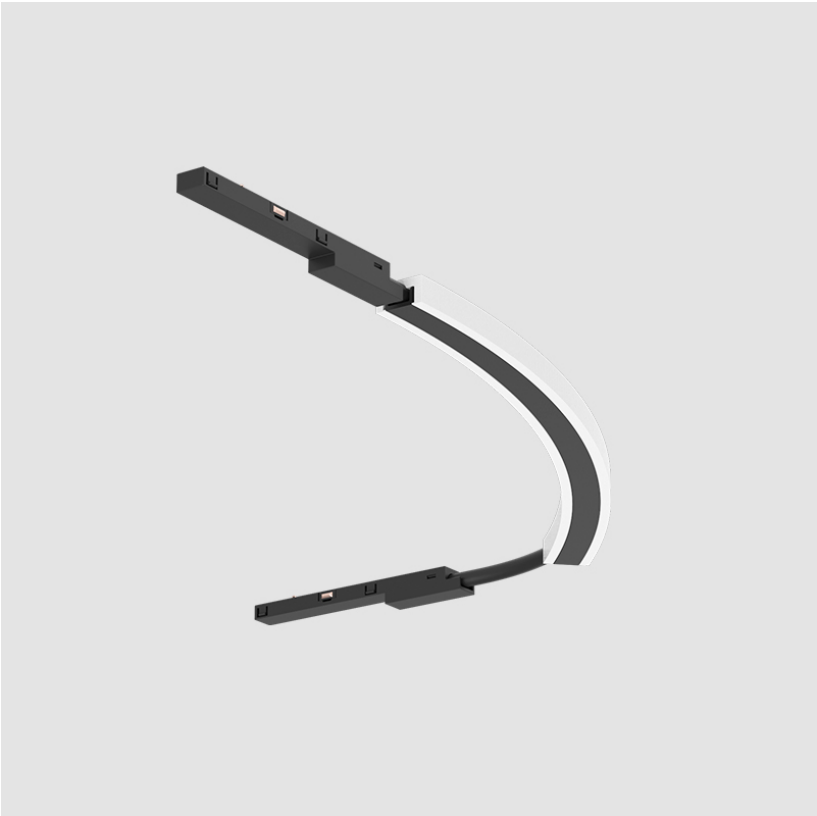



PROJECT
TYPE
NOTES
QUANTITY
DATE

A3T189-

DESCRIPTION

Minimal Track / Code System - Curved Track Ø=1600mm / 45°

GENERAL


Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling

PHYSICAL

Shape: Curves
Diameter (mm): 1600
Diameter (in): 63
Length (mm): 740
Length (in): 29 1⁄8
Width (mm): 320
Width (in): 12 5⁄8
Height (mm): 10
Height (in): 3⁄8
Weight (kg): 0.237
Weight (lbs): 0.037
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

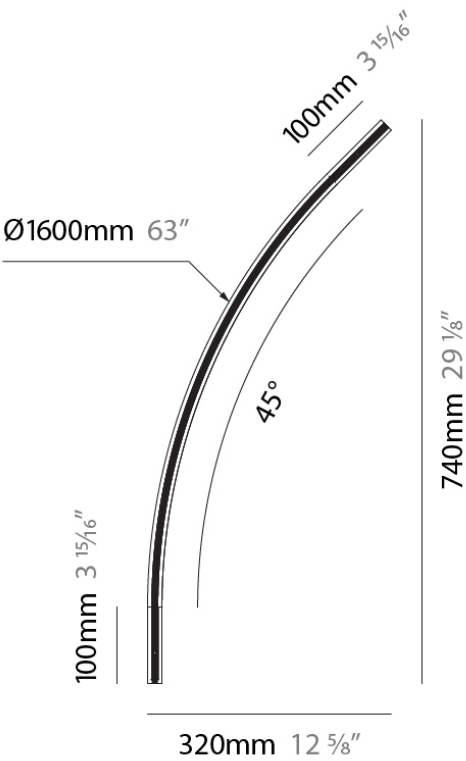

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T190-

DESCRIPTION

Minimal Track / Code System - Curved Track Connector -  
Ø=400mm / 15 3/4" - 90°

GENERAL


Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling

PHYSICAL

Shape: Curves  
Diameter (mm): 400  
Diameter (in): 15 3/4  
Length (mm): 200  
Length (in): 7 7/8  
Width (mm): 200  
Width (in): 7 7/8  
Height (mm): 10  
Height (in): 3/8  
Weight (kg): 0.135  
Weight (lbs): 0.021  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

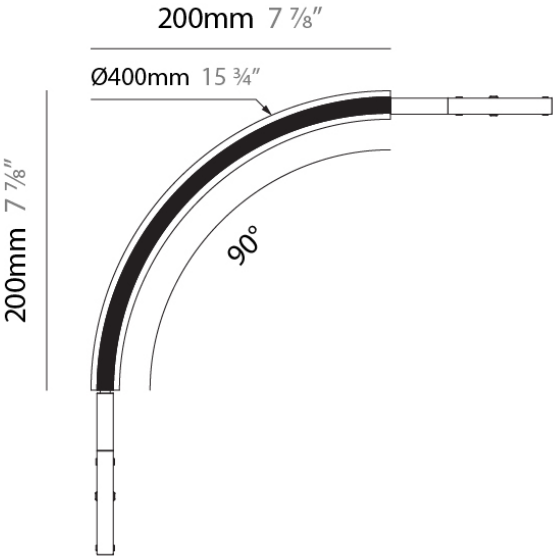

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3T191-

DESCRIPTION

Minimal Track - Curved Track Ø=1600mm / 90°

GENERAL


Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling

PHYSICAL

Shape: Curves
Diameter (mm): 1600
Diameter (in): 63
Length (mm): 100
Length (in): 3 15/16
Width (mm): 100
Width (in): 3 15/16
Height (mm): 10
Height (in): 3/8
Weight (kg): 0.332
Weight (lbs): 0.052
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

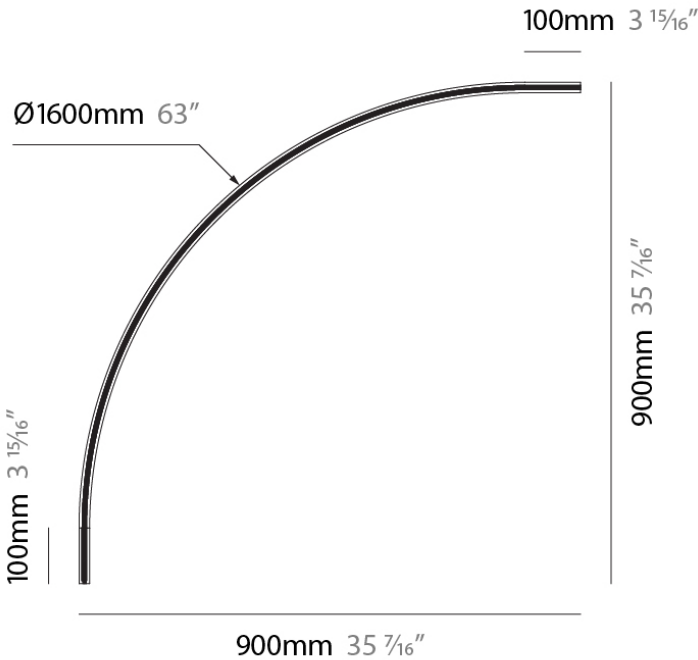

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T192-

DESCRIPTION

Minimal Track - Curved Track Ø=1600mm / 180°

GENERAL



Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling

PHYSICAL

Shape: Curves
Diameter (mm): 1600
Diameter (in): 63
Length (mm): 1600
Length (in): 63
Width (mm): 900
Width (in): 35 7/16
Height (mm): 10
Height (in): 3/8
Weight (kg): 0.522
Weight (lbs): 0.082
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

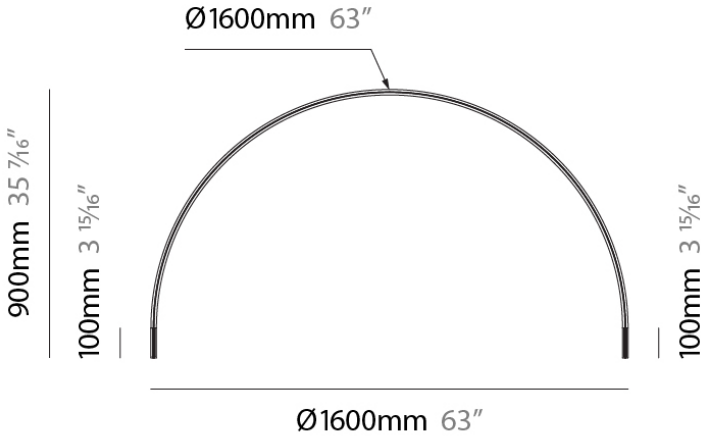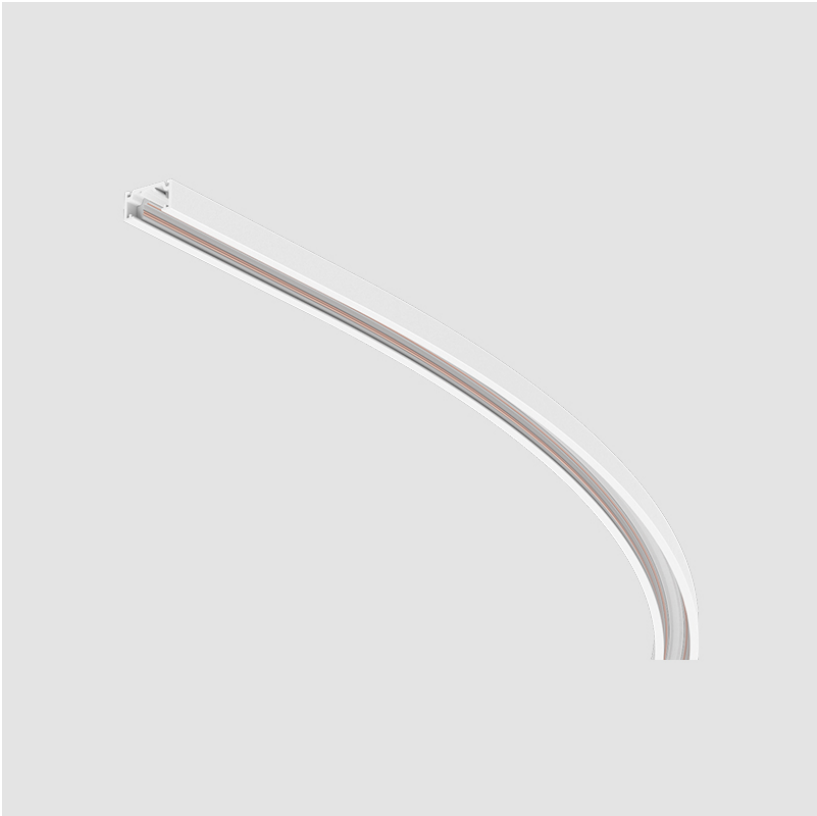

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T193-

DESCRIPTION

Minimal Track - X-Connector

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

PHYSICAL

Length (mm): 160

Length (in): 6 5/16

Width (mm): 160

Width (in): 6 3/8

Height (mm): 10

Height (in): 3/8

Weight (kg): 0.15

Weight (lbs): 0.33


Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

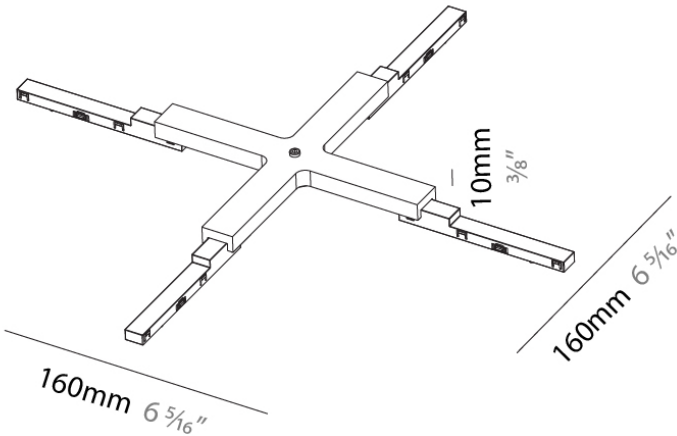

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T194-

DESCRIPTION

Minimal Track - T-Connector

GENERAL


Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling

PHYSICAL

Length (mm): 160
Length (in): 6 5/16
Width (mm): 89
Width (in): 3 1/2
Height (mm): 10
Height (in): 3/8
Weight (kg): 0.1
Weight (lbs): 0.22
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

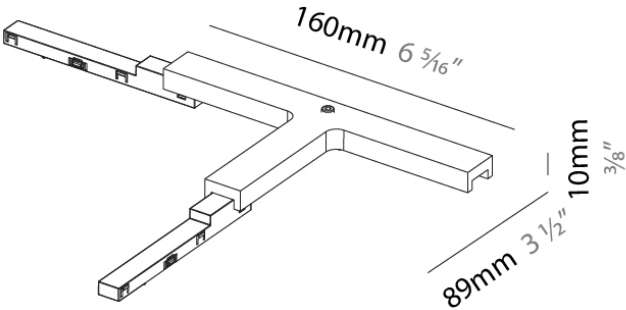

A3MINTRK-SUR-SYS COMPONENTS

A3T256-

DESCRIPTION

Minimal Track - Driver Box for End Feed - 48Vdc - Max 96W - Dali dimming - 120/277Vac

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 240  
Length (in): 9 7/16  
Width (mm): 70  
Width (in): 2 3/4  
Height (mm): 32  
Height (in): 1 1/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Total Output Wattage (W): 96  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

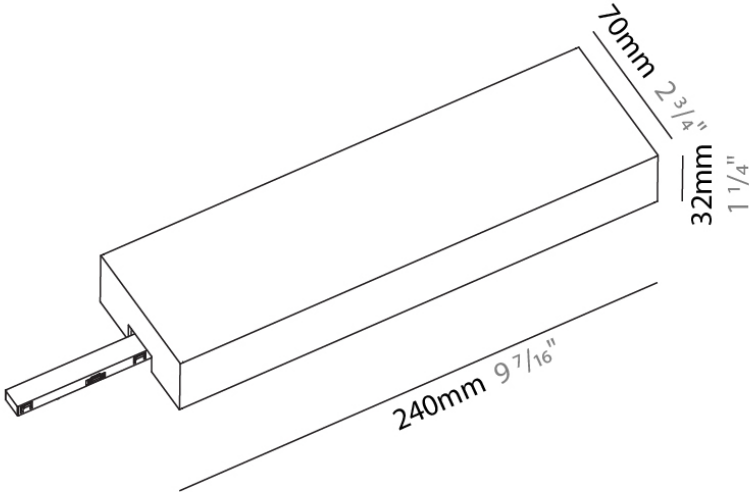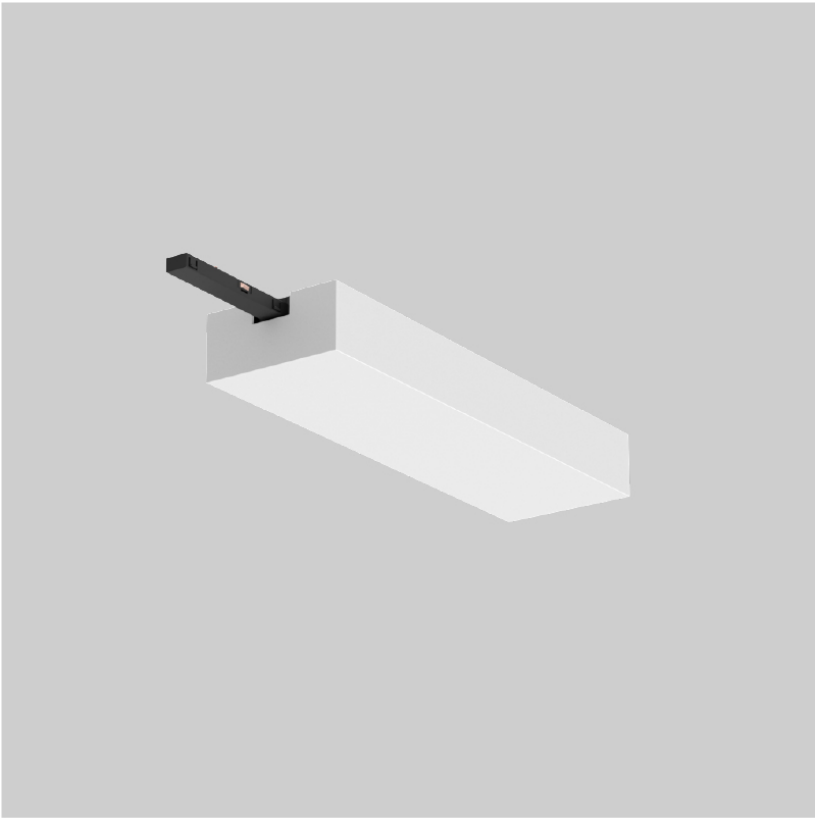

A3MINTRK-SUR-SYS COMPONENTS

A3T257-

DESCRIPTION

Minimal Track - Driver Box for Central Feed - 48Vdc - Max 96W -  
Dali dimming - 120/277Vac

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural

PHYSICAL

Shape: Rectangle  
Length (mm): 240  
Length (in): 9 7/16  
Width (mm): 70  
Width (in): 2 3/4  
Height (mm): 32  
Height (in): 1 1/4  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)  
Total Output Wattage (W): 96  
Dimming: Dali Dimming  
Driver Included: Yes  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

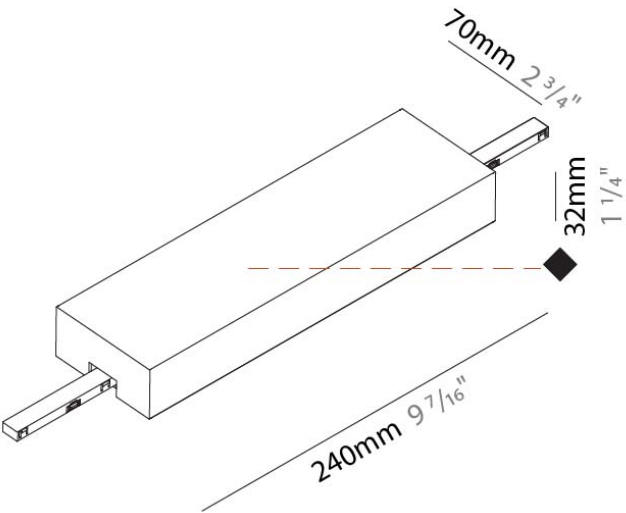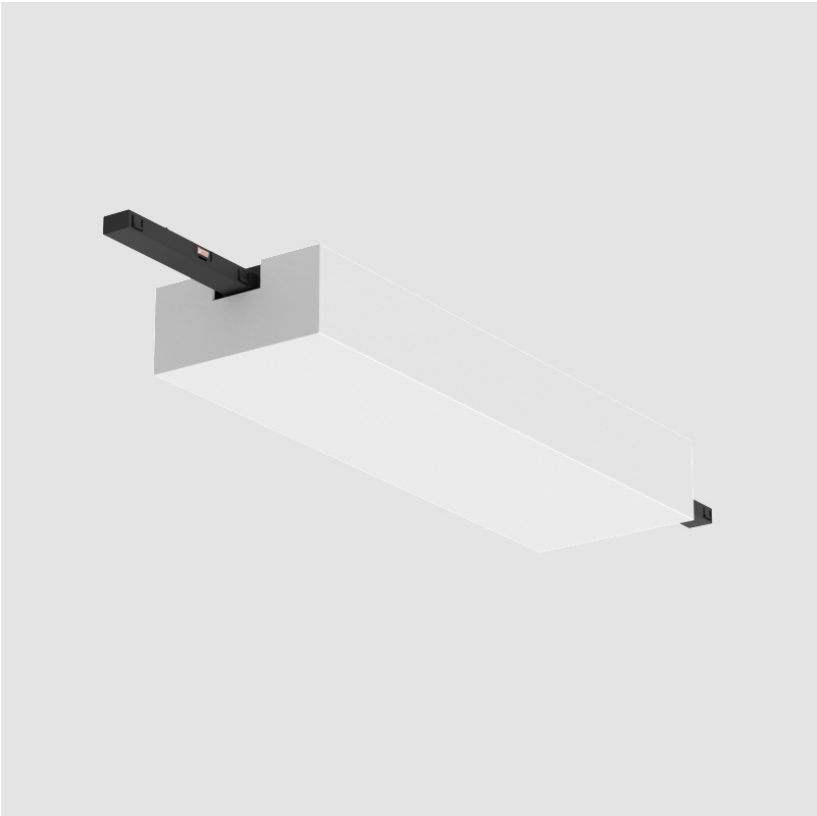



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3T323-

DESCRIPTION

Minimal Track cable loop

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 25

Height (in): 1

Weight (kg): 0.011

Weight (lbs): 0.024

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA /  
RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP /  
BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum


OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

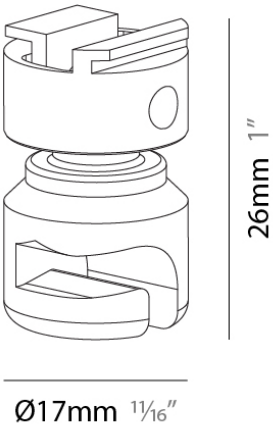

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3T324-

DESCRIPTION

Minimal Track Cable Roller

GENERAL

Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Track  
Mounting Location: Ceiling  
Subcategory: Modular

PHYSICAL

Diameter (mm): 17  
Diameter (in): 11/16  
Height (mm): 77  
Height (in): 3 1/16  
Weight (kg): 0.029  
Weight (lbs): 0.064  
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG  
Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20



PROJECT
TYPE
NOTES
QUANTITY
DATE

A3T325-

DESCRIPTION

Minimal Track - Suspended Cable Roller

GENERAL


Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling

PHYSICAL

Diameter (mm): 17
Diameter (in): 11/16
Height (mm): 80
Height (in): 3 1/8
Weight (kg): 0.032
Weight (lbs): 0.005
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

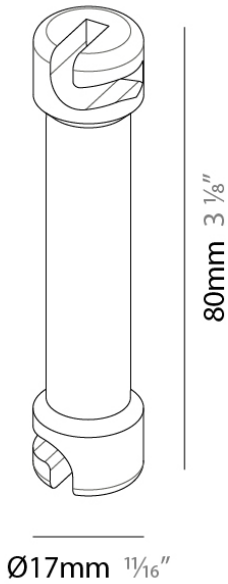

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)