

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380657-

#### DESCRIPTION

Bilo Insert for Minimal Track System Suspension - Ø120mm - 6.4W LED , 48V, CRI:90, Beam 180

#### GENERAL

Series: Bilo  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Sphere  
 Diameter (mm): 120  
 Diameter (in): 4 ¾  
 Height (mm): 120  
 Height (in): 4 ¾  
 Light Distribution: Omnidirectional  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
 Fixture Material: Glass / Metal  
 Cable Details: 2000mm/78 ¾" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL



Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.4  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Constant Current (MA): 500  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 356 / 377 / 398 / 408  
 Nominal Lumen (lm): 460 / 487 / 514 / 528  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
 IP rating: IP20

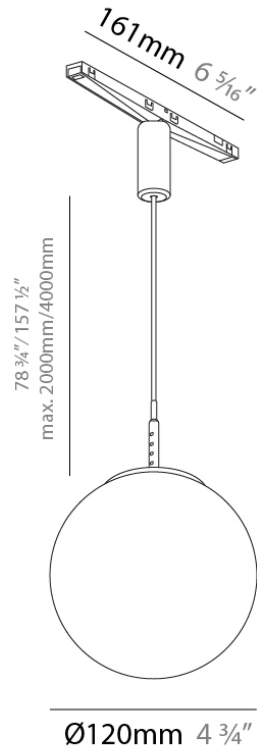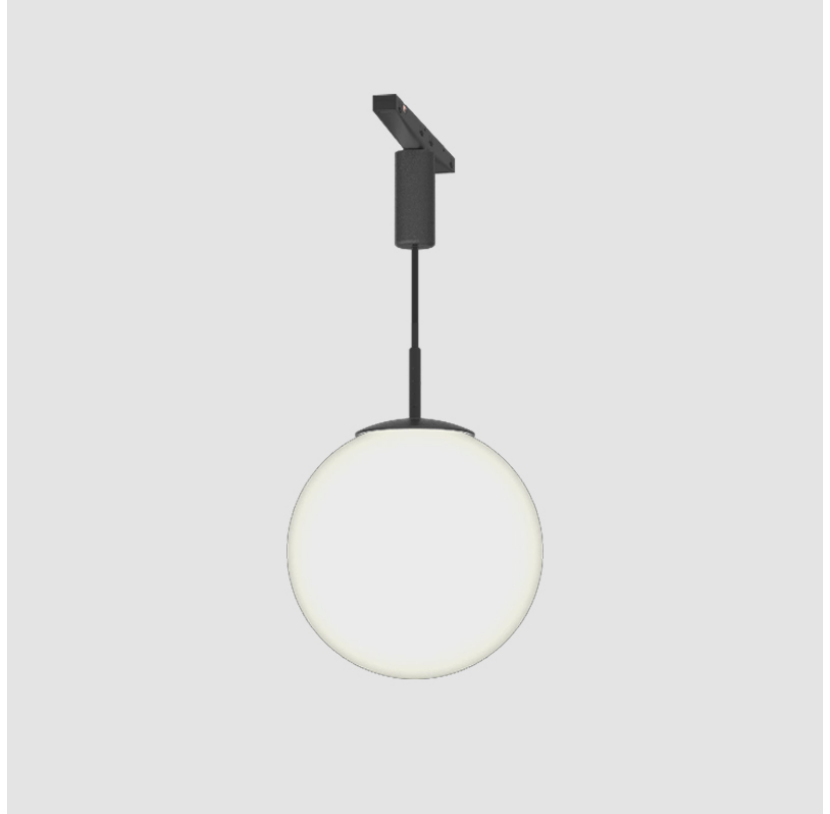

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380683-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Ø28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 22°/26° / 56° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 381 / 404 / 426 / 438

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL

Optic°: 20 / 26 / 56

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

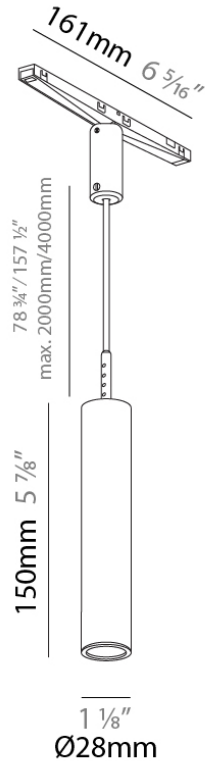

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380684-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 381 / 404 / 426 / 438

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



#### OPTICAL

Optic°: 20 / 26 / 56

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

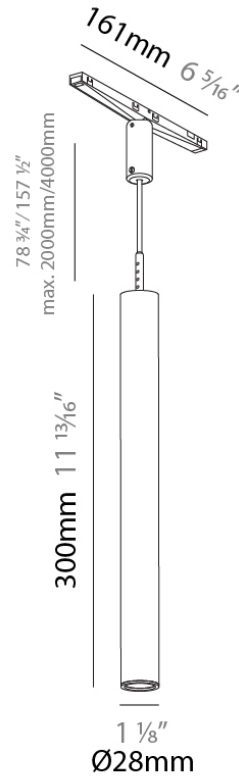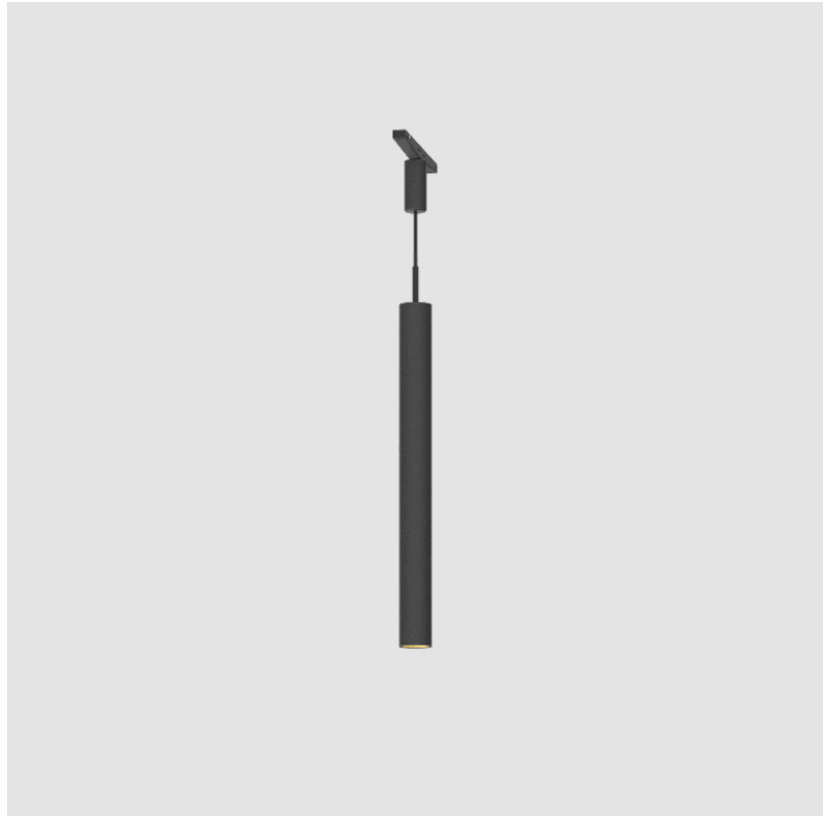

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380685-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Spots

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 28  
 Diameter (in): 1 1/8  
 Height (mm): 450  
 Height (in): 17 11/16  
 Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Number of LEDs: 1  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438  
 Nominal Lumen (lm): 460 / 487 / 514 / 528  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Optic°: 20 / 26 / 56

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

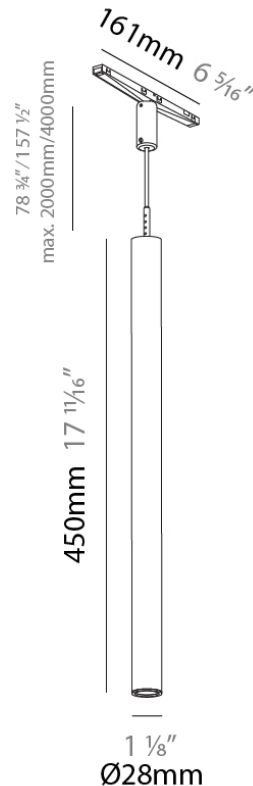

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380686-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 150mm / 5 7/8" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 40° / 52° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL

Optic°: 40 / 52

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

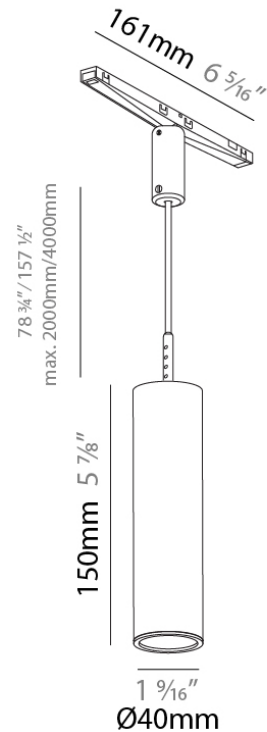

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380687-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim , Beam Angle 40° / 52° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000



#### OPTICAL

Optic°: 40 / 52

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

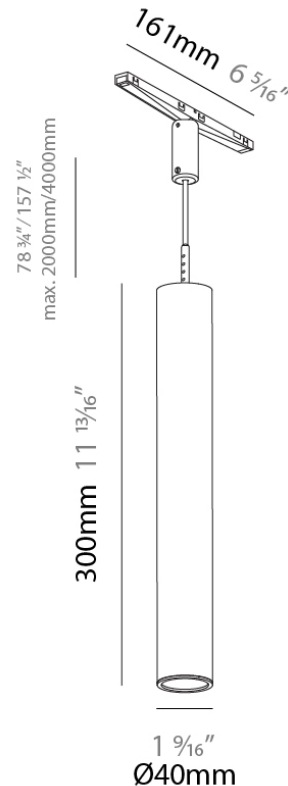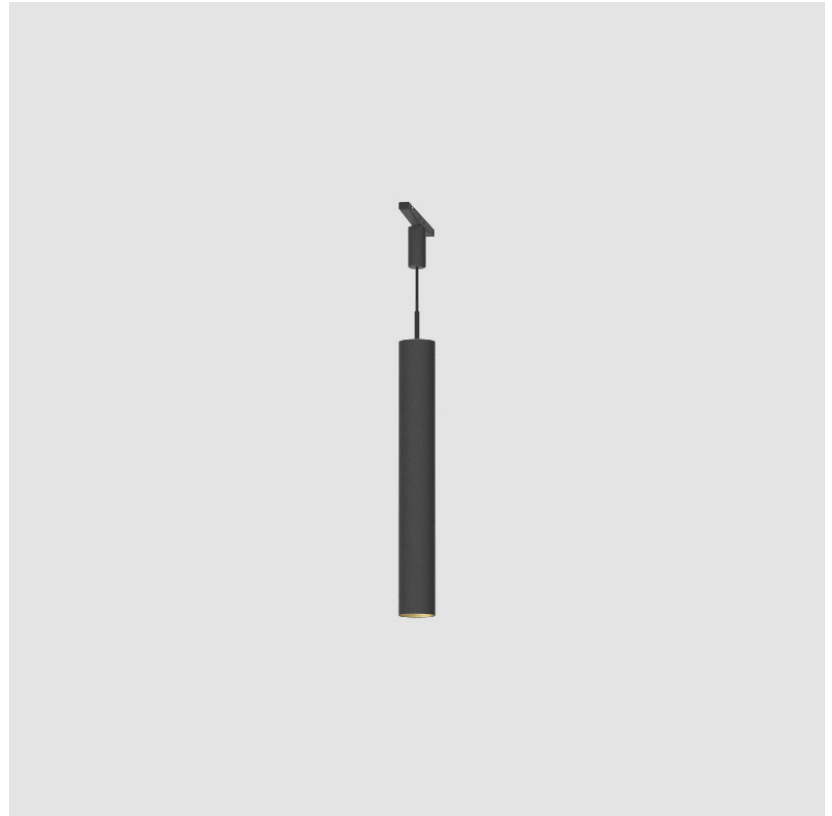

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380688-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / DALI Dim - Beam Angle 40° / 52° - Shine Ring - CRI: 90

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 450

Height (in): 17 11/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000



#### OPTICAL

Optic°: 40 / 52

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

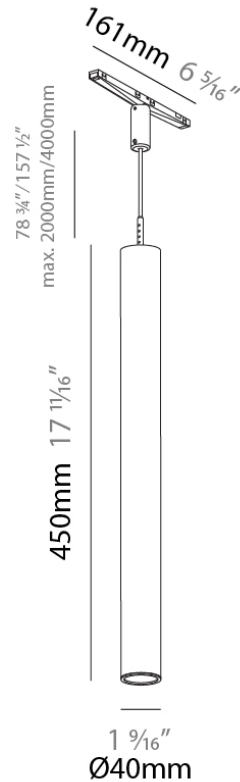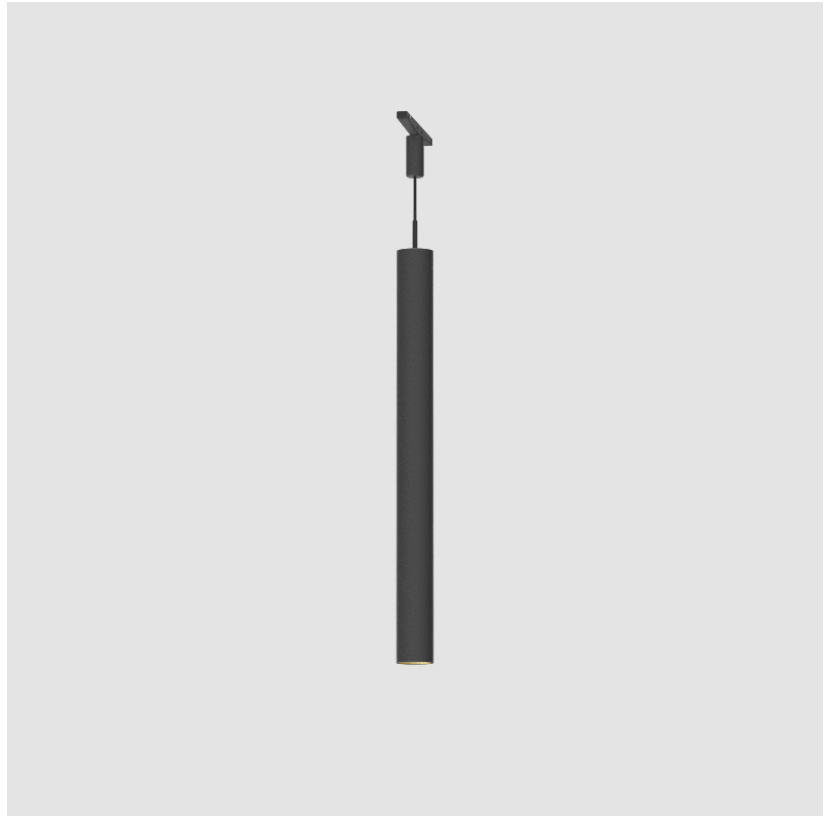

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380689-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Ø75mm/2 15/16" - 150mm/5 7/8" - 10W LED - 2700K / 3000K / 3500K / 4000K - 48Vdc, Non-Dimming / Dali Dim - CRI90 - Shine Ring - Beam Angles: 18° / 36° / 56°

#### GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Direct

Weight (kg): 0.481

Weight (lbs): 1.06

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Accent Finish: OPL / YEL / ORA / RED / BLU / GRN

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 500 - 1999 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 851 / 890 / 923 / 944

Nominal Lumen (lm): 969 / 1014 / 1054 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000

#### OPTICAL


Optic°: 18 / 36 / 56

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

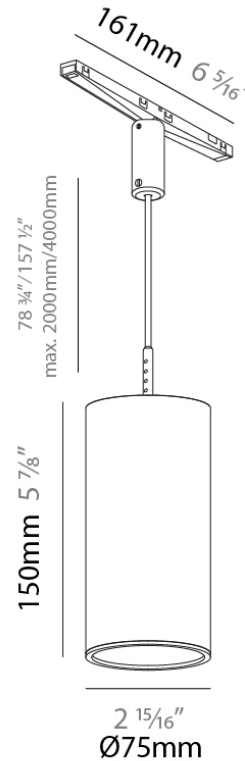



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380690-

#### DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension Round - Direct / Indirect, Ø75mm/2 15/16" - 150mm/5 7/8" - 19.5W LED - Max. 1826lm, 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

#### GENERAL

Series: Hangover Plug  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 75  
 Diameter (in): 2 15/16  
 Height (mm): 150  
 Height (in): 5 7/8  
 Light Distribution: Direct / Indirect  
 Weight (kg): 0.481  
 Weight (lbs): 1.06  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
 Fixture Material: Aluminum  
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 20 - 29 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 20  
 Total Output Wattage (W): 18.2  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 1000 - 2999 lm  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): Max. 1826  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Optic°: 18 / 36 / 56  
 Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

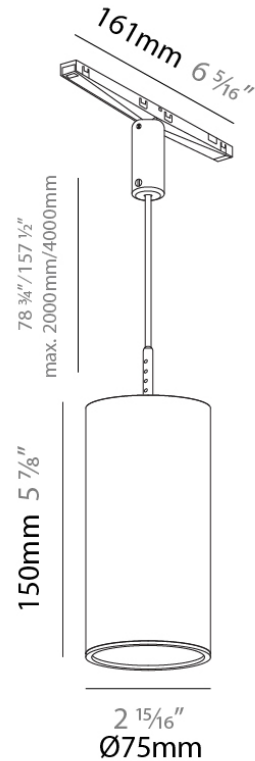

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380691-

#### DESCRIPTION

Minimal Track Suspension Round System - Hangover Plug Micro Dot - Ø28/1 1/8" - 150mm/5 7/8" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

#### GENERAL

Series: Hangover Plug Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8"

Height (mm): 150

Height (in): 5 7/8"

Light Distribution: Direct

Weight (kg): 0.124

Weight (lbs): 0.273

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL

Beam Angle: 32 / 58

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

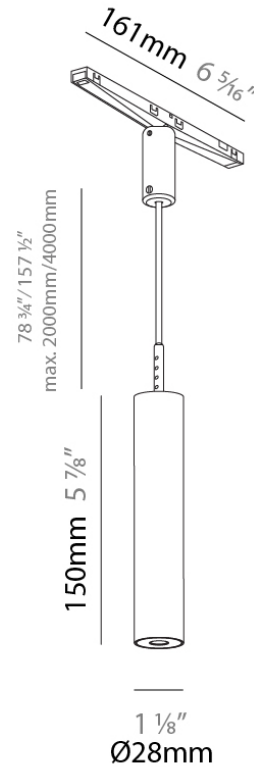

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380692-

#### DESCRIPTION

Minimal Track Suspension Round System - Hangover Plug Micro Dot - Ø28/1 1/8" - 300mm/11 13/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non Dimming / Dali Dim - 48Vdc, CRI90

#### GENERAL

Series: Hangover Plug Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Direct

Weight (kg): 0.24

Weight (lbs): 0.529

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



#### OPTICAL

Beam Angle: 32 / 58

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

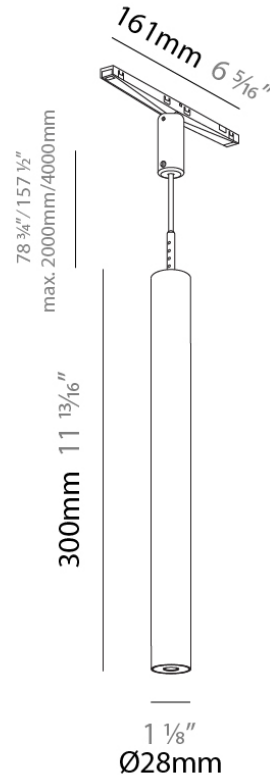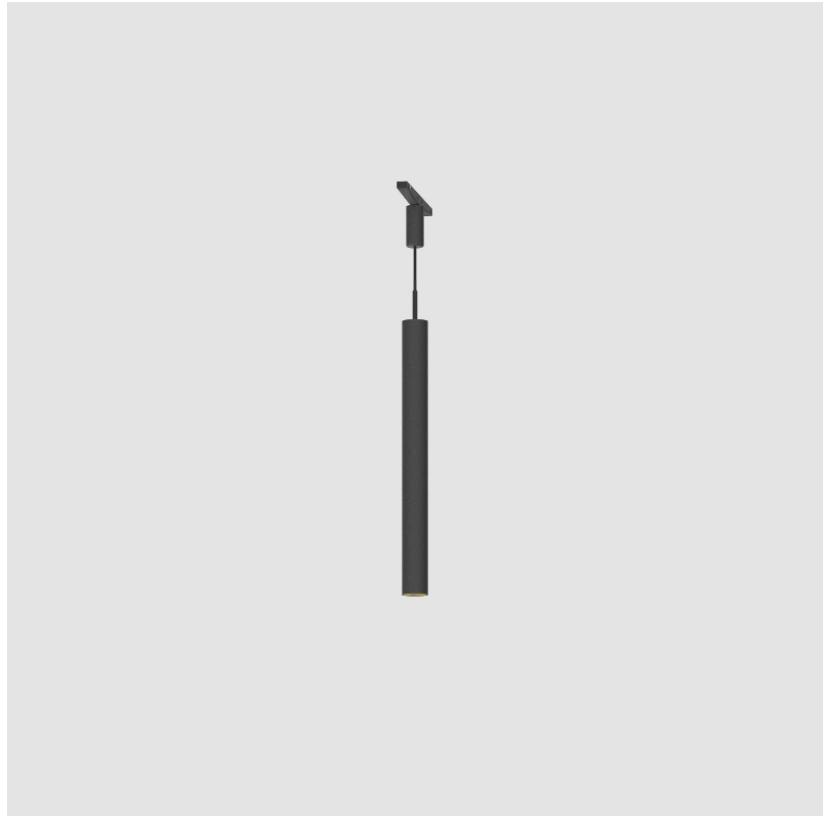

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380700-

#### DESCRIPTION

Minimal Track Suspension Round System - Hangover Plug Micro Dot - Ø28/1 1/8" - 450mm/17 11/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

#### GENERAL

Series: Hangover Plug Micro  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 28  
 Diameter (in): 1 1/8  
 Height (mm): 450  
 Height (in): 17 11/16  
 Light Distribution: Direct  
 Weight (kg): 0.355  
 Weight (lbs): 0.783  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356  
 Nominal Lumen (lm): 460 / 487 / 514 / 528  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 32 / 58

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

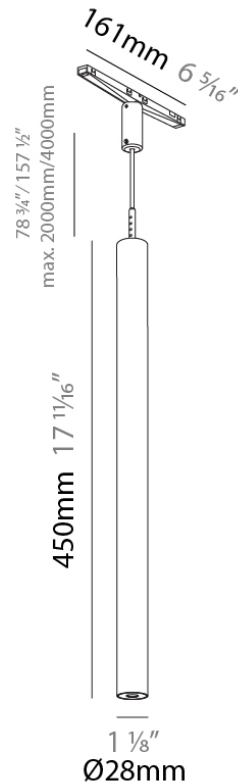

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380701-

#### DESCRIPTION

Imagine Micro Insert for Minimal Track Surface - Ø23mm / 7/8" x 66mm / 2 5/8" - 4.4W LED, 2700K / 3000K / 3500K / 4000K - 48 - Non Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

#### GENERAL

Series: Imagine Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Cylinder

Diameter (mm): 23

Diameter (in): 7/8

Height (mm): 66

Height (in): 2 5/8

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 4

Total Output Wattage (W): 3.6

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 252 / 271 / 315 / 290

Nominal Lumen (lm): 295 / 317 / 368 / 339

CRI: >90 CRI

Lamp Life (hrs): 50000

#### OPTICAL


Beam Angle: 26, 28, 38, 46, 64

Adjustability: Rotational 350°; Tilt 90°

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

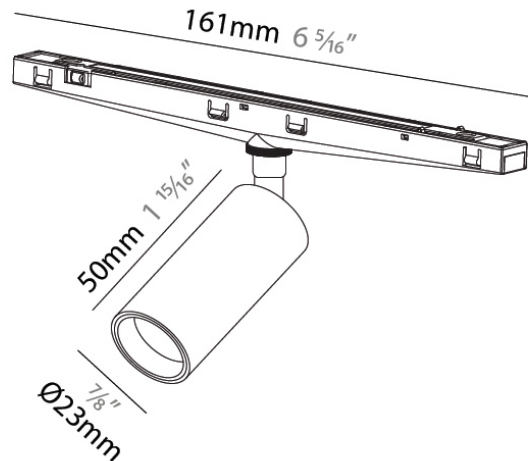

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380702-

#### DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension Round - 35mm/1 3/8" x 90mm/2 5/8" - 8.6W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimmg / Dali Dim, CRI:90 - Beam: 22° / 36° / 62°

#### GENERAL

Series: Imagine Micro  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 35  
 Diameter (in): 1 3/8  
 Height (mm): 90  
 Height (in): 3 9/16  
 Light Distribution: Direct  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 9  
 Total Output Wattage (W): 8.2  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 554 / 590 / 620 / 636  
 Nominal Lumen (lm): 750 / 800 / 840 / 861  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 22, 36, 62  
 Adjustability: Rotational 350°; Tilt 90°

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

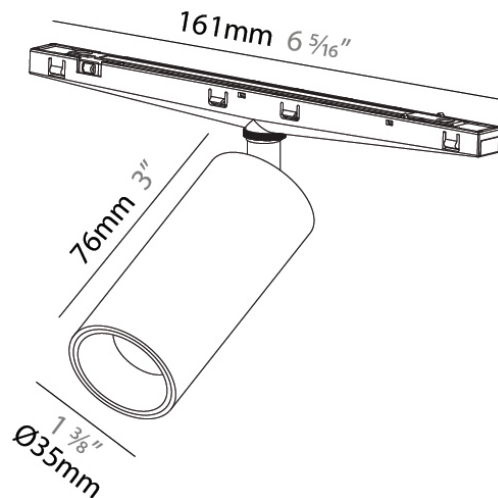

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380703-

#### DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension Round - Ø37mm/1 7/16" x 100mm/3 15/16" - 7.1W LED, 48V, Adjustable - CRI:90 - Beam: 14° / 20° / 52°

#### GENERAL

Series: Imagine Micro Flex  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 37  
 Diameter (in): 1 7/16  
 Height (mm): 100  
 Height (in): 3 15/16  
 Light Distribution: Direct  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 7  
 Total Output Wattage (W): 6.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 328 / 342 / 362  
 Nominal Lumen (lm): 607 / 634 / 671  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 14, 20, 52  
 Adjustability: Rotational 350°; Tilt 90°

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

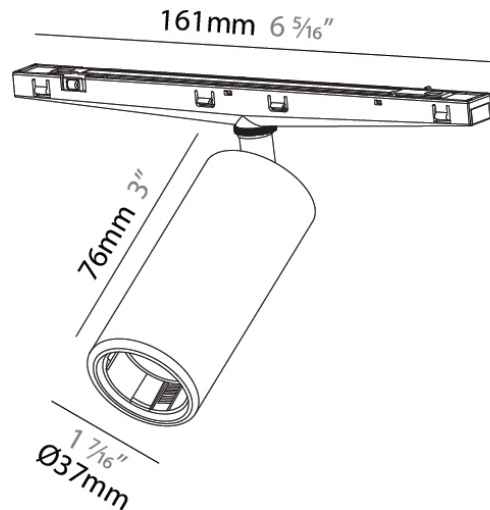

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380704-

#### DESCRIPTION

Imagine Micro Dot Insert for Minimal Track Suspension Round - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K. 48V, Adjustable, Non-Dimming / Dali Dim, CRI:90 - Beam: 34° / 52°

#### GENERAL

Series: Imagine Micro Dot  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Cylinder  
 Diameter (mm): 35  
 Diameter (in): 1 3/8  
 Height (mm): 90  
 Height (in): 3 9/16  
 Light Distribution: Direct  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 235 / 252 / 270  
 Nominal Lumen (lm): 372 / 399 / 427  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 34, 52  
 Adjustability: Rotational 350°; Tilt 90°

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

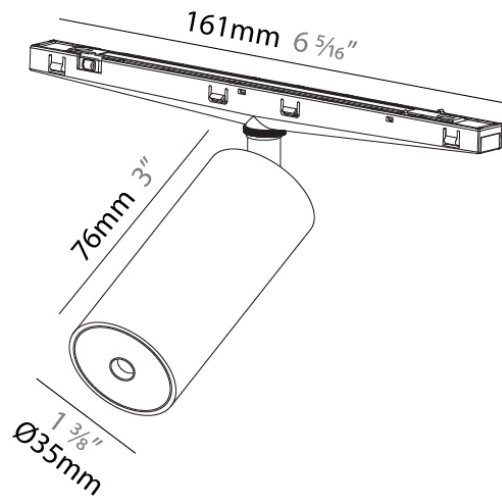



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380705-

#### DESCRIPTION

Magiq Micro Insert for Minimal Track Suspension Round - 4.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K Max. 365lm, Beam Angle 54

#### GENERAL

Series: Magiq Micro  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 300  
 Length (in): 11 <sup>13</sup>/<sub>16</sub>  
 Width (mm): 11  
 Width (in): 7/16  
 Height (mm): 7  
 Height (in): 1/4  
 Light Distribution: Direct  
 Fixture Finish: BLK / WHI  
 Fixture Material: Aluminum Die Cast

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED  
 Input Wattage (W): 5  
 Total Output Wattage (W): 4.6  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 4000  
 Max. Delivered Lumen (lm): 370 / 384 / 417  
 Nominal Lumen (lm): 370 / 384 / 417  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 54

#### RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
 IP rating: IP20

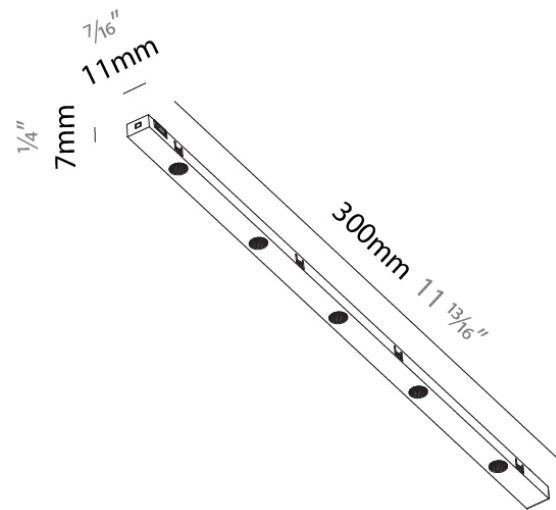

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380706-

#### DESCRIPTION

Melt Mini Insert for Minimal Track Suspension Round - Ø280mm/11" x 270mm/10 5/8" - 6.2W LED - 3000K, 48Vdc, CRI90 - Diffuser: Smoke - 44lm, Chrome - 158lm, Gold - 235lm, Copper - 220lm - Cable Options

#### GENERAL

Series: Melt Mini  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Round  
 Diameter (mm): 280  
 Diameter (in): 11  
 Height (mm): 270  
 Height (in): 10 5/8  
 Light Distribution: Omnidirectional  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Accent Finish: NOF / COP / MIR / SSS  
 Fixture Material: Plastic  
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green  
 Upon Request: 1,000mm and 10,000mm Black Cable Available

#### ELECTRICAL


Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Constant Current (mA): 350  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 3000  
 Max. Delivered Lumen (lm): Max 235  
 Nominal Lumen (lm): 885  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
 IP rating: IP20

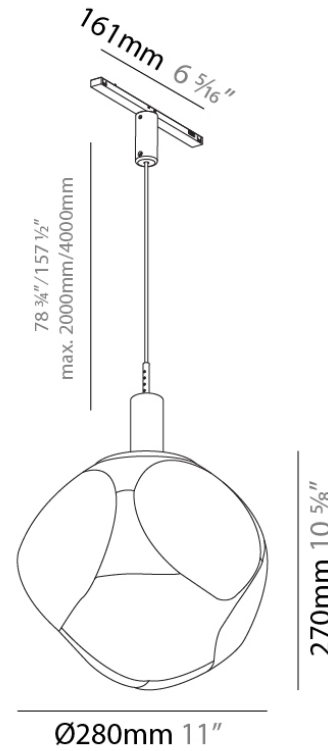

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SURFACE

### A380707-

#### DESCRIPTION

Microline Insert for Minimal Track Suspension Round - L=672mm, LED 8W, max. 429lm, CRI90

#### GENERAL

Series: Microline  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Surface  
 Mounting Location: Wall / Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 674  
 Length (in): 26 <sup>9</sup>/<sub>16</sub>  
 Width (mm): 11  
 Width (in): 7/16  
 Height (mm): 7  
 Height (in): 1/4  
 Light Distribution: Direct  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 8  
 Total Output Wattage (W): 7.3  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 386 / 429  
 Nominal Lumen (lm): 386 / 429  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 116

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

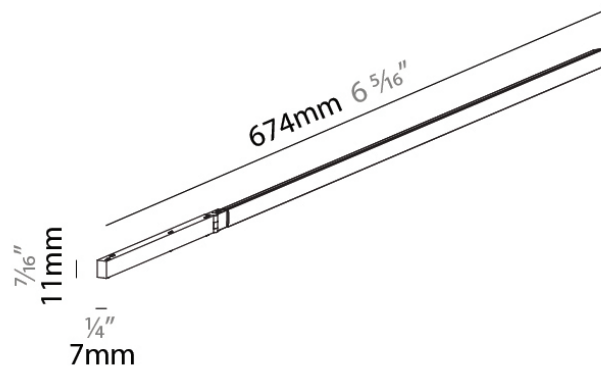

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SURFACE

### A380708-

#### DESCRIPTION

Microline Insert for Minimal Track Suspension Round - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

#### GENERAL

Series: Microline  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Surface  
 Mounting Location: Wall / Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 1174  
 Length (in): 46 1/4  
 Width (mm): 11  
 Width (in): 7/16  
 Height (mm): 7  
 Height (in): 1/4  
 Light Distribution: Direct  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 16  
 Total Output Wattage (W): 14.6  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 772 / 858  
 Nominal Lumen (lm): 772 / 858  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 116

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

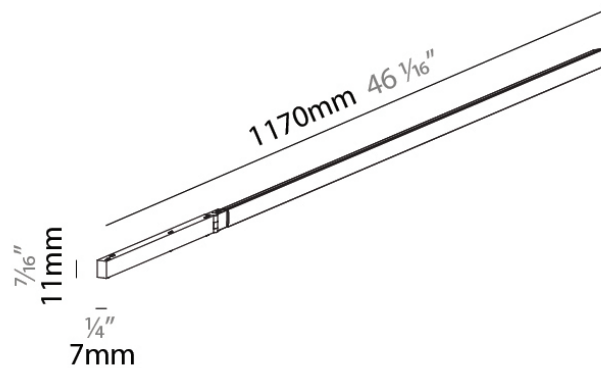

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A380709-

#### DESCRIPTION

Microline Insert for Minimal Track Suspension Round -  
L=1670mm / 65 3/4", L24W LED,2700K / 3000K - max. 1287lm,  
CRI90

#### GENERAL

Series: Microline  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Wall / Ceiling  
Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
Length (mm): 1674  
Length (in): 65 7/8  
Width (mm): 11  
Width (in): 7/16  
Height (mm): 7  
Height (in): 1/4  
Light Distribution: Direct  
Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 20 - 29 W  
Lamp Type: LED (Zhaga Standard)  
Input Wattage (W): 24  
Total Output Wattage (W): 21.8  
Dimming: Non-Dimmable  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 48  
Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 1000 - 1999 lm  
Color Temperature (°K): 2700 / 3000  
Max. Delivered Lumen (lm): 1158 / 1287  
Nominal Lumen (lm): 1158 / 1287  
CRI: >90 CRI  
Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 116

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

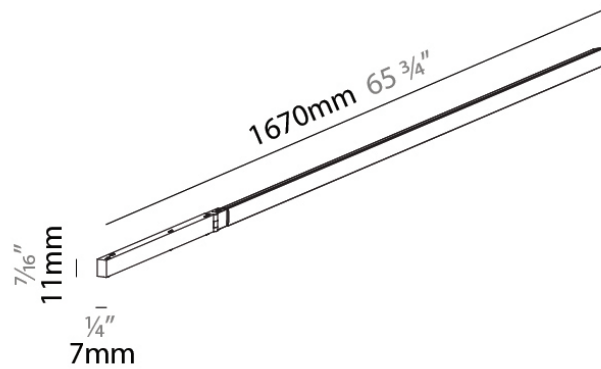

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380710-

#### DESCRIPTION

Opal Insert for Minimal Track Suspension Round - Ø250mm/9 13/16" - 6.2W LED - 3000K - 560lm - Beam 160° - 48Vdc - CR180 - Cable Options

#### GENERAL

Series: Opal  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Round  
 Diameter (mm): 250  
 Diameter (in): 9 13/16  
 Height (mm): 250  
 Height (in): 9 13/16  
 Light Distribution: Omnidirectional  
 Weight (kg): 0.26  
 Weight (lbs): 0.04  
 Diffuser: PMMA - Opal  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Plastic  
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green  
 Upon Request: 1,000mm and 10,000mm Black Cable Available

#### ELECTRICAL


Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Constant Current (MA): 350  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 3000  
 Max. Delivered Lumen (lm): 506  
 Nominal Lumen (lm): 800  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
 IP rating: IP20

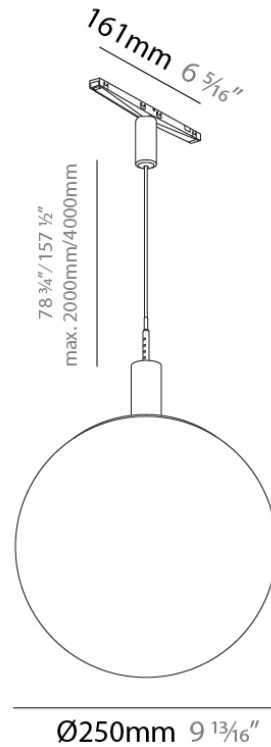

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380711-

#### DESCRIPTION

Snooker Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

#### GENERAL

Series: Snooker

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 <sup>13</sup>/<sub>16</sub>

Height (mm): 71

Height (in): 2 <sup>13</sup>/<sub>16</sub>

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Accent Finish: OPL / YEL / ORA / RED / BLU / GRN

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: Integrated

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000

#### OPTICAL


Beam Angle: 32 / 58

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

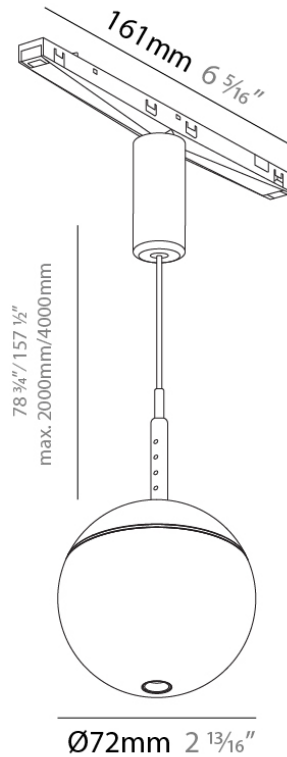

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380712-

#### DESCRIPTION

Snooker Glass Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non- Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

#### GENERAL

Series: Snooker Glass  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Track  
 Mounting Location: Ceiling  
 Subcategory: Modular

#### PHYSICAL

Shape: Round  
 Diameter (mm): 72  
 Diameter (in): 2 <sup>13</sup>/<sub>16</sub>  
 Height (mm): 71  
 Height (in): 2 <sup>13</sup>/<sub>16</sub>  
 Light Distribution: Direct  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN  
 Fixture Material: Aluminum  
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W  
 Lamp Type: LED (Zhaga Standard)  
 Input Wattage (W): 6.4  
 Total Output Wattage (W): 5.4  
 Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Integrated  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 48  
 Constant Current (mA): 500  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED


Delivered Lumen Range: 100 - 499 lm  
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000  
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356  
 Nominal Lumen (lm): 460 / 487 / 514 / 528  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL

Beam Angle: 32 / 58  
 Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

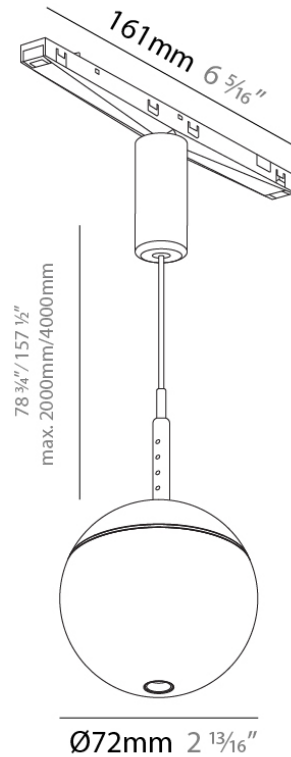



## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A380713-

#### DESCRIPTION

Snooker Metal Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Chrome

#### GENERAL

Series: Snooker Metal

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 <sup>13</sup>/<sub>16</sub>

Height (mm): 72

Height (in): 2 <sup>13</sup>/<sub>16</sub>

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Accent Finish: CHR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: Integrated

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10V Dimming with Tridonic Bridge

#### LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


#### OPTICAL

Beam Angle: 32 / 58

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

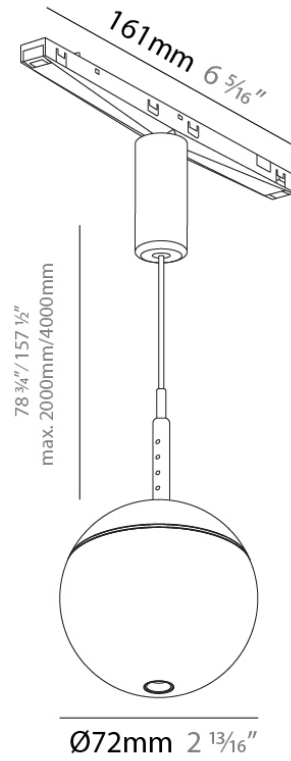

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A3T142-

#### DESCRIPTION

Minimal Track Wall / Ceiling Cable Loop

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 30

Height (in): 1 3/16

Weight (kg): 0.01

Weight (lbs): 0.022

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


#### OPTICAL

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

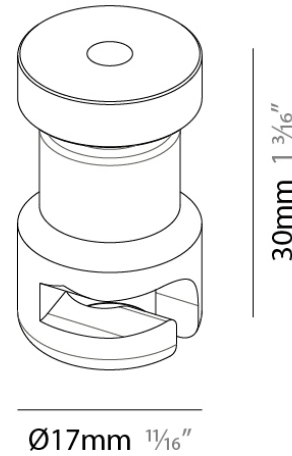

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A3T143-

#### DESCRIPTION

Minimal Track Suspended Cable Roller

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 75

Height (in): 2 <sup>15</sup>/<sub>16</sub>

Weight (kg): 0.02

Weight (lbs): 0.044

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


#### OPTICAL

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

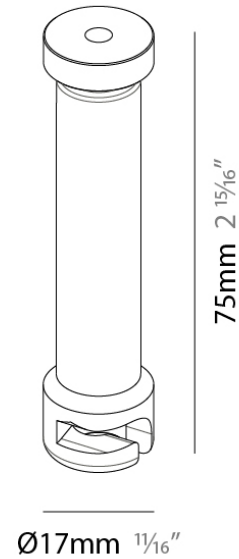

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3MINTRK-SUS-RND-SYS COMPONENTS

### A3T145-

#### DESCRIPTION

Minimal Track / Code System - Central Feed Unit with 2500mm supply cable

#### GENERAL


Series: Minimal Track \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 116 \_\_\_\_\_  
 Length (in): 4 <sup>9</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 11 \_\_\_\_\_  
 Width (in): 7/16 \_\_\_\_\_  
 Height (mm): 12 \_\_\_\_\_  
 Height (in): 1/2 \_\_\_\_\_  
 Fixture Finish: BLK / WHI \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_  
 Cable Details: 2500mm Supply Cable \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

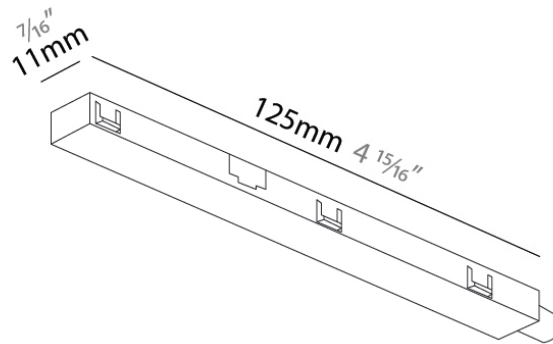

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3MINTRK-SUS-RND-SYS COMPONENTS

### A3T146-

#### DESCRIPTION

Minimal Track / Code System - Linear Connector

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

#### PHYSICAL

Shape: Rectangle

Length (mm): 112

Length (in): 4 <sup>7</sup>/<sub>16</sub>

Width (mm): 11

Width (in): 7/16

Height (mm): 7

Height (in): 1/4


Fixture Finish: BLK / WHI

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

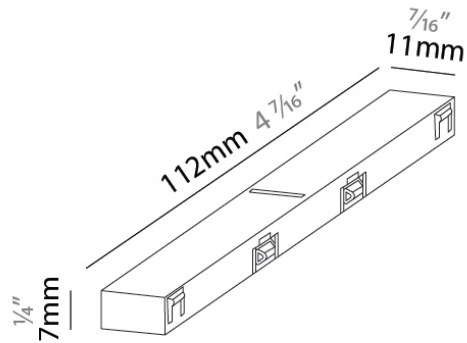

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3MINTRK-SUS-RND-SYS COMPONENTS

### A3T149-

#### DESCRIPTION

Minimal Track / Code System - Flexible Connector- 108mm / 4 1/4" x 108mm / 4 1/4" - Black

#### GENERAL


Series: Minimal Track \_\_\_\_\_  
 Brand: Prolicht \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 116 x 116 \_\_\_\_\_  
 Length (in): 4 9/16 \_\_\_\_\_  
 Width (mm): 11 \_\_\_\_\_  
 Width (in): 7/16 \_\_\_\_\_  
 Height (mm): 12 \_\_\_\_\_  
 Height (in): 1/2 \_\_\_\_\_  
 Fixture Finish: BLK / WHI \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

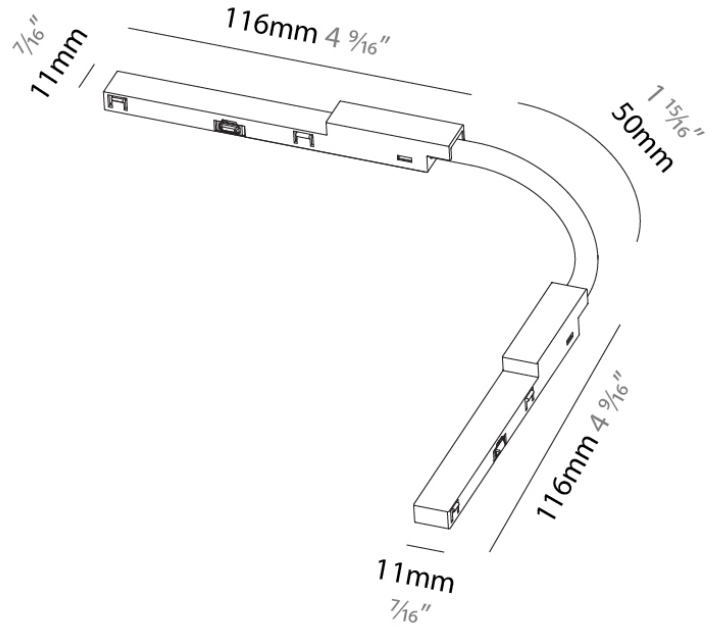

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T298-

#### DESCRIPTION

Minimal Track - Suspension - Cover Strip for Profile - Black / White

#### GENERAL



Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Wall / Ceiling  
Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 14  
Width (in): 9/16  
Height (mm): 5  
Height (in): 3/16  
Fixture Finish: BLK / WHI  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

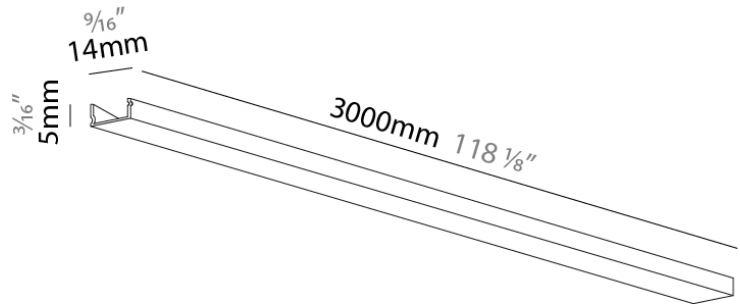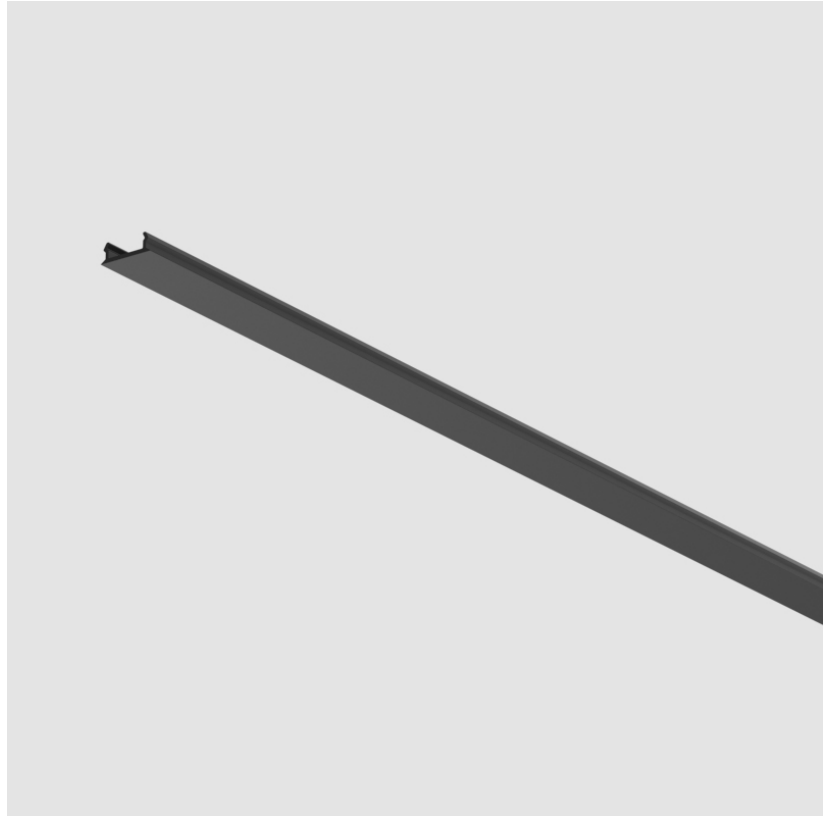

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T300-

#### DESCRIPTION

Minimal Track - Suspension - Short Pendant Bracket with Countersunk Hole for Suspensions

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

#### PHYSICAL

Shape: Rectangle

Length (mm): 25

Length (in): 1

Width (mm): 15.6

Width (in): 5/8

Height (mm): 6

Height (in): 1/4


Fixture Finish: BLK / WHI

Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

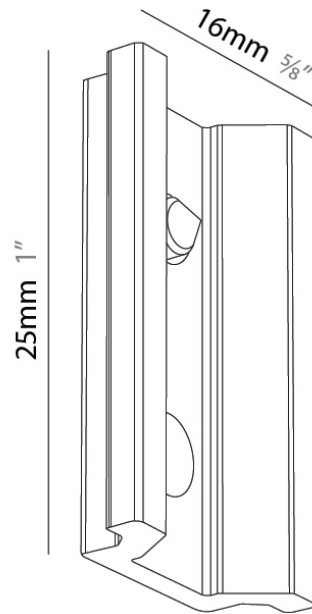



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T301-

#### DESCRIPTION

Minimal Track - Suspension - Long Pendant Bracket with Countersunk Hole for Suspensions

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 50  
 Length (in): 115/16  
 Width (mm): 15.6  
 Width (in): 5/8  
 Height (mm): 6  
 Height (in): 1/4  
 Fixture Finish: BLK / WHI  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

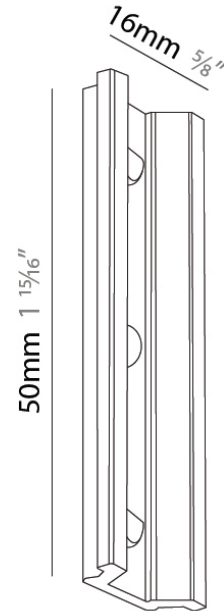

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T302-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box ON/OFF (max. 96W)

#### GENERAL



Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 240  
 Length (in): 9 <sup>7</sup>/<sub>16</sub>  
 Width (mm): 75  
 Width (in): 2 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 36  
 Height (in): 1 <sup>5</sup>/<sub>16</sub>  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

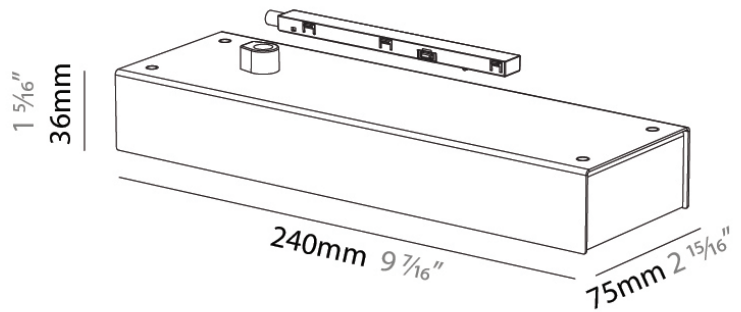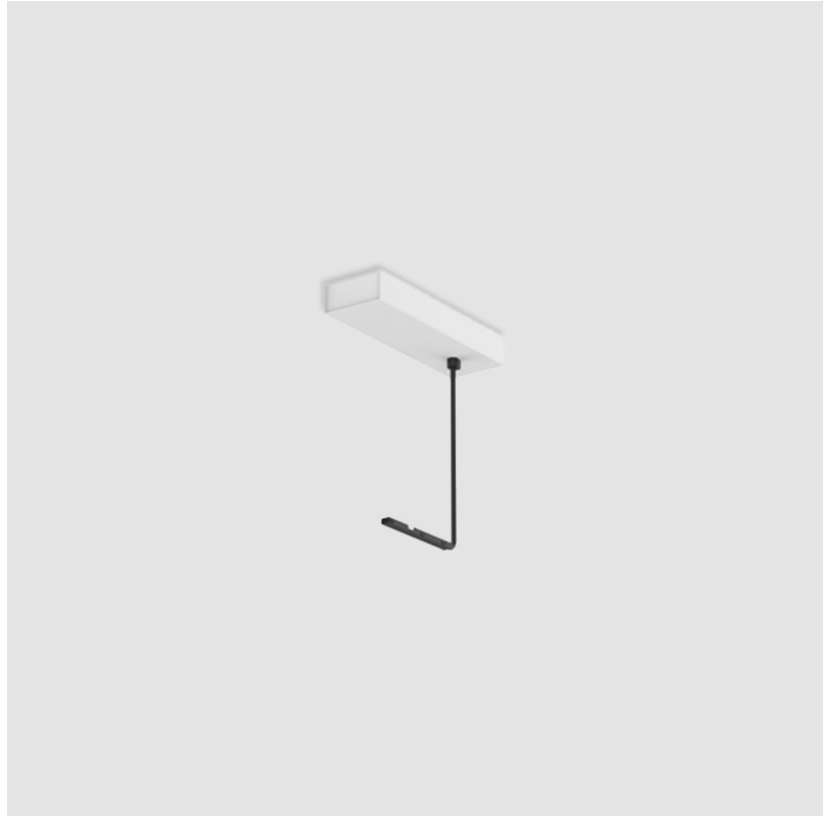

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T303-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Touchdim (max. 92W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 240  
 Length (in): 9 7/16  
 Width (mm): 120  
 Width (in): 4 3/4  
 Height (mm): 36  
 Height (in): 1 5/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

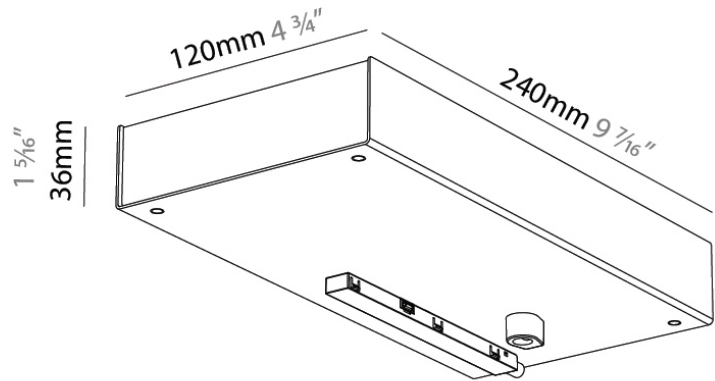

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T304-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Dali (max. 86W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 240  
 Length (in): 9 <sup>7</sup>/<sub>16</sub>  
 Width (mm): 120  
 Width (in): 4 <sup>3</sup>/<sub>4</sub>  
 Height (mm): 36  
 Height (in): 1 <sup>5</sup>/<sub>16</sub>  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

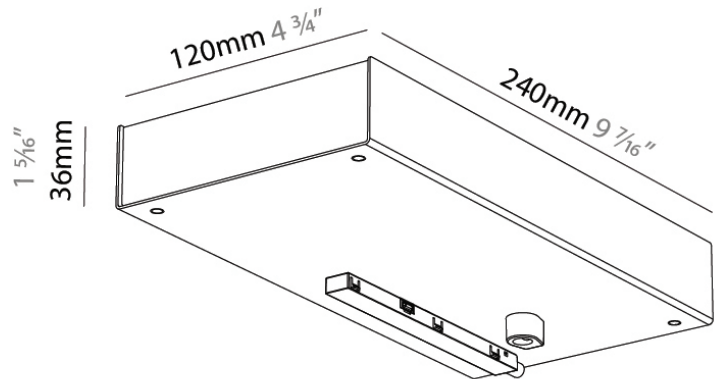

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T305-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Matter (max. 86W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 240  
 Length (in): 9 <sup>7</sup>/<sub>16</sub>  
 Width (mm): 125  
 Width (in): 4 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 36  
 Height (in): 1 <sup>7</sup>/<sub>16</sub>  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

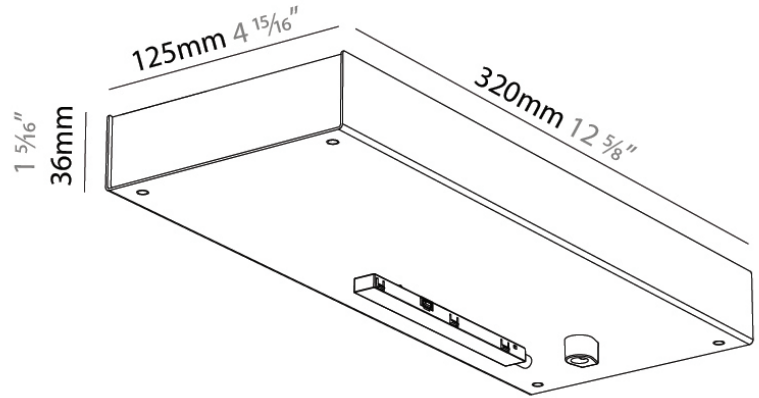

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T306-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box ON/OFF (max. 200W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 400  
 Length (in): 15 3/4  
 Width (mm): 125  
 Width (in): 4 15/16  
 Height (mm): 36  
 Height (in): 1 7/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

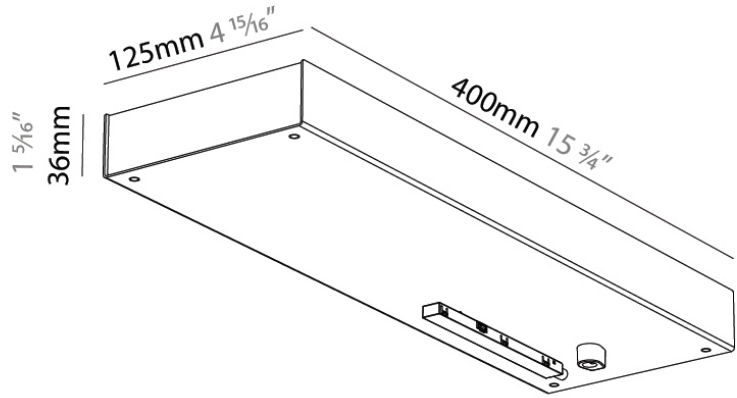

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T307-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Touchdim (max. 200W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 400  
 Length (in): 15 3/4  
 Width (mm): 125  
 Width (in): 4 15/16  
 Height (mm): 36  
 Height (in): 1 7/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

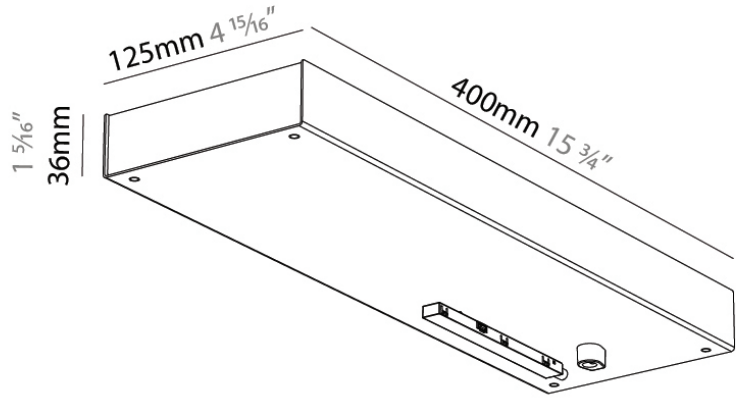

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T308-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Dali (max. 200W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 400  
 Length (in): 15 3/4  
 Width (mm): 125  
 Width (in): 4 15/16  
 Height (mm): 36  
 Height (in): 1 7/16  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

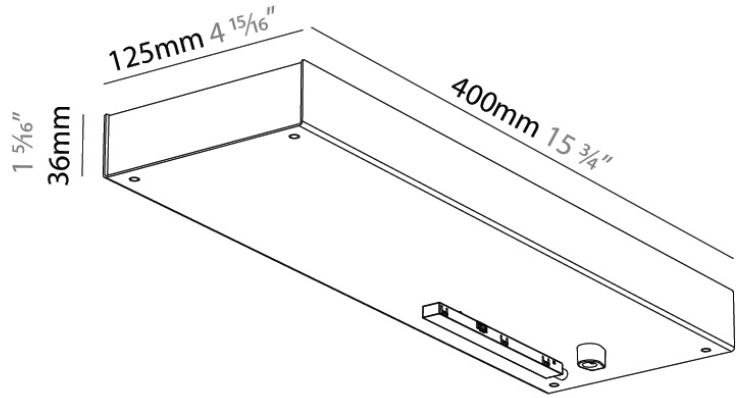



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T309-

#### DESCRIPTION

Minimal Track - Suspension - Driver Box Matter (max. 200W)

#### GENERAL


Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 400  
 Length (in): 15 <sup>3</sup>/<sub>4</sub>  
 Width (mm): 125  
 Width (in): 4 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 36  
 Height (in): 1 <sup>7</sup>/<sub>16</sub>  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Holder Finish: WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

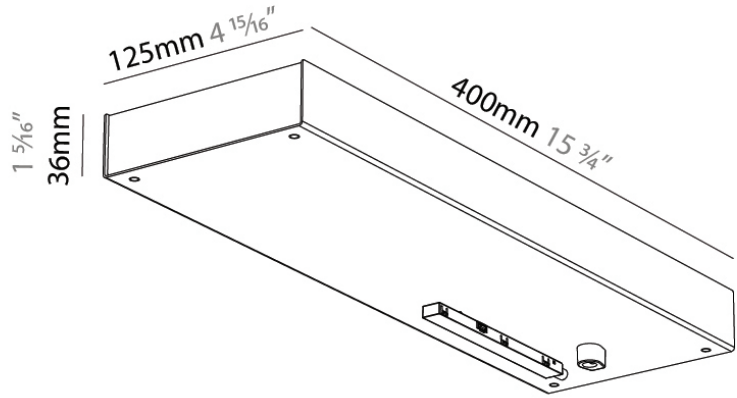

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SURFACE

### A3T313-

#### DESCRIPTION

Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile - Black or White

#### GENERAL

Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Surface  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL


Shape: Rectangle  
 Length (mm): 1000 / 2000 / 3000  
 Length (in): 39 <sup>3</sup>/<sub>8</sub>  
 Width (mm): 19  
 Width (in): 3/4  
 Height (mm): 10  
 Height (in): 3/8  
 Fixture Finish: BLK / WHI  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

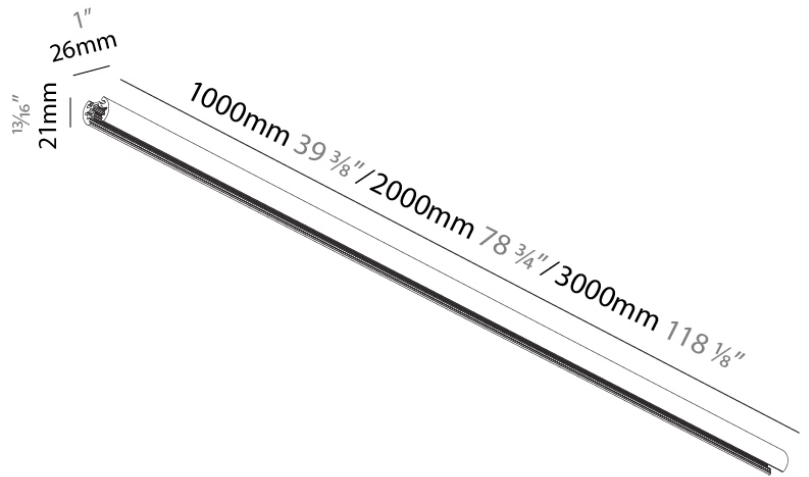

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T314-

#### DESCRIPTION

Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile - Colored

#### GENERAL

Series: Minimal Track  
 Brand: Prolicht  
 Division: Architectural  
 Mounting Type: Suspension  
 Mounting Location: Wall / Ceiling  
 Subcategory: Profile

#### PHYSICAL


Shape: Rectangle  
 Length (mm): 1000 / 2000 / 3000  
 Length (in): 39 <sup>3</sup>/<sub>8</sub>  
 Width (mm): 19  
 Width (in): 3/4  
 Height (mm): 10  
 Height (in): 3/8  
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR  
 Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming  
 Driver Included: No  
 Driver Location: Remote  
 Driver Type: Constant Voltage - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120 - 277  
 Output Voltage (V): 48  
 Upon Request: 0-10V Dimming with Tridonic Bridge

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

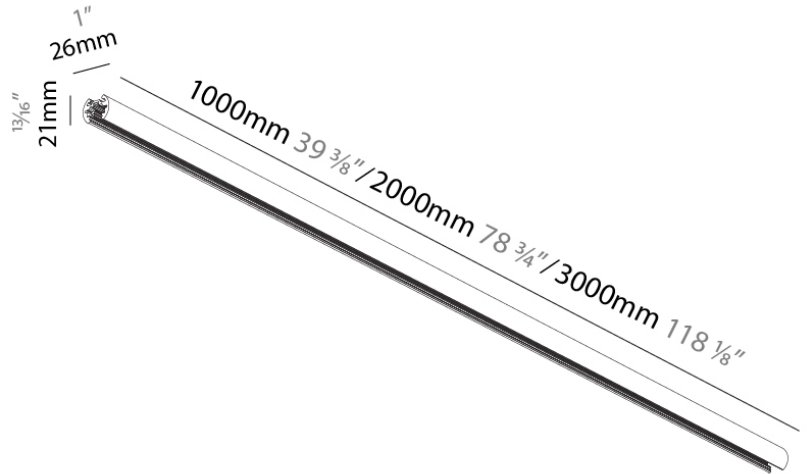

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A3MINTRK-SUS-RND-SYS COMPONENTS SUSPENSION

### A3T315-

#### DESCRIPTION

Minimal Track - Suspension Round - End Cap - Black / White

#### GENERAL



Series: Minimal Track  
Brand: Prolicht  
Division: Architectural  
Mounting Type: Suspension  
Mounting Location: Wall / Ceiling  
Subcategory: Profile

#### PHYSICAL

Shape: Rectangle  
Width (mm): 26  
Width (in): 1  
Height (mm): 21  
Depth (mm): 9  
Height (in): 13/16  
Depth (in): 3/8  
Fixture Finish: BLK / WHI  
Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

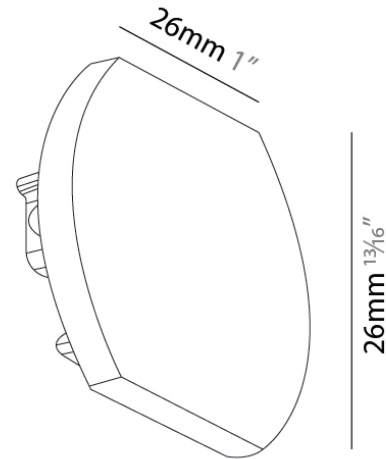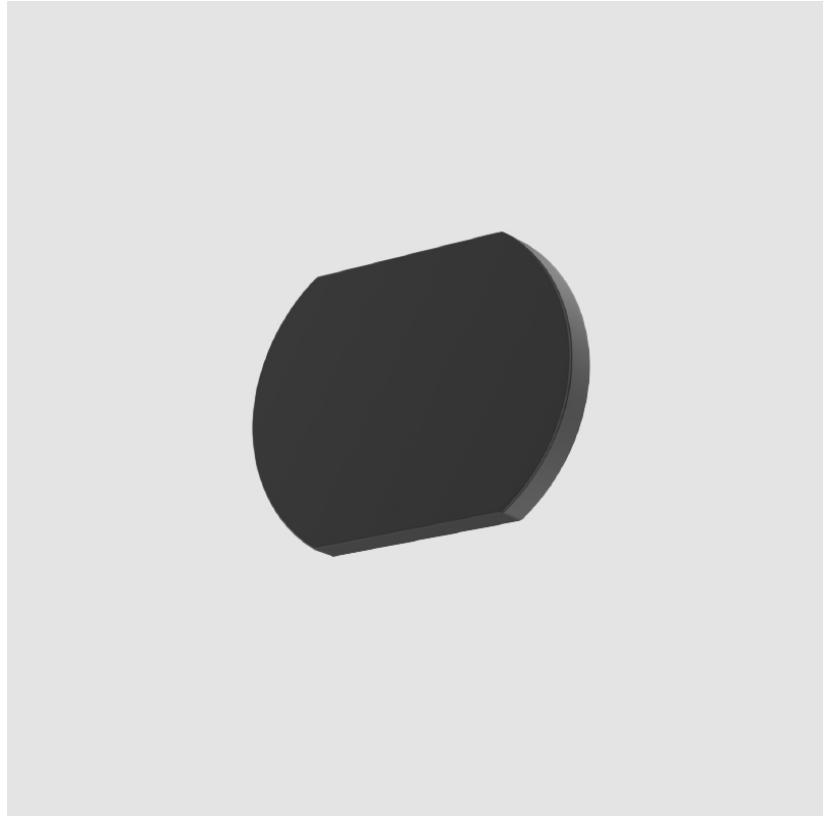

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A3T323-

#### DESCRIPTION

Minimal Track cable loop

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 25

Height (in): 1

Weight (kg): 0.011

Weight (lbs): 0.024

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


#### OPTICAL

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

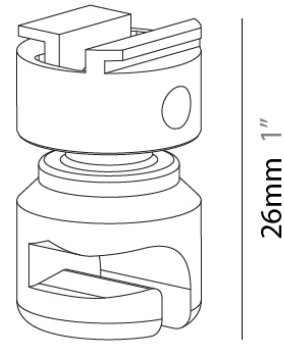

Ø17mm 11/16"

26mm 1"



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A3MINTRK-SUS-RND-SYS COMPONENTS TRACK

### A3T324-

#### DESCRIPTION

Minimal Track Cable Roller

#### GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

#### PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 77

Height (in): 3 1/16

Weight (kg): 0.029

Weight (lbs): 0.064

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

#### OPTICAL

Adjustability: Fixed

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



77mm 3 1/16"

Ø17mm 1 1/16"



### LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)