

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380656-

DESCRIPTION
 Bilo Insert for Minimal Track System Suspension - Ø120mm - 6.4W LED , 48V, CRI:90, Beam 180


GENERAL
 Series: Bilo
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling

PHYSICAL
 Shape: Sphere
 Diameter (mm): 120
 Diameter (in): 4 3/4
 Height (mm): 120
 Height (in): 4 3/4
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Glass / Metal
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 356 / 377 / 398 / 408
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS
 Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

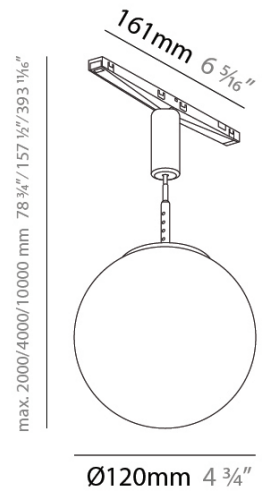

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380659-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 150
 Height (in): 5 7/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

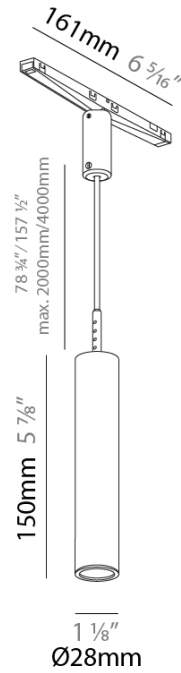

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380660-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight



PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8"
 Height (mm): 300
 Height (in): 11 13/16"
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

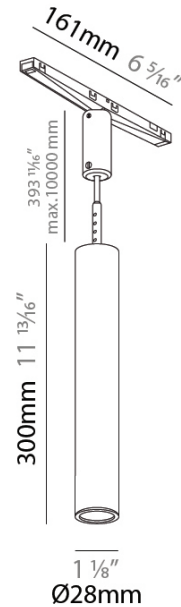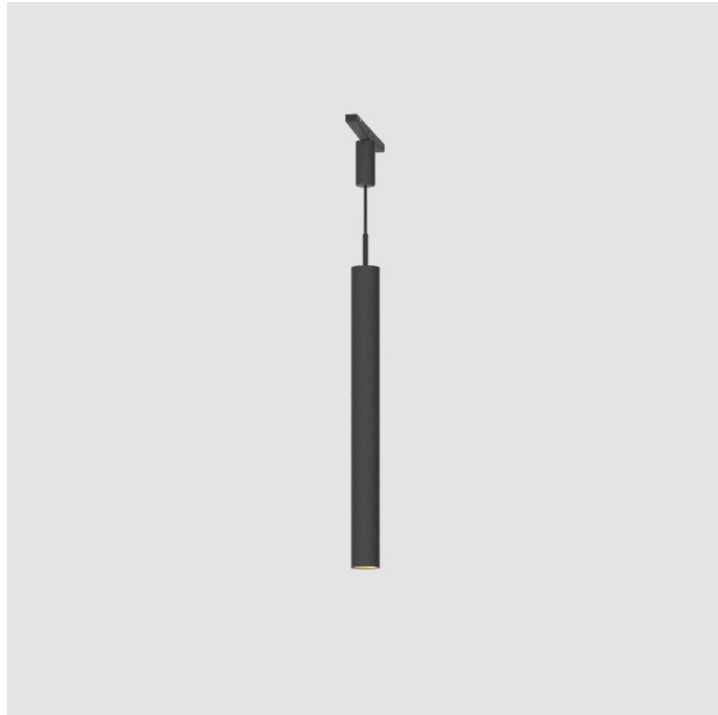

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380661-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8"
 Height (mm): 450
 Height (in): 17 11/16"
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

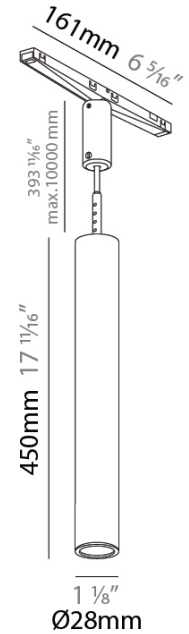

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380662-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 150mm / 5 7/8" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 150
 Height (in): 5 7/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48

LED
 Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
 Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Optic°: 40 / 52

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

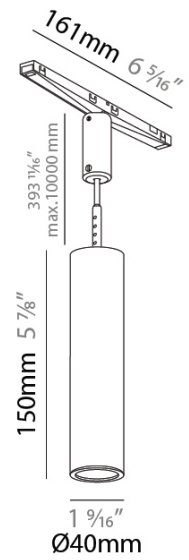

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380663-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 300
 Height (in): 11 13/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
 Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

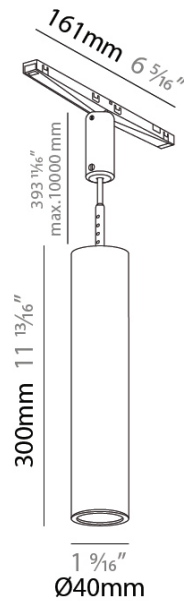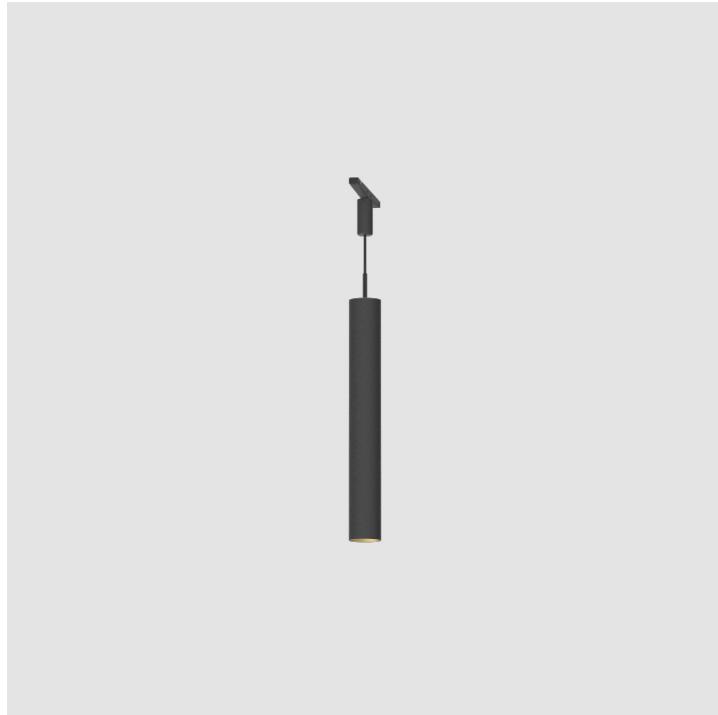

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380664-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16"
 Height (mm): 450
 Height (in): 17 11/16"
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
 Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 40 / 52

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

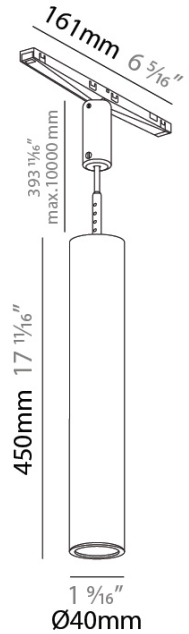

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380665-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - 10W LED - 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Weight (kg): 0.481
 Weight (lbs): 1.06
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 851 / 890 / 923 / 944
 Nominal Lumen (lm): 969 / 1014 / 1054 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Optic°: 18 / 36 / 56
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

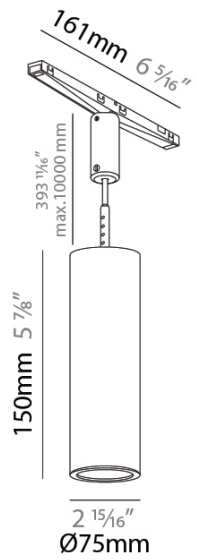

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380666-

DESCRIPTION
 Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - Direct - 20W LED - Max. 1826lm, 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect


PHYSICAL
 Aperture Sizes - Downlights: 2"
 Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16"
 Height (mm): 150
 Height (in): 5 7/8"
 Weight (kg): 0.481
 Weight (lbs): 1.06
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20
 Total Output Wattage (W): 18.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Max. 1826
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Optic°: 18 / 36 / 56
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

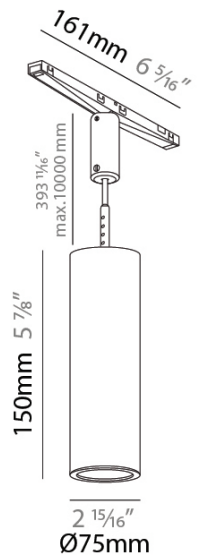

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380667-

DESCRIPTION
 Hangover Plug Micro Insert for Minimal Track Suspension -
 Ø28/1 1/8" - 150mm/5 7/8" - Direct/Indirect - 6.4W LED (Zhaga
 Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali
 Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8"
 Height (mm): 150
 Height (in): 5 7/8"
 Weight (kg): 0.124
 Weight (lbs): 0.273
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color
 Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

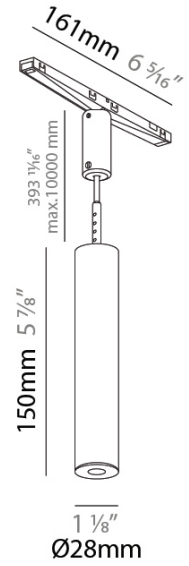

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380668-

DESCRIPTION
 Hangover Plug Micro for Minimal Track Suspension - Ø28/1 1/8"
 - 300mm/11 13/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K
 / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct



PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 300
 Height (in): 11 13/16
 Weight (kg): 0.24
 Weight (lbs): 0.529
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color
 Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

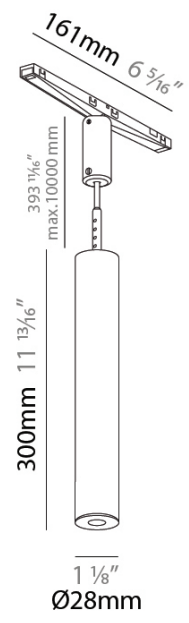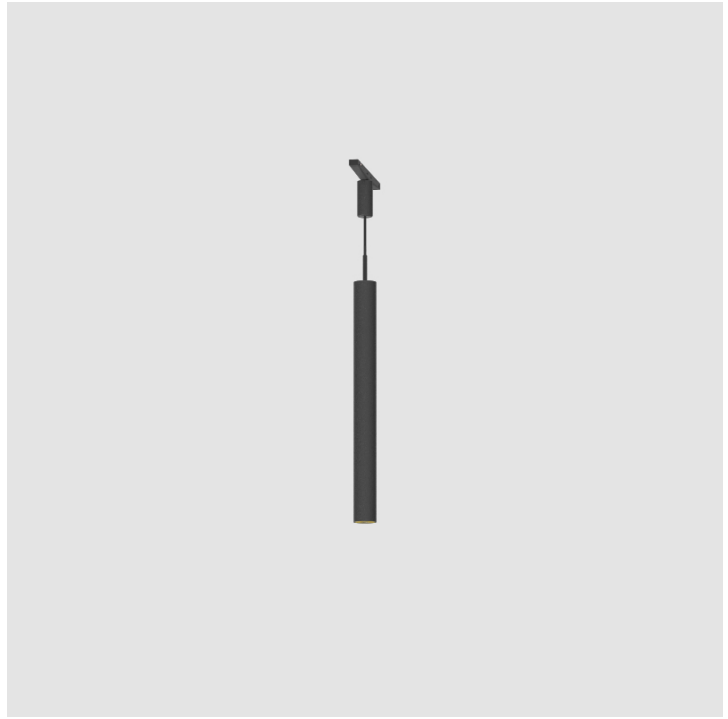

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380669-

DESCRIPTION
 Hangover Plug Micro Insert for Minimal Track Suspension - Ø28/1 1/8" - 450mm/17 11/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL
 Series: Hangover Plug
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Weight (kg): 0.355
 Weight (lbs): 0.783
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP Rating: IP20

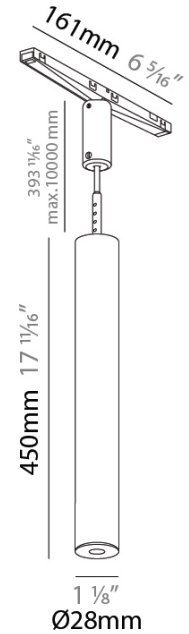

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380670-

DESCRIPTION
 Imagine Micro Insert for Minimal Track Suspension - 23mm / 7/8" x 66mm / 2 5/8" - 4.4W LED, 2700K / 3000K / 3500K / 4000K - 48 - Non-Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

GENERAL
 Series: Imagine Micro
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 23
 Diameter (in): 7/8
 Height (mm): 66
 Height (in): 2 5/8
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4
 Total Output Wattage (W): 3.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 252 / 271 / 315 / 290
 Nominal Lumen (lm): 295 / 317 / 368 / 339
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 26, 28, 38, 46, 64
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

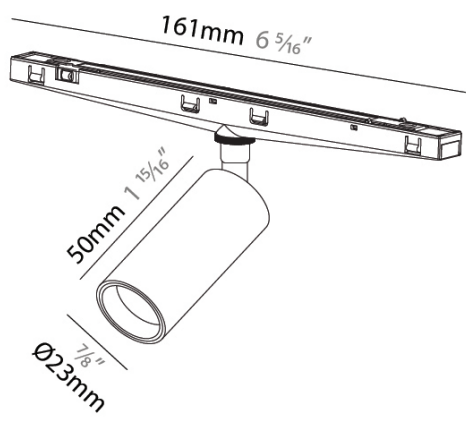

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380671-

DESCRIPTION
 Imagine Micro Insert for Minimal Track Suspension - 35mm/1 3/8" x 90mm/2 5/8" - 9.8W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimmg / DALI Dim, CRI:90 - Beam: 22° / 36° / 62°

GENERAL
 Series: Imagine Micro
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 90
 Height (in): 3 5/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 554 / 590 / 620 / 636
 Nominal Lumen (lm): 750 / 800 / 840 / 861
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 22, 36, 62
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

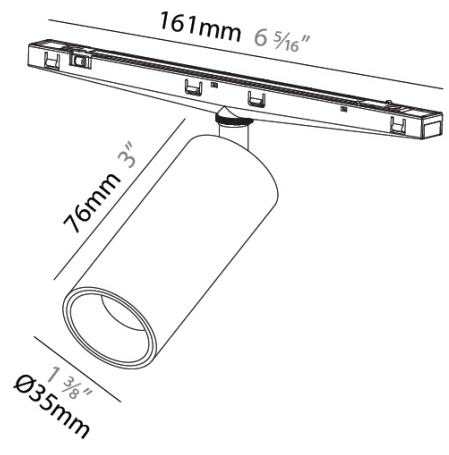

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380672-

DESCRIPTION
 Imagine Micro Flex Insert for Minimal Track Suspension -
 Ø37mm/1 7/16" x 100mm/3 15/16" - 7.1W LED, 48V, Adjustable -
 CRI:90 - Beam: 14° / 20° / 52°

GENERAL
 Series: Imagine Micro Flex
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 37
 Diameter (in): 1 7/16
 Height (mm): 100
 Height (in): 3 15/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 342 / 362
 Nominal Lumen (lm): 607 / 634 / 671
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 14, 20, 52
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

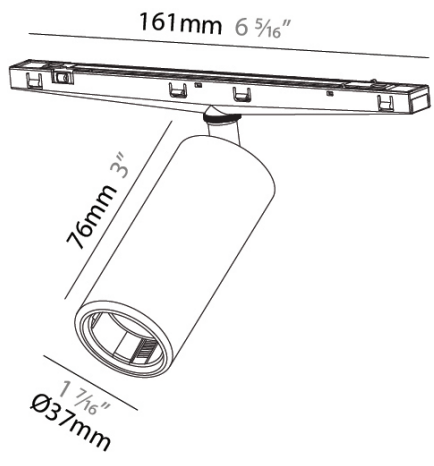

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380673-

DESCRIPTION
 Imagine Micro Dot Insert for Minimal Track Suspension -
 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K /
 4000K, 48V, Adjustable, Non-Dimming / Dali Dim, CRI:90 - Beam:
 34° / 52°

GENERAL
 Series: Imagine Micro Dot
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 90
 Height (in): 3 5/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
 MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
 CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 235 / 252 / 270
 Nominal Lumen (lm): 372 / 399 / 427
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 34, 52
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

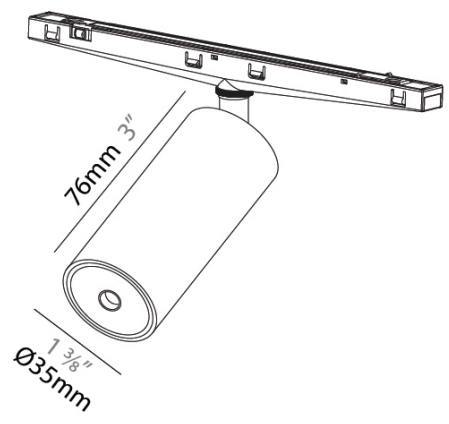

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380674-

DESCRIPTION
 Magiq Micro Insert for Minimal Track Suspension - 4.9W LED
 (Zhaga Standard) - 2700K / 3000K / 4000K Max. 365lm, Beam
 Angle 54

GENERAL
 Series: Magiq Micro
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Light Distribution: Direct


PHYSICAL
 Shape: Rectangle
 Length (mm): 300
 Length (in): 11 13/16
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 5
 Total Output Wattage (W): 4.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (*K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 370 / 384 / 417
 Nominal Lumen (lm): 370 / 384 / 417
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 54

RATINGS AND CERTIFICATIONS
 Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

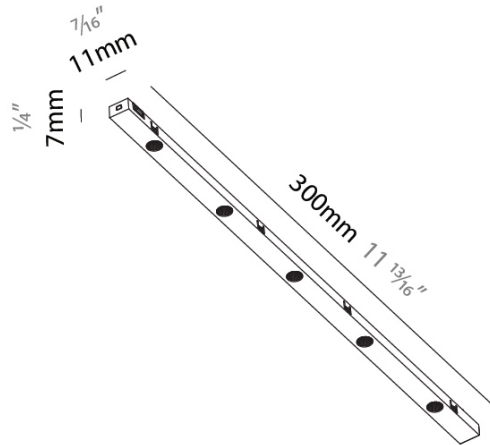

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SURFACE

A380676-

DESCRIPTION
 Microline Insert for Minimal Track Suspension - L=672mm, LED
 8W, max. 429lm, CRI90

GENERAL
 Series: Microline _____
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Surface _____
 Product Type: Modular Systems _____
 Mounting Location: Wall / Ceiling _____
 Light Distribution: Direct _____


PHYSICAL
 Shape: Rectangle _____
 Length (mm): 674 _____
 Length (in): 26 ⁹/₁₆ _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 7 _____
 Height (in): 1/4 _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 8 _____
 Total Output Wattage (W): 7.3 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

LED
 Delivered Lumen Range: 100 - 499 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 386 / 429 _____
 Nominal Lumen (lm): 386 / 429 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL
 Beam Angle: 116 _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

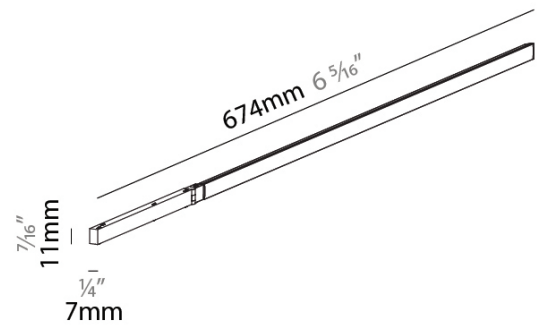

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SURFACE

A380677-

DESCRIPTION
 Microline Insert for Minimal Track Suspension - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

GENERAL
 Series: Microline _____
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Surface _____
 Product Type: Modular Systems _____
 Mounting Location: Wall / Ceiling _____
 Light Distribution: Direct _____


PHYSICAL
 Shape: Rectangle _____
 Length (mm): 1174 _____
 Length (in): 46 1/16" _____
 Width (mm): 11 _____
 Width (in): 7/16" _____
 Height (mm): 7 _____
 Height (in): 1/4" _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 16 _____
 Total Output Wattage (W): 14.6 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

LED
 Delivered Lumen Range: 500 - 999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 772 / 858 _____
 Nominal Lumen (lm): 772 / 858 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL
 Beam Angle: 116 _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

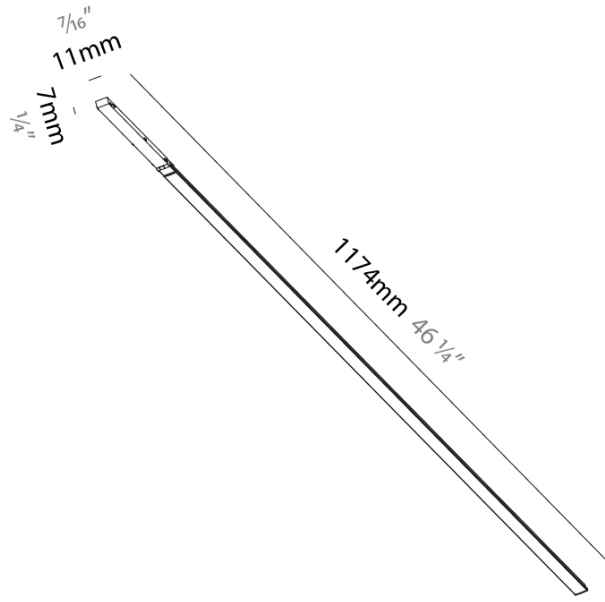

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A380678-

DESCRIPTION
 Microline Insert for Minimal Track Suspension - L=1670mm / 65 3/4", L24W LED,2700K / 3000K - max. 1287lm, CRI90

GENERAL
 Series: Microline _____
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Suspension _____
 Product Type: Linear Profiles _____
 Mounting Location: Wall / Ceiling _____
 Light Distribution: Direct _____


PHYSICAL
 Shape: Rectangle _____
 Length (mm): 1674 _____
 Length (in): 65 7/8 _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 7 _____
 Height (in): 1/4 _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Input Wattage Range: 20 - 29 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 24 _____
 Total Output Wattage (W): 21.8 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

LED
 Delivered Lumen Range: 1000 - 1999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 1158 / 1287 _____
 Nominal Lumen (lm): 1158 / 1287 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL
 Beam Angle: 116 _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

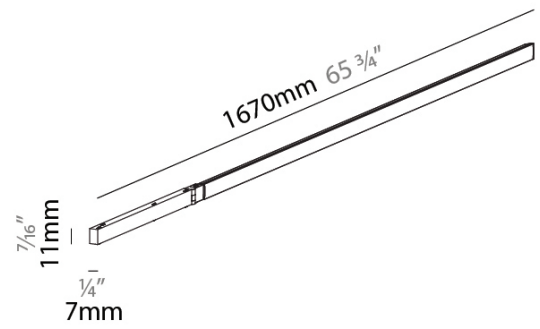

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380680-

DESCRIPTION
 Snooker Insert for Minimal Track Suspension - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Shine Ring

GENERAL
 Series: Snooker
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct



PHYSICAL
 Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 13/16
 Height (mm): 71
 Height (in): 2 13/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: NOR / OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

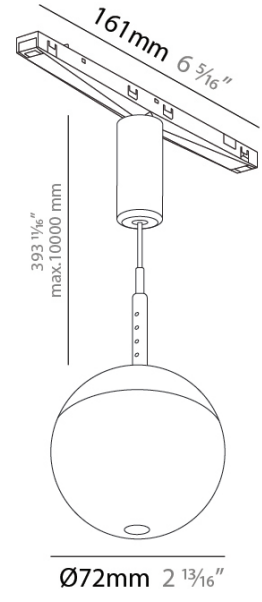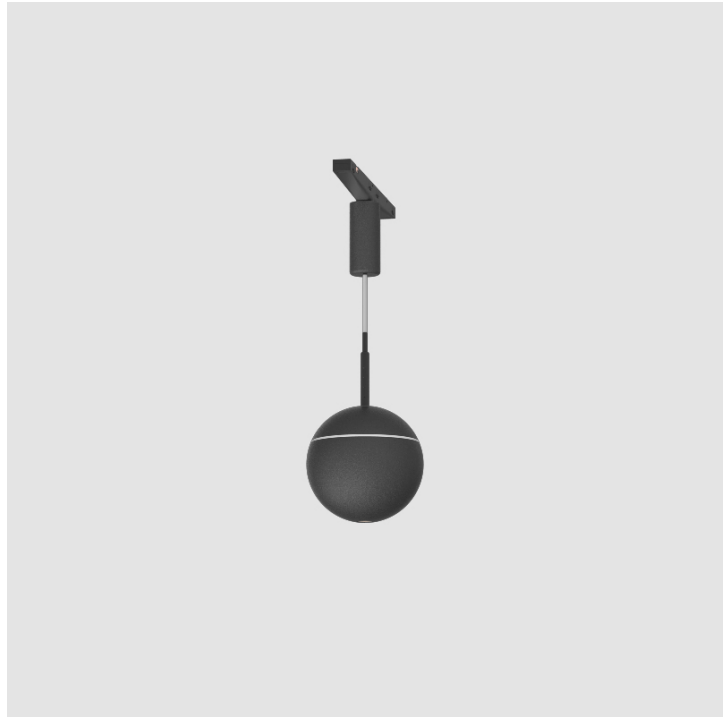

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380681-

DESCRIPTION
 Snooker Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

GENERAL
 Series: Snooker Glass
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct


PHYSICAL
 Shape: Round
 Diameter (mm): 74
 Diameter (in): 2 15/16
 Height (mm): 76
 Height (in): 3
 Diffuser: Opal, Yellow, Orange, Red, Green, Blue
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

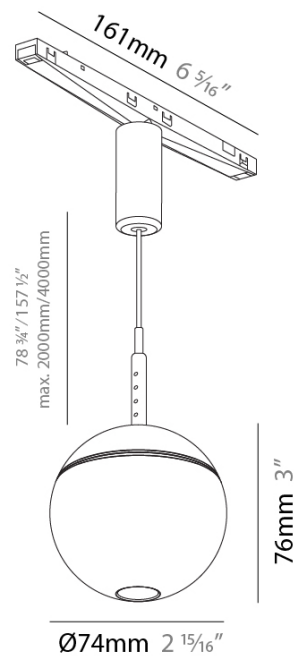

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380682-

DESCRIPTION
 Snooker Metal Insert for Minimal Track Suspension - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Chrome

GENERAL
 Series: Snooker Metal
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling
 Light Distribution: Direct



PHYSICAL
 Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 13/16
 Height (mm): 72
 Height (in): 2 13/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: CHR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL
 Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED
 Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL
 Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

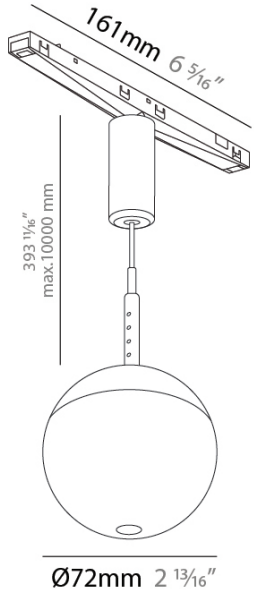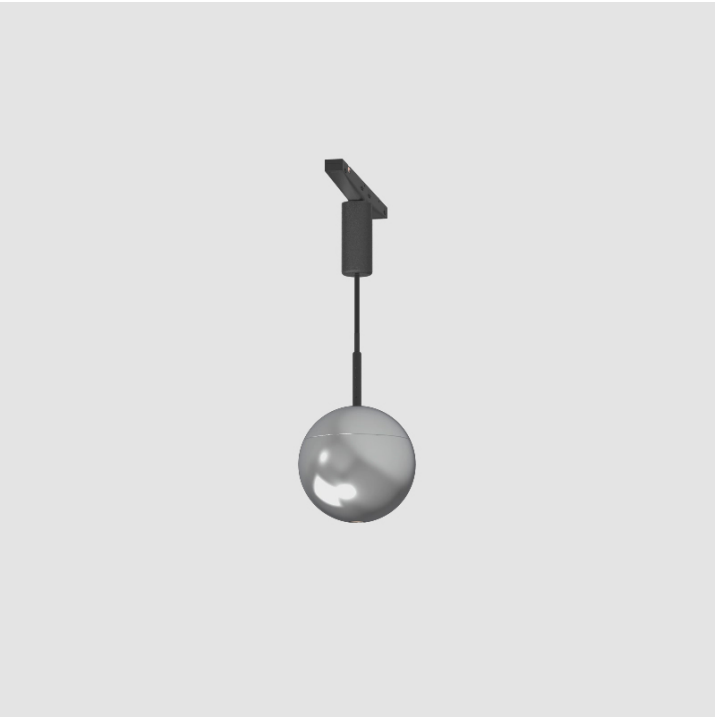

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380753-

DESCRIPTION

Minimal Track Suspension - Imagine Micro - Insert - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimming / Dali Dim, CRI:90 - Beam: 14°

GENERAL

Series: Imagine Micro
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 90
Height (in): 3 5/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Input Voltage (V): 48

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 110 / 119 / 127
Nominal Lumen (lm): 372 / 399 / 427
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 14
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T142-


DESCRIPTION
 Minimal Track Wall / Ceiling Cable Loop

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling

PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 30
 Height (in): 1 3/16
 Weight (kg): 0.01
 Weight (lbs): 0.022
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

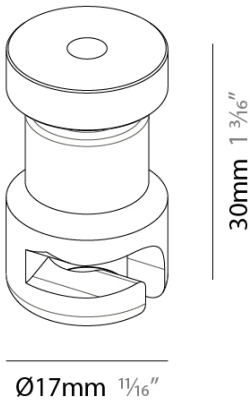

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T143-


DESCRIPTION
 Minimal Track Suspended Cable Roller

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling

PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 75
 Height (in): 2 15/16
 Weight (kg): 0.02
 Weight (lbs): 0.044
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

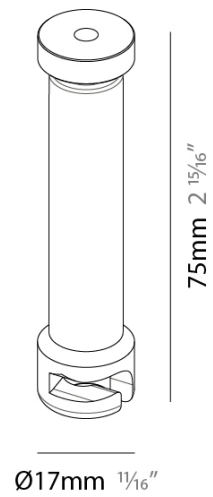

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS

A3T145-

DESCRIPTION
 Minimal Track / Code System - Central Feed Unit with 2500mm supply cable

GENERAL


Series: Minimal Track _____
 Partner: Prolicht _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 116 _____
 Length (in): 4 ⁹/₁₆ _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 12 _____
 Height (in): 1/2 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____
 Cable Details: 2500mm Supply Cable _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

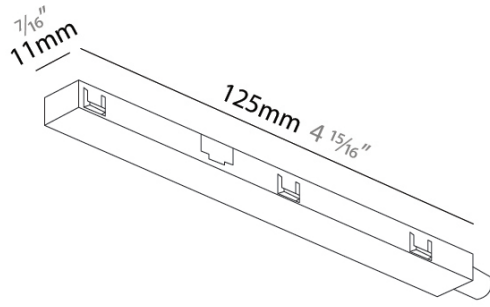

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS


A3T146-

DESCRIPTION
 Minimal Track / Code System - Linear Connector

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 112
 Length (in): 4 7/16
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

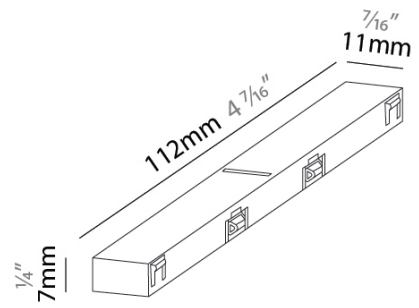

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS


A3T149-

DESCRIPTION
 Minimal Track / Code System - Flexible Connector- 108mm / 4 1/4" x 108mm / 4 1/4" - Black

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 116 x 116
 Length (in): 4 9/16"
 Width (mm): 11
 Width (in): 7/16"
 Height (mm): 12
 Height (in): 1/2"
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

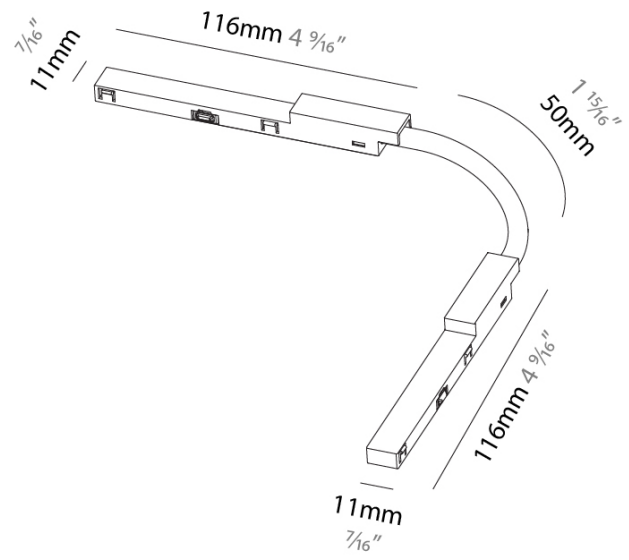

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION



A3T298-

DESCRIPTION
 Minimal Track - Suspension - Cover Strip for Profile - Black / White

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 3000
 Length (in): 118 1/8
 Width (mm): 14
 Width (in): 9/16
 Height (mm): 5
 Height (in): 3/16
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

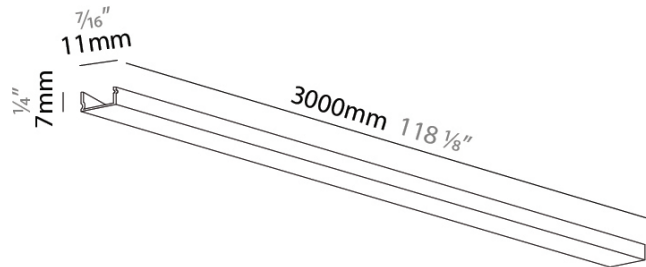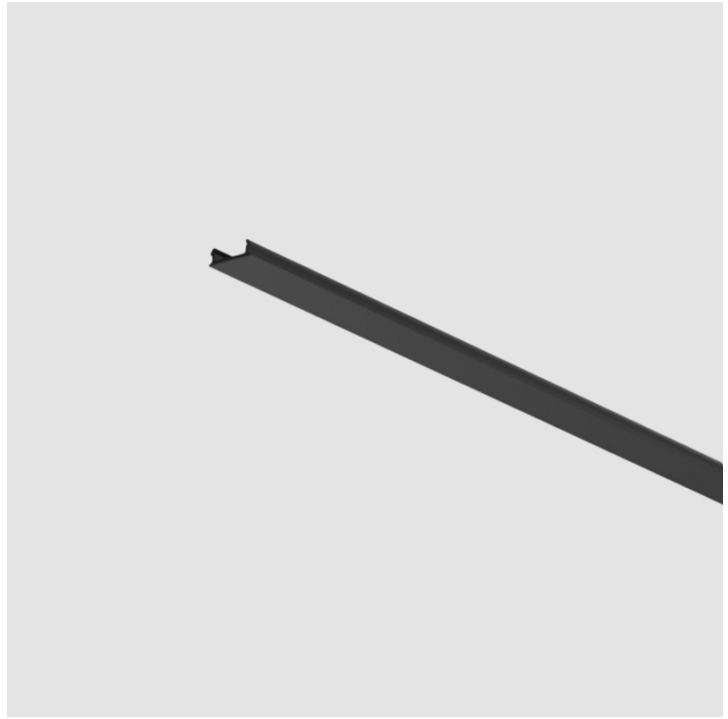

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION



A3T299-

DESCRIPTION
 Minimal Track - Suspension - Gripper M10x1 16L wit Steel Rope
 L=2000mm

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Diameter (mm): 20
 Diameter (in): 13/16
 Height (mm): 33
 Height (in): 1 5/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

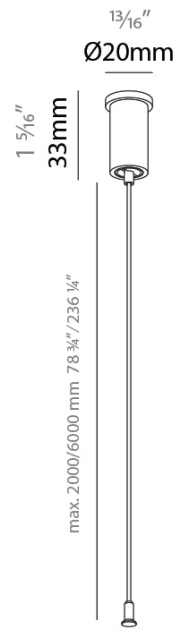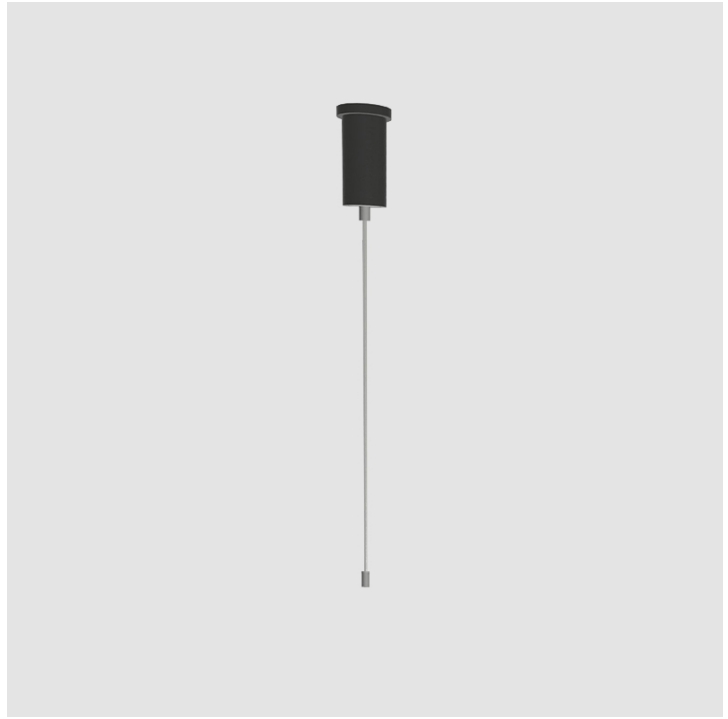

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T300-

DESCRIPTION
 Minimal Track - Suspension - Short Pendant Bracket with Countersunk Hole for Suspensions

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 25
 Length (in): 1
 Width (mm): 15.6
 Width (in): 5/8
 Height (mm): 6
 Height (in): 1/4
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

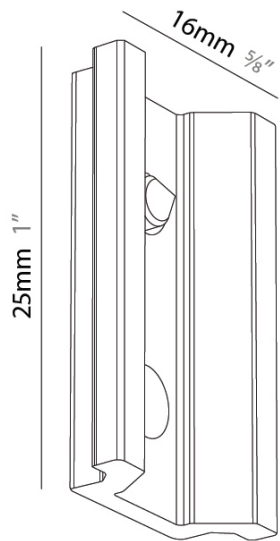

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T301-

DESCRIPTION
 Minimal Track - Suspension - Long Pendant Bracket with Countersunk Hole for Suspensions

GENERAL
 Series: Minimal Track _____
 Partner: Prolight _____
 Division: Architectural _____
 Installation: Suspension _____
 Product Type: Linear Profiles _____
 Mounting Location: Ceiling _____

PHYSICAL
 Shape: Rectangle _____
 Length (mm): 50 _____
 Length (in): 115/16 _____
 Width (mm): 15.6 _____
 Width (in): 5/8 _____
 Height (mm): 6 _____
 Height (in): 1/4 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

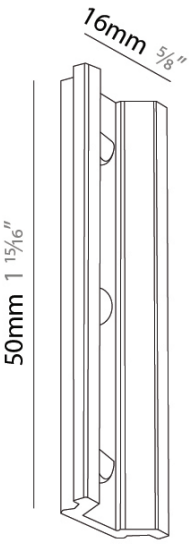

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION



A3T302-

DESCRIPTION
 Minimal Track - Suspension - Driver Box ON/OFF (max. 96W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Wall / Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 240
 Length (in): 9 7/16
 Width (mm): 75
 Width (in): 2 15/16
 Height (mm): 36
 Height (in): 1 7/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

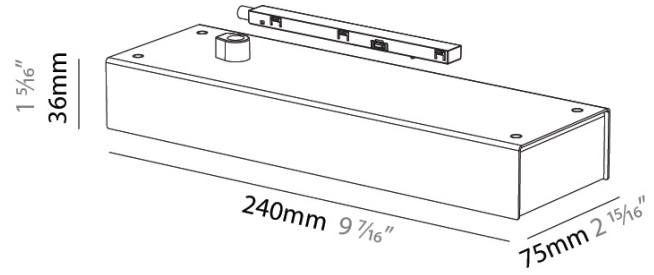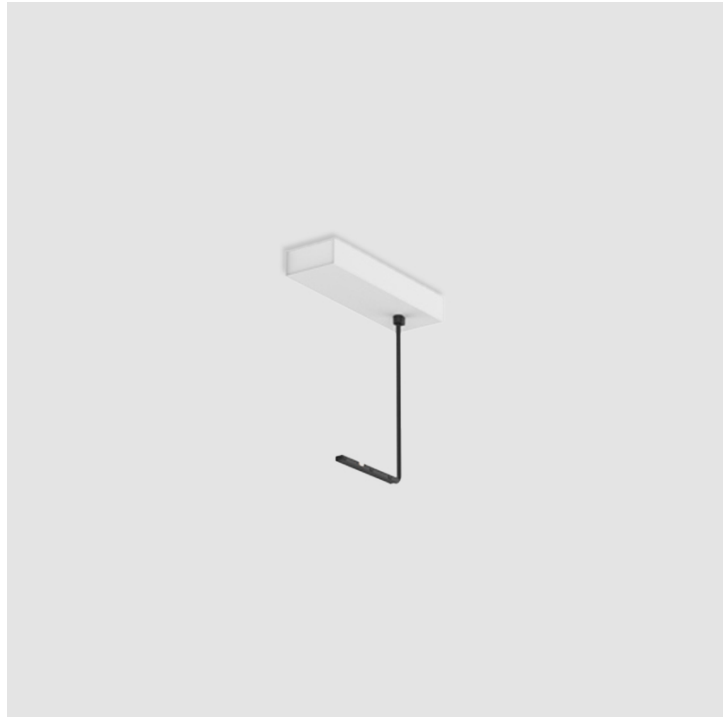

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T303-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Touchdim (max. 92W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 240
 Length (in): 9 7/16
 Width (mm): 120
 Width (in): 4 3/4
 Height (mm): 36
 Height (in): 1 5/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

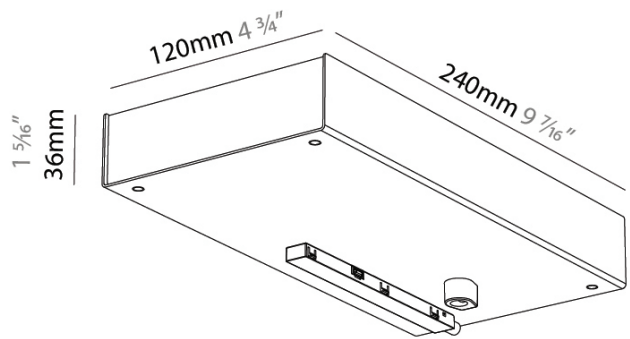

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T304-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Dali (max. 86W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 240
 Length (in): 9 7/16
 Width (mm): 120
 Width (in): 4 3/4
 Height (mm): 36
 Height (in): 1 3/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

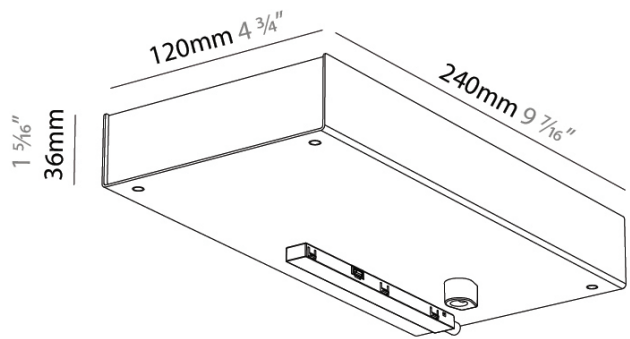

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T305-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Matter (max. 86W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 240
 Length (in): 9 7/16
 Width (mm): 125
 Width (in): 4 15/16
 Height (mm): 36
 Height (in): 1 7/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

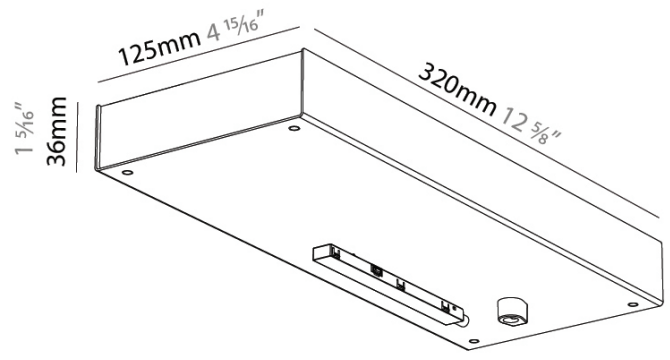

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T306-

DESCRIPTION
Minimal Track - Suspension - Driver Box ON/OFF (max. 200W)

GENERAL
Series: Minimal Track
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Linear Profiles
Mounting Location: Ceiling

PHYSICAL
Shape: Rectangle
Length (mm): 400
Length (in): 15 3/4
Width (mm): 125
Width (in): 4 15/16
Height (mm): 36
Height (in): 1 7/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

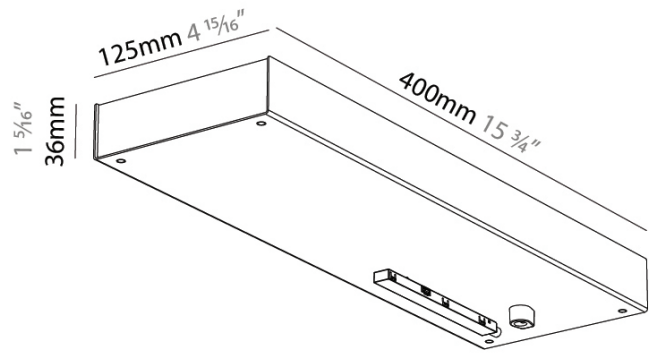

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T307-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Touchdim (max. 200W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 400
 Length (in): 15 3/4
 Width (mm): 125
 Width (in): 4 15/16
 Height (mm): 36
 Height (in): 1 7/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

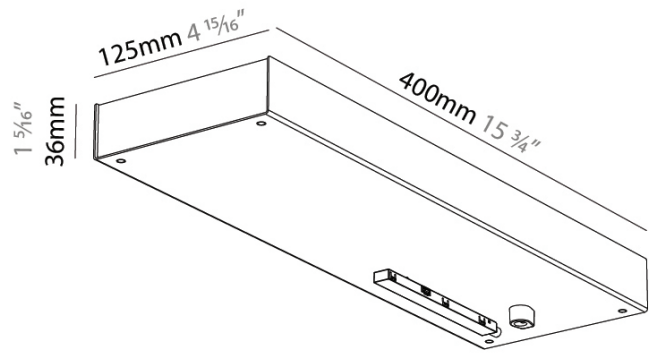

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T308-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Dali (max. 200W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 400
 Length (in): 15 3/4
 Width (mm): 125
 Width (in): 4 15/16
 Height (mm): 36
 Height (in): 1 7/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

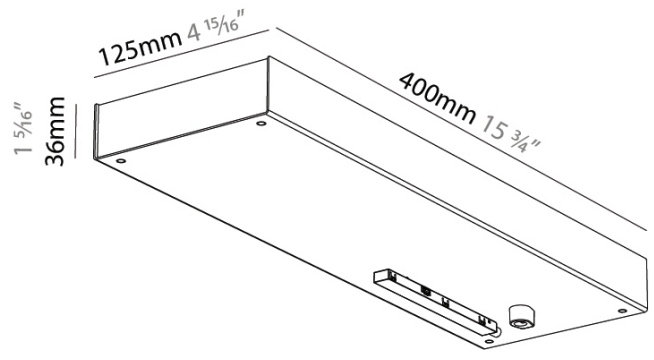

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T309-

DESCRIPTION
 Minimal Track - Suspension - Driver Box Matter (max. 200W)

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 400
 Length (in): 15 3/4
 Width (mm): 125
 Width (in): 4 15/16
 Height (mm): 36
 Height (in): 1 7/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

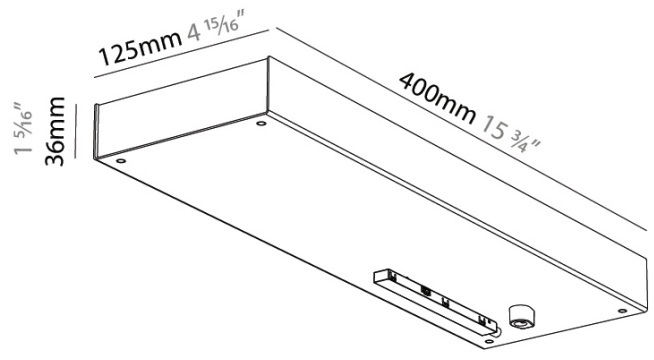

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T310-

DESCRIPTION
 Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile

GENERAL

Series: Minimal Track _____
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Suspension _____
 Product Type: Linear Profiles _____
 Mounting Location: Ceiling _____

PHYSICAL


Shape: Rectangle _____
 Length (mm): 1000 / 2000 / 3000 _____
 Length (in): 39 3/8 _____
 Width (mm): 19 _____
 Width (in): 3/4 _____
 Height (mm): 24 _____
 Height (in): 15/16 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 30 - 49 W _____
 Total Output Wattage (W): 40 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

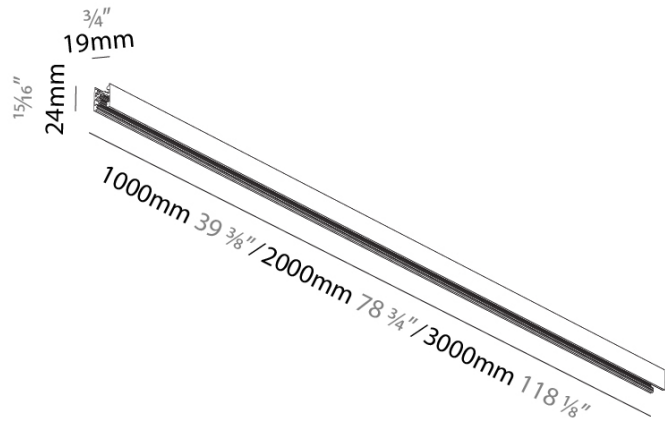

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION


A3T311-

DESCRIPTION
 Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile - Colored

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 3/8"
 Width (mm): 19
 Width (in): 3/4"
 Height (mm): 24
 Height (in): 15/16"
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

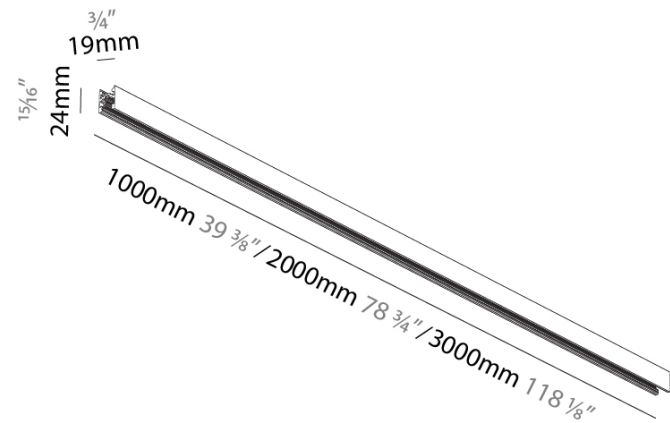

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T312-



DESCRIPTION
 Minimal Track - Suspension - End Cap - Black / White

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling

PHYSICAL
 Shape: Rectangle
 Width (mm): 19
 Width (in): 3/4
 Height (mm): 24
 Depth (mm): 9
 Height (in): 15/16
 Depth (in): 3/8
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 30 - 49 W
 Total Output Wattage (W): 40
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

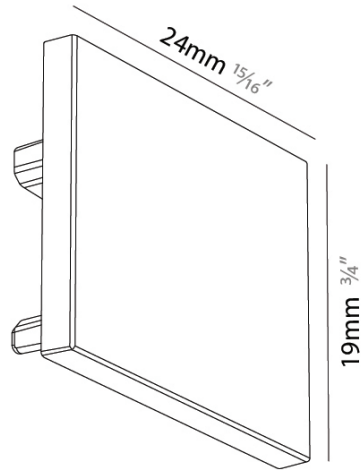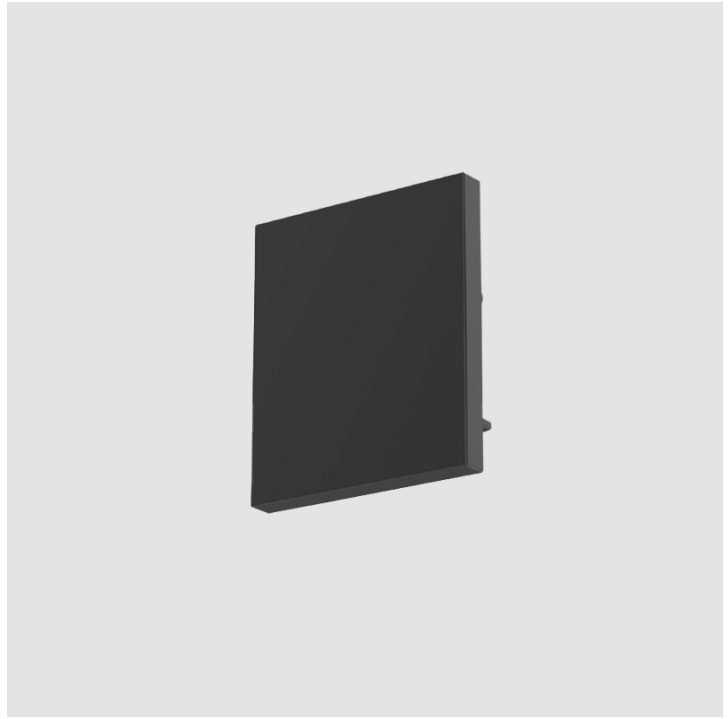

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T323-


DESCRIPTION
 Minimal Track cable loop

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling

PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 25
 Height (in): 1
 Weight (kg): 0.011
 Weight (lbs): 0.024
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

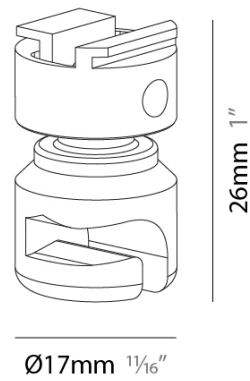

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T324-


DESCRIPTION
 Minimal Track Cable Roller

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Product Type: Modular Systems
 Mounting Location: Ceiling

PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 77
 Height (in): 3 1/16
 Weight (kg): 0.029
 Weight (lbs): 0.064
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

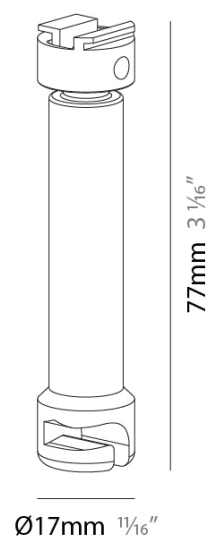

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

A3MINTRK-SUS-SYS COMPONENTS TRACK


A3T325-

DESCRIPTION
 Minimal Track - Suspended Cable Roller

GENERAL
 Series: Minimal Track
 Partner: Prolicht
 Division: Architectural
 Installation: Track
 Mounting Location: Ceiling





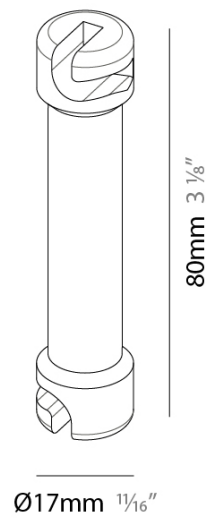
































































PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 80
 Height (in): 3 1/8
 Weight (kg): 0.032
 Weight (lbs): 0.005
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20













PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____











LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)