

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380656-

DESCRIPTION

Bilo Insert for Minimal Track System Suspension - Ø120mm - 6.4W LED , 48V, CRI:90, Beam 180

GENERAL

Series: Bilo
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Sphere
 Diameter (mm): 120
 Diameter (in): 4 ¾
 Height (mm): 120
 Height (in): 4 ¾
 Light Distribution: Omnidirectional
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Glass / Metal
 Cable Details: 2000mm/78 ¾" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 356 / 377 / 398 / 408
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

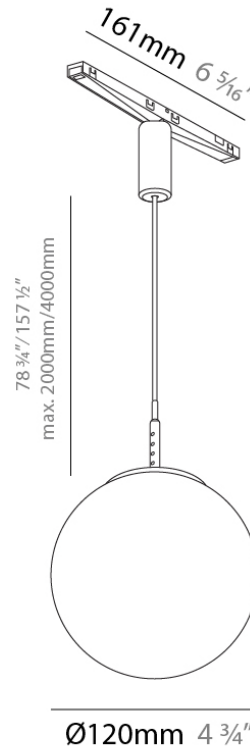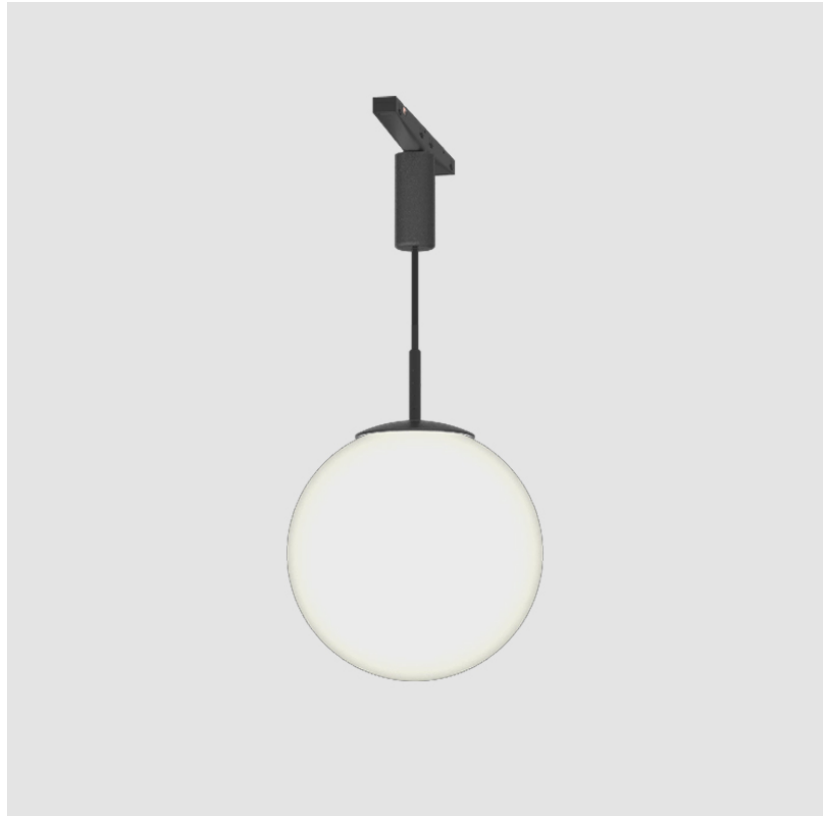

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380659-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 22°/26°/56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 150
 Height (in): 5 7/8
 Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

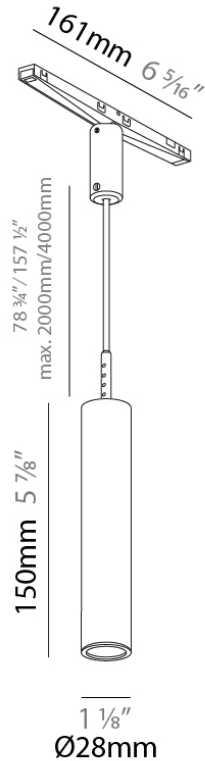

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380660-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26° / 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 381 / 404 / 426 / 438

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

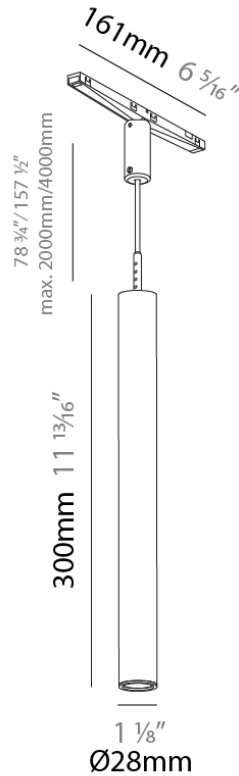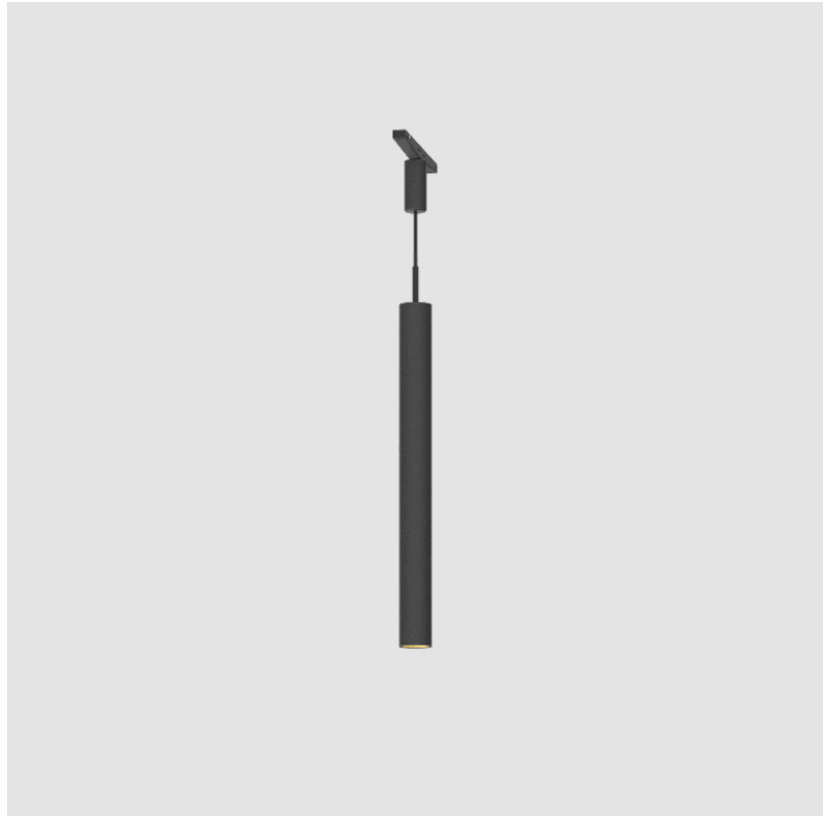

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380661-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16

Light Distribution: Downlight
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

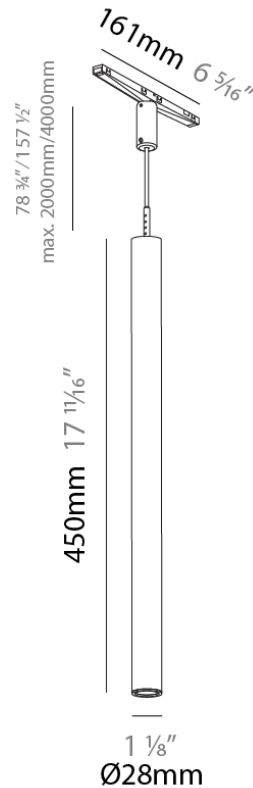

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380662-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 150mm / 5 7/8" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

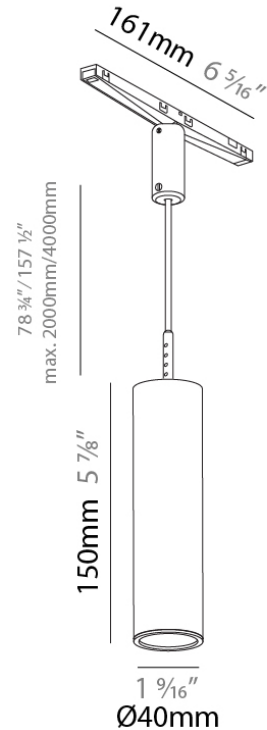

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380663-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

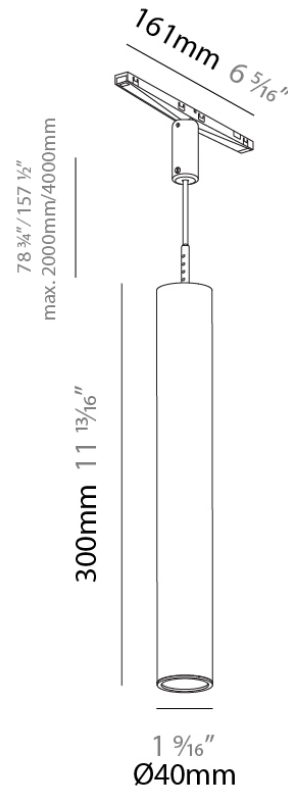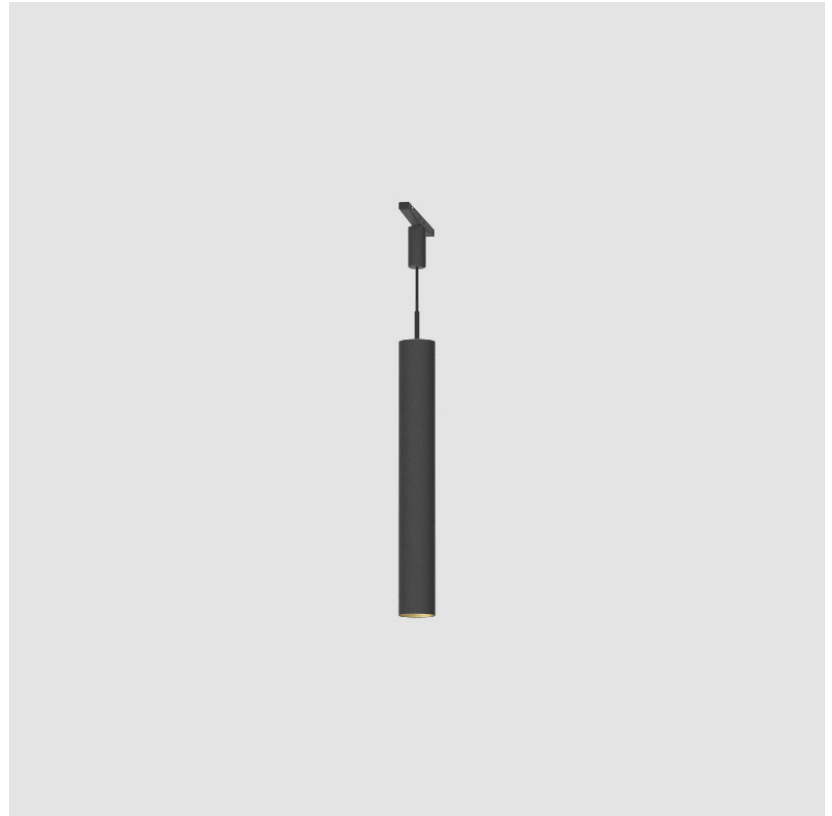

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380664-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 450
 Height (in): 17 11/16
 Light Distribution: Downlight
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
 Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

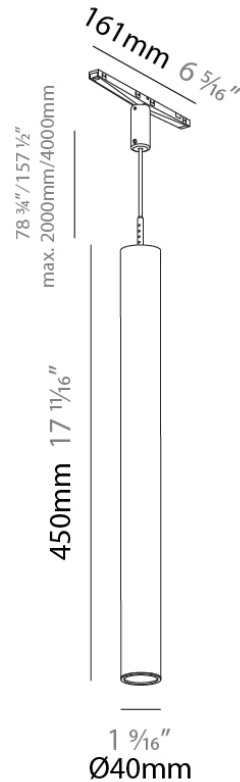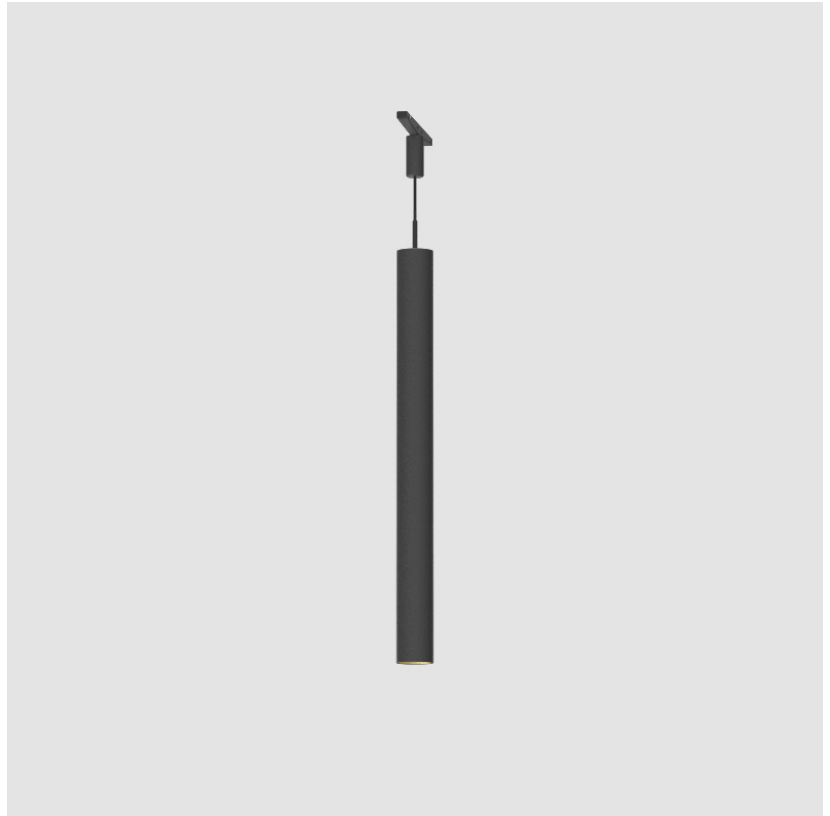

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380665-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - 10W LED - 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Direct

Weight (kg): 0.481

Weight (lbs): 1.06

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Accent Finish: OPL / YEL / ORA / RED / BLU / GRN

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color

Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 1999 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 851 / 890 / 923 / 944

Nominal Lumen (lm): 969 / 1014 / 1054 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL


Optic°: 18 / 36 / 56

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

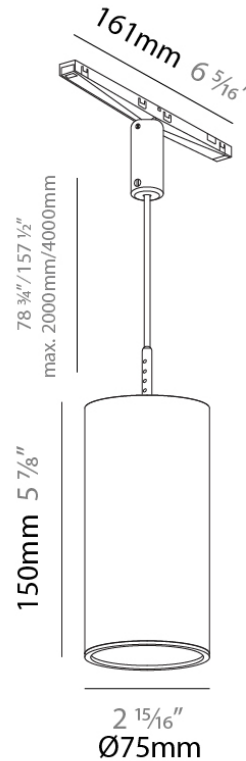

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380666-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - Direct - 20W LED - Max. 1826lm, 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Light Distribution: Direct / Indirect
 Weight (kg): 0.481
 Weight (lbs): 1.06
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20
 Total Output Wattage (W): 18.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Max. 1826
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 18 / 36 / 56
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

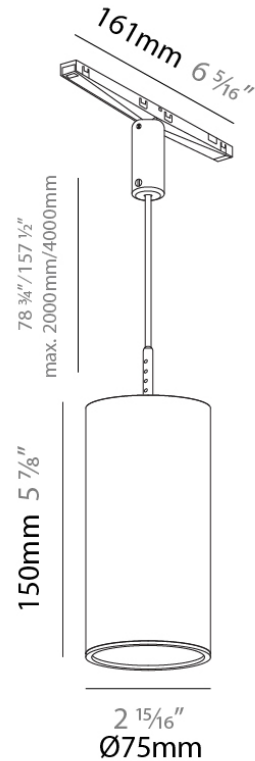

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380667-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Suspension - Ø28/1 1/8" - 150mm/5 7/8" - Direct/Indirect - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8"

Height (mm): 150

Height (in): 5 7/8"

Light Distribution: Direct

Weight (kg): 0.124

Weight (lbs): 0.273

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

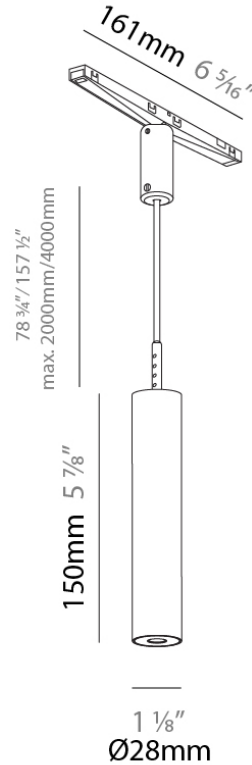

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380668-

DESCRIPTION

Hangover Plug Micro for Minimal Track Suspension - Ø28/1 1/8" - 300mm/11 13/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8"

Height (mm): 300

Height (in): 11 13/16"

Light Distribution: Direct

Weight (kg): 0.24

Weight (lbs): 0.529

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color

Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

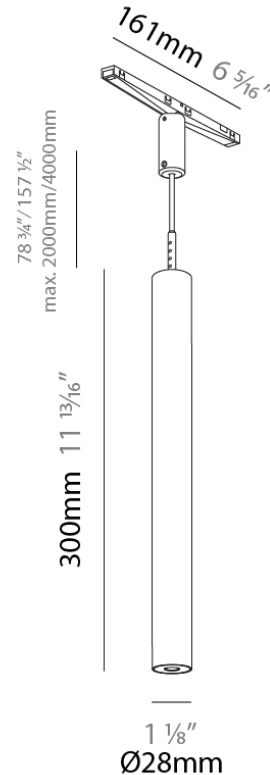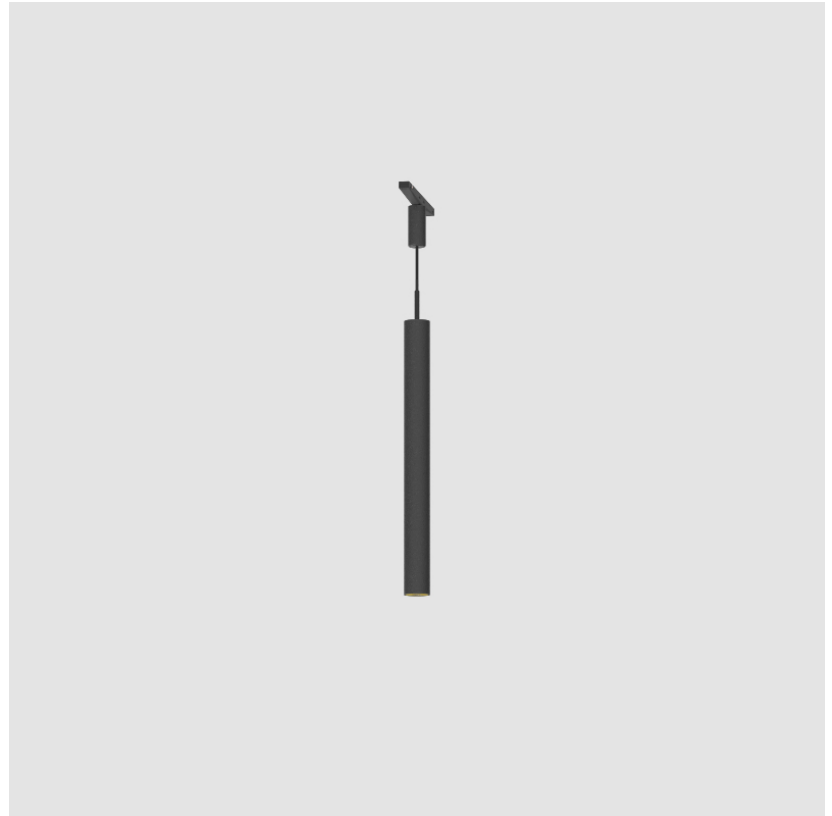

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380669-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Suspension - Ø28/1 1/8" - 450mm/17 11/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Light Distribution: Direct
 Weight (kg): 0.355
 Weight (lbs): 0.783
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

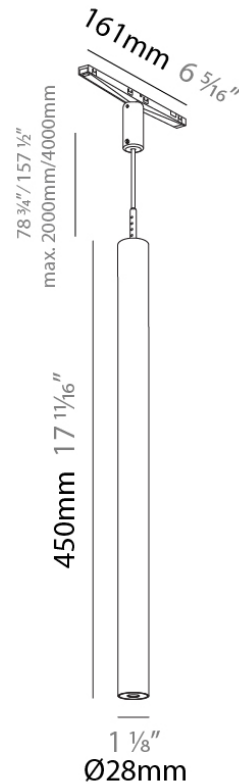

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380670-

DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension - 23mm / 7/8" x 66mm / 2 5/8" - 4.4W LED, 2700K / 3000K / 3500K / 4000K - 48 - Non-Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

GENERAL

Series: Imagine Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder
 Diameter (mm): 23
 Diameter (in): 7/8
 Height (mm): 66
 Height (in): 2 5/8
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4
 Total Output Wattage (W): 3.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 252 / 271 / 315 / 290
 Nominal Lumen (lm): 295 / 317 / 368 / 339
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 26, 28, 38, 46, 64
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

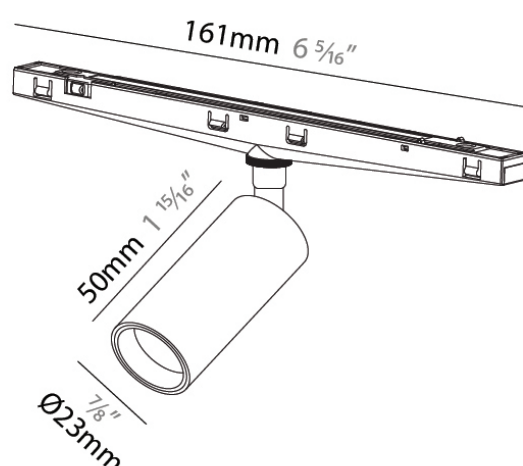

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380671-

DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension - 35mm/1 3/8" x 90mm/2 5/8" - 9.8W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimmable / Dali Dim, CRI:90 - Beam: 22° / 36° / 62°

GENERAL

Series: Imagine Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder

Diameter (mm): 35

Diameter (in): 1 3/8

Height (mm): 90

Height (in): 3 9/16

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 9

Total Output Wattage (W): 8.2

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 554 / 590 / 620 / 636

Nominal Lumen (lm): 750 / 800 / 840 / 861

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL


Beam Angle: 22, 36, 62

Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

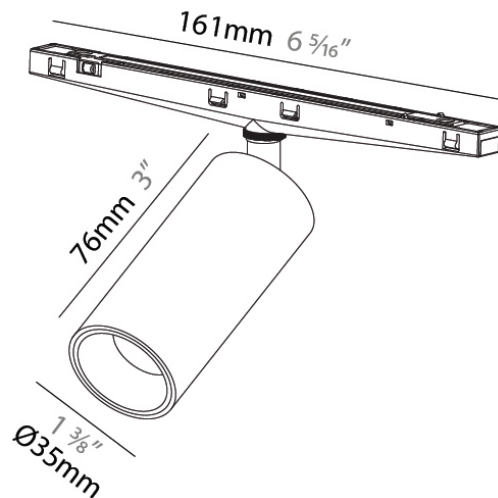

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380672-

DESCRIPTION

Imagine Micro Flex Insert for Minimal Track Suspension - Ø37mm/1 7/16" x 100mm/3 15/16" - 7.1W LED, 48V, Adjustable - CRI:90 - Beam: 14° / 20° / 52°

GENERAL

Series: Imagine Micro Flex
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder
 Diameter (mm): 37
 Diameter (in): 1 7/16
 Height (mm): 100
 Height (in): 3 15/16
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 328 / 342 / 362
 Nominal Lumen (lm): 607 / 634 / 671
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 14, 20, 52
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

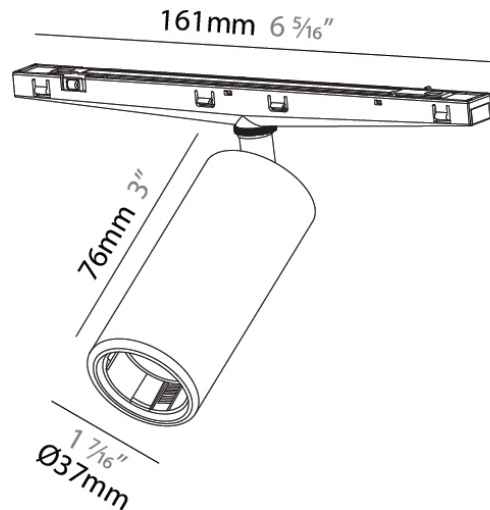

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380673-

DESCRIPTION

Imagine Micro Dot Insert for Minimal Track Suspension - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K. 48V, Adjustable, Non-Dimming / Dali Dim, CRI:90 - Beam: 34° / 52°

GENERAL

Series: Imagine Micro Dot
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 90
 Height (in): 3 9/16
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 7
 Total Output Wattage (W): 6.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 235 / 252 / 270
 Nominal Lumen (lm): 372 / 399 / 427
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 34, 52
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

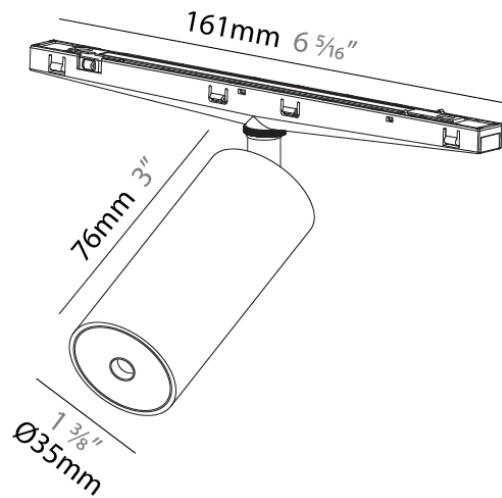

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380674-

DESCRIPTION

Magiq Micro Insert for Minimal Track Suspension - 4.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K Max. 365lm, Beam Angle 54

GENERAL

Series: Magiq Micro _____
 Brand: Prolicht _____
 Division: Architectural _____
 Mounting Type: Track _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 300 _____
 Length (in): 11 ¹³/₁₆ _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 7 _____
 Height (in): 1/4 _____
 Light Distribution: Direct _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum Die Cast _____

ELECTRICAL

Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED _____
 Input Wattage (W): 5 _____
 Total Output Wattage (W): 4.6 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

LED


Delivered Lumen Range: 100 - 499 lm _____
 Color Temperature (°K): 2700 / 3000 / 4000 _____
 Max. Delivered Lumen (lm): 370 / 384 / 417 _____
 Nominal Lumen (lm): 370 / 384 / 417 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 54 _____

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
 IP rating: IP20 _____

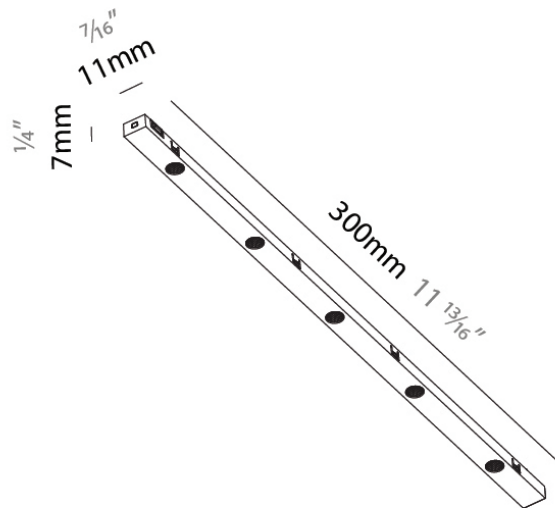

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380675-

DESCRIPTION

Melt Mini Insert for Minimal Track Suspension - Ø280mm/11" x 270mm/10 5/8" - 6.2W LED - 3000K, 48Vdc, CRI90 - Diffuser: Smoke - 44lm, Chrome - 158lm, Gold - 235lm, Copper - 220lm - Cable Options

GENERAL

Series: Melt Mini
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Abstract
 Diameter (mm): 280
 Diameter (in): 11
 Height (mm): 270
 Height (in): 10 5/8
 Light Distribution: Omnidirectional
 Fixture Finish: CHR / COP / GLD / SMK
 Holder Finish: WHI / BLK
 Accent Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG
 Fixture Material: Plastic
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green
 Upon Request: 1,000mm and 10,000mm Black Cable Available

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 350
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): Max 235
 Nominal Lumen (lm): 885
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

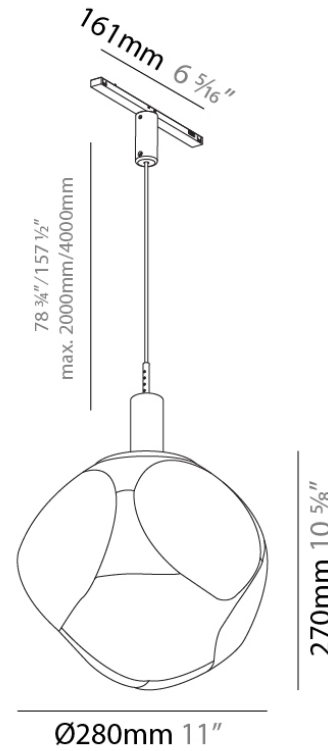

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS SURFACE

A380676-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=672mm, LED 8W, max. 429lm, CRI90

GENERAL

Series: Microline
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall / Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Rectangle
 Length (mm): 674
 Length (in): 26 ⁹/₁₆
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 8
 Total Output Wattage (W): 7.3
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 386 / 429
 Nominal Lumen (lm): 386 / 429
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

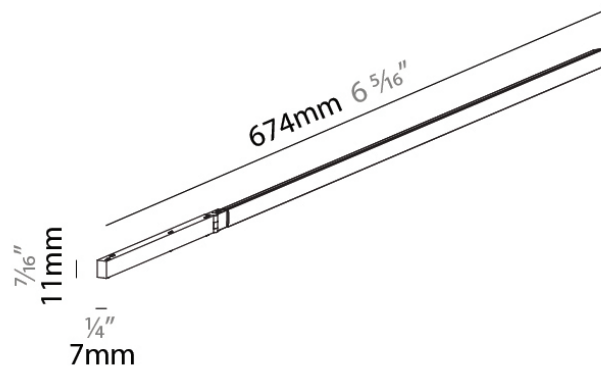

A3MINTRK-SUS-SYS COMPONENTS SURFACE

A380677-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

GENERAL

Series: Microline
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall / Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Rectangle
 Length (mm): 1174
 Length (in): 46 1/4
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16
 Total Output Wattage (W): 14.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 772 / 858
 Nominal Lumen (lm): 772 / 858
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

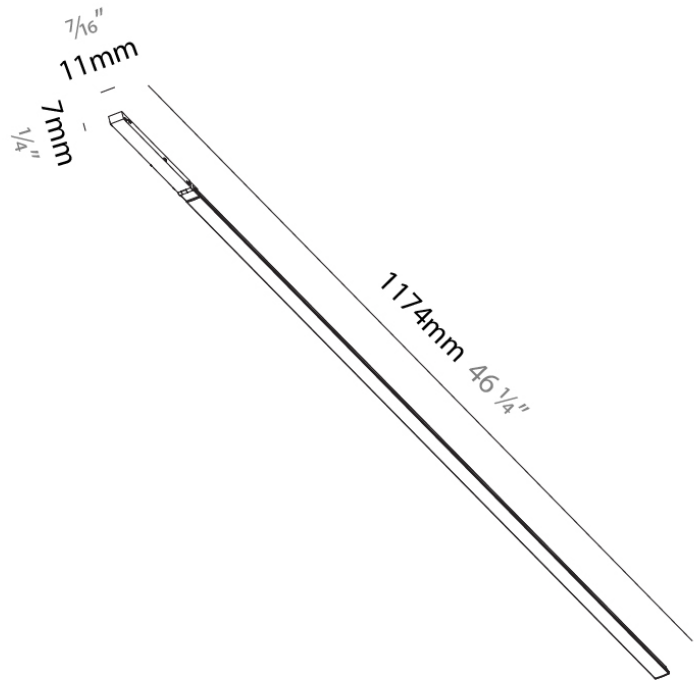

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A380678-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=1670mm / 65 3/4", L24W LED, 2700K / 3000K - max. 1287lm, CRI90

GENERAL

Series: Microline _____
 Brand: Prolicht _____
 Division: Architectural _____
 Mounting Type: Suspension _____
 Mounting Location: Wall / Ceiling _____
 Subcategory: Profile _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 1674 _____
 Length (in): 65 7/8 _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 7 _____
 Height (in): 1/4 _____
 Light Distribution: Direct _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 20 - 29 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 24 _____
 Total Output Wattage (W): 21.8 _____
 Dimming: Non-Dimmable _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 48 _____
 Upon Request: 0-10V Dimming with Tridonic Bridge _____

LED


Delivered Lumen Range: 1000 - 1999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 1158 / 1287 _____
 Nominal Lumen (lm): 1158 / 1287 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Beam Angle: 116 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

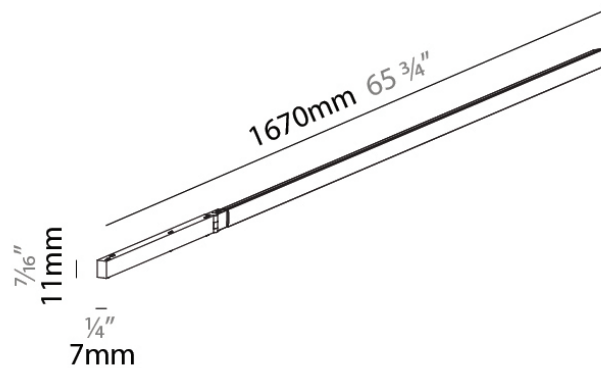

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380679-

DESCRIPTION

Opal Insert for Minimal Track Suspension - Ø250mm/9 13/16" - 6.2W LED - 3000K - 560lm - Beam 160° - 48Vdc - CRI80 - Cable Options

GENERAL

Series: Opal
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Round
 Diameter (mm): 250
 Diameter (in): 9 13/16
 Height (mm): 250
 Height (in): 9 13/16
 Light Distribution: Omnidirectional
 Weight (kg): 0.26
 Weight (lbs): 0.04
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Plastic
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green
 Upon Request: 1,000mm and 10,000mm Black Cable Available

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 350
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 506
 Nominal Lumen (lm): 800
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

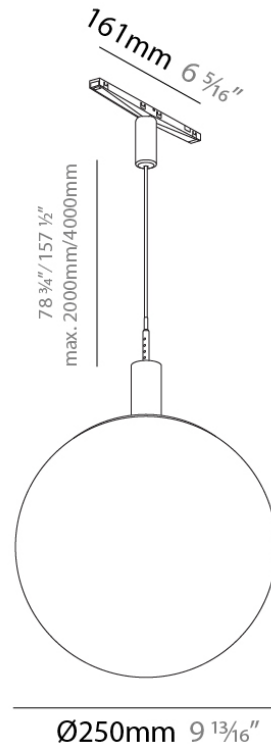

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380680-

DESCRIPTION

Snooker Insert for Minimal Track Suspension - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Shine Ring

GENERAL

Series: Snooker
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Height (mm): 71
 Height (in): 2 ¹³/₁₆
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: NOR / OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

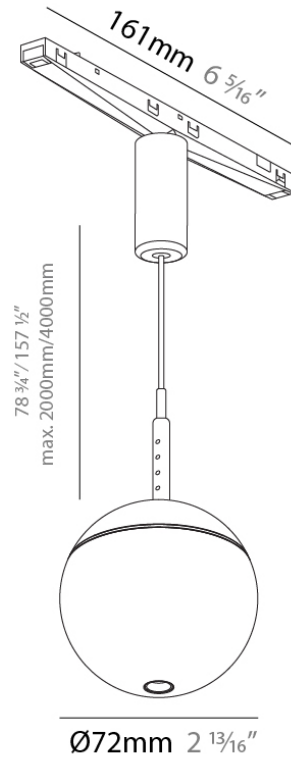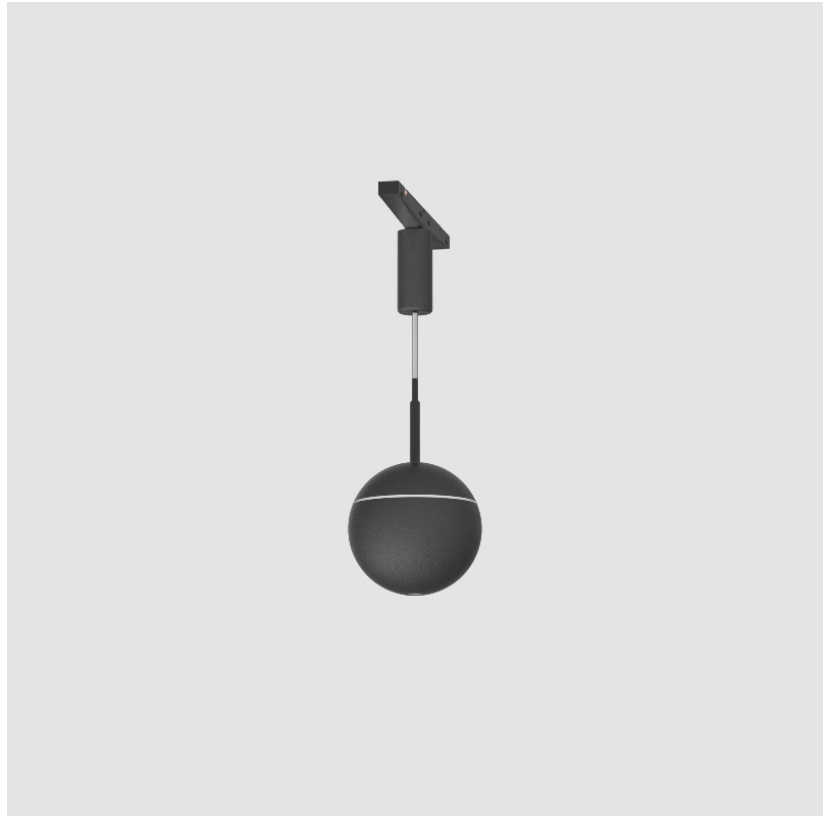

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380681-

DESCRIPTION

Snooker Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

GENERAL

Series: Snooker Glass
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL

Shape: Round
 Diameter (mm): 74
 Diameter (in): 2 ¹⁵/₁₆
 Height (mm): 76
 Height (in): 3
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

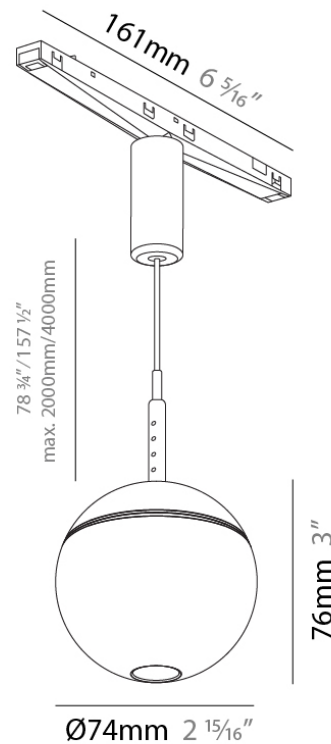

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380682-

DESCRIPTION

Snooker Metal Insert for Minimal Track Suspension - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Chrome

GENERAL

Series: Snooker Metal

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Round

Diameter (mm): 72

Diameter (in): 2 ¹³/₁₆

Height (mm): 72

Height (in): 2 ¹³/₁₆

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Accent Finish: CHR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable / 0-10V Dimming

Driver Included: No

Driver Location: Integrated

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Constant Current (mA): 500

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

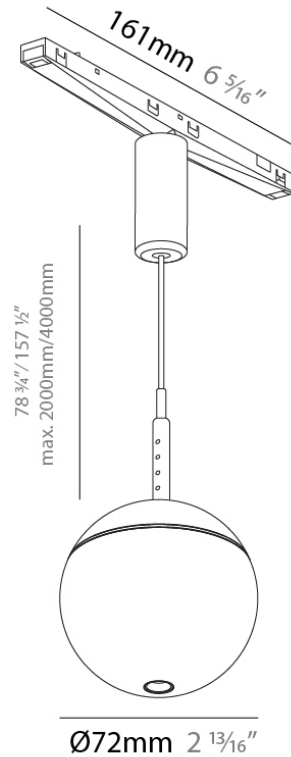

A3MINTRK-SUS-SYS COMPONENTS TRACK

A380753-

DESCRIPTION

Minimal Track Suspension - Imagine Micro - Insert - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimming / Dali Dim, CRI:90 - Beam: 14°

GENERAL

Series: Imagine Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Shape: Cylinder

Diameter (mm): 35

Diameter (in): 1 3/8

Height (mm): 90

Height (in): 3 9/16

Light Distribution: Direct

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6.4

Input Voltage (V): 48

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 110 / 119 / 127

Nominal Lumen (lm): 372 / 399 / 427

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 14

Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T142-


DESCRIPTION
 Minimal Track Wall / Ceiling Cable Loop

GENERAL
 Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular Systems

PHYSICAL
 Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 30
 Height (in): 1 3/16
 Weight (kg): 0.01
 Weight (lbs): 0.022
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

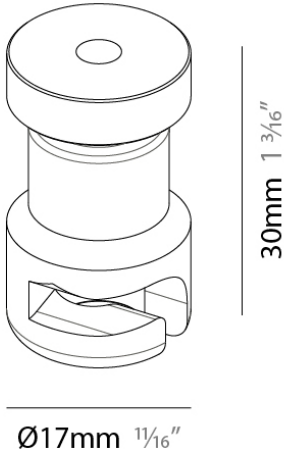

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T143-


DESCRIPTION
Minimal Track Suspended Cable Roller

GENERAL
Series: Minimal Track
Brand: Prolicht
Division: Architectural
Mounting Type: Track
Mounting Location: Ceiling
Subcategory: Modular Systems

PHYSICAL
Diameter (mm): 17
Diameter (in): 11/16
Height (mm): 75
Height (in): 2 15/16
Weight (kg): 0.02
Weight (lbs): 0.044
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum

OPTICAL
Adjustability: Fixed

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

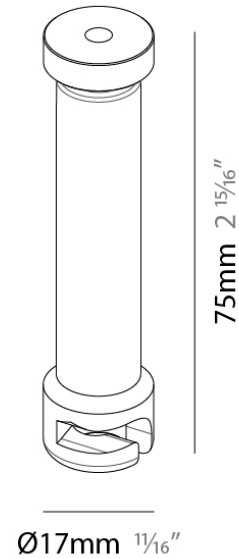

A3MINTRK-SUS-SYS COMPONENTS

A3T145-

DESCRIPTION

Minimal Track / Code System - Central Feed Unit with 2500mm supply cable

GENERAL


Series: Minimal Track _____
 Brand: Prolicht _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 116 _____
 Length (in): 4 ⁹/₁₆ _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 12 _____
 Height (in): 1/2 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____
 Cable Details: 2500mm Supply Cable _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

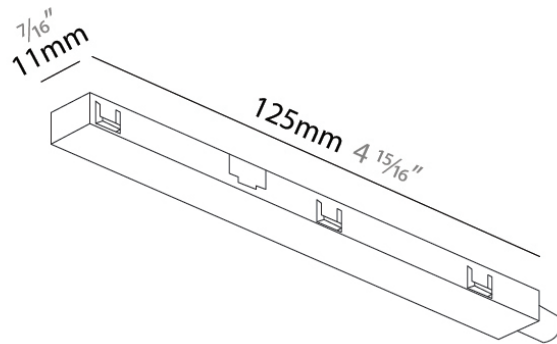

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS

A3T146-

DESCRIPTION

Minimal Track / Code System - Linear Connector

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 112

Length (in): 4 ⁷/₁₆

Width (mm): 11

Width (in): 7/16

Height (mm): 7

Height (in): 1/4


Fixture Finish: BLK / WHI

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

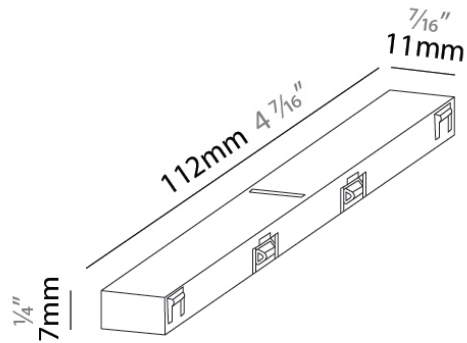

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

A3MINTRK-SUS-SYS COMPONENTS

A3T149-

DESCRIPTION

Minimal Track / Code System - Flexible Connector- 108mm / 4 1/4" x 108mm / 4 1/4" - Black

GENERAL


Series: Minimal Track _____
 Brand: Prolicht _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 116 x 116 _____
 Length (in): 4 9/16 _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 12 _____
 Height (in): 1/2 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

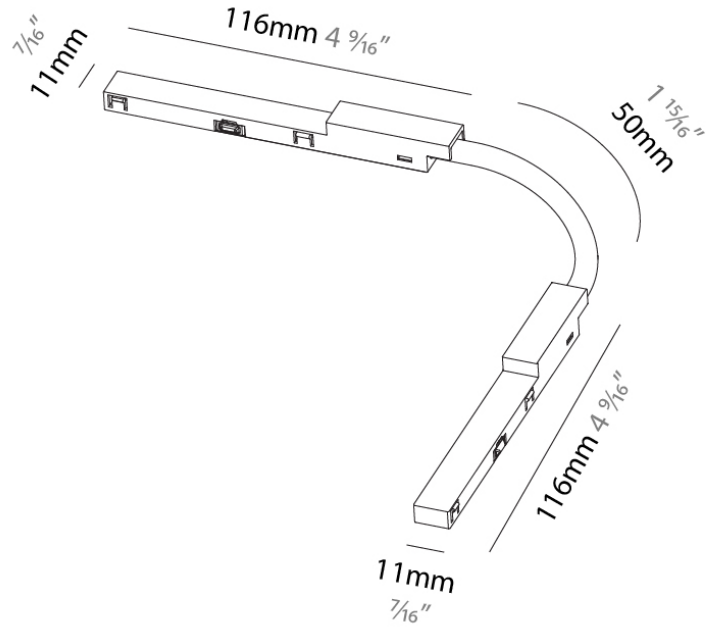

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T298-

DESCRIPTION

Minimal Track - Suspension - Cover Strip for Profile - Black / White

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 3000

Length (in): 118 1/8

Width (mm): 14

Width (in): 9/16

Height (mm): 5

Height (in): 3/16



Fixture Finish: BLK / WHI

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

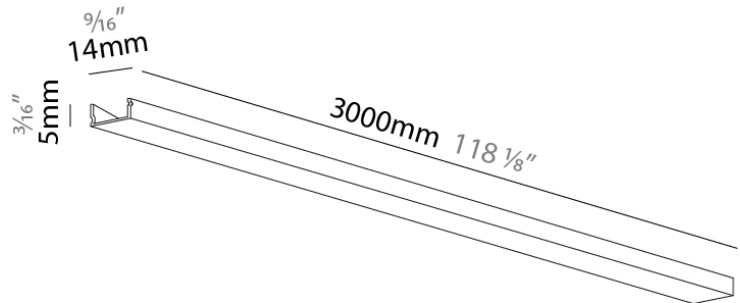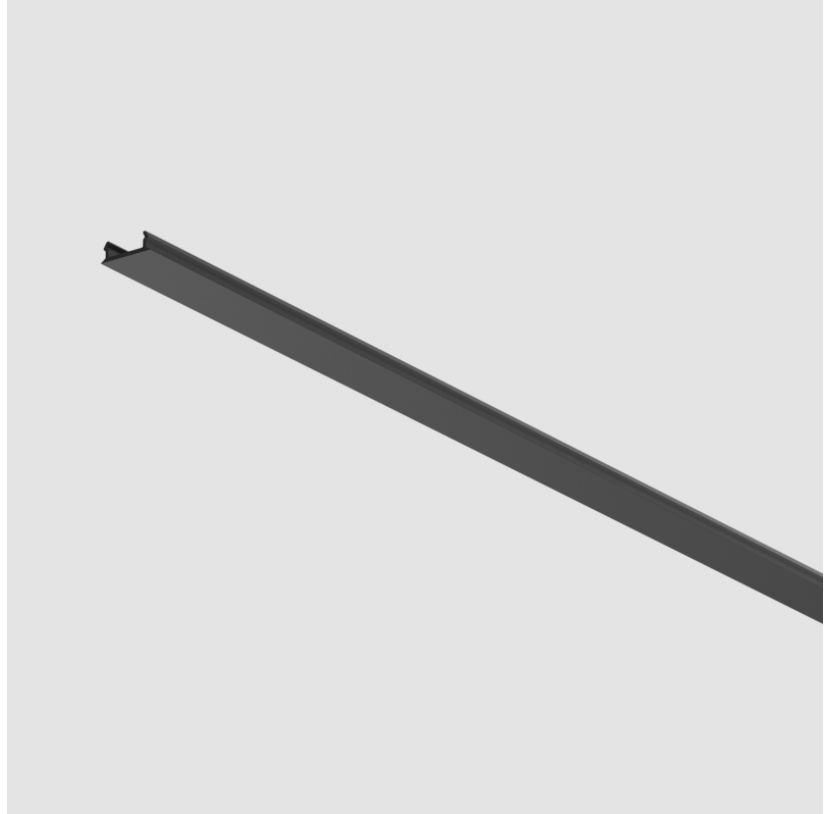

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T299-

DESCRIPTION

Minimal Track - Suspension - Gripper M10x1 16L wit Steel Rope
L=2000mm

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Diameter (mm): 20

Diameter (in): 13/16

Height (mm): 33

Height (in): 1 5/16



Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

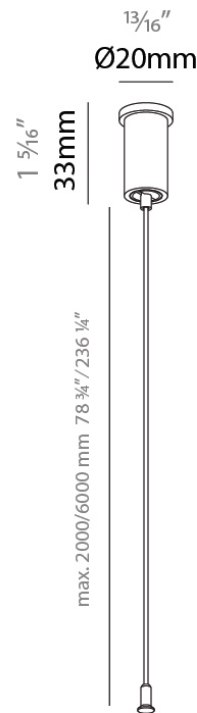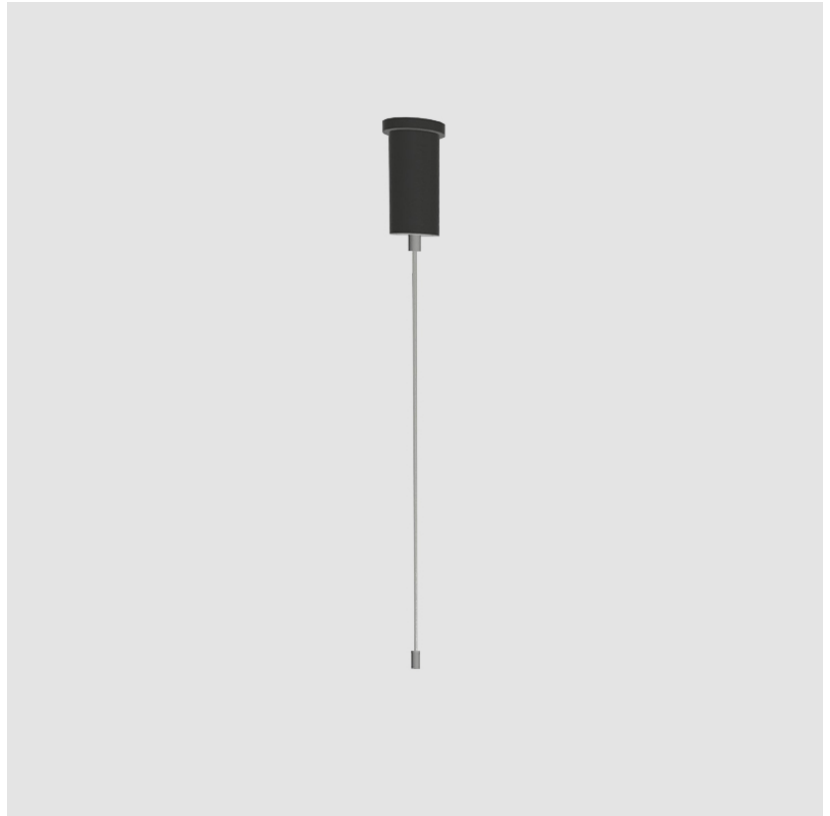

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T300-

DESCRIPTION

Minimal Track - Suspension - Short Pendant Bracket with Countersunk Hole for Suspensions

GENERAL

Series: Minimal Track _____

Brand: Prolicht _____

Division: Architectural _____

Mounting Type: Suspension _____

Mounting Location: Wall / Ceiling _____

Subcategory: Profile _____

PHYSICAL

Shape: Rectangle _____

Length (mm): 25 _____

Length (in): 1 _____

Width (mm): 15.6 _____

Width (in): 5/8 _____

Height (mm): 6 _____

Height (in): 1/4 _____


Fixture Finish: BLK / WHI _____

Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____

IP rating: IP20 _____

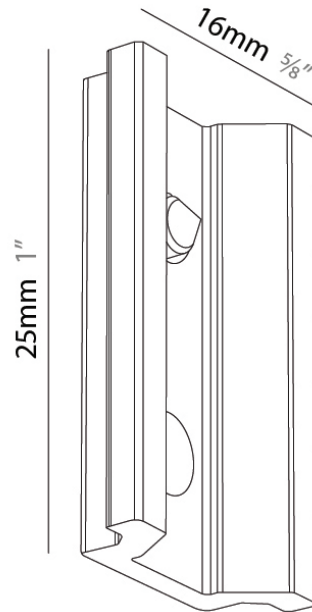

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T301-

DESCRIPTION

Minimal Track - Suspension - Long Pendant Bracket with Countersunk Hole for Suspensions

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 50

Length (in): 115/16

Width (mm): 15.6

Width (in): 5/8

Height (mm): 6

Height (in): 1/4


Fixture Finish: BLK / WHI

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

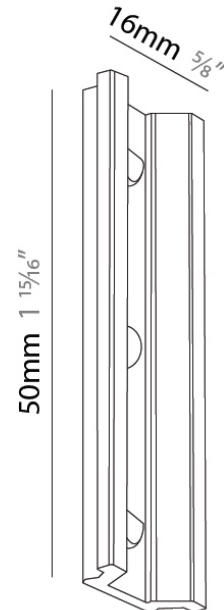

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T302-

DESCRIPTION

Minimal Track - Suspension - Driver Box ON/OFF (max. 96W)

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 240
 Length (in): 9 ⁷/₁₆
 Width (mm): 75
 Width (in): 2 ¹⁵/₁₆
 Height (mm): 36
 Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR



Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

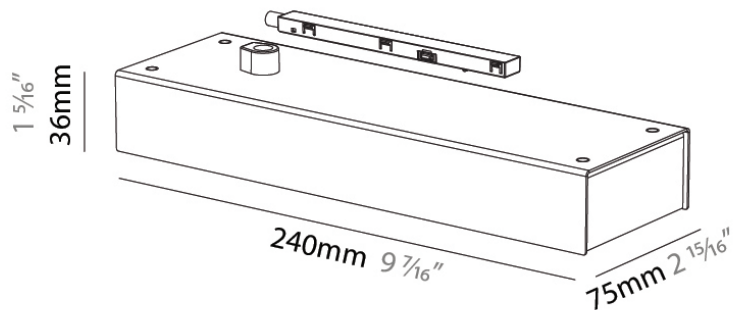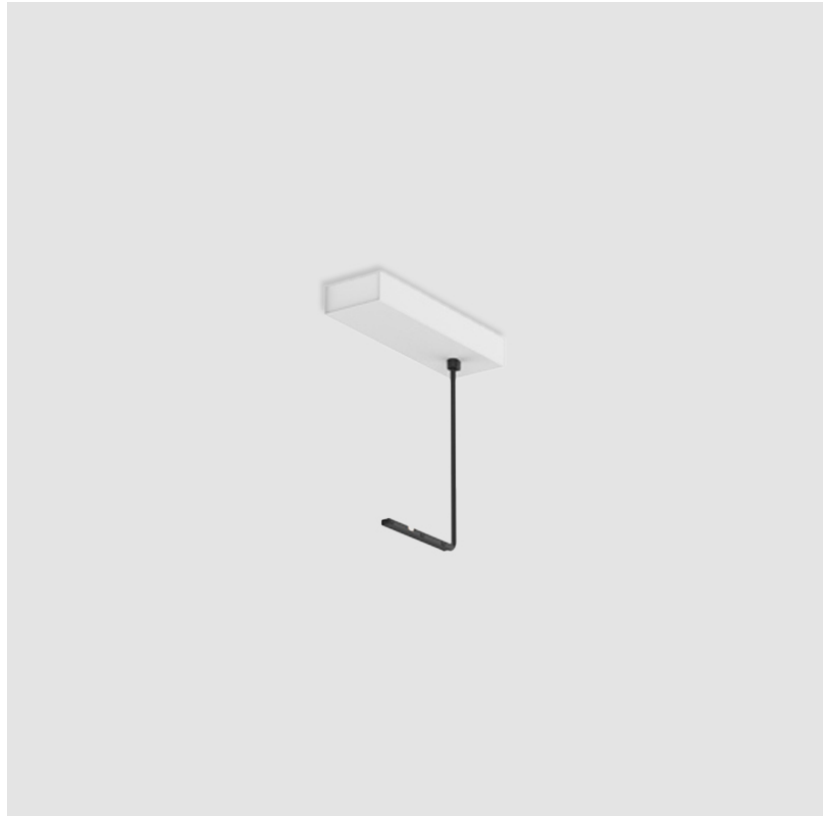

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T303-

DESCRIPTION

Minimal Track - Suspension - Driver Box Touchdim (max. 92W)

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 240
 Length (in): 9 ⁷/₁₆
 Width (mm): 120
 Width (in): 4 ³/₄
 Height (mm): 36
 Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

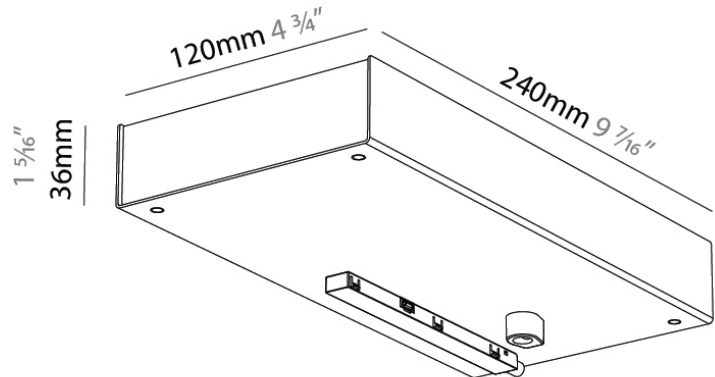

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T304-

DESCRIPTION

Minimal Track - Suspension - Driver Box Dali (max. 86W)

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 240

Length (in): 9 ⁷/₁₆

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 36

Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

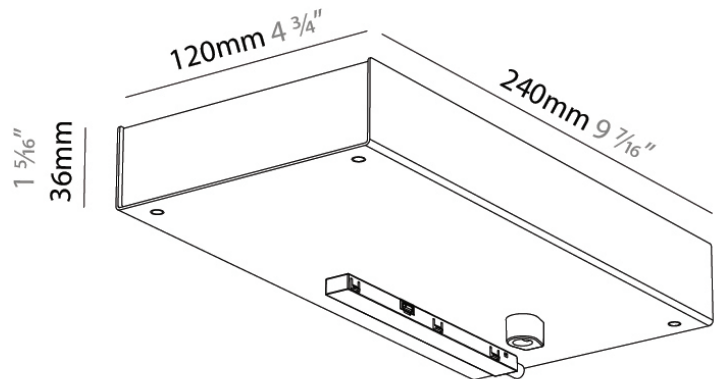

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T305-

DESCRIPTION

Minimal Track - Suspension - Driver Box Matter (max. 86W)

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 240

Length (in): 9 ⁷/₁₆

Width (mm): 125

Width (in): 4 ¹⁵/₁₆

Height (mm): 36

Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

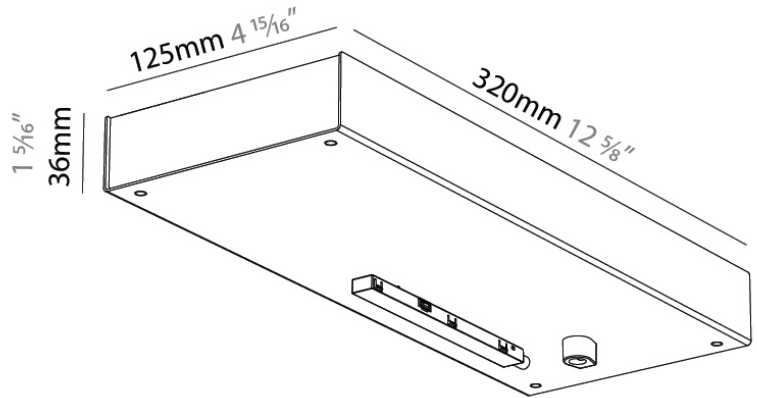

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T306-

DESCRIPTION

Minimal Track - Suspension - Driver Box ON/OFF (max. 200W)

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 400

Length (in): 15 ³/₄

Width (mm): 125

Width (in): 4 ¹⁵/₁₆

Height (mm): 36

Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

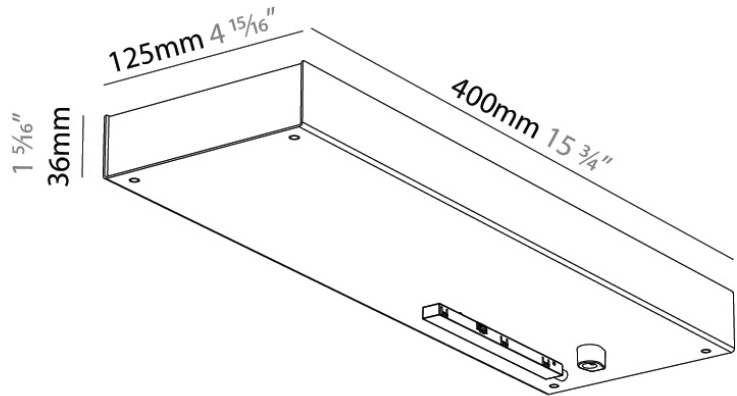

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T307-

DESCRIPTION

Minimal Track - Suspension - Driver Box Touchdim (max. 200W)

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 400
 Length (in): 15 3/4
 Width (mm): 125
 Width (in): 4 15/16
 Height (mm): 36
 Height (in): 1 7/16

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

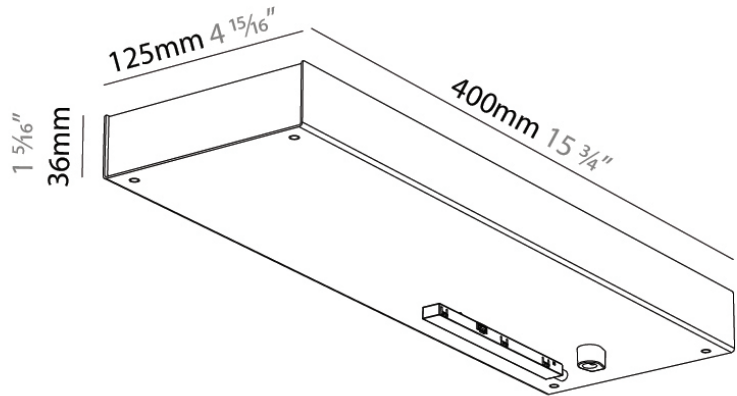

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T308-

DESCRIPTION

Minimal Track - Suspension - Driver Box Dali (max. 200W)

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 400

Length (in): 15 ³/₄

Width (mm): 125

Width (in): 4 ¹⁵/₁₆

Height (mm): 36

Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

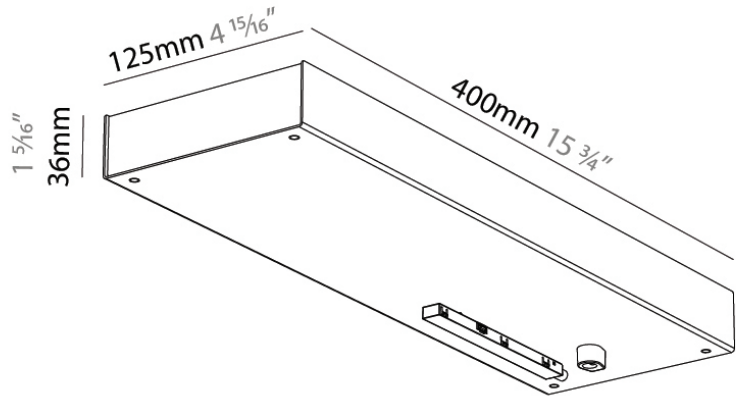

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T309-

DESCRIPTION

Minimal Track - Suspension - Driver Box Matter (max. 200W)

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Length (mm): 400

Length (in): 15 ³/₄

Width (mm): 125

Width (in): 4 ¹⁵/₁₆

Height (mm): 36

Height (in): 1 ⁷/₁₆

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR


Holder Finish: WHI / BLK

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

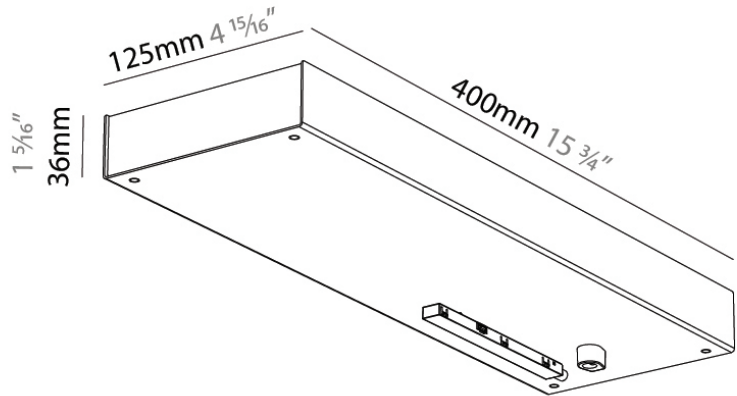

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T310-

DESCRIPTION

Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL


Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 ³/₈
 Width (mm): 19
 Width (in): 3/4
 Height (mm): 24
 Height (in): 15/16
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W
 Total Output Wattage (W): 40
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

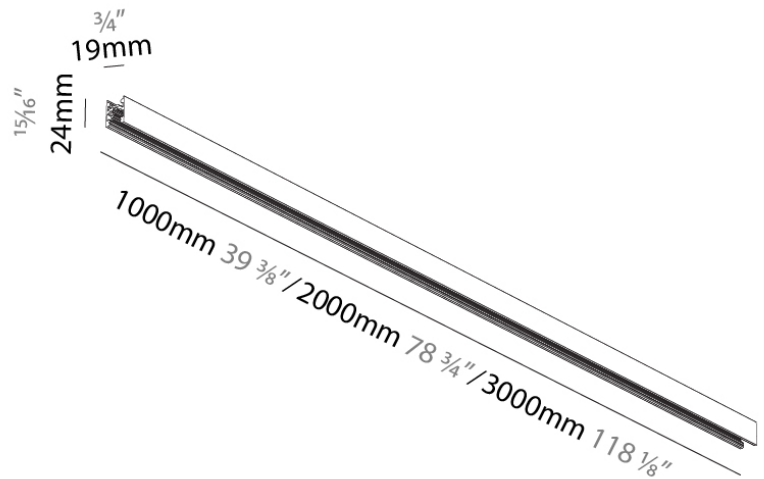

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T311-

DESCRIPTION

Minimal Track - Suspension Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile - Colored

GENERAL


Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 ³/₈
 Width (mm): 19
 Width (in): 3/4
 Height (mm): 24
 Height (in): 15/16
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

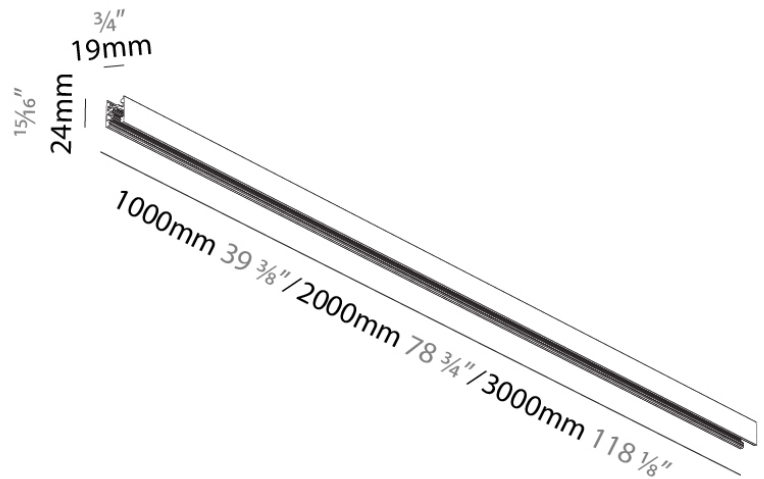

A3MINTRK-SUS-SYS COMPONENTS SUSPENSION

A3T312-

DESCRIPTION

Minimal Track - Suspension - End Cap - Black / White

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Suspension

Mounting Location: Wall / Ceiling

Subcategory: Profile

PHYSICAL

Shape: Rectangle

Width (mm): 19

Width (in): 3/4

Height (mm): 24

Depth (mm): 9

Height (in): 15/16

Depth (in): 3/8

Fixture Finish: BLK / WHI

Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W

Total Output Wattage (W): 40

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277



Output Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

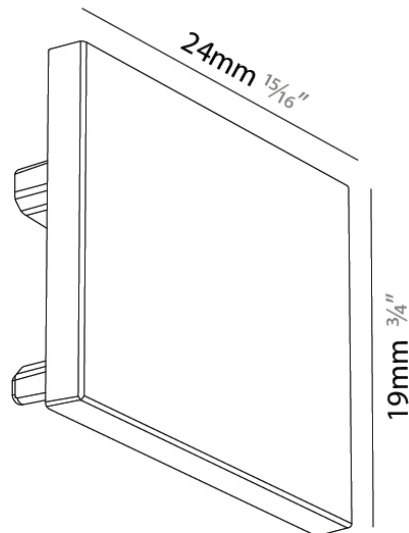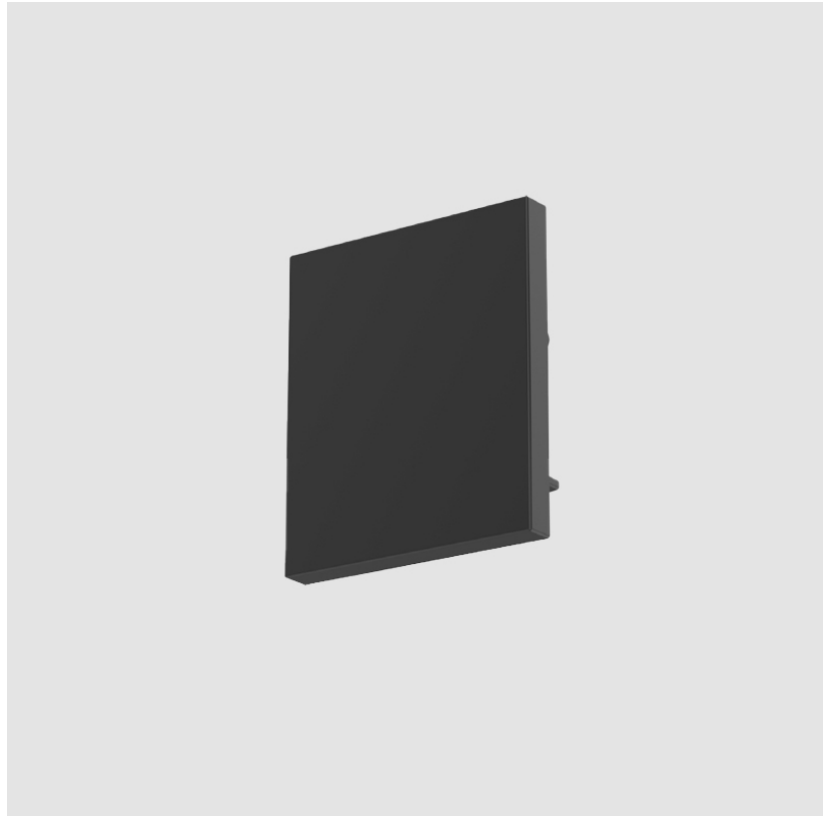

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T323-

DESCRIPTION

Minimal Track cable loop

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 25

Height (in): 1

Weight (kg): 0.011

Weight (lbs): 0.024

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

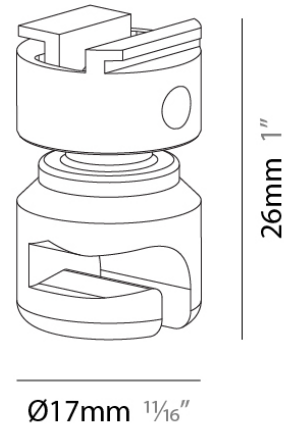

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T324-

DESCRIPTION

Minimal Track Cable Roller

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular Systems

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 77

Height (in): 3 1/16

Weight (kg): 0.029

Weight (lbs): 0.064

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



77mm 3 1/16"

Ø17mm 1 1/16"



| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

A3MINTRK-SUS-SYS COMPONENTS TRACK

A3T325-

DESCRIPTION

Minimal Track - Suspended Cable Roller

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 80

Height (in): 3 1/8

Weight (kg): 0.032

Weight (lbs): 0.005


Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



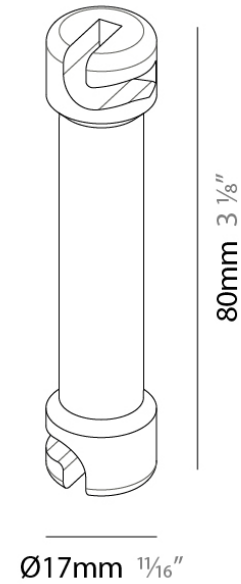







IP rating: IP20



LEGEND

| | | |
|--|--|--|
|  floor-mounted |  pivotable |  special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  wall and ceiling: recessed and surface mounted |  rotating |  warm dim / natural dimming LED |
|  ceiling-mounted and wall-mounted |  illuminate tilted |  rechargeable battery powered |
|  wall-mounted |  color of suspension cable |  fixture with natural vivid LED (upon request) |
|  omni-directional light distribution |  length of suspension cable |  color rendering index |
|  direct light distribution |  reflector degree selection |  color temperature |
|  direct/indirect light distribution |  super spot |  lumen (luminous flux) |
|  indirect light distribution |  lens |  efficacy (lumens per watt) |
|  asymmetric light distribution |  lens pack |  Unified Glare Rating (UGR) range from 5-40 |
|  aura light distribution |  shine ring |  marine grade (AISI 316 stainless steel) |
|  round wall or ceiling cut-out |  integrated shine ring with diffuser |  walk on |
|  square wall or ceiling cut-out |  free individual colors 01-29 |  drive on |
|  the supplied jig specifies the cutout dimensions |  individual colors: 00 (free of charge), 01-25 (extra charge) |  Dark Sky Compliance |
|  minimum distance (meters) lamp - object |  luminaire part to be colored (F1) |  Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  recessed depth |  luminaire part to be colored (F2) |  lamp protected against explosion |
|  ceiling thickness in mm |  luminaire part to be colored (F3) |  blown glass using traditional methods by master glass blower |
|  ceiling thickness selection |  luminaire part to be colored (F4) |  acoustic material |
|  dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  luminaire part to be colored (F5) |  protection class I, protection insulation |
|  included or excluded LED driver/transformer/control gear |  color of 3-circuit adaptor |  protection class II, protection insulation |
|  separately switchable |  indirect diffuser |  ETL Certified to UL and CSA Standards |
|  sensor |  direct diffuser |  UL Certified to UL and CSA Standards |
|  remote control |  ball-proof (upon request) |  CSA Certified to UL and CSA Standards |
|  available upon request |  accessory |  Certified for North American Standards |

IP RATING

| | |
|--|--|
|  IP20 | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  IP33 | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  IP40 | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  IP43 | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  IP44 | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  IP54 | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  IP65 | protected against ingress of dust protected against jets of water |
|  IP66 | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  IP67 | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  IP68 | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|--|---|
|  IK01 | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  IK02 | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  IK03 | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  IK04 | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  IK05 | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  IK06 | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  IK07 | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  IK08 | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  IK09 | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  IK10 | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |