

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380658-

DESCRIPTION

Bilo Insert for Minimal Track System Trimless - Ø120mm - 6.4W LED , 48V, CRI:90, Beam 180°

GENERAL

Series: Bilo
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Sphere
 Diameter (mm): 120
 Diameter (in): 4 ¾
 Height (mm): 120
 Height (in): 4 ¾
 Light Distribution: Omnidirectional
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Glass / Metal
 Cable Details: 2000mm/78 ¾" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 356 / 377 / 398 / 408
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

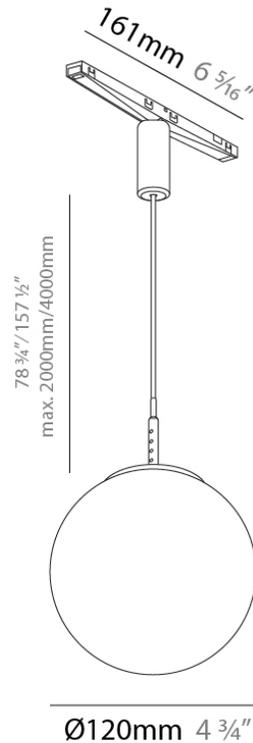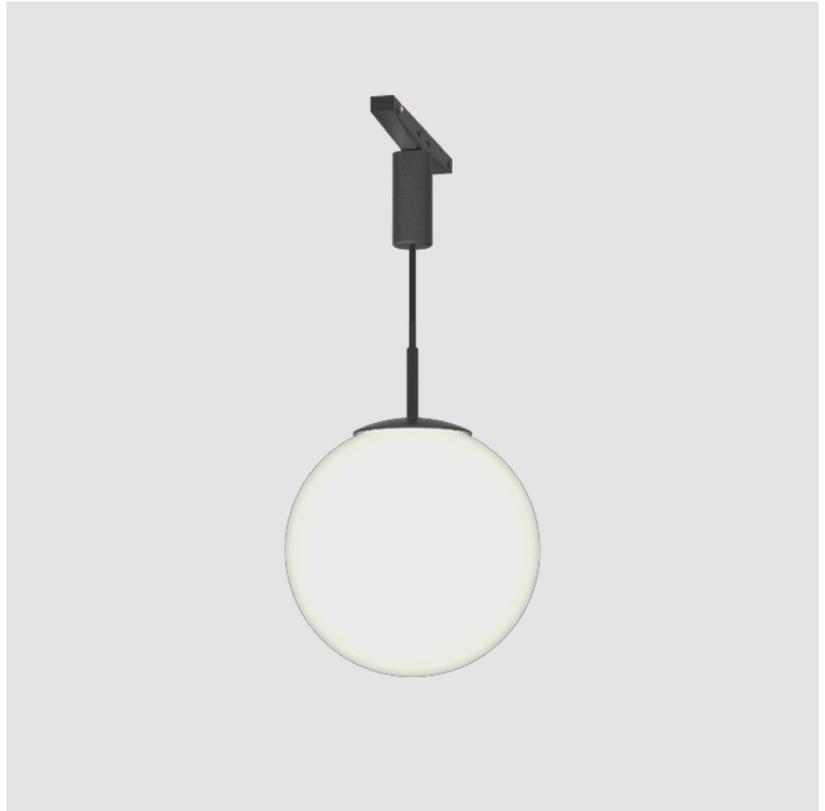

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380714-

DESCRIPTION

Hangover Plug Trimless Insert - Minimal Track Suspension - Ø28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 22°/26° / 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 381 / 404 / 426 / 438

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

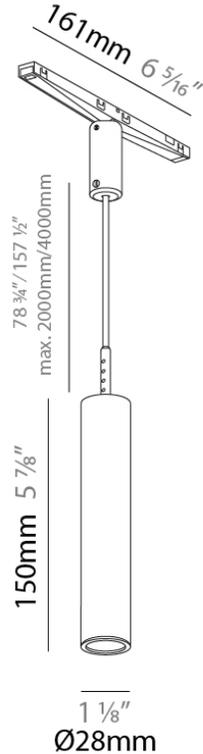

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380715-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 381 / 404 / 426 / 438

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

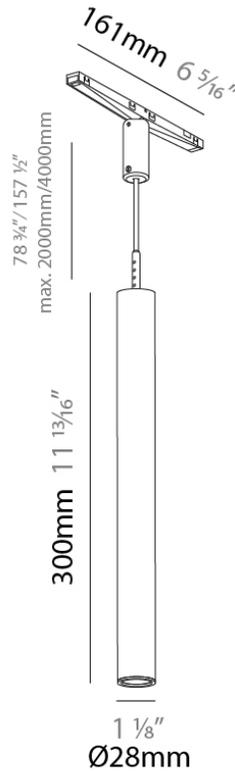

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380716-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26° / 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Light Distribution: Downlight
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

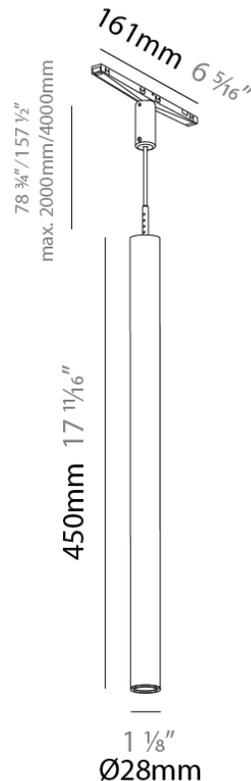

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380717-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø40mm / 1 9/16" x 150mm / 5 7/8" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Spots

PHYSICAL

Shape: Cylinder
 Diameter (mm): 40
 Diameter (in): 1 9/16
 Height (mm): 150
 Height (in): 5 7/8

Light Distribution: Downlight
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10
 Total Output Wattage (W): 9.1
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Number of LEDs: 1
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
 Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

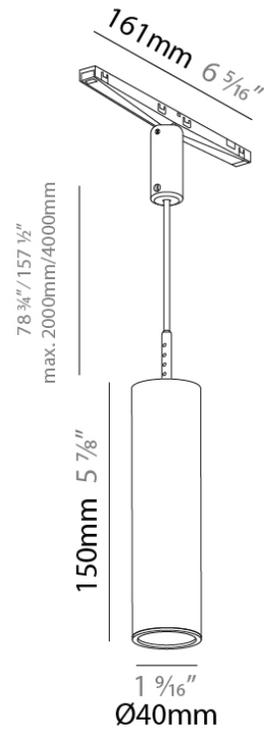

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380718-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 300

Height (in): 11 13/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

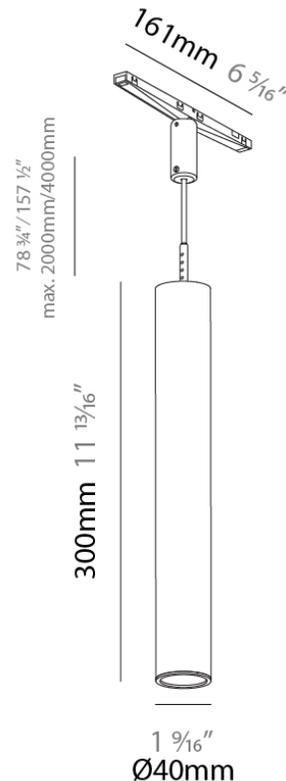

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380719-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø40mm / 1 9/16" x 450mm / 17 11/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Spots

PHYSICAL

Shape: Cylinder

Diameter (mm): 40

Diameter (in): 1 9/16

Height (mm): 450

Height (in): 17 11/16

Light Distribution: Downlight

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 684 / 716 / 742 / 759

Nominal Lumen (lm): 969 / 1014 / 1052 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

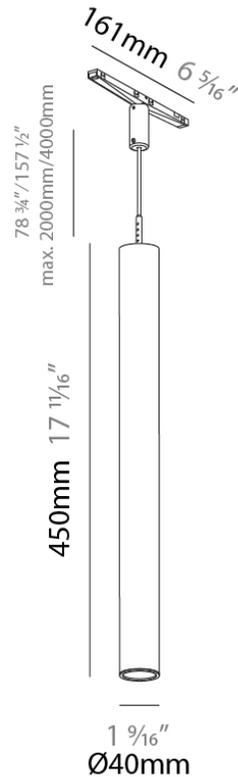

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380720-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø75mm/2 15/16" - 150mm/5 7/8" - 9.8W LED - 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Shape: Cylinder

Diameter (mm): 75

Diameter (in): 2 15/16

Height (mm): 150

Height (in): 5 7/8

Light Distribution: Direct

Weight (kg): 0.481

Weight (lbs): 1.06

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Accent Finish: OPL / YEL / ORA / RED / BLU / GRN

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color

Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9.1

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 1999 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 851 / 890 / 923 / 944

Nominal Lumen (lm): 969 / 1014 / 1054 / 1075

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL


Optic°: 18 / 36 / 56

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

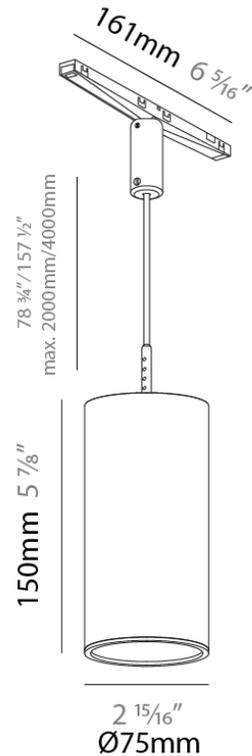

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380721-

DESCRIPTION

Hangover Plug Insert for Minimal Track Trimless - Ø75mm/2 15/16" - 150mm/5 7/8" - 20W LED - Max. 1826lm, 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 75
 Diameter (in): 2 15/16
 Height (mm): 150
 Height (in): 5 7/8
 Light Distribution: Direct / Indirect
 Weight (kg): 0.481
 Weight (lbs): 1.06
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20
 Total Output Wattage (W): 18.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Max. 1826
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 18 / 36 / 56
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

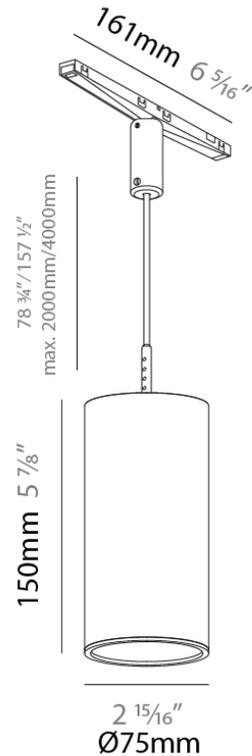

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380722-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Trimless - Ø28/1 1/8" - 150mm/5 7/8" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8"

Height (mm): 150

Height (in): 5 7/8"

Light Distribution: Direct

Weight (kg): 0.124

Weight (lbs): 0.273

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color

Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

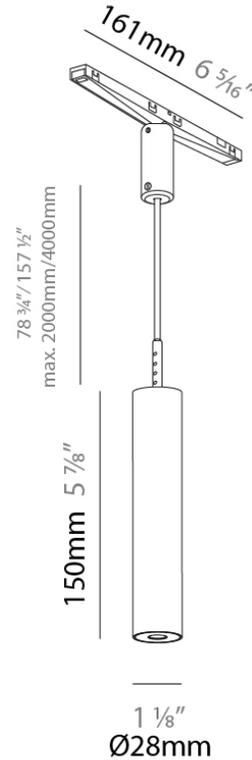

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380723-

DESCRIPTION

Hangover Plug Micro for Minimal Track Trimless - Ø28/1 1/8" - 300mm/11 13/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90

GENERAL

Series: Hangover Plug Micro

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Shape: Cylinder

Diameter (mm): 28

Diameter (in): 1 1/8"

Height (mm): 300

Height (in): 11 13/16"

Light Distribution: Direct

Weight (kg): 0.24

Weight (lbs): 0.529

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Holder Finish: WHI / BLK

Fixture Material: Aluminum

Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color

Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 6

Total Output Wattage (W): 5.4

Dimming: Non-Dimmable

Driver Included: No

Driver Location: Remote

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 48

Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 310 / 328 / 347 / 356

Nominal Lumen (lm): 460 / 487 / 514 / 528

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

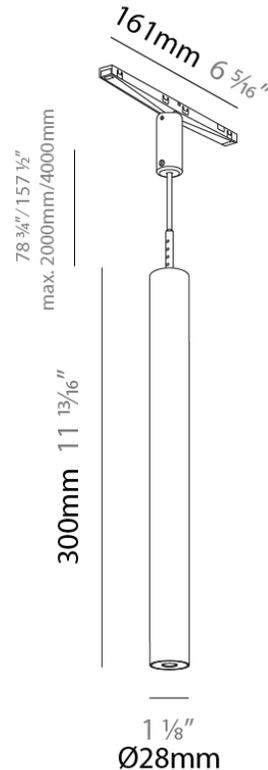

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380724-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Trimless - Ø28/1 1/8" - 450mm/17 11/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 28
 Diameter (in): 1 1/8
 Height (mm): 450
 Height (in): 17 11/16
 Light Distribution: Direct
 Weight (kg): 0.355
 Weight (lbs): 0.783
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

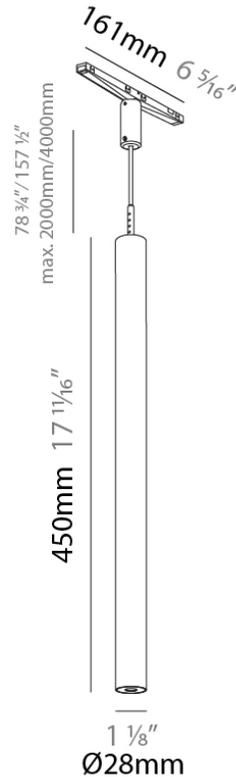

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380725-

DESCRIPTION

Imagine Micro Insert for Minimal Track Trimless - 23mm / 7/8" x 66mm / 2 5/8" - 4.4W LED, 2700K / 3000K / 3500K / 4000K - 48 - Non-Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

GENERAL

Series: Imagine Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 23
 Diameter (in): 7/8
 Height (mm): 66
 Height (in): 2 5/8
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 4
 Total Output Wattage (W): 3.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 252 / 271 / 315 / 290
 Nominal Lumen (lm): 295 / 317 / 368 / 339
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 26, 28, 38, 46, 64
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

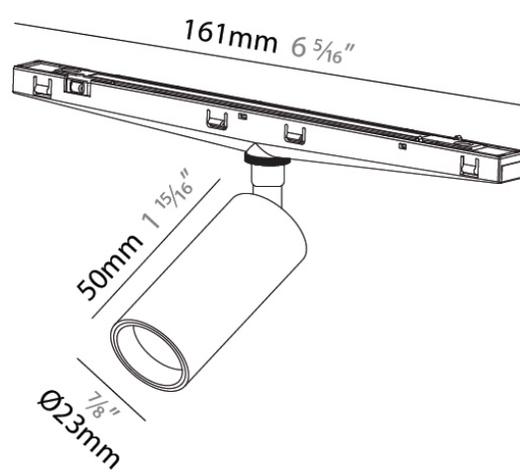

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380726-

DESCRIPTION

Imagine Micro Insert for Minimal Track Trimless - Ø35mm/1 3/8" x 90mm/2 5/8" - 9.8W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimmg / Dali Dim, CRI:90 - Beam: 22° / 36° / 62°

GENERAL

Series: Imagine Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 90
 Height (in): 3 9/16
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 9
 Total Output Wattage (W): 8.2
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 554 / 590 / 620 / 636
 Nominal Lumen (lm): 750 / 800 / 840 / 861
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 22, 36, 62
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

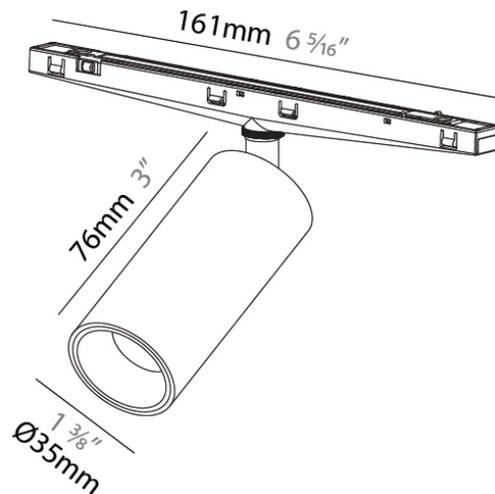

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380727-

DESCRIPTION

Imagine Micro Flex Insert for Minimal Track Trimless - Ø37mm / 1 7/16" x 76mm / 3" - 6.4W LED, 2700K / 3000K / 3500K / 4000K - 48V - Non Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

GENERAL

Series: Imagine Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 37
 Diameter (in): 1 7/16
 Length (mm): 161
 Length (in): 6 5/16
 Height (mm): 76
 Height (in): 3
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 7
 Total Output Wattage (W): 6.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 252 / 271 / 315 / 290
 Nominal Lumen (lm): 295 / 317 / 368 / 339
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 26, 28, 38, 46, 64
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

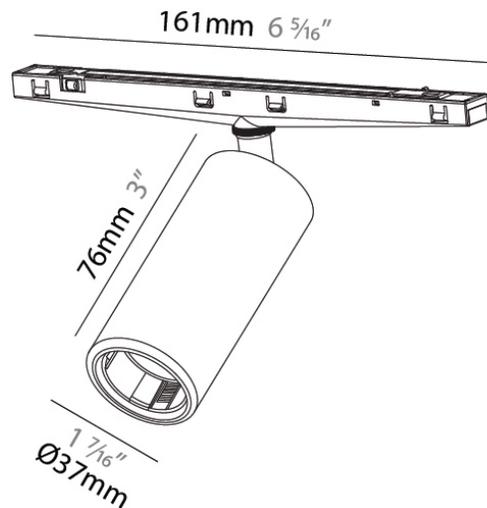

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380728-

DESCRIPTION

Imagine Micro Dot Insert for Minimal Track Trimless - Ø35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K. 48V, Adjustable, Non-Dimming / Dali Dim, CRI:90 - Beam: 34° / 52°

GENERAL

Series: Imagine Micro Dot
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Cylinder
 Diameter (mm): 35
 Diameter (in): 1 3/8
 Height (mm): 90
 Height (in): 3 9/16
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 235 / 252 / 270
 Nominal Lumen (lm): 372 / 399 / 427
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 34, 52
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

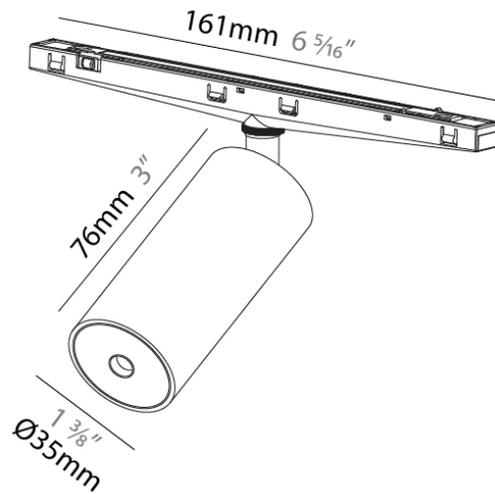

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380729-

DESCRIPTION

Magiq Micro Insert for Minimal Track Trimless - 4.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K Max. 365lm, Beam Angle 54

GENERAL

Series: Magiq Micro
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track

PHYSICAL

Shape: Rectangle
 Length (mm): 300
 Length (in): 11 ¹³/₁₆
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 5
 Total Output Wattage (W): 4.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 4000
 Max. Delivered Lumen (lm): 370 / 384 / 417
 Nominal Lumen (lm): 370 / 384 / 417
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 54

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

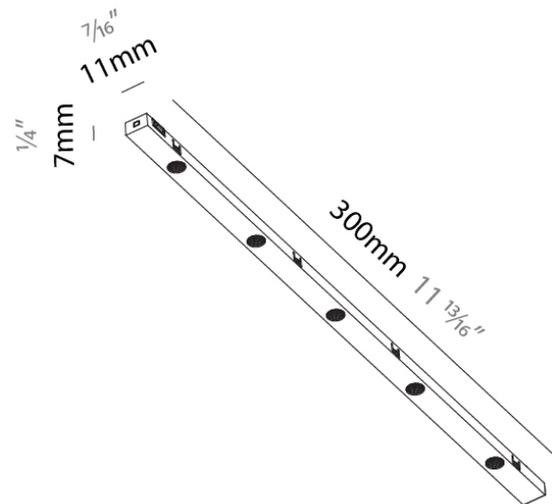

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380730-

DESCRIPTION

Melt Mini Insert for Minimal Track Trimmless - Ø280mm/11" x 270mm/10 5/8" - 6.2W LED - 3000K, 48Vdc, CRI90 - Diffuser: Smoke - 44lm, Chrome - 158lm, Gold - 235lm, Copper - 220lm - Cable Options

GENERAL

Series: Melt Mini
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 280
 Diameter (in): 11
 Height (mm): 270
 Height (in): 10 5/8
 Light Distribution: Omnidirectional
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: NOF / COP / MIR / SSS
 Fixture Material: Plastic
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green
 Upon Request: 1,000mm and 10,000mm Black Cable Available

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 350
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): Max 235
 Nominal Lumen (lm): 885
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

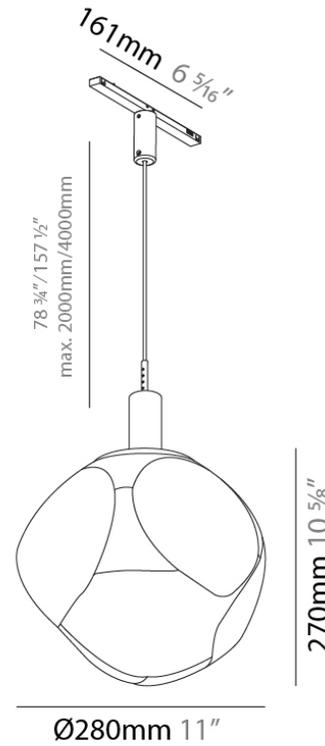

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS SURFACE

A380731-

DESCRIPTION

Microline Insert for Minimal Track Trimless - L=672mm, LED 8W, max. 429lm, CRI90

GENERAL

Series: Microline
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall / Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 674
 Length (in): 26 ³/₁₆
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 8
 Total Output Wattage (W): 7.3
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 386 / 429
 Nominal Lumen (lm): 386 / 429
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

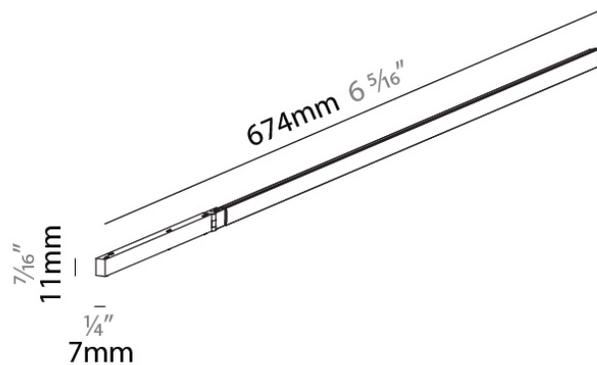

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS SURFACE

A380732-

DESCRIPTION

Microline Insert for Minimal Track Trimless - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

GENERAL

Series: Microline
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall / Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Rectangle
 Length (mm): 1174
 Length (in): 46 1/4
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16
 Total Output Wattage (W): 14.6
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 772 / 858
 Nominal Lumen (lm): 772 / 858
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

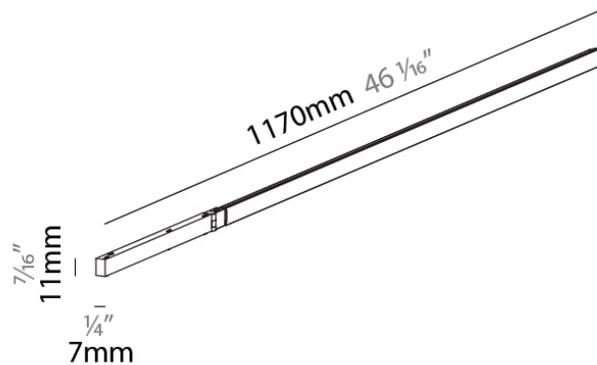

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS SUSPENSION

A380733-

DESCRIPTION

Microline Insert for Minimal Track Trimless - L=1670mm / 65 3/4", L24W LED,2700K / 3000K - max. 1287lm, CRI90

GENERAL

Series: Microline
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Suspension
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 1674
 Length (in): 65 7/8
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 7
 Height (in): 1/4
 Light Distribution: Direct
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 24
 Total Output Wattage (W): 21.8
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 1158 / 1287
 Nominal Lumen (lm): 1158 / 1287
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

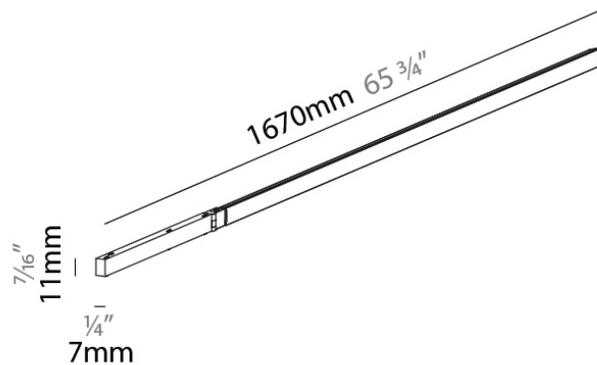

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380734-

DESCRIPTION

Opal Insert for Minimal Track Trimless - Ø250mm/9 13/16" - 6.2W LED - 3000K - 560lm - Beam 160° - 48Vdc - CRI80 - Cable Options

GENERAL

Series: Opal
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 250
 Diameter (in): 9 13/16
 Height (mm): 250
 Height (in): 9 13/16
 Light Distribution: Omnidirectional
 Weight (kg): 0.26
 Weight (lbs): 0.04
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Fixture Material: Plastic
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green
 Upon Request: 1,000mm and 10,000mm Black Cable Available

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 350
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 506
 Nominal Lumen (lm): 800
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

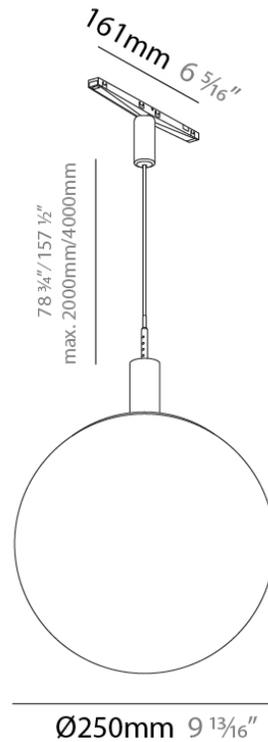

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380735-

DESCRIPTION

Snooker Insert for Minimal Track Trimless - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Shine Ring

GENERAL

Series: Snooker
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Height (mm): 71
 Height (in): 2 ¹³/₁₆
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: NOR / OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

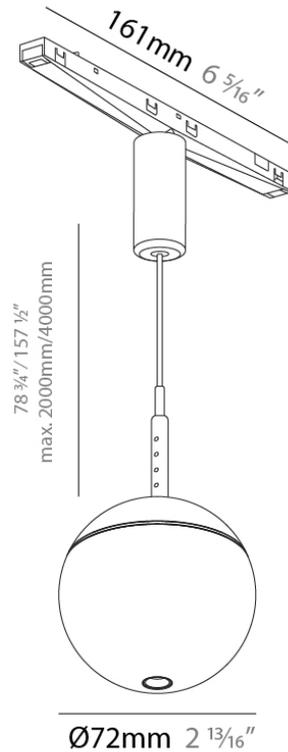

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380736-

DESCRIPTION

Snooker Glass Insert for Minimal Track Trimless - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

GENERAL

Series: Snooker Glass
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 74
 Diameter (in): 2 ¹⁵/₁₆
 Height (mm): 76
 Height (in): 3
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (MA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
 Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

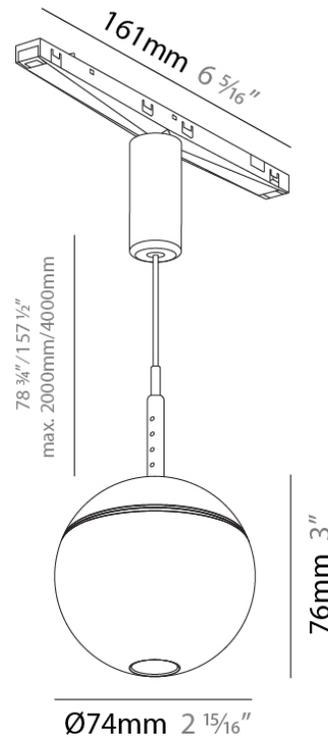

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A380737-

DESCRIPTION

Snooker Metal Insert for Minimal Track Trimless - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Chrome

GENERAL

Series: Snooker Metal
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL

Shape: Round
 Diameter (mm): 72
 Diameter (in): 2 ¹³/₁₆
 Height (mm): 72
 Height (in): 2 ¹³/₁₆
 Light Distribution: Direct
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Holder Finish: WHI / BLK
 Accent Finish: CHR
 Fixture Material: Aluminum
 Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 6.4
 Total Output Wattage (W): 5.4
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Integrated
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 48
 Constant Current (mA): 500
 Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
 Nominal Lumen (lm): 460 / 487 / 514 / 528
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

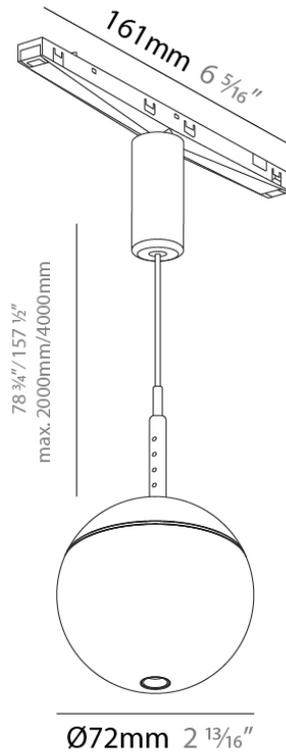

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A3T142-

DESCRIPTION

Minimal Track Wall / Ceiling Cable Loop

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Track
 Mounting Location: Ceiling
 Subcategory: Modular

PHYSICAL


Diameter (mm): 17
 Diameter (in): 11/16
 Height (mm): 30
 Height (in): 1 3/16
 Weight (kg): 0.01
 Weight (lbs): 0.022
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

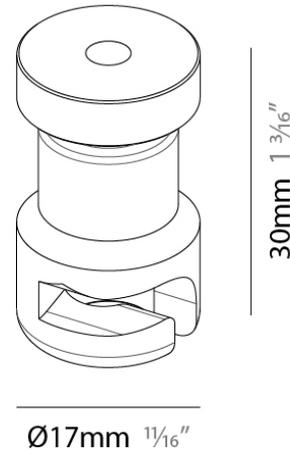

A3MINTRK-TRM-SYS COMPONENTS TRACK

A3T143-

DESCRIPTION

Minimal Track Suspended Cable Roller

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 75

Height (in): 2 ¹⁵/₁₆

Weight (kg): 0.02

Weight (lbs): 0.044

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



75mm 2 ¹⁵/₁₆"

Ø17mm 1 ¹/₁₆"



PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS

A3T145-

DESCRIPTION

Minimal Track / Code System - Central Feed Unit with 2500mm supply cable

GENERAL


Series: Minimal Track
 Brand: Prolicht
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 116
 Length (in): 4 ⁹/₁₆
 Width (mm): 11
 Width (in): 7/16
 Height (mm): 12
 Height (in): 1/2
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum
 Cable Details: 2500mm Supply Cable

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

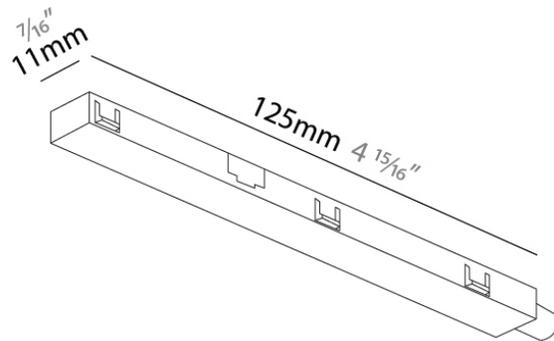

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-TRM-SYS COMPONENTS

A3T146-

DESCRIPTION

Minimal Track / Code System - Linear Connector

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 112

Length (in): 4 ⁷/₁₆

Width (mm): 11

Width (in): 7/16

Height (mm): 7

Height (in): 1/4


Fixture Finish: BLK / WHI

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

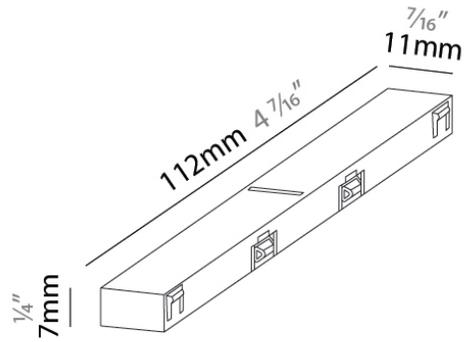

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3MINTRK-TRM-SYS COMPONENTS

A3T149-

DESCRIPTION

Minimal Track / Code System - Flexible Connector- 108mm / 4 1/4" x 108mm / 4 1/4" - Black

GENERAL


Series: Minimal Track _____
 Brand: Prolicht _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 116 x 116 _____
 Length (in): 4 9/16 _____
 Width (mm): 11 _____
 Width (in): 7/16 _____
 Height (mm): 12 _____
 Height (in): 1/2 _____
 Fixture Finish: BLK / WHI _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

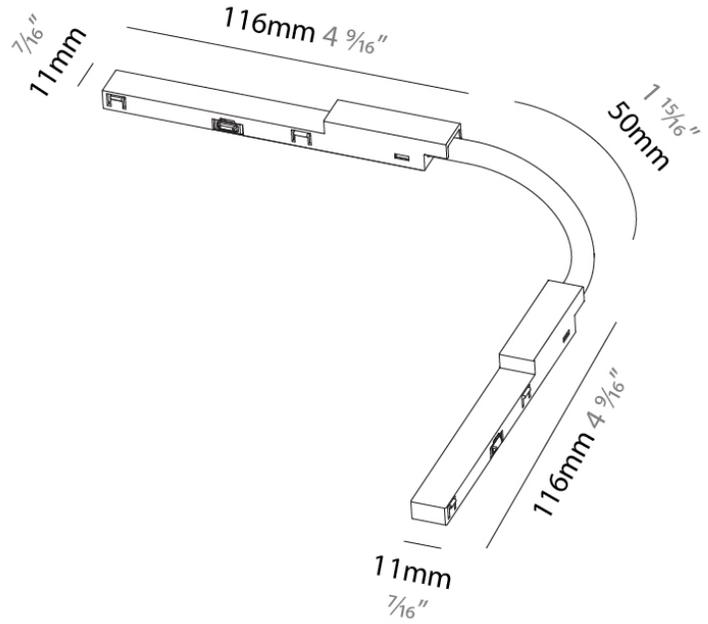

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3MINTRK-TRM-SYS COMPONENTS TRIMLESS

A3T316-

DESCRIPTION

Minimal Track - Trimless Profile - 1000mm / 2000mm / 3000mm - Aluminum Profile - Black or White

GENERAL

Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Trimless
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL


Shape: Rectangle
 Length (mm): 1000 / 2000 / 3000
 Length (in): 39 3/8
 Width (mm): 49
 Width (in): 1 15/16
 Height (mm): 15
 Height (in): 9/16
 Ceiling Thickness (mm): 12.5
 Ceiling Thickness (in): 1/2
 Min. Recessing Depth (mm): 40
 Min. Recessing Depth (in): 1 9/16
 Weight (kg): 0.462
 Fixture Finish: BLK / WHI
 Fixture Material: Aluminum
 Cut-out Measurements: 1,005mm/39 9/16" / 2,005mm / 78 15/16" / 3,005mm / 118 5/16" x 22mm / 7/8"

ELECTRICAL

Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Upon Request: 0-10V Dimming with Tridonic Bridge

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

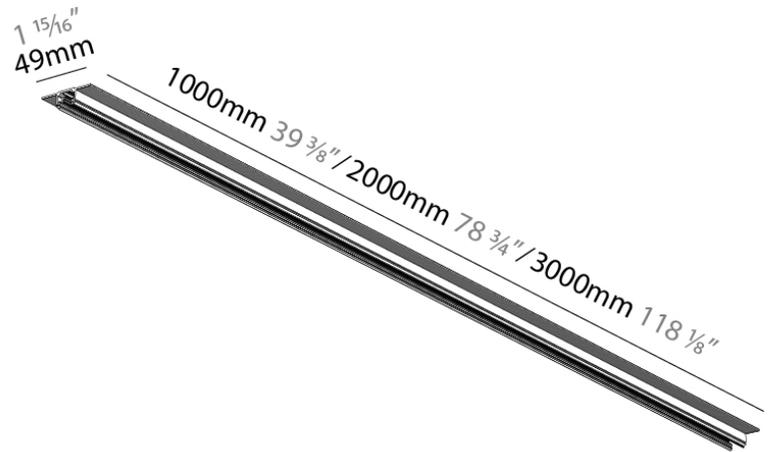

A3MINTRK-TRM-SYS COMPONENTS TRIMLESS

A3T317-

DESCRIPTION

Minimal Track - Trimless - End Cap - Black

GENERAL


Series: Minimal Track
 Brand: Prolicht
 Division: Architectural
 Mounting Type: Trimless
 Mounting Location: Wall / Ceiling
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 14
 Depth (mm): 4
 Height (in): 9/16
 Depth (in): 3/16
 Fixture Finish: BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

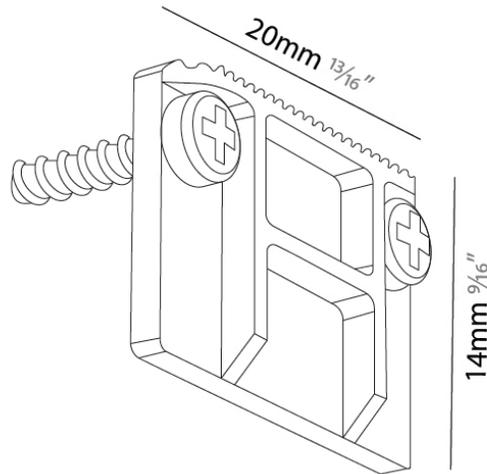

A3MINTRK-TRM-SYS COMPONENTS TRIMLESS

A3T318-

DESCRIPTION

Minimal Track - Trimless - Bolt Set - 8pcs for 1 meter profile length - Black

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Trimless

PHYSICAL

Diameter (mm): 4

Diameter (in): 3/16


Fixture Finish: BLK

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A3MINTRK-TRM-SYS COMPONENTS TRIMLESS

A3T319-

DESCRIPTION

Minimal Track - Trimless - Frame Alignment Kit - Black

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Trimless

PHYSICAL

Width (mm): 39

Width (in): 1 ⁹/₁₆

Height (mm): 48

Depth (mm): 2

Height (in): 1 ⁷/₈

Depth (in): 1/16



Fixture Finish: BLK

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

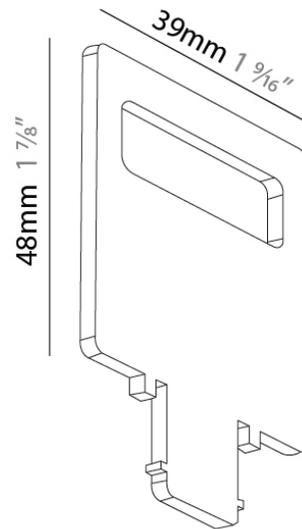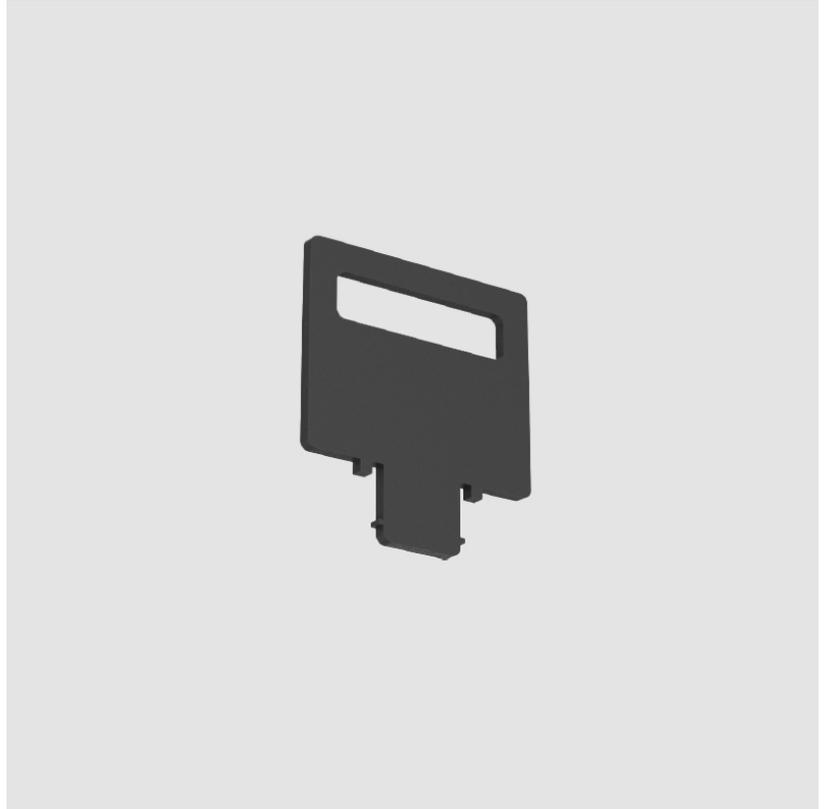

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A3T323-

DESCRIPTION

Minimal Track cable loop

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 25

Height (in): 1

Weight (kg): 0.011

Weight (lbs): 0.024

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum


OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

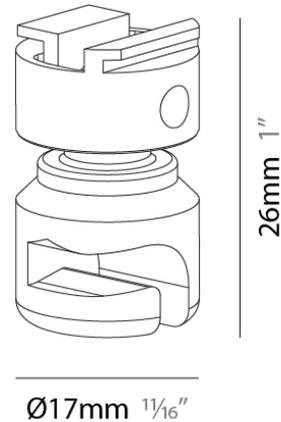

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3MINTRK-TRM-SYS COMPONENTS TRACK

A3T324-

DESCRIPTION

Minimal Track Cable Roller

GENERAL

Series: Minimal Track

Brand: Prolicht

Division: Architectural

Mounting Type: Track

Mounting Location: Ceiling

Subcategory: Modular

PHYSICAL

Diameter (mm): 17

Diameter (in): 11/16

Height (mm): 77

Height (in): 3 1/16

Weight (kg): 0.029

Weight (lbs): 0.064

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



77mm 3 1/16"

Ø17mm 1 1/16"



LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)