

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3NE-SUR-SYS COMPONENTS SURFACE

A33000-

DESCRIPTION

Neverending - Surface Wall Profile per Meter - Max 3000mm / 118 1/8"

GENERAL



Series: Never Ending
 Partner: Prolicht
 Division: Architectural
 Installation: Surface
 Product Type: Linear Profiles
 Mounting Location: Wall
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Height (mm): 110
 Depth (mm): 66
 Height (in): 4 5/16
 Depth (in): 2 5/8
 Weight (kg): 3.43
 Weight (lbs): 7.56
 Diffuser: Satin Finished Polycarbonate
 Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

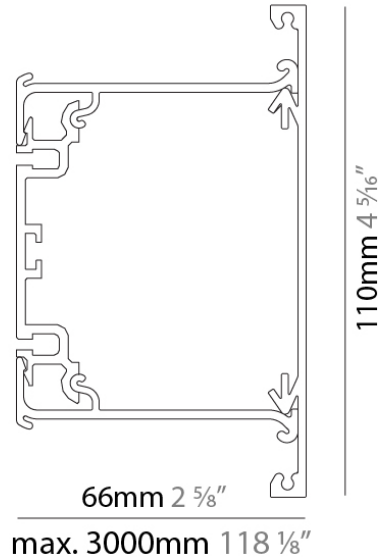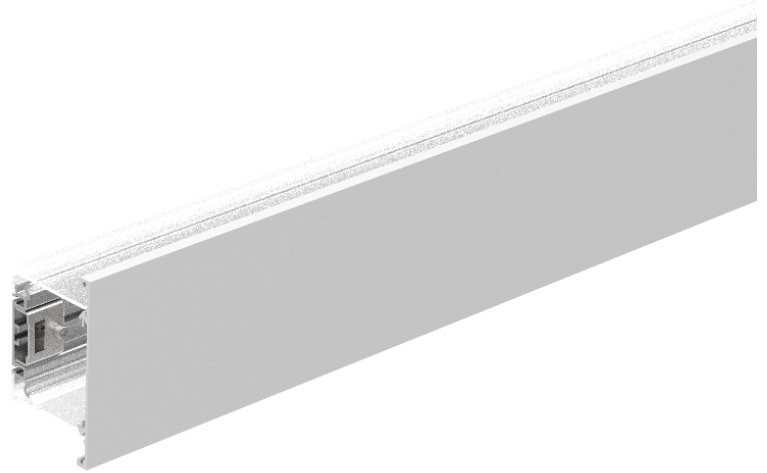

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3NE-SUR-SYS COMPONENTS

A38281-

DESCRIPTION

LED (Zhaga Standard) Light Insert - 1140mm / 44 7/8" - 20.2W
 LED (Zhaga Standard) - 3000K / 3500K / 4000K - CRI >90

GENERAL

Series: Never Ending
 Partner: Prolight
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Length (mm): 1140
 Length (in): 44 7/8
 Width (mm): 56
 Width (in): 2 3/16
 Height (mm): 58
 Height (in): 2 5/16
 Weight (kg): 1.785
 Weight (lbs): 3.94
 Fixture Material: Metal

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20.2
 Total Output Wattage (W): 16 / 12.8 (3500K)
 Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120 / 277Vac
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350 / 400 (3500K)

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1220 / 1264 / 1290
 Nominal Lumen (lm): 2840 / 2940 / 3000
 CRI: >80 CRI
 Efficiency (%): 54.7
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

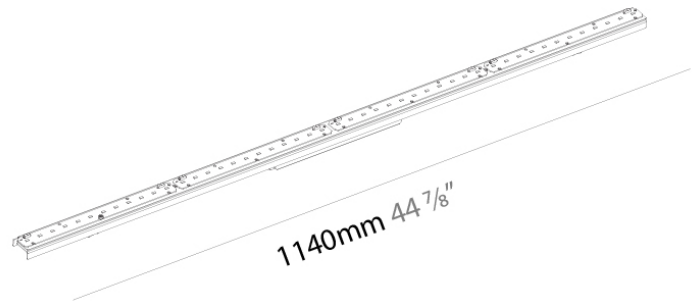

A3NE-SUR-SYS COMPONENTS

A38285-

DESCRIPTION
 Neverending System - Insert - 1420mm / 55-7/8" - 25.3W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Never Ending
 Partner: Prolight
 Division: Architectural
 Light Distribution: Direct

PHYSICAL

Length (mm): 1420
 Length (in): 55 7/8
 Width (mm): 56
 Width (in): 2 3/16
 Height (mm): 58
 Height (in): 2 5/16
 Weight (kg): 2.2
 Weight (lbs): 4.85
 Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.3
 Total Output Wattage (W): 20 / 3500K 16
 Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120 / 277Vac
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1526 / 1580 / 1612
 Nominal Lumen (lm): 3550 / 3675 / 3750
 CRI: >90 CRI
 Efficiency (%): 54.7
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20



PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____



A3NE-SUR-SYS COMPONENTS

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____



A38289-

DESCRIPTION

Neverending System - Insert - 1700mm - 30.4W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

Light Distribution: Direct

PHYSICAL

Length (mm): 1700

Length (in): 66 ¹⁵/₁₆

Width (mm): 56

Width (in): 2 ⁷/₁₆

Height (mm): 58

Height (in): 2 ⁵/₁₆

Weight (kg): 2.509

Weight (lbs): 5.53

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 30.4

Total Output Wattage (W): 27.6 / 25.9

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 400

LED

Delivered Lumen Range: 1000 - 1999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1832 / 1896 / 1935

Nominal Lumen (lm): 4260 / 4410 / 4500

CRI: >90 CRI


Efficiency (%): 0.547

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

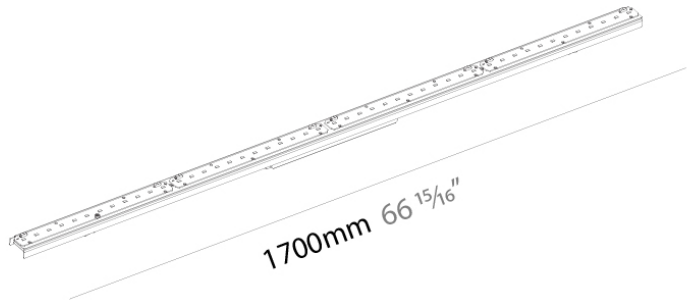

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE



A38293-

DESCRIPTION

Neverending System - Insert - 1980mm - 35.4W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

Light Distribution: Direct

PHYSICAL

Length (mm): 1980

Length (in): 77 ¹⁵/₁₆

Width (mm): 56

Width (in): 2 ³/₁₆

Height (mm): 58

Height (in): 2 ⁵/₁₆

Weight (kg): 3.094

Weight (lbs): 6.82

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 35.4

Total Output Wattage (W): 28 / 3500K 22.4

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Delivered Lumen Range: 2000 - 2999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2137 / 2213 / 2258

Nominal Lumen (lm): 4970 / 5145 / 5250

CRI: >90 CRI


Efficiency (%): 0.547

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

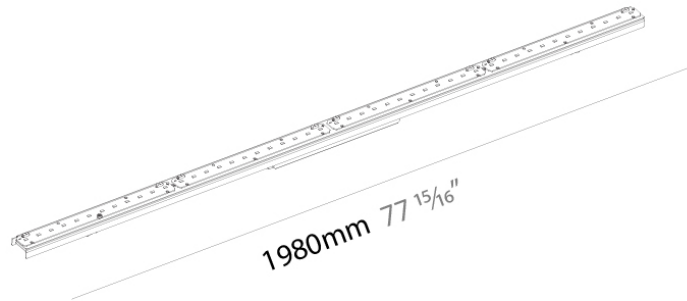

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A38297-

DESCRIPTION

Neverending System - Insert - 2270mm / 89-3/8" - 40.5W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

Light Distribution: Direct

PHYSICAL

Length (mm): 2270

Length (in): 89 3/8

Width (mm): 56

Width (in): 2 3/16

Height (mm): 58

Height (in): 2 3/10

Weight (kg): 3.293

Weight (lbs): 7.26

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 40.5

Total Output Wattage (W): 32 / 25.6 (3500K)

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350 / 100 (3500K)

LED

Delivered Lumen Range: 2000 - 2999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2442 / 2528 / 2580

Nominal Lumen (lm): 5680 / 5880 / 6000

CRI: >90 CRI


Efficiency (%): 54.7

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

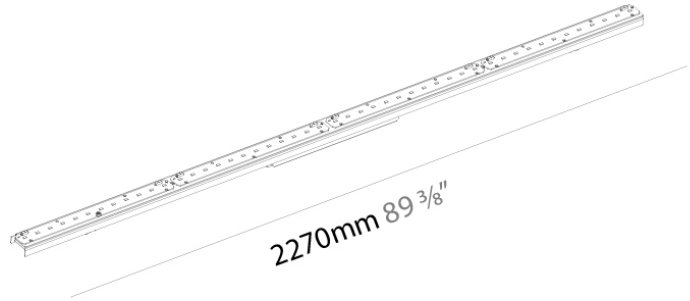

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE



A38990-

DESCRIPTION

Neverending - System - End Cap

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 110

Length (in): 4 5/16

Width (mm): 6

Width (in): 1/4

Height (mm): 65

Height (in): 2 9/16

Weight (kg): 0.19

Weight (lbs): 0.42


Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

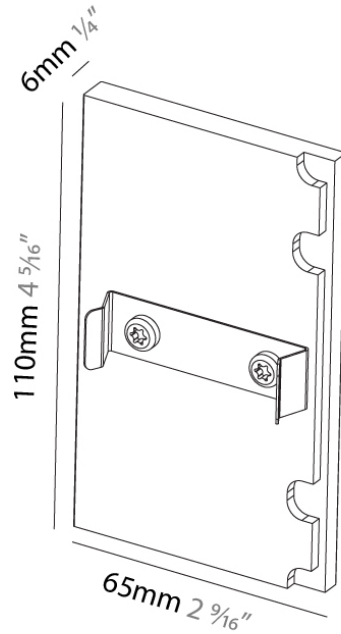

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A39128-

DESCRIPTION

Neverending - Exterior 90° Angle

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 130

Length (in): 5 1/8"

Width (mm): 130

Width (in): 5 1/8"

Height (mm): 110

Height (in): 4 3/16"

Weight (kg): 0.37

Weight (lbs): 0.82


Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

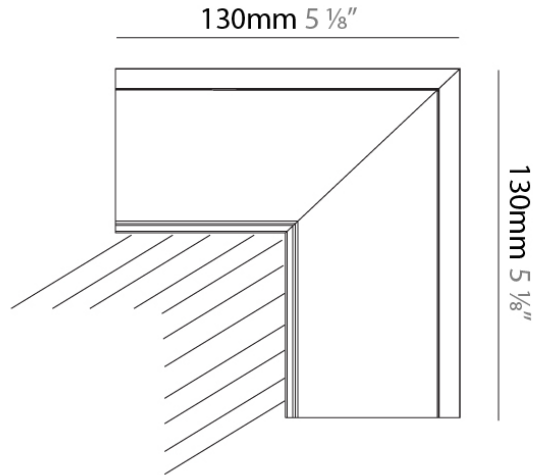

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A39129-

DESCRIPTION

Neverending - Exterior Any Required Angle (45°-180°)

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 130

Length (in): 5 1/8"

Width (mm): 130

Width (in): 5 1/8"

Height (mm): 110

Height (in): 4 3/16"

Weight (kg): 0.37

Weight (lbs): 0.82


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

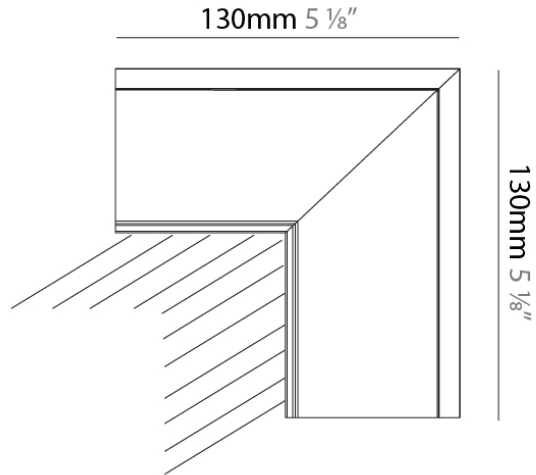

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A39130-

DESCRIPTION

Neverending - Interior 90° Angle

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 130

Length (in): 5 1/8"

Width (mm): 130

Width (in): 5 1/8"

Height (mm): 110

Height (in): 4 3/16"

Weight (kg): 0.36

Weight (lbs): 0.79


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

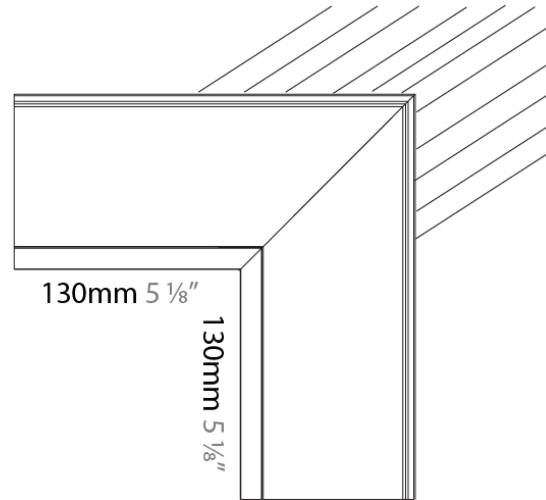

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A39131-

DESCRIPTION

Neverending - Interior Any Required Angle (45°-180°)

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 130

Length (in): 5 1/8"

Width (mm): 130

Width (in): 5 1/8"

Height (mm): 110

Height (in): 4 3/16"

Weight (kg): 0.37

Weight (lbs): 0.82


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

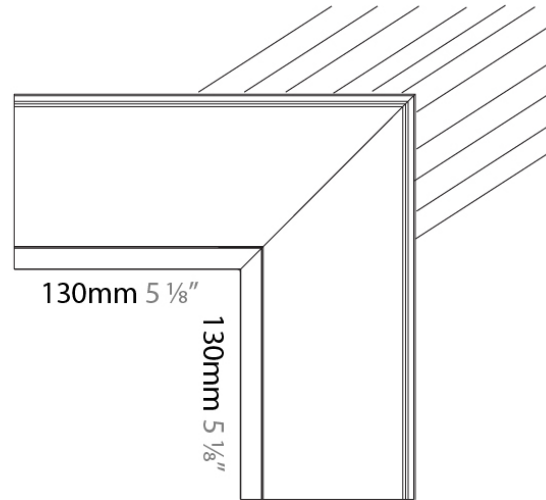

ZANEEN®

A3NE-SUR-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



A3913200

DESCRIPTION

Never Ending System - Identity Milling Per Character

GENERAL

Series: Never Ending

Partner: Prolicht

Division: Architectural

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)