

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30245-

DESCRIPTION

Super-G 2100/120° - Suspension - Direct - 35W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Linear Profiles

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Curves

Length (mm): 1818

Length (in): 71 ⁹/₁₆

Width (mm): 150

Width (in): 5 ⁷/₈

Height (mm): 120

Height (in): 4 ³/₄

Weight (kg): 8.375

Weight (lbs): 18.46

Diffuser: PMMA - Opal

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 35

Total Output Wattage (W): 28

Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 3230 / 3342 / 3410

Nominal Lumen (lm): 4970 / 5145 / 5250

CRI: >90 CRI


Efficiency (%): 0.65

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

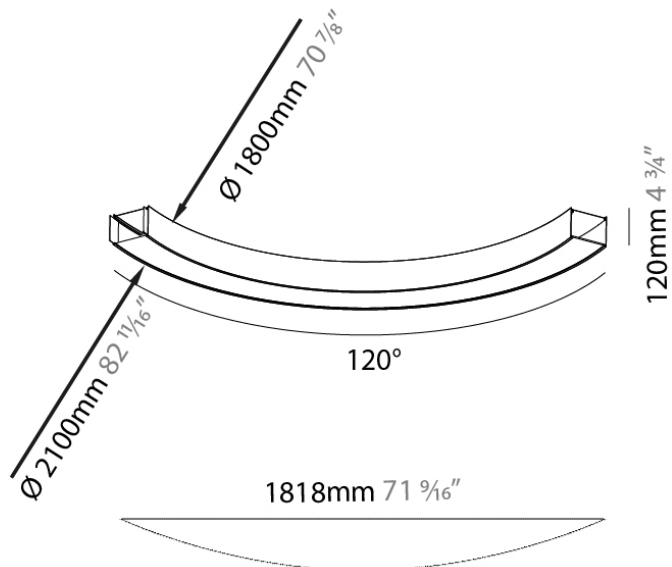

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30247-

DESCRIPTION

Super-G 3100/90° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Curves
 Length (mm): 2192
 Length (in): 86 ⁵/₁₆
 Width (mm): 150
 Width (in): 5 ⁷/₈
 Height (mm): 120
 Height (in): 4 ³/₄
 Weight (kg): 9.6
 Weight (lbs): 20.94
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 40
 Total Output Wattage (W): 32
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3690 / 3822 / 3900
 Nominal Lumen (lm): 5680 / 5880 / 6000
 CRI: >90 CRI
 Efficiency (%): 65
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

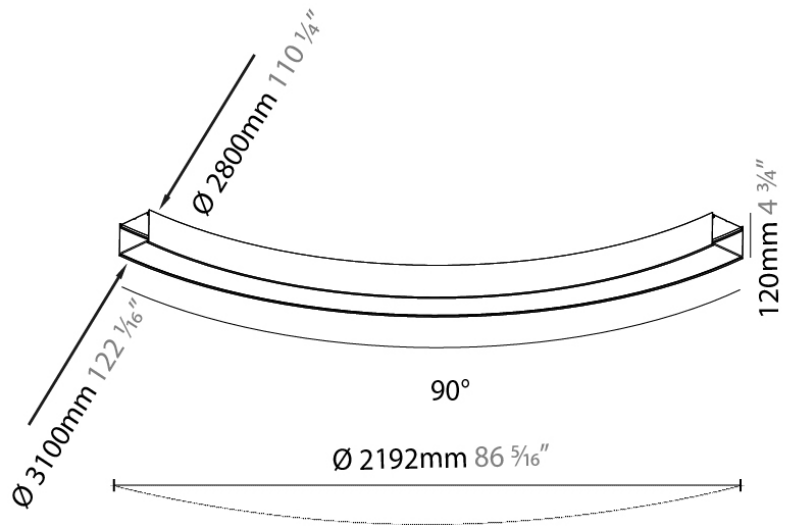

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30249-

DESCRIPTION

Super-G 4000/72° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Curves
 Length (mm): 2351
 Length (in): 92 ⁹/₁₆
 Width (mm): 150
 Width (in): 5 ⁷/₈
 Height (mm): 120
 Height (in): 4 ³/₄
 Weight (kg): 9.918
 Weight (lbs): 21.87
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 40
 Total Output Wattage (W): 32
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3690 / 3822 / 3900
 Nominal Lumen (lm): 5680 / 5880 / 6000
 CRI: >90 CRI
 Efficiency (%): 0.65
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

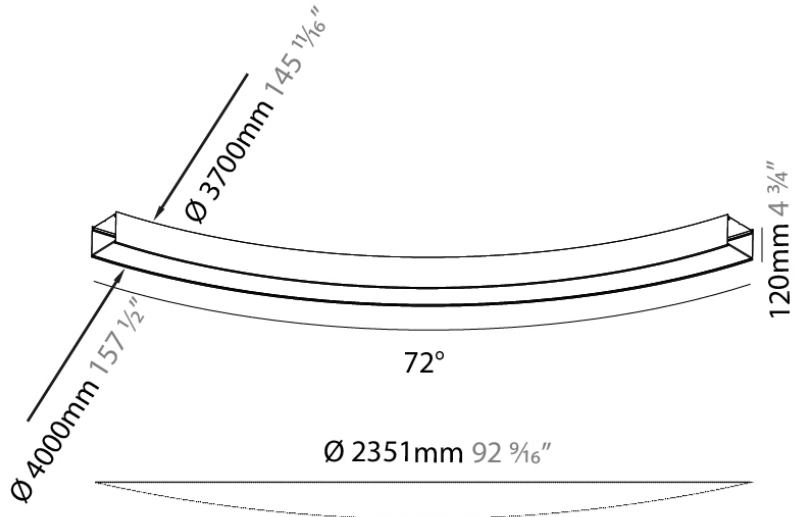

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30251-

DESCRIPTION

Super-G 5400mm / 51° - Suspension - Direct - 40W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Curves
 Length (mm): 2343
 Length (in): 92 1/4
 Width (mm): 150
 Width (in): 5 7/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 9.6
 Weight (lbs): 21.34
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 40
 Total Output Wattage (W): 32
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3690 / 3822 / 3900
 Nominal Lumen (lm): 5680 / 5880 / 6000
 CRI: >90 CRI
 Efficiency (%): 65
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

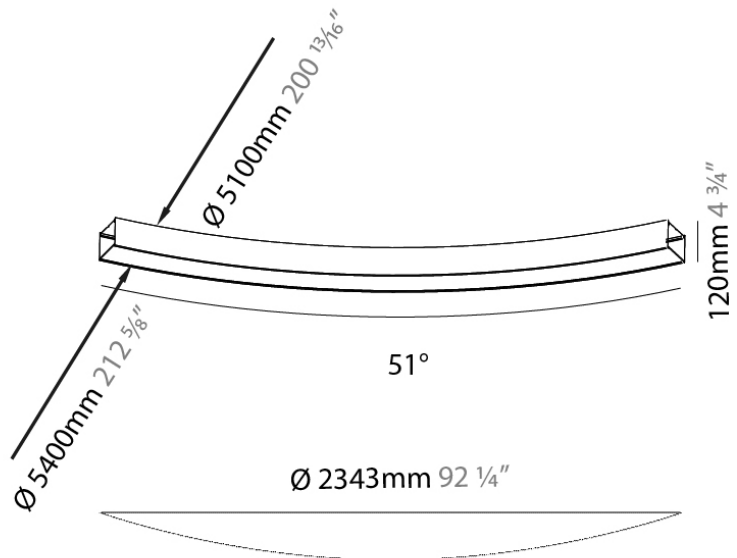

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30253-

DESCRIPTION

Super-G - 1150mm / 45 1/4" - Suspension - Direct - 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1150
 Length (in): 45 1/4
 Width (mm): 150
 Width (in): 5 7/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 5
 Weight (lbs): 11
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 20
 Total Output Wattage (W): 16
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1850 / 1911 / 1950
 Nominal Lumen (lm): 2840 / 2940 / 3000
 CRI: >90 CRI
 Efficiency (%): 65%
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

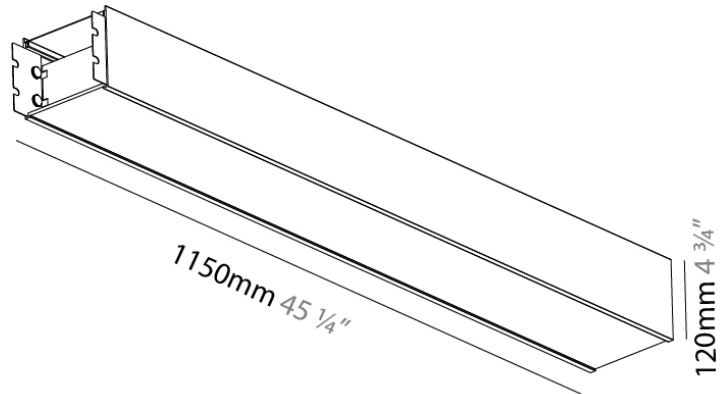

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30255-

DESCRIPTION

Super-G - 1750mm / 68 7/8" - Suspension - Direct - 30W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1750
 Length (in): 68 7/8
 Width (mm): 150
 Width (in): 5 7/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 7.3
 Weight (lbs): 16.09
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30
 Total Output Wattage (W): 24
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (mA): 350

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2770 / 2862 / 2920
 Nominal Lumen (lm): 4260 / 4410 / 4500
 CRI: >90 CRI
 Efficiency (%): 65
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

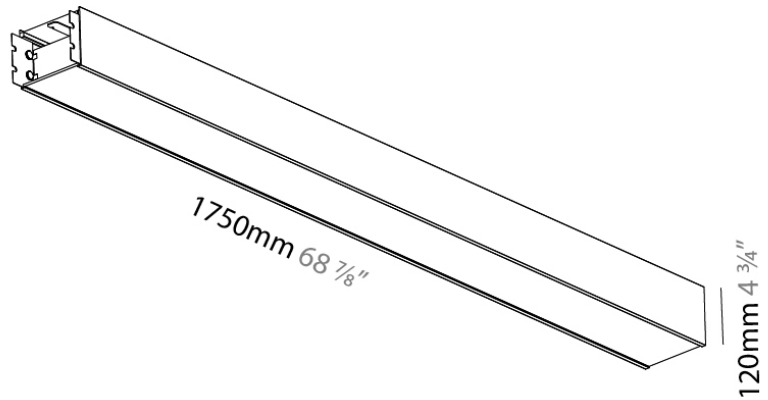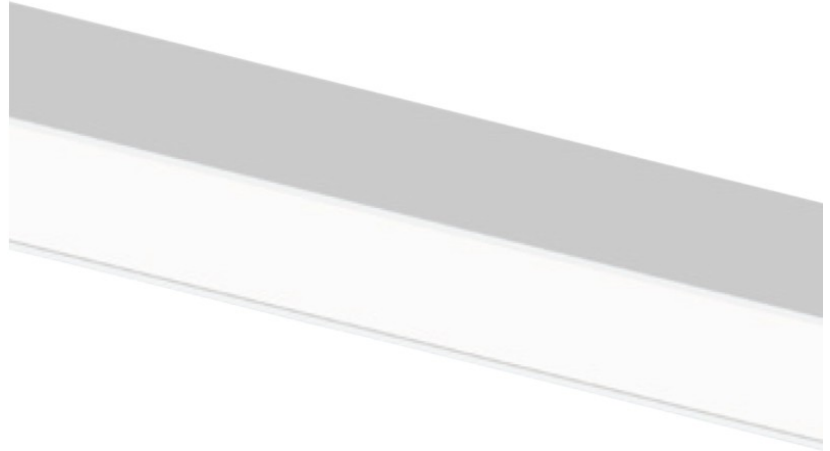

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30531-

DESCRIPTION

Super-G 1150 - Suspension - Direct / Indirect - 20W + 10W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Linear Profiles

Mounting Location: Ceiling

Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle

Length (mm): 1150

Length (in): 45 1/4

Width (mm): 150

Width (in): 5 7/8

Height (mm): 120

Height (in): 4 3/4

Weight (kg): 5.255

Weight (lbs): 11.59

Diffuser: PMMA - Opal

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 20 / 10

Total Output Wattage (W): 16 Dir / 8 Ind.

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): Dir - 1850 / 1911 / 1950 / Ind - 1270 / 1323 / 1350

Nominal Lumen (lm): 3120 / 3234 / 3300

CRI: >90 CRI



Efficiency (%): 69.8

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

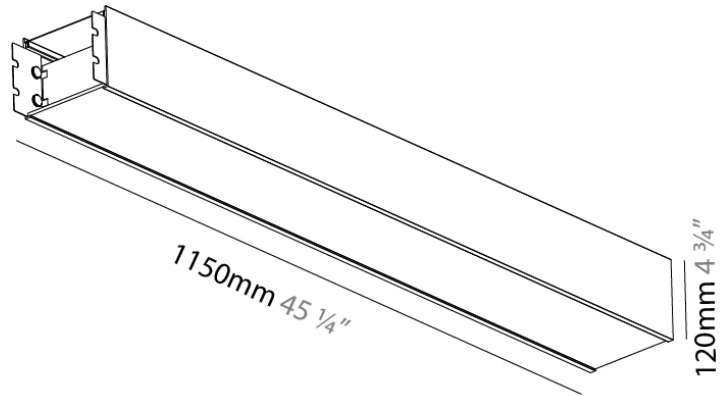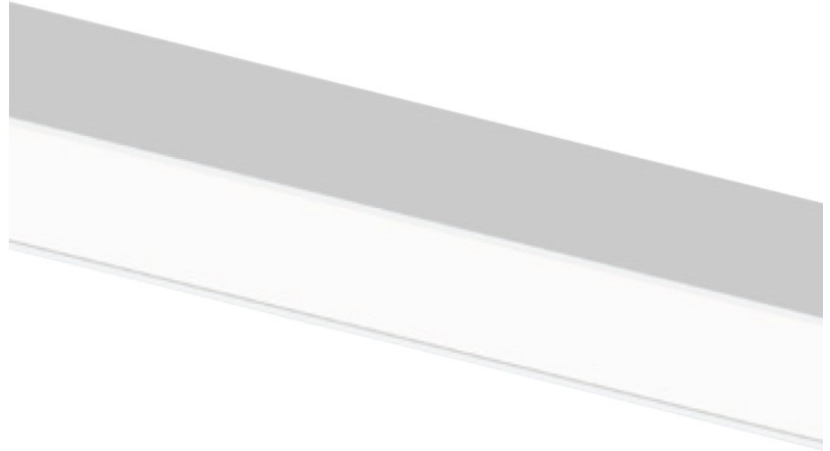

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30533-

DESCRIPTION

Super-G 1750 - Suspension - Direct / Indirect - 30W + 15W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Rectangle
 Length (mm): 1750
 Length (in): 68 ⁷/₈
 Width (mm): 150
 Width (in): 5 ⁷/₈
 Height (mm): 120
 Height (in): 4 ³/₄
 Weight (kg): 7.8
 Weight (lbs): 17.2
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 45
 Total Output Wattage (W): 24 Dir / 12 Ind
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (mA): 350

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Dir - 2770 / 2862 / 2920 / Ind - 1920 / 1989 / 2030
 Nominal Lumen (lm): 6390 / 6615 / 6750
 CRI: >90 CRI
 Efficiency (%): 69.8
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

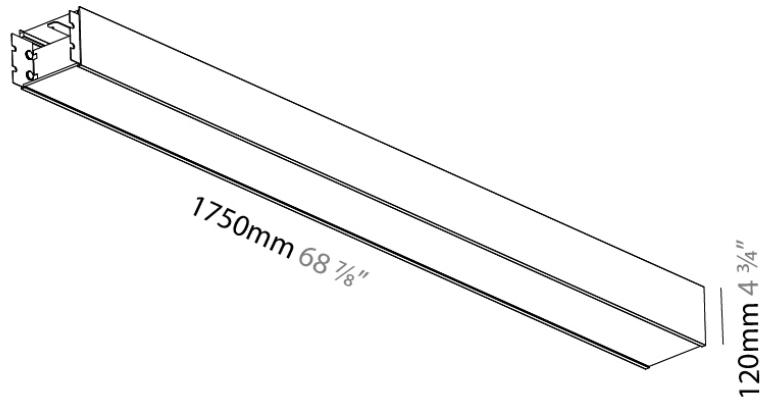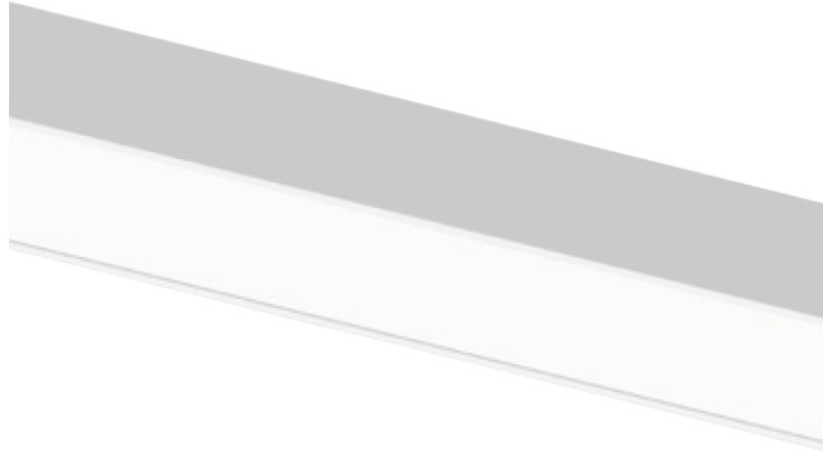

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30535-

DESCRIPTION

Super-G 2100/120° - Suspension - Direct / Indirect - 35W + 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Curves
 Length (mm): 1818
 Length (in): 71 ⁹/₁₆
 Width (mm): 150
 Width (in): 5 ⁷/₈
 Height (mm): 120
 Height (in): 4 ³/₄
 Weight (kg): 8.7
 Weight (lbs): 19.18
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 55
 Total Output Wattage (W): 28 - Dir / 16 Ind
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Dir - 3230 / 3342 / 3410 / Ind - 2560 / 2646 / 2700
 Nominal Lumen (lm): 7810 / 8085 / 8250
 CRI: >90 CRI
 Efficiency (%): 0.704
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

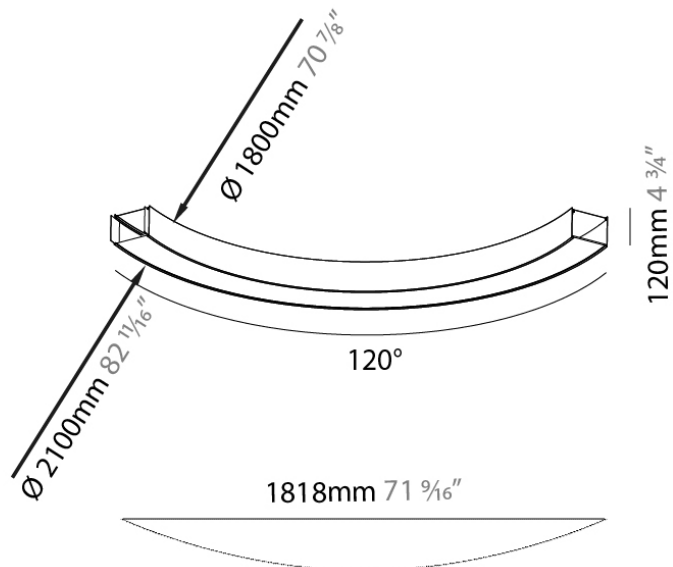

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30537-

DESCRIPTION

Super-G 3100/90° - Suspension - 60W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Curves
 Length (mm): 2192
 Length (in): 86 ⁵/₁₆
 Width (mm): 150
 Width (in): 5 ⁷/₈
 Height (mm): 120
 Height (in): 4 ³/₄
 Weight (kg): 9.926
 Weight (lbs): 22.88
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60
 Total Output Wattage (W): 32 Dir / 16 Ind
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 / 2646 / 2700
 Nominal Lumen (lm): 8520 / 8820 / 9000
 CRI: >90 CRI
 Efficiency (%): 69.8
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

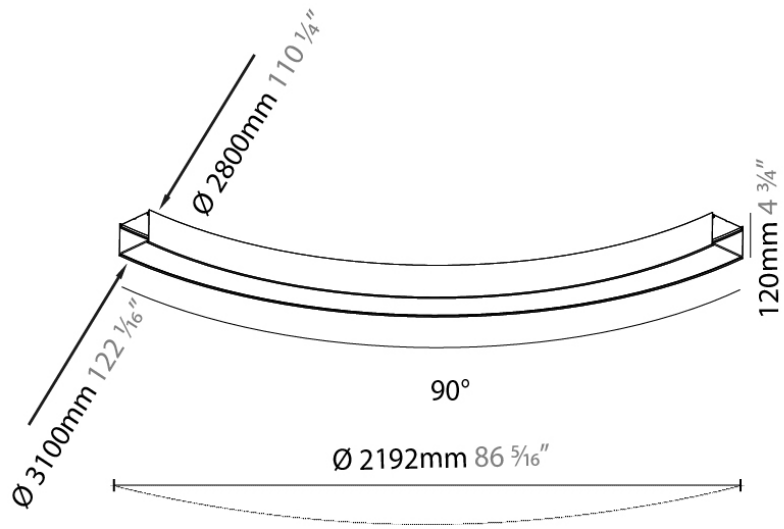

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30539-

DESCRIPTION

Super-G 4000/72° - Suspension - Direct / Indirect - 40W + 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Curves
 Diameter (mm): 4000
 Diameter (in): 157 1/2
 Length (mm): 2351
 Length (in): 92 9/16
 Width (mm): 150
 Width (in): 5 7/8
 Height (mm): 120
 Height (in): 4 3/4
 Weight (kg): 10.5
 Weight (lbs): 23.15
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 40 / 20
 Total Output Wattage (W): 32 Dir / 16 Ind
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 / 2646 / 2700
 Nominal Lumen (lm): 8520 / 8820 / 9000
 CRI: >90 CRI
 Efficiency (%): 69.8
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

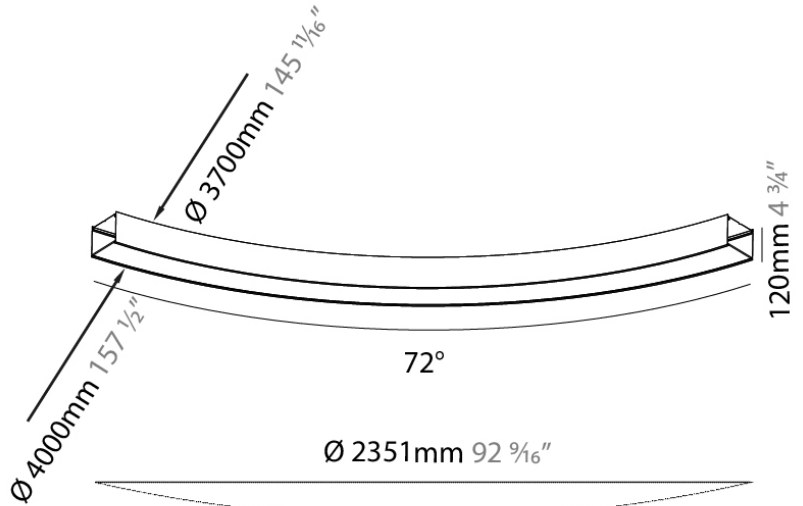

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A30541-

DESCRIPTION

Super-G 5400/51° - Suspension - Direct / Indirect - 40W + 20W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G
 Subseries: Super-G 150
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Direct / Indirect

PHYSICAL

Shape: Curves
 Length (mm): 2343
 Length (in): 92 ¼
 Width (mm): 150
 Width (in): 5 ⅞
 Height (mm): 120
 Height (in): 4 ¾
 Weight (kg): 10.023
 Weight (lbs): 22.1
 Diffuser: PMMA - Opal
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60
 Total Output Wattage (W): 32 Dir / 16 Ind
 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Constant Current (MA): 350

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): Dir - 3690 / 3822 / 3900 / Ind - 2560 / 2646 / 2700
 Nominal Lumen (lm): 8520 / 8820 / 9000
 CRI: >90 CRI
 Efficiency (%): 0.698
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

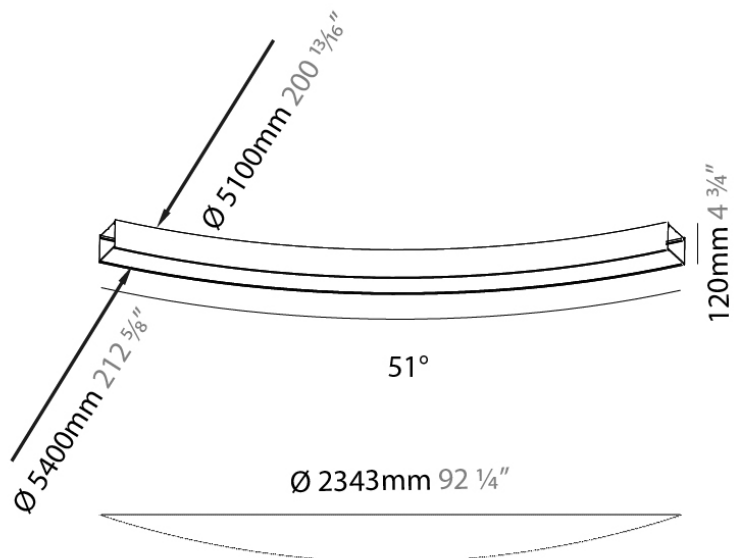

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A38115-

DESCRIPTION

Super-G End Cap - Suspension - 3.2W LED (Zhaga Standard) - 3000K / 3500K / 4000K - Dimmable

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Linear Profiles

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 125mm

Length (in): 4 ¹⁵/₁₆

Width (mm): 150

Width (in): 5 ⁹/₁₀

Height (mm): 120

Height (in): 4 ³/₄

Weight (kg): 0.62

Weight (lbs): 1.37

Diffuser: Opal - PMMA

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 3.2

Total Output Wattage (W): 2.9

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current

Driver Class: Class 2

Input Voltage (V): 120

Constant Current (mA): 350

LED

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 270 / 284 / 290

Nominal Lumen (lm): 429 / 462 / 471

CRI: >90 CRI

Efficiency (%): 0.624

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20



A3SG150-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A38117-

DESCRIPTION

Super-G Suspension Cable - 2000mm -

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 144

Length (in): 5 ¹¹/₁₆

Width (mm): 52

Width (in): 2 ¹/₁₆

Height (mm): 200

Height (in): 7 ³/₄

Weight (kg): 0.083

Weight (lbs): 0.19

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum


ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

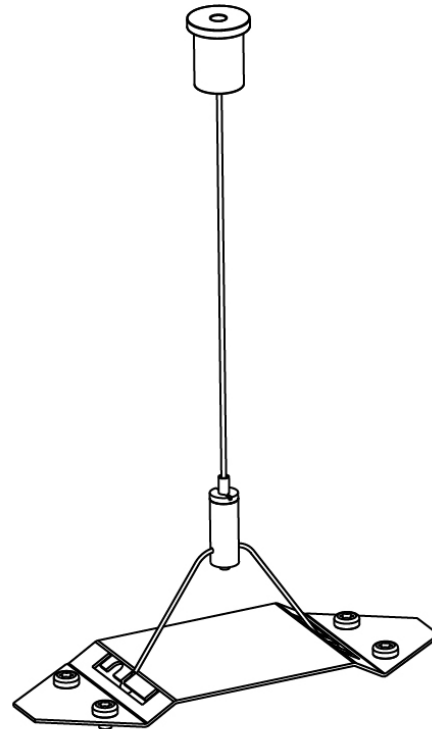

A

A3SG150-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A38118-

DESCRIPTION

Super-G Suspension Cable - 6000mm -

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 144

Length (in): 5 ¹¹/₁₆

Width (mm): 52

Width (in): 2 ¹/₁₆

Height (mm): 6000

Height (in): 236 ¹/₄

Weight (kg): 0.083

Weight (lbs): 0.19

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum


ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

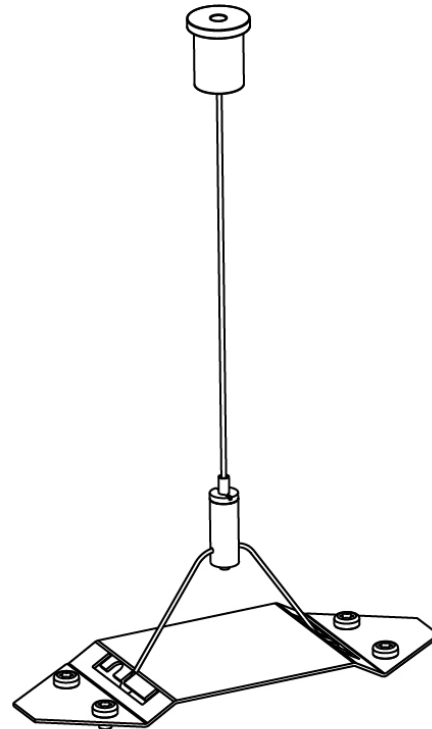

A3SG150-SUS-SYS COMPONENTS SUSPENSION

A38151-

DESCRIPTION

Super-G Crossing - Suspension - 10W LED (Zhaga Standard) - 3000K / 3500K / 4000K

GENERAL

Series: Super-G

Subseries: Super-G 150

Partner: Prolicht

Division: Architectural

Installation: Suspension

Product Type: Linear Profiles

Mounting Location: Ceiling

Light Distribution: Direct

PHYSICAL

Shape: Abstract

Length (mm): 350

Length (in): 13 ³/₄

Width (mm): 303

Width (in): 11 ¹⁵/₁₆

Height (mm): 120

Height (in): 4 ³/₄

Weight (kg): 1.95

Weight (lbs): 4.3

Diffuser: PMMA - Opal

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 10

Total Output Wattage (W): 9

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (mA): 350

LED

Delivered Lumen Range: 500 - 1999 lm

Color Temperature (°K): 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 940 / 960 / 980

Nominal Lumen (lm): 1440 / 1470 / 1500

CRI: >90 CRI



Efficiency (%): 0.884

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

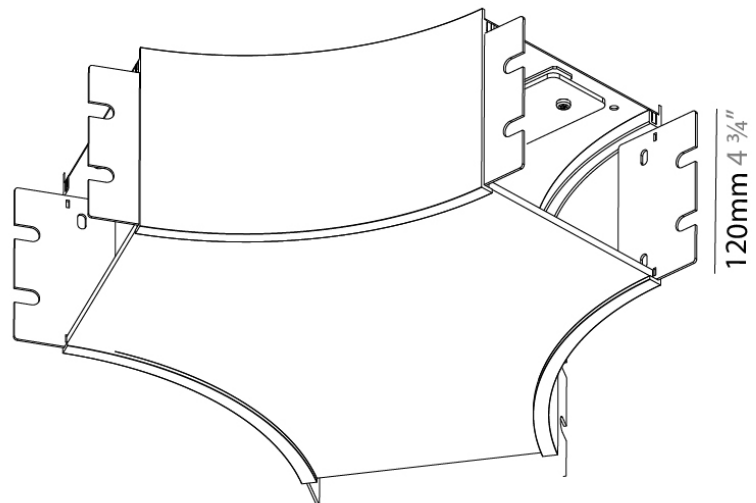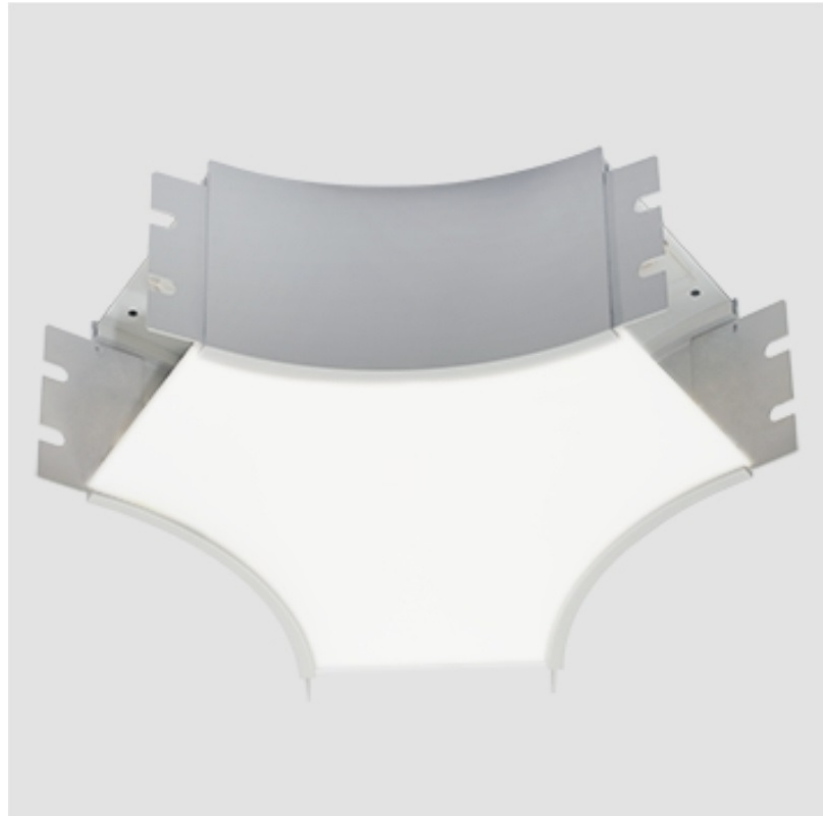

A3SG150-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A38346-

DESCRIPTION

Super-G Suspension Flat End Cap

GENERAL

Series: Super-G

Partner: Prolicht

Division: Architectural

PHYSICAL

Length (mm): 150

Length (in): 5 ⁷/₈

Width (mm): 3

Width (in): 1/8

Height (mm): 120

Height (in): 4 ³/₄

Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Extruded Aluminum



ELECTRICAL

Lamp Type: LED (Zhaga Standard)

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

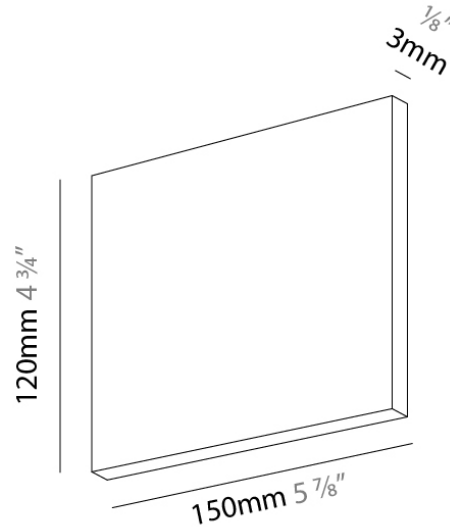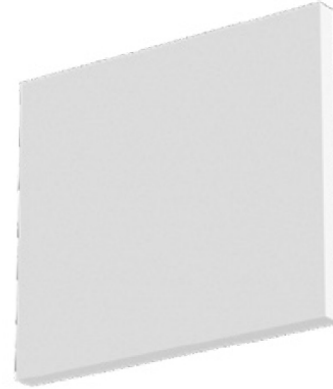

A3SG150-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A39013-

DESCRIPTION

Suspension Power Feed 3x0.75, 2000mm

GENERAL

Partner: Prolight

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 ³/₄

Length (mm): 2000

Length (in): 78 ³/₄

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 30

Height (in): 1 ¹/₁₆

Weight (kg): 0.3

Weight (lbs): 0.66


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

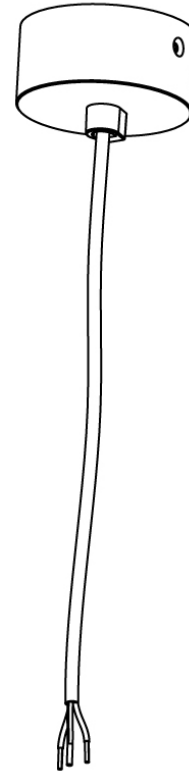

A

A3SG150-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A39014-

DESCRIPTION

Suspension Power Feed 5x0.75 - 2000mm

GENERAL

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 ³/₄

Length (mm): 2000

Length (in): 78 ³/₄

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 30

Height (in): 1 ³/₁₆

Weight (kg): 0.3

Weight (lbs): 0.661


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

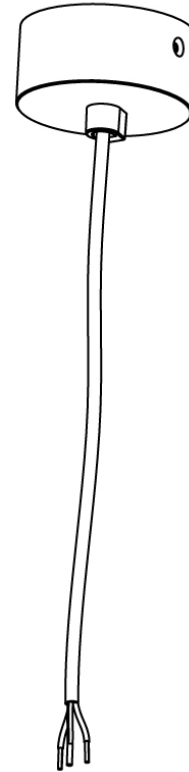

A

A3SG150-SUS-SYS COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A39016-

DESCRIPTION

Suspension Power Feed 3x0.75, 6000mm

GENERAL

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 ³/₄

Length (mm): 6000

Length (in): 236 ¹/₄

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 30

Height (in): 1 ³/₁₆

Weight (kg): 0.117

Weight (lbs): 0.258


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA /
RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP /
BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

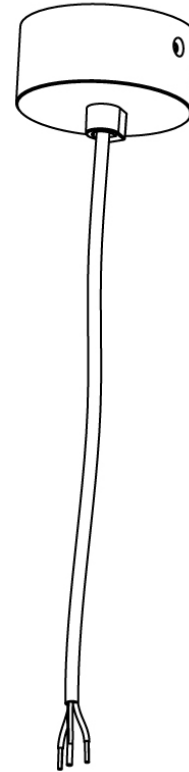

A3SG150-SUS-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A39017-

DESCRIPTION

Suspension Power Feed 5x0.75, 6000mm

GENERAL

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 ³/₄

Length (mm): 6000

Length (in): 236 ¹/₄

Width (mm): 120

Width (in): 4 ³/₄

Height (mm): 30

Height (in): 1 ³/₁₆

Weight (kg): 0.117

Weight (lbs): 0.258


Fixture Finish: ANA / SSR / BKV / CWI / CRY / HAB / MSR / UFT / ITA / RUA / OGR / FTG / MYG / RWR / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

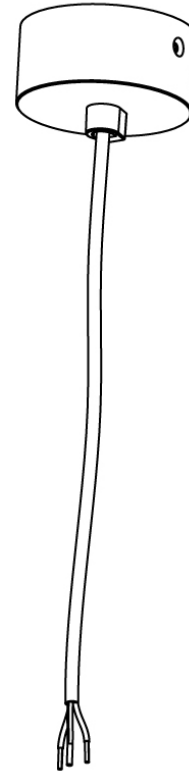

A

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)