

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300751-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED
51.6W, 2700K / 3000K / 3500K / 4000K, Max. 7387lm, CRI90

GENERAL

Series: Unity
Partner: Prolight
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 1260
Width (in): 49 ³/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Holder Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

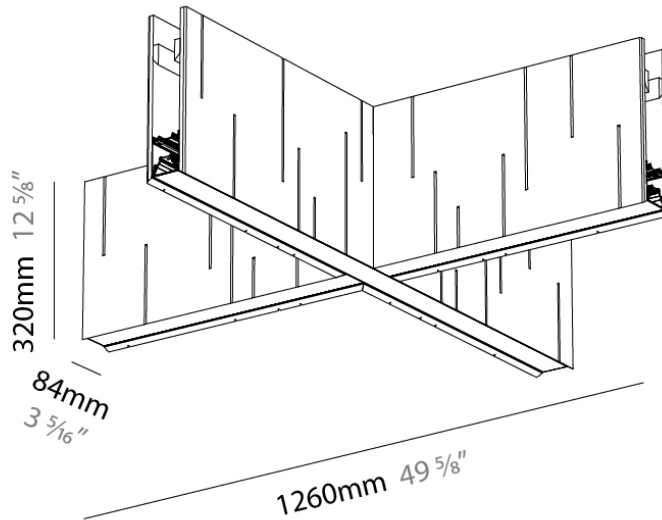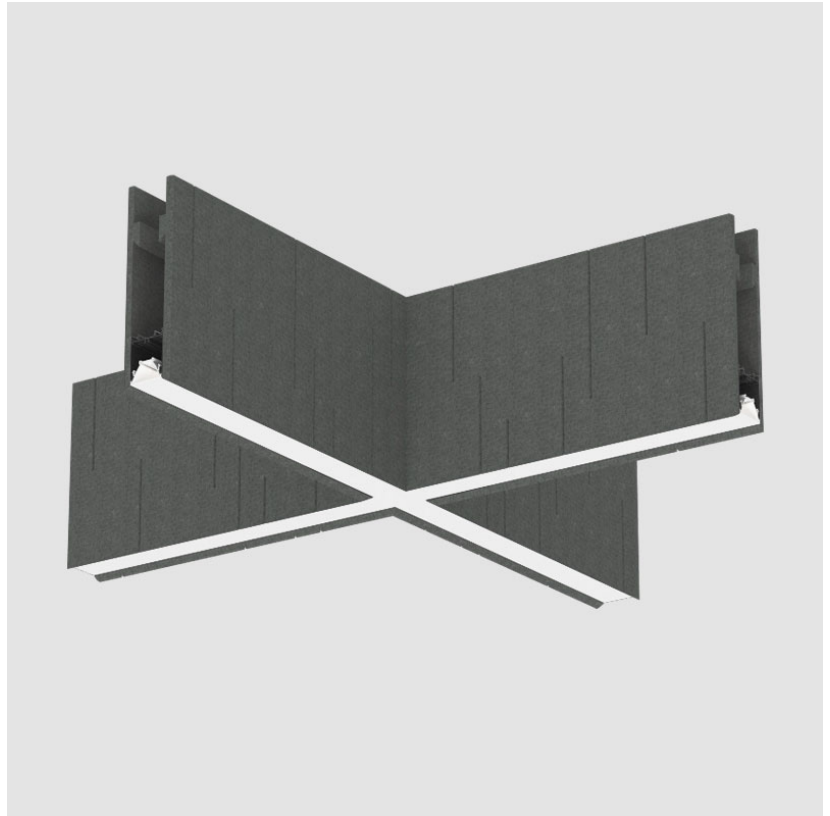

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300752-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED 51.6W, Tunable White (2700K-6500K), Max. 7249lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₈
 Width (mm): 1260
 Width (in): 49 ³/₈
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Holder Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

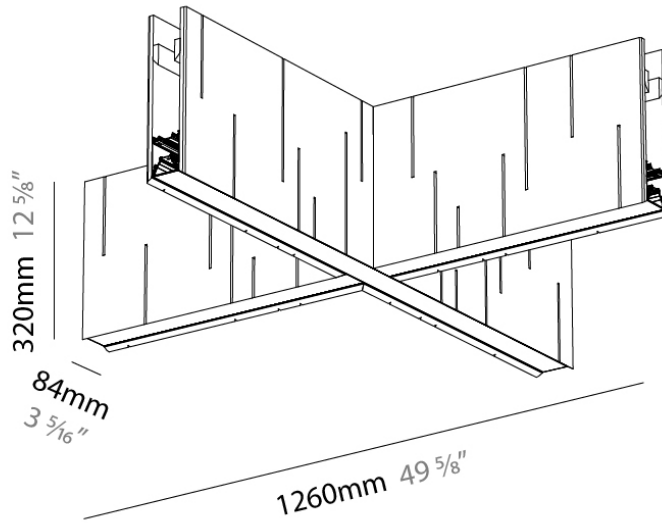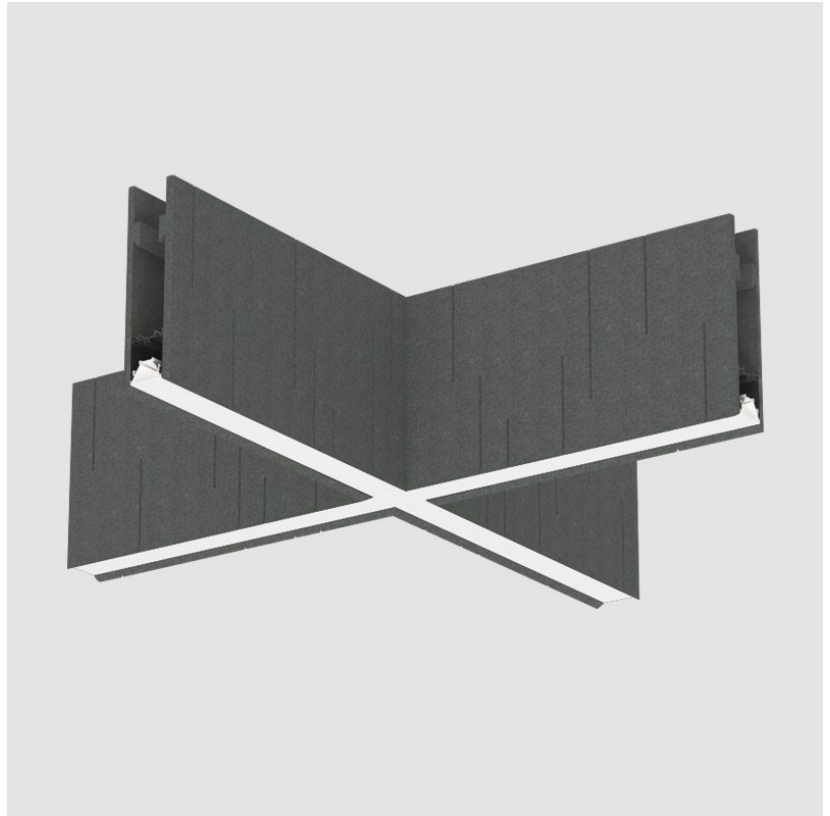

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300753-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
51.6W, 2700K / 3000K / 3500K / 4000K, Max. 7387lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 1260
Width (in): 49 ³/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

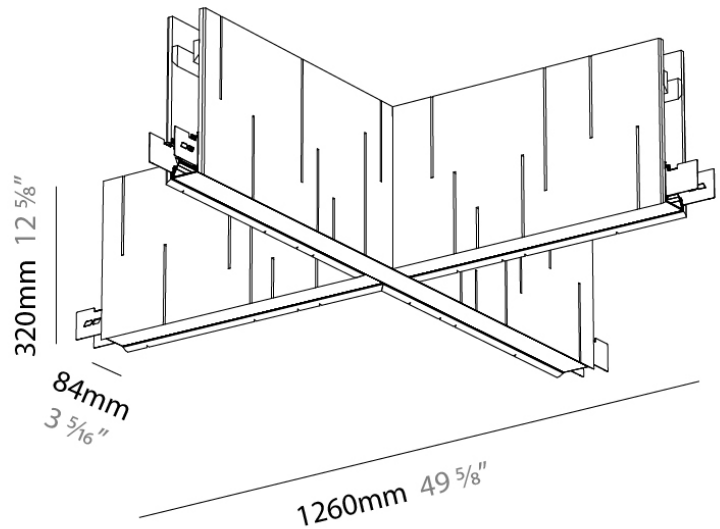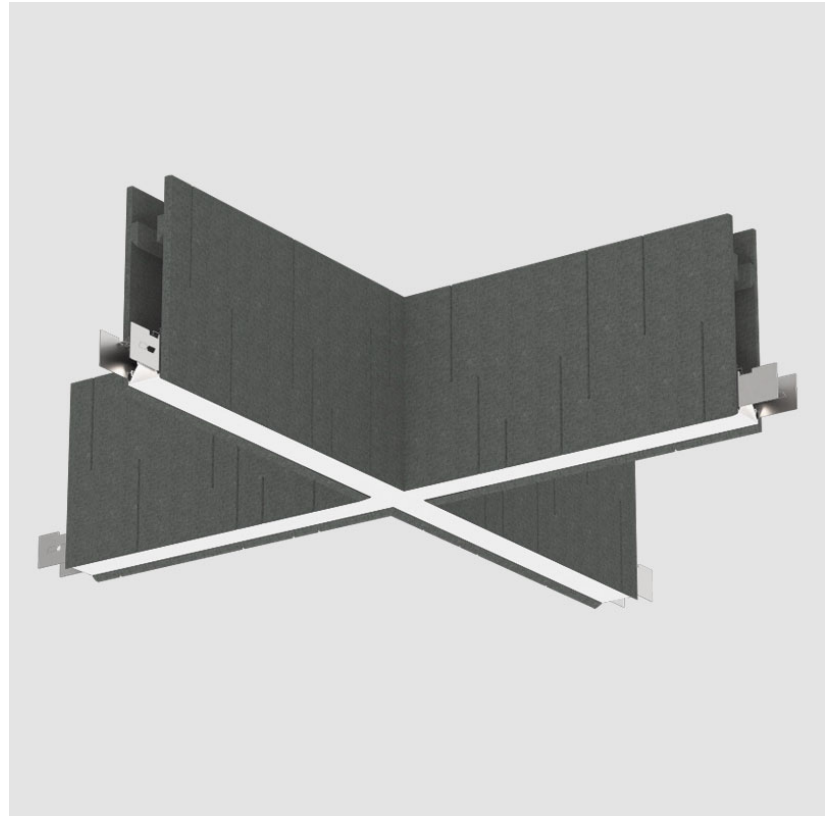

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300754-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
51.6W, Tunable White (2700K-6500K), Max. 7249lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 1260
Width (in): 49 ³/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

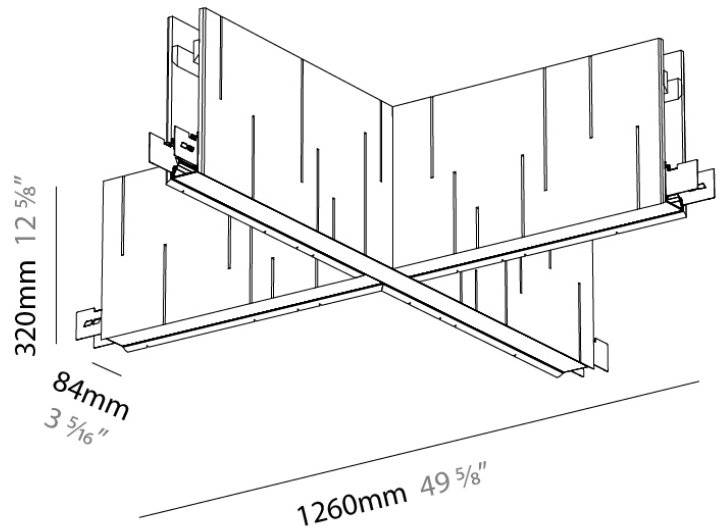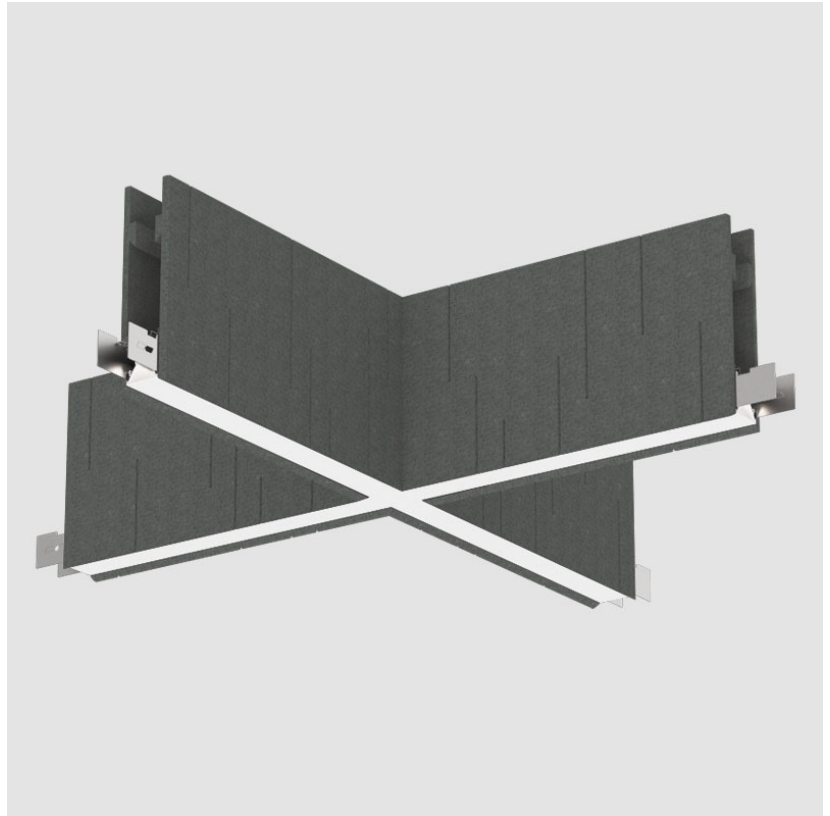

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300756-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED
51.6W, 2700K / 3000K / 3500K / 4000K, Max. 7165lm, CRI90 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO /
DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 6863 / 6964 / 7031 / 7165
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

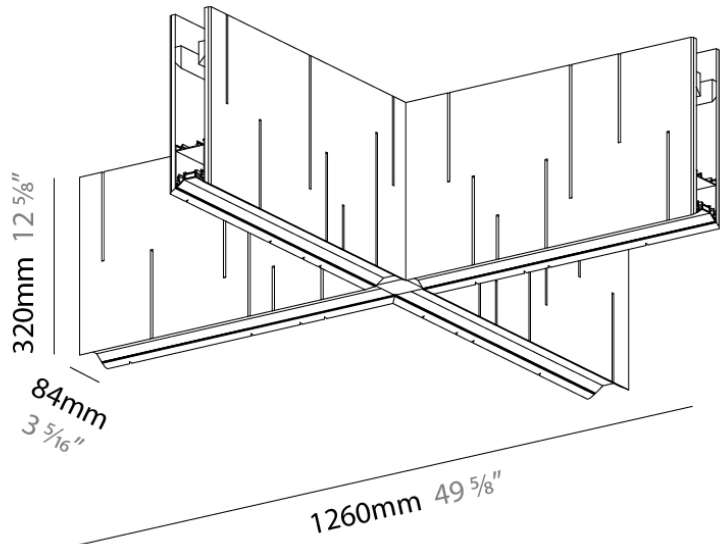

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300757-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED 51.6W, Tunable White (2700K-6500K), Max. 7031lm, CRI90 - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

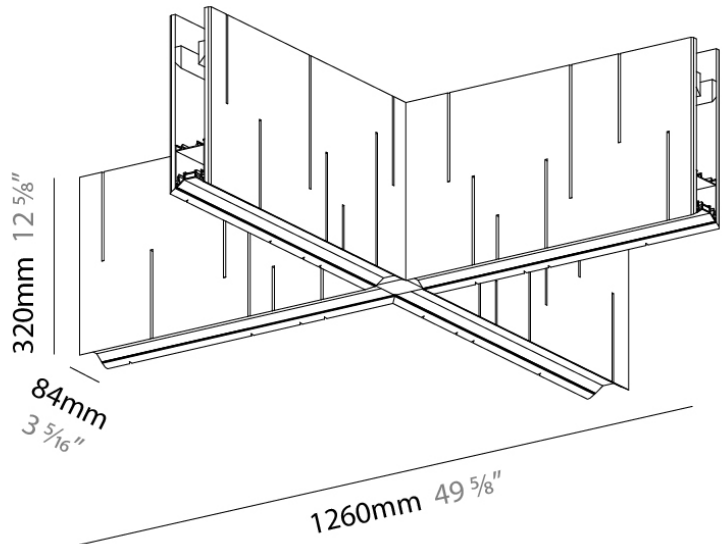

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300762-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
 51.6W, 2700K / 3000K / 3500K / 4000K, Max. 7165lm, CRI90 -
 Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₈
 Width (mm): 1260
 Width (in): 49 ³/₈
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
 / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 6863 / 6964 / 7031 / 7165
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

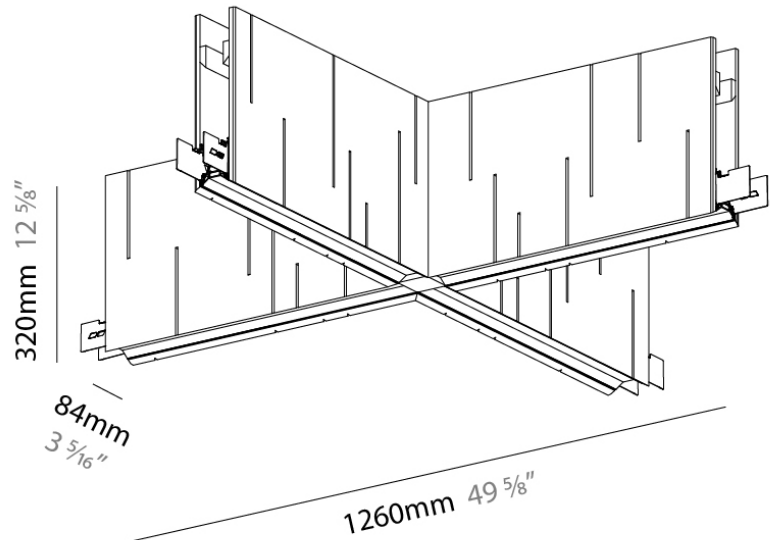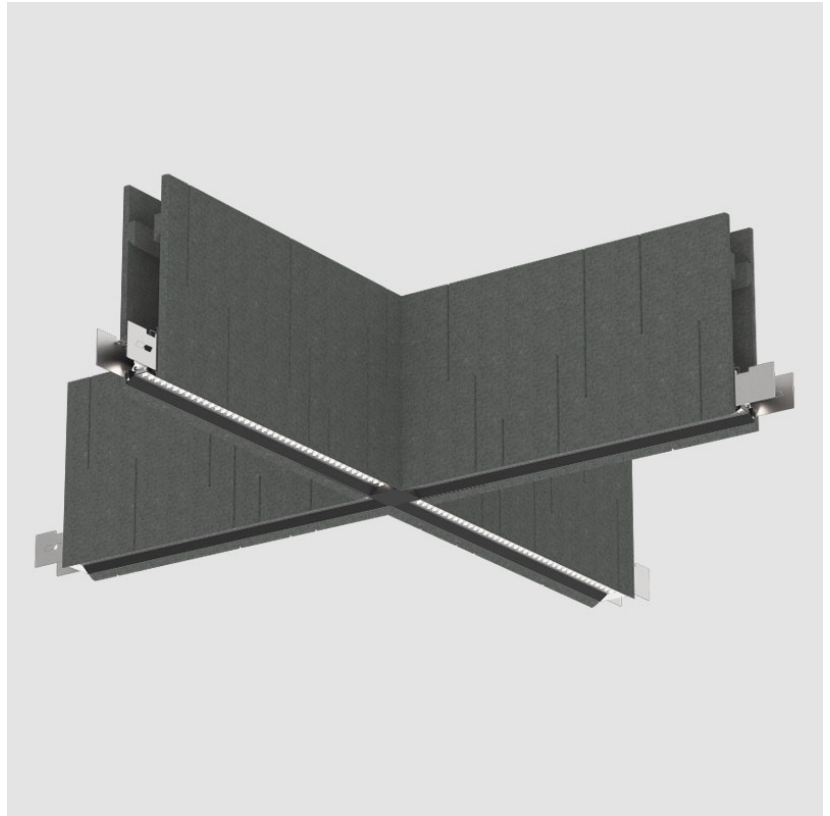

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300763-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
51.6W, Tunable White (2700K-6500K), Max. 7031lm, CR190 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 1260
Width (in): 49 ³/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
/ DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 7077 / 7180 / 7249 / 7387
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

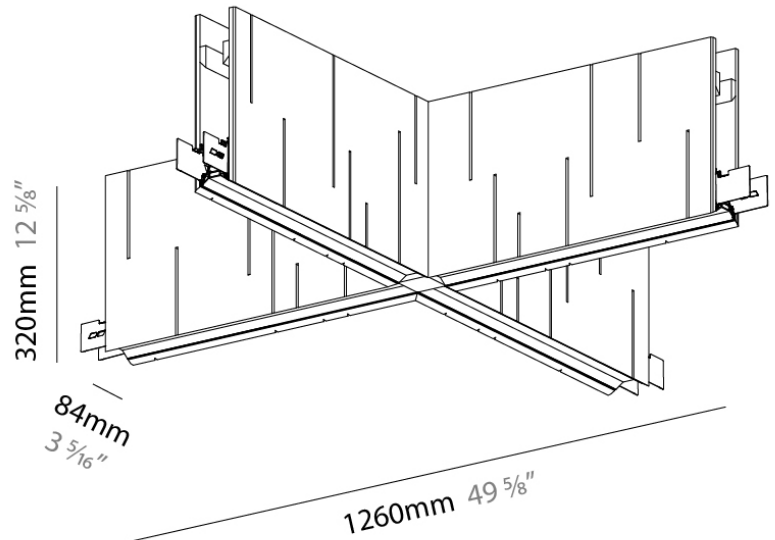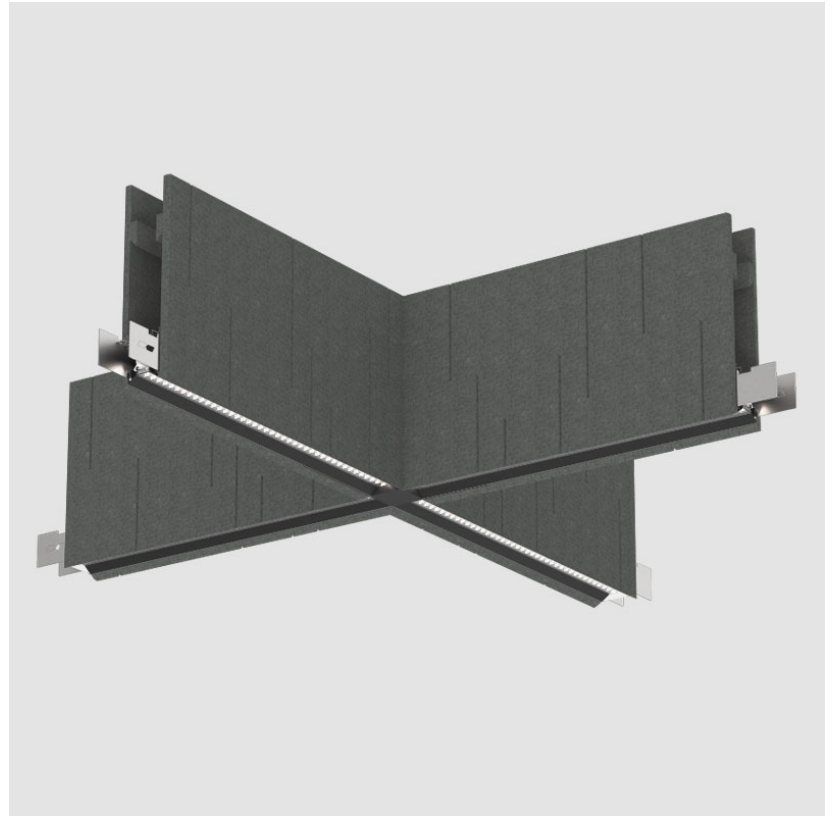

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300811-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - No Through Wiring - LED
51.6W, 2700K / 3000K / 3500K / 4000K, Max. 6609lm, CRI90

GENERAL

Series: Unity
Partner: Prolight
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1490
Length (in): 58 ⁷/₅
Width (mm): 1290
Width (in): 50 ⁷/₅
Height (mm): 320
Height (in): 12 ³/₅
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3182 / 3229 / 3264 / 3322
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

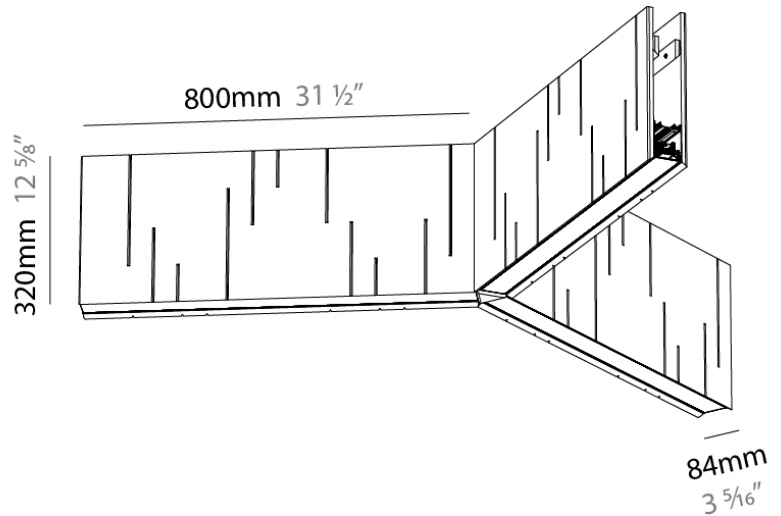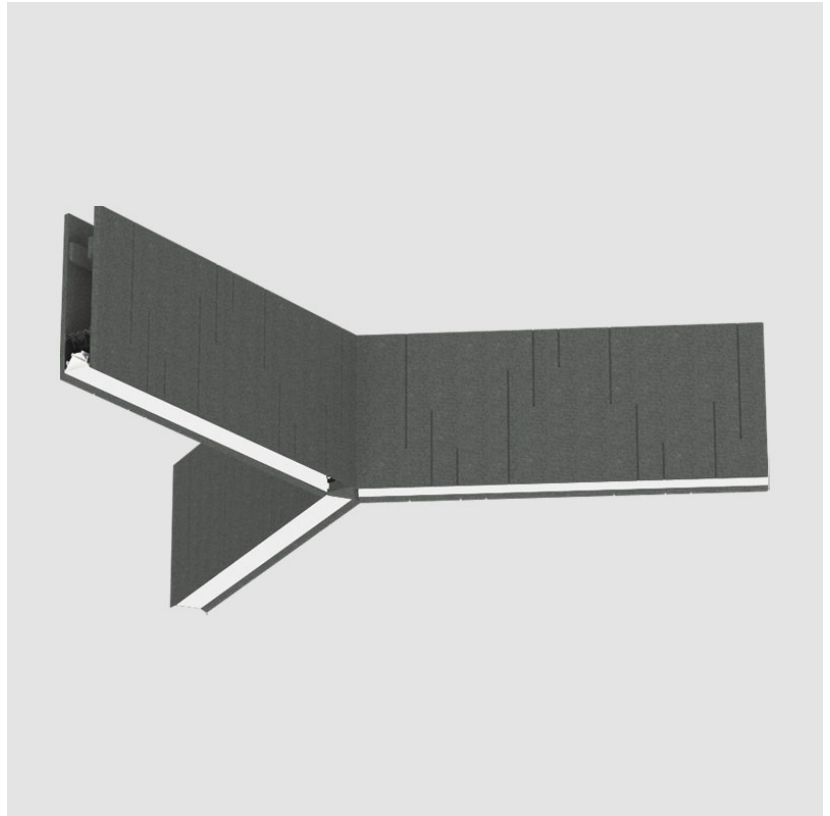

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300812-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - No Through Wiring - LED 51.6W, Tunable White (2700K-6500K), Max. 6493lm, CRI90

GENERAL

Series: Unity _____
 Partner: Prolight _____
 Division: Architectural _____
 Installation: Suspension _____
 Product Type: Acoustic _____
 Mounting Location: Ceiling _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 1490 _____
 Length (in): 58 ⁷/₅ _____
 Width (mm): 1290 _____
 Width (in): 50 ⁷/₆ _____
 Height (mm): 320 _____
 Height (in): 12 ³/₅ _____
 Fixture Finish: BLK _____
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF _____
 Fixture Material: Acoustic _____
 Primary Material: Acoustic _____

ELECTRICAL



Input Wattage Range: 30 - 49 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 38.7 _____
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____

LED

Delivered Lumen Range: 5000 - 9999 lm _____
 Color Temperature (°K): 2700-5000 Tunable White _____
 Max. Delivered Lumen (lm): 5148-5273 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

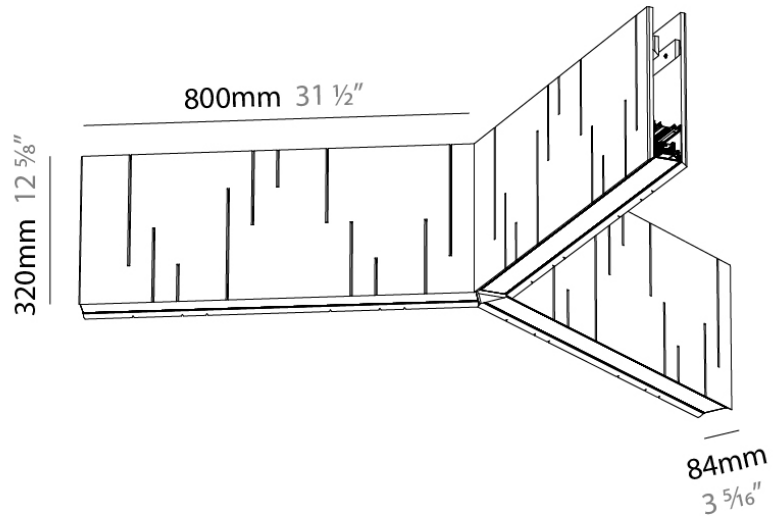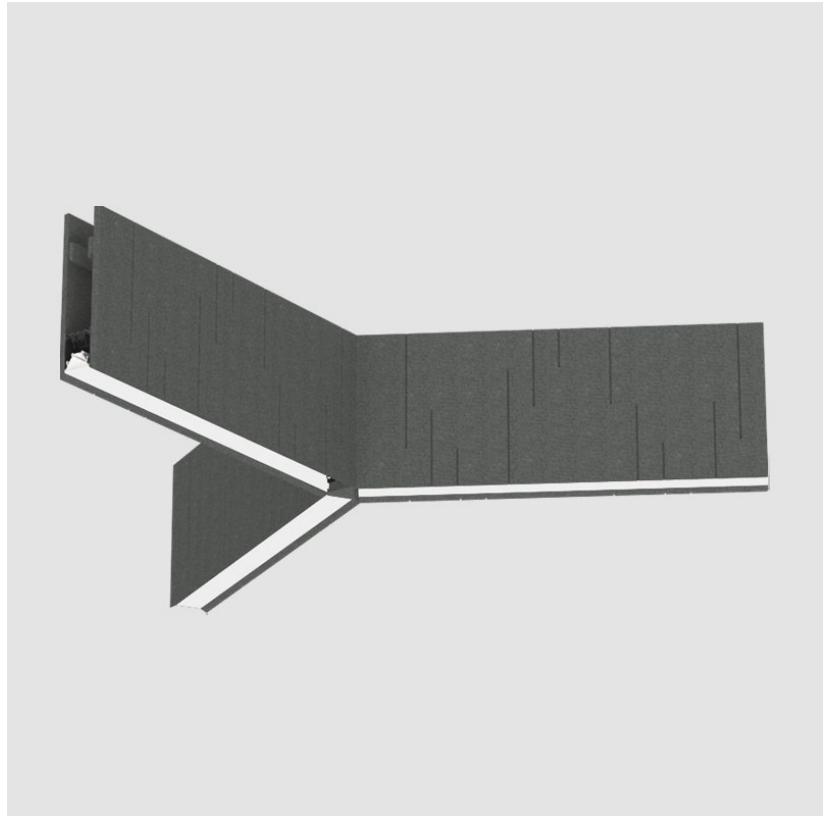

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300813-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - Through Wiring - LED
51.6W, 2700K / 3000K / 3500K / 4000K, Max. 6609lm, CRI90

GENERAL

Series: Unity _____
Partner: Prolicht _____
Division: Architectural _____
Installation: Suspension _____
Product Type: Acoustic _____
Mounting Location: Ceiling _____
Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 1490 _____
Length (in): 58 ⁷/₈ _____
Width (mm): 1290 _____
Width (in): 50 ⁷/₈ _____
Height (mm): 320 _____
Height (in): 12 ³/₅ _____
Fixture Finish: BLK _____
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF _____
Fixture Material: Acoustic _____
Primary Material: Acoustic _____

ELECTRICAL



Input Wattage Range: 50 - 79 W _____
Lamp Type: LED (Zhaga Standard) _____
Input Wattage (W): 51.6 _____
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming _____
Driver Included: Yes _____
Driver Location: Integrated _____
Driver Type: Constant Current - Universal _____
Driver Class: Class 2 _____
Input Voltage (V): 120 - 277 _____

LED

Delivered Lumen Range: 3000 - 4999 lm _____
Color Temperature (°K): 2700 / 3000 / 3500 / 4000 _____
Max. Delivered Lumen (lm): 3182 / 3229 / 3264 / 3322 _____
CRI: >90 CRI _____
Lamp Life (hrs): 50000 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
IP rating: IP20 _____

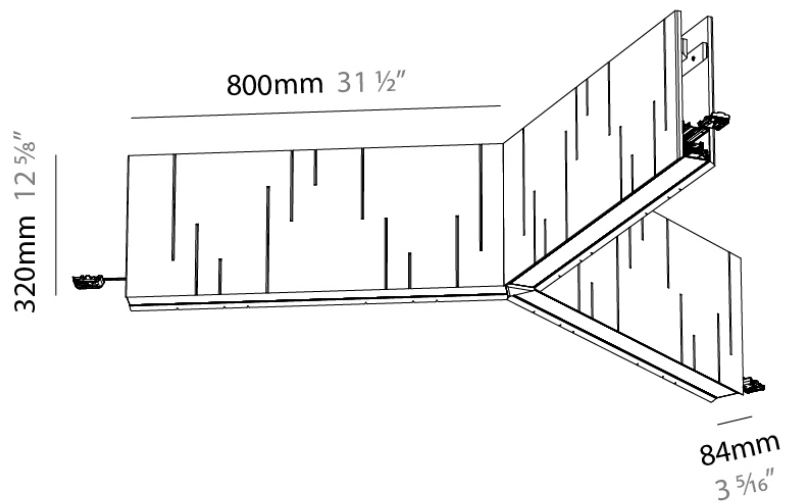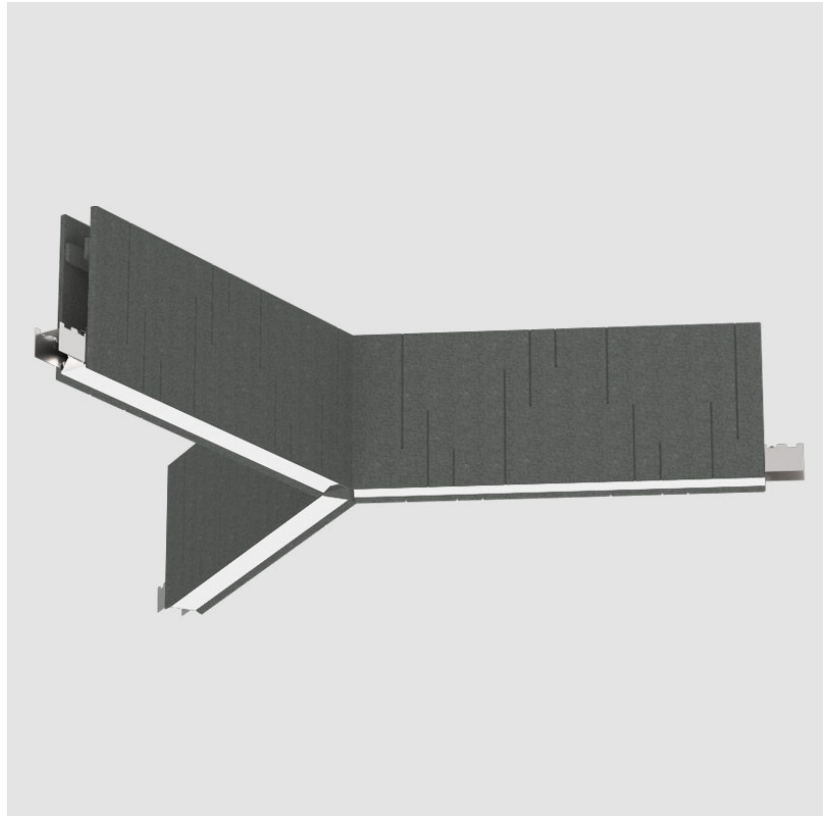

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300814-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - Through Wiring - LED
51.6W, Tunable White (2700K-6500K), Max. 6493lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1490
Length (in): 58 ⁷/₃
Width (mm): 1290
Width (in): 50 ⁷/₆
Height (mm): 320
Height (in): 12 ³/₅
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 51.6
Dimming: Dali Dimming / Matter
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700-6500 Tunable White
Max. Delivered Lumen (lm): 5307-7249
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

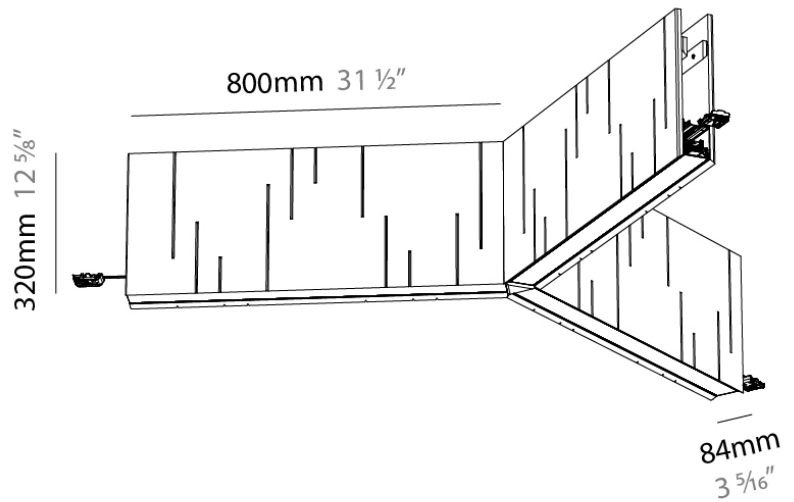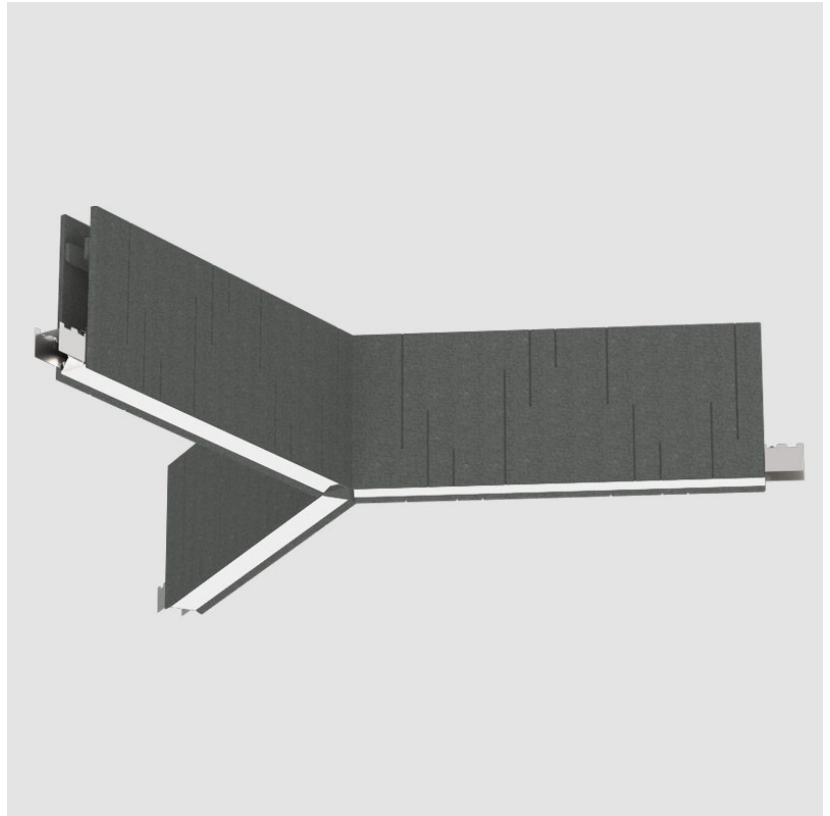

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300815-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - No Through Wiring - LED
25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3308lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ³/₅
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.8
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3169 / 3216 / 3247 / 3308
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

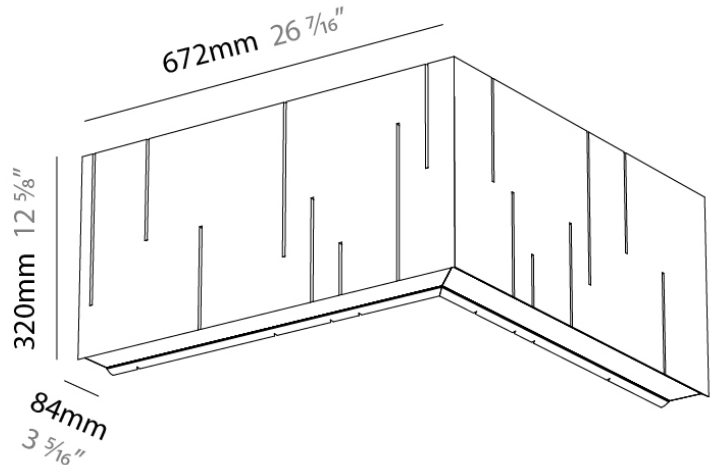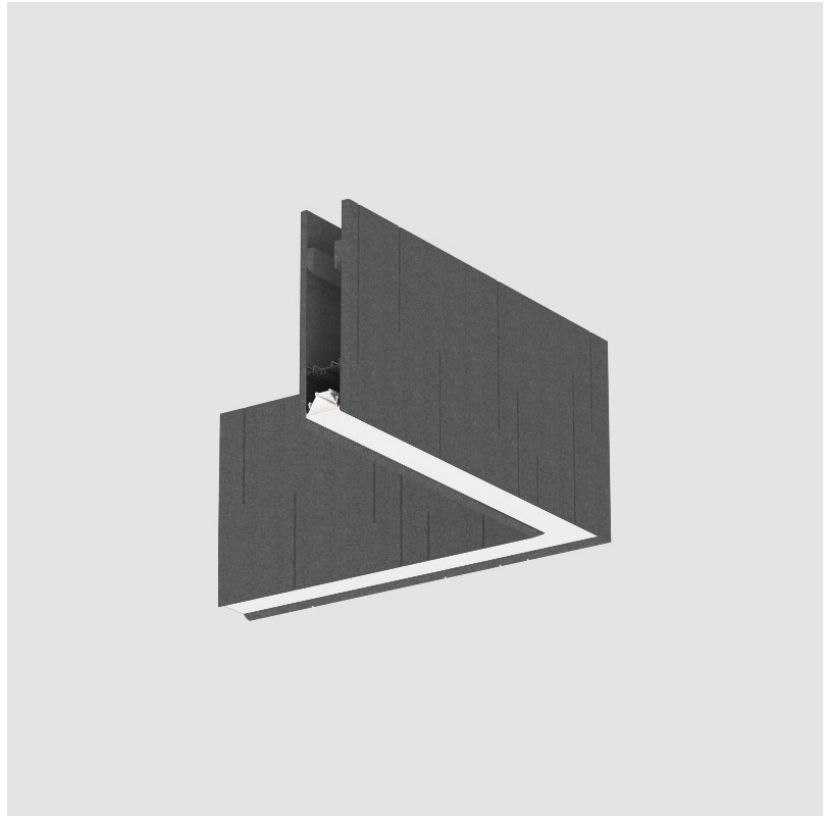

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300816-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - No Through Wiring - LED 25.8W, Tunable White (2700K-6500K), Max. 3515lm, CRI90

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ³/₅
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3432-3515
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

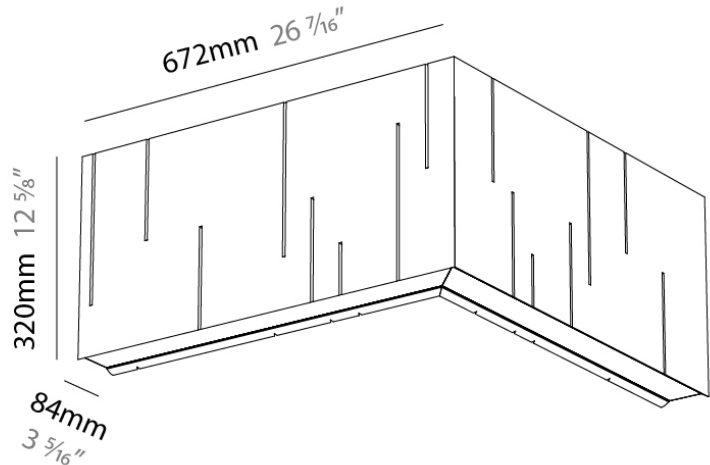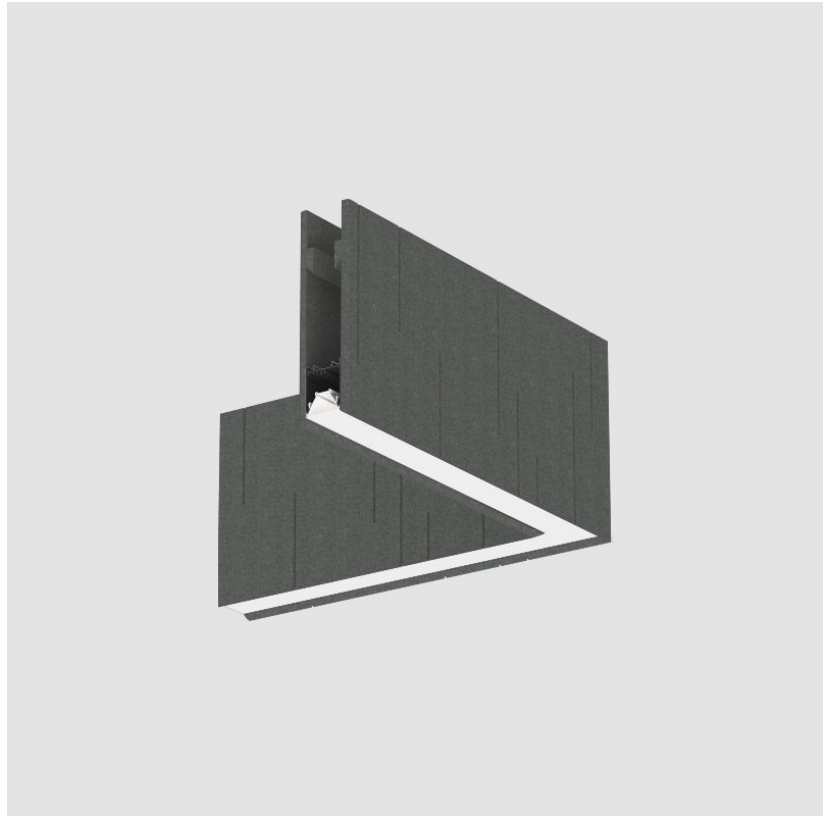

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300817-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3308lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ³/₅
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.8
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3169 / 3216 / 3247 / 3308
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

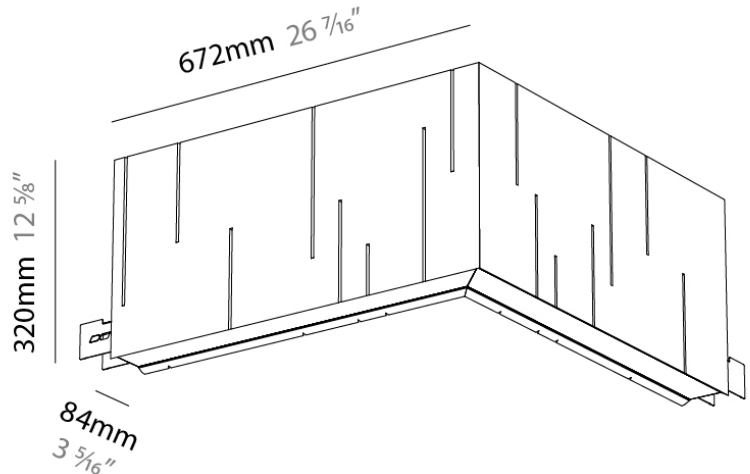

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300818-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
25.8W, Tunable White (2700K-6500K), Max. 3515lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ³/₅
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.8
Dimming: Dali Dimming / Matter
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700-6500 Tunable White
Max. Delivered Lumen (lm): 3432-3515
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

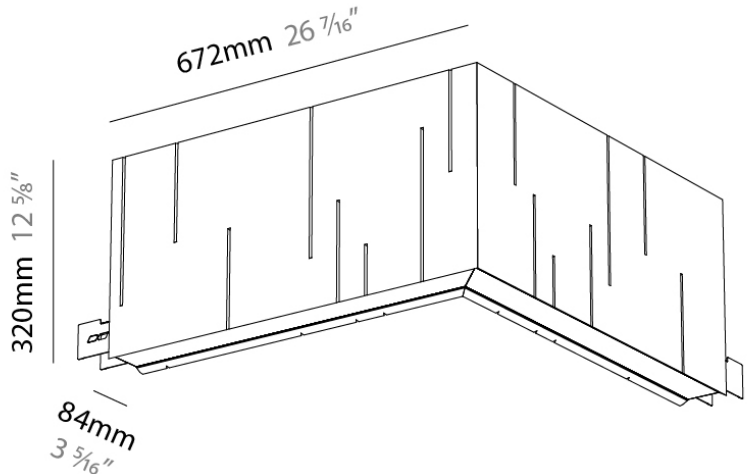

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300819-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - No Through Wiring - LED
25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3582lm, CRI90 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ³/₅
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO /
DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.8
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3432 / 3482 / 3515 / 3582
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

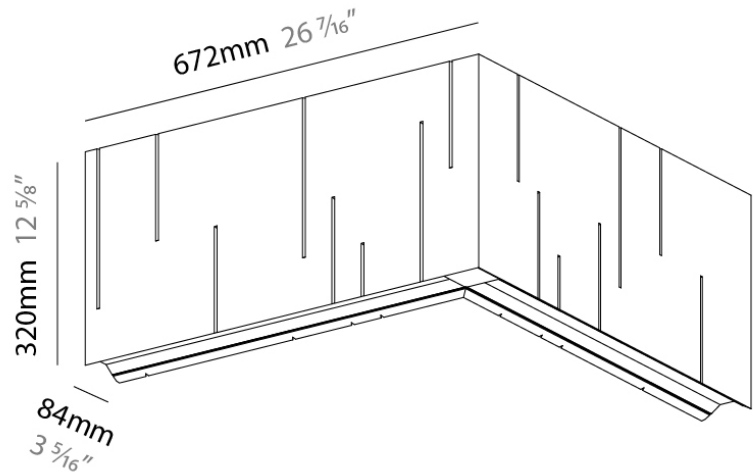

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300820-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - No Through Wiring - LED 25.8W, Tunable White (2700K-6500K), Max. 3515lm, CRI90 - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ³/₅
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3432-3515
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

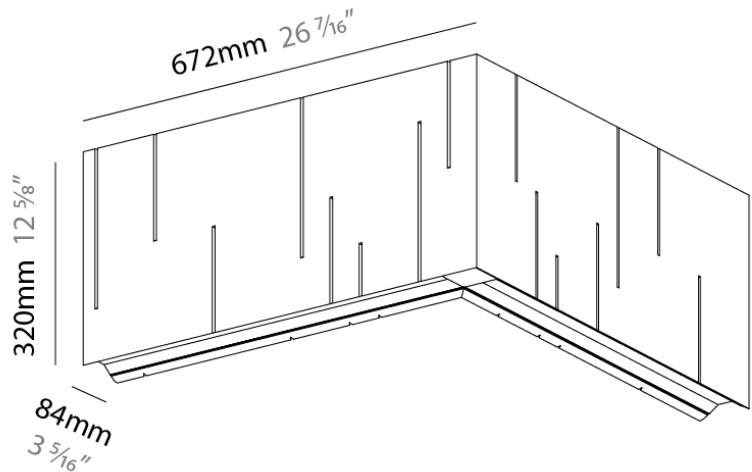

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300821-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
 25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3582lm, CRI90 -
 Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
 / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3432 / 3482 / 3515 / 3582
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

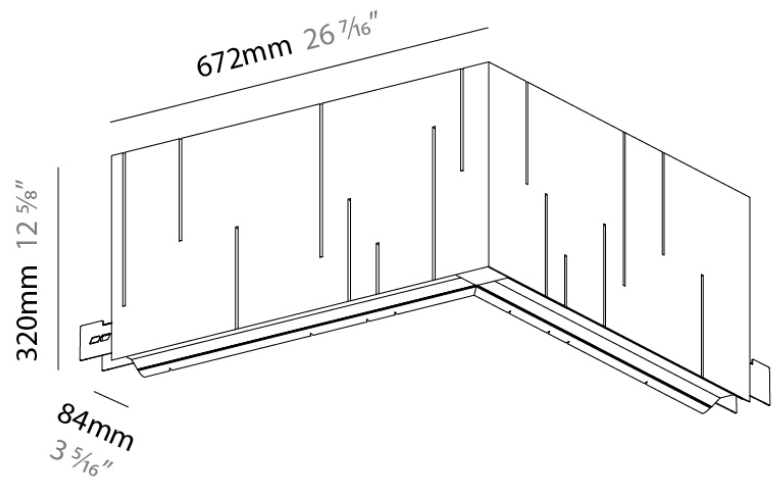

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300822-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
 25.8W, Tunable White (2700K-6500K), Max. 3515lm, CRI90 -
 Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
 / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3432-3515
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

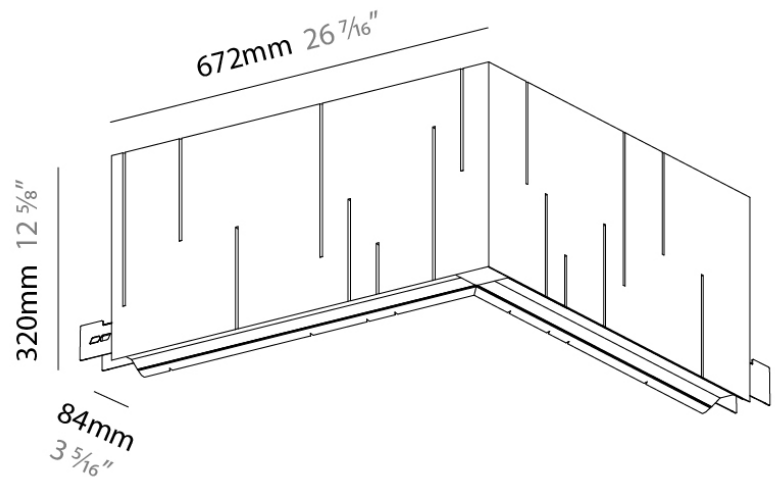

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300823-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - No Through Wiring - LED 17.2W, 2700K / 3000K / 3500K / 4000K, Max. 2129lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 17.2
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2039 / 2069 / 2092 / 2129
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

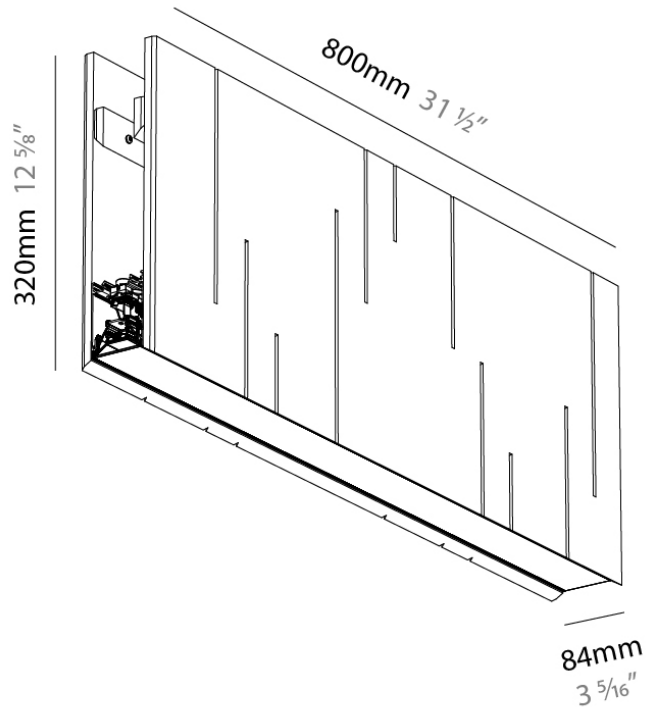

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300824-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - No Through Wiring - LED 17.2W, Tunable White (2700K-6500K), Max. 2416lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 17.2
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 1769-2416
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

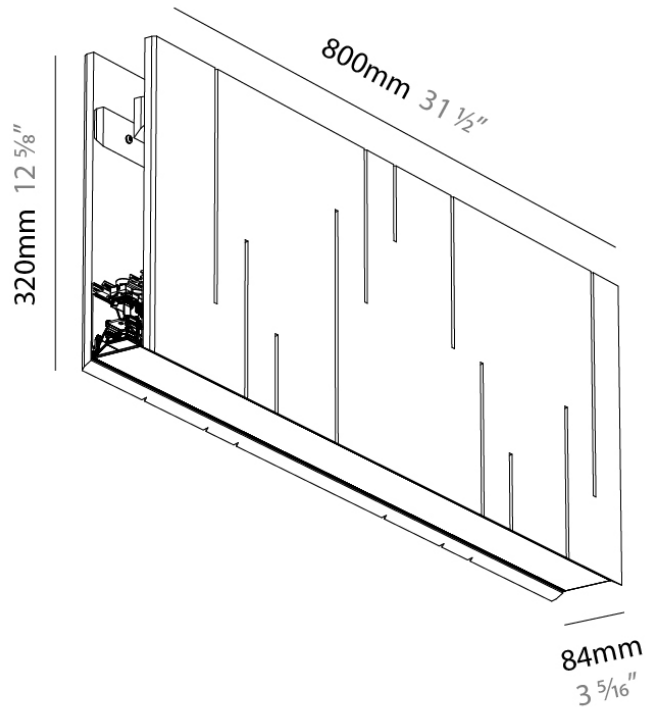

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300825-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 39 3/8" - No Through Wiring - LED 21.5W, 2700K / 3000K / 3500K / 4000K, Max. 2659lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21.5
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2547 / 2585 / 2615 / 2659
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

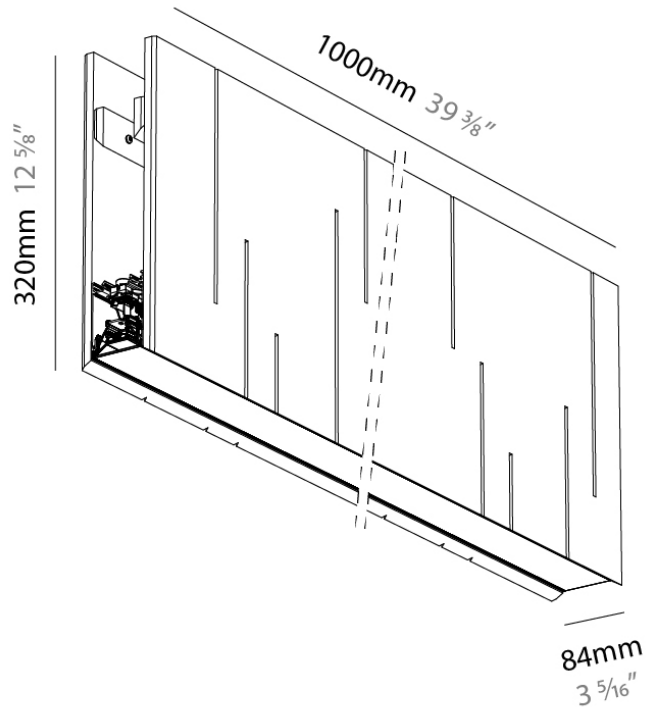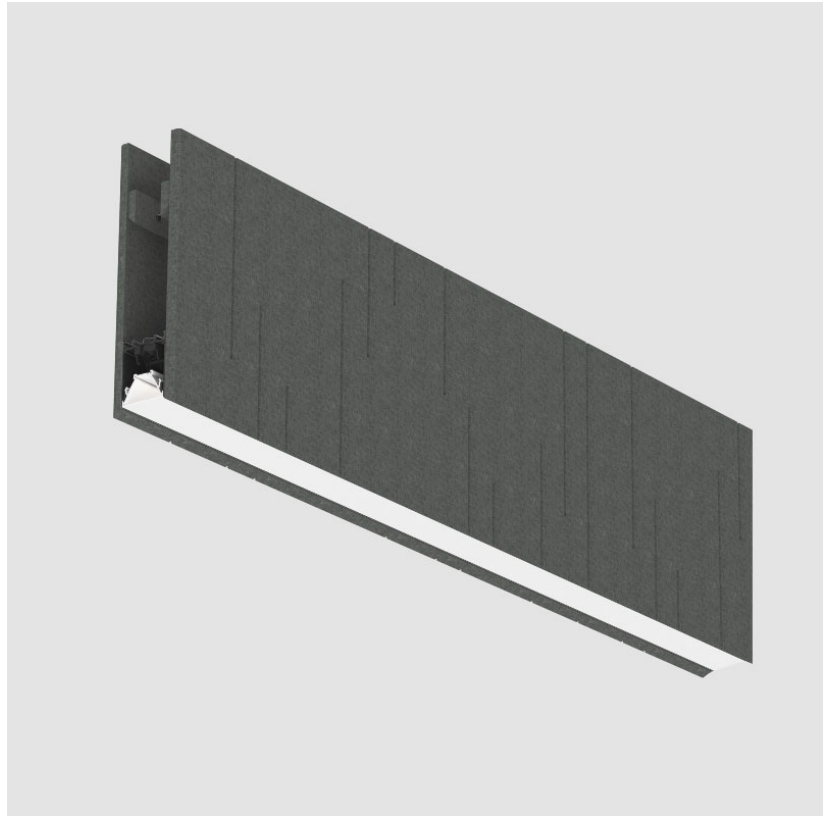

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300826-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 31 1/2" - No Through Wiring - LED 21.5W, Tunable White (2700K-6500K), Max. 3021lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21.5
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 2210-3021
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

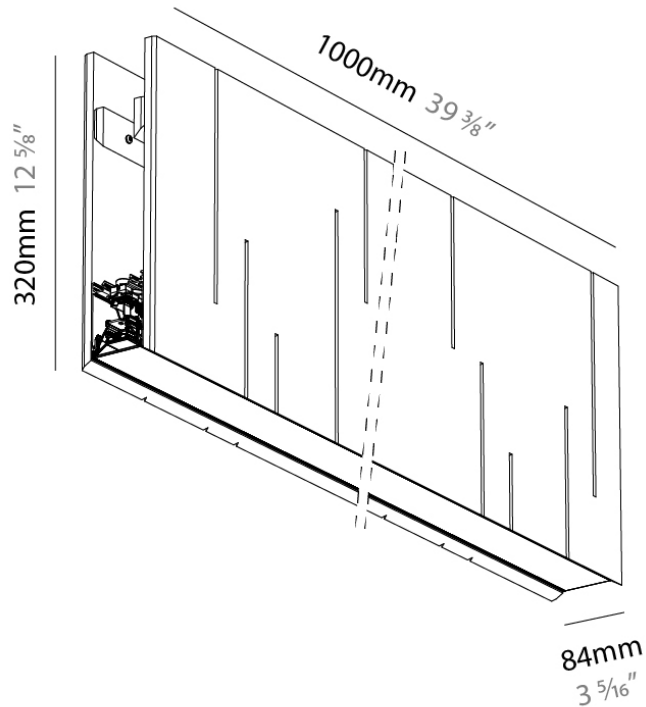

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300827-

DESCRIPTION

Unity - Acoustic Suspension, L = 12000mm / 47 1/4" - No Through Wiring - LED 25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3197lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3063 / 3108 / 3137 / 3197
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

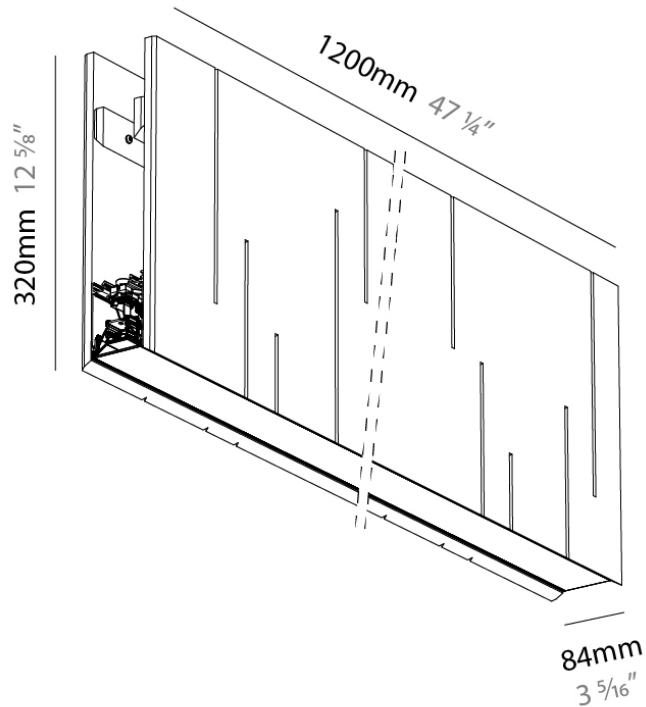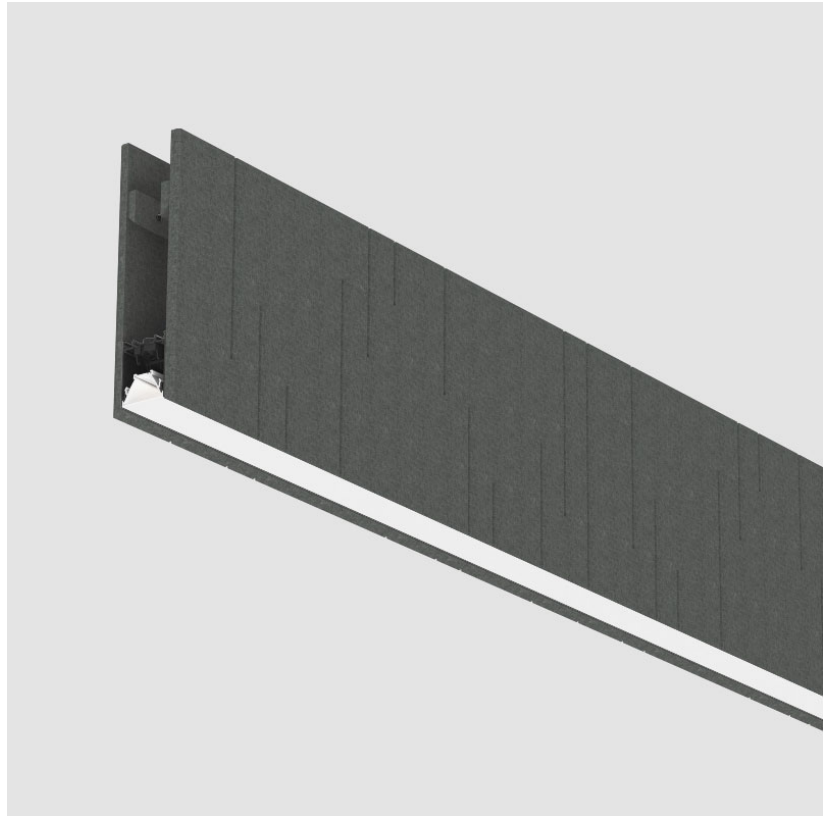

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300828-

DESCRIPTION

Unity - Acoustic Suspension, L = 1200mm / 47 1/4" - No Through Wiring - LED 25.8W, Tunable White (2700K-6500K), Max. 3625lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 2657-3625
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

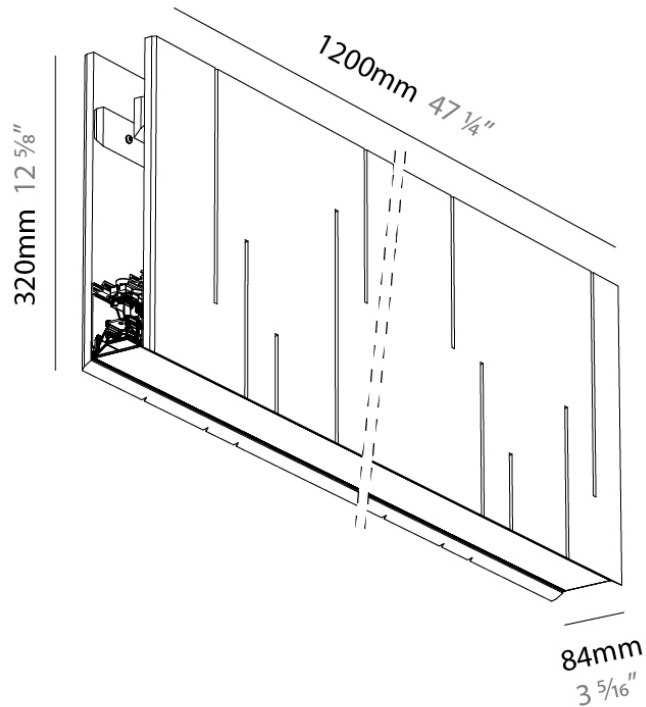

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300829-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - No Through Wiring - LED 30.1W, 2700K / 3000K / 3500K / 4000K, Max. 3728lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1400
 Length (in): 55 1/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30.1
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3571 / 3623 / 3660 / 3728
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

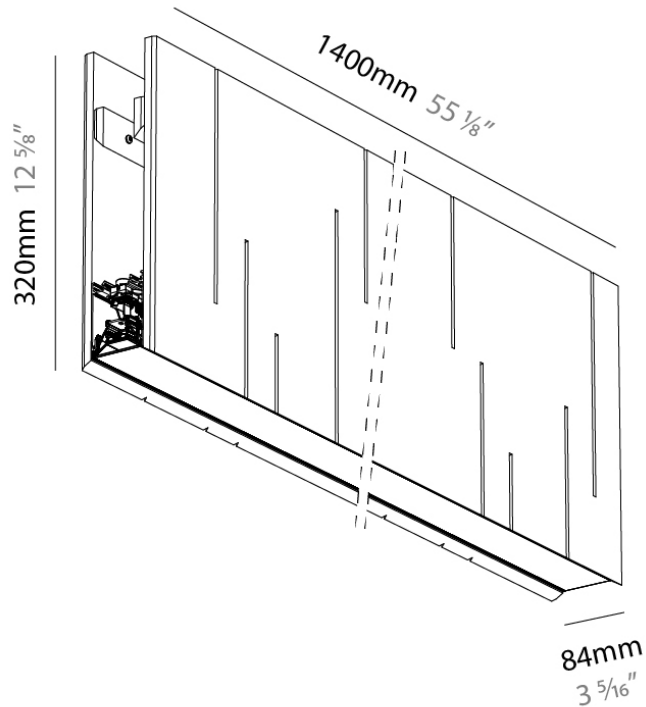

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300830-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - No Through Wiring - LED 30.1W, Tunable White (2700K-6500K), Max. 4229lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1400
 Length (in): 55 1/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30.1
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3097-4229
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

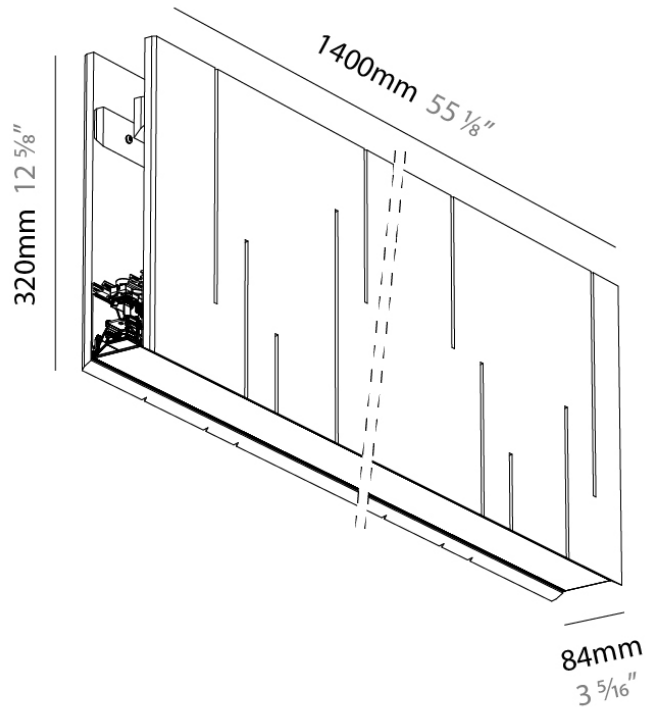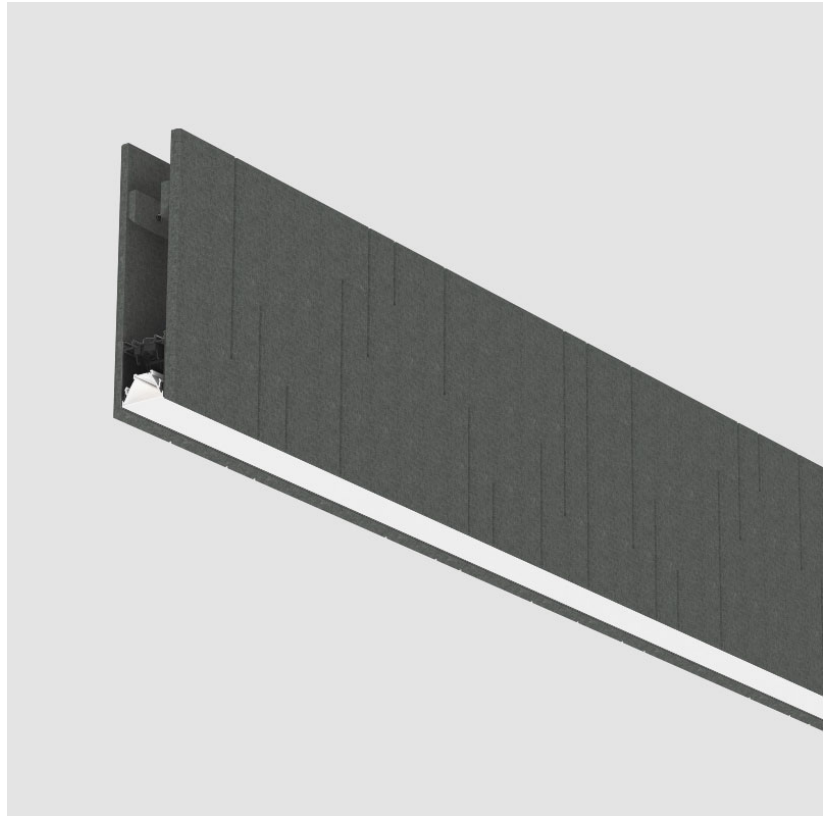

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300831-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - No Through Wiring - LED 34.4W, 2700K / 3000K / 3500K / 4000K, Max. 4258lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1600
 Length (in): 63
 Width (mm): 84
 Width (in): 3 1/4
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 34.4
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 4079 / 4138 / 4183 / 4258
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

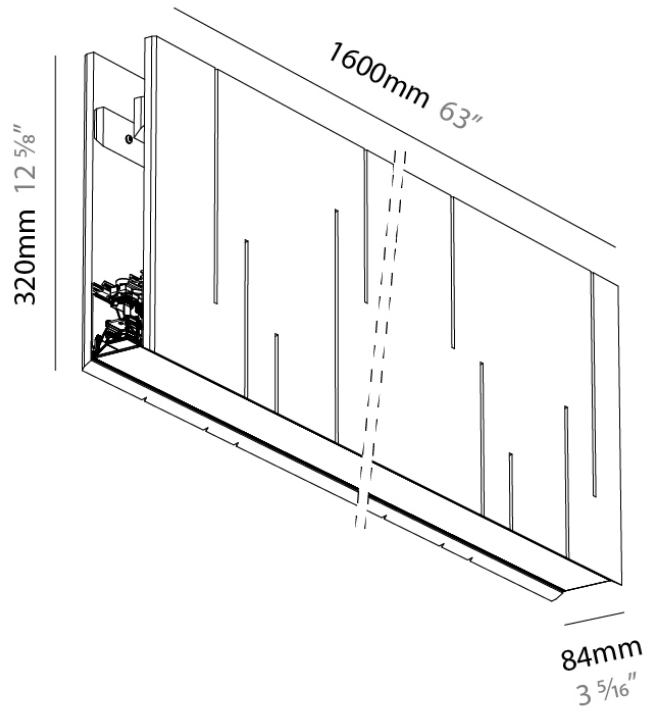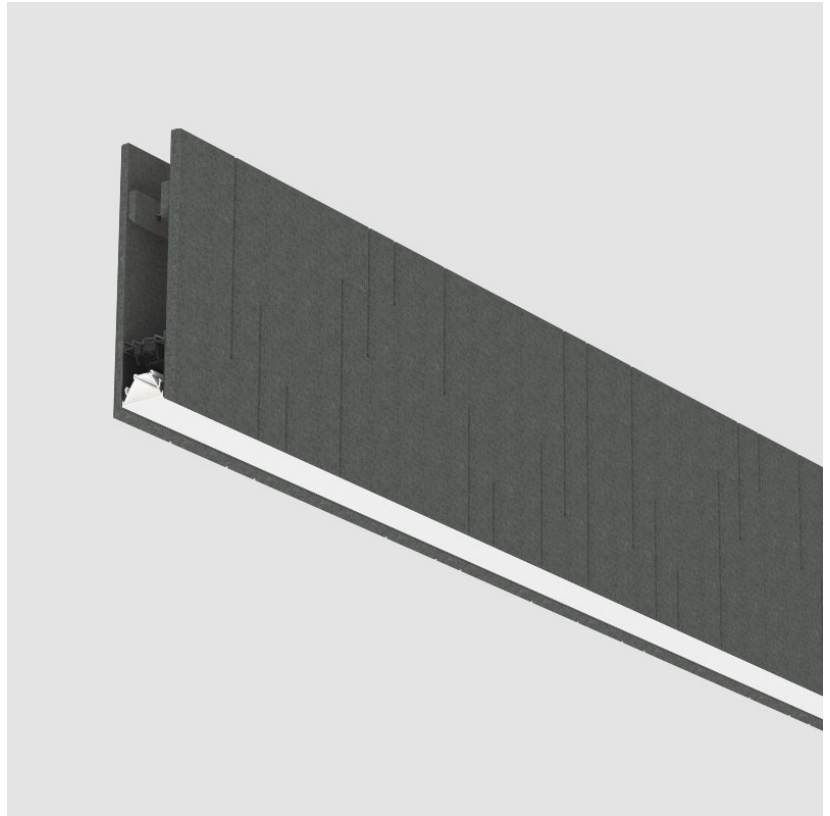

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300832-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - No Through Wiring - LED 34.4W, Tunable White (2700K-6500K), Max. 4833lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1600
 Length (in): 63
 Width (mm): 84
 Width (in): 3 1/4
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 34.4
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3538 - 4833
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

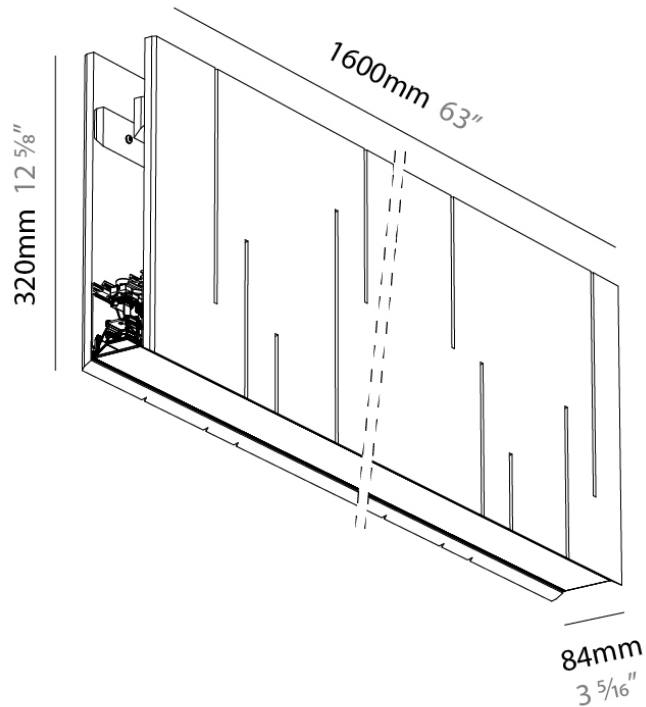

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300833-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - No Through Wiring - LED 38.7W, 2700K / 3000K / 3500K / 4000K, Max. 4796lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 4594 / 4661 / 4706 / 4796
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

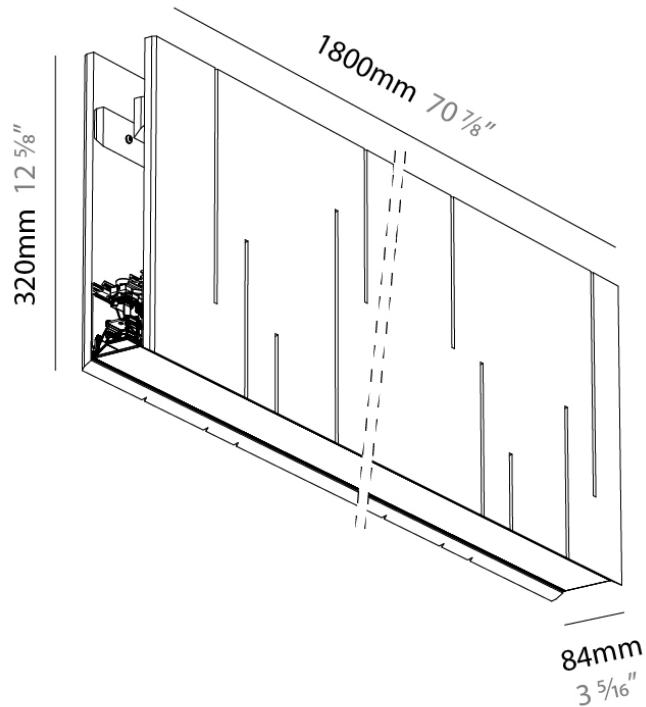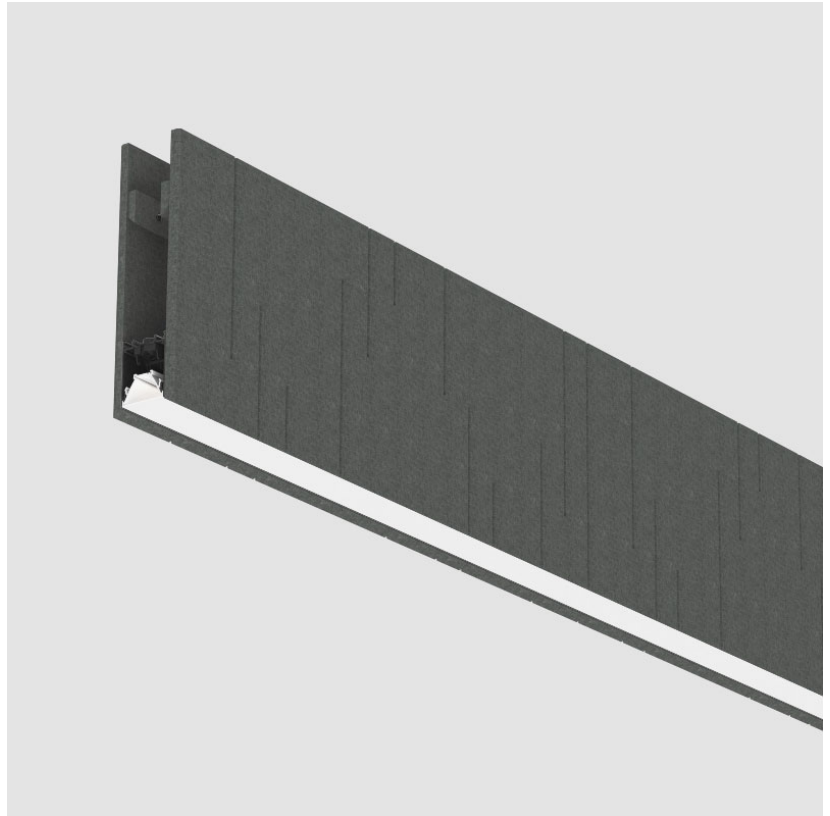

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300834-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - No Through Wiring - LED 38.7W, Tunable White (2700K-6500K), Max. 5437lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3985 - 5437
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

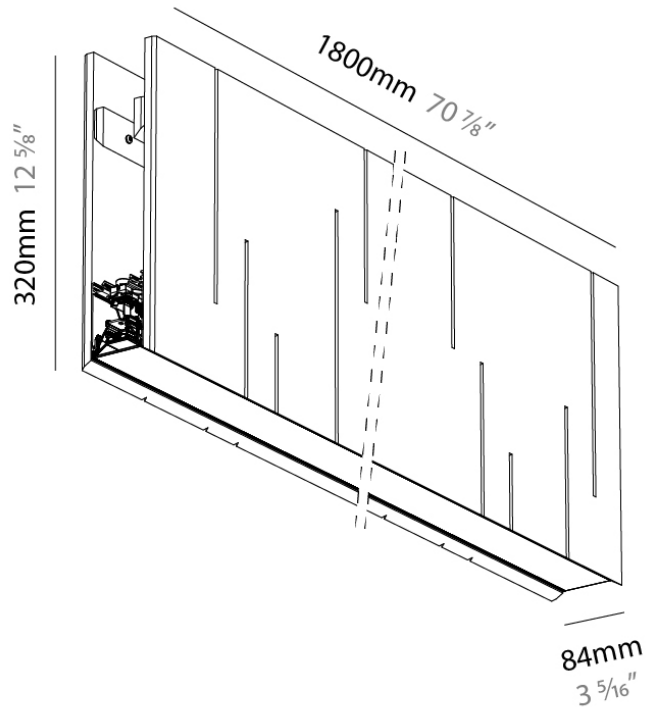

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300835-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - No Through Wiring - LED 43W, 2700K / 3000K / 3500K / 4000K, Max. 5326lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 43
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 5102 / 5177 / 5229 / 5326
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

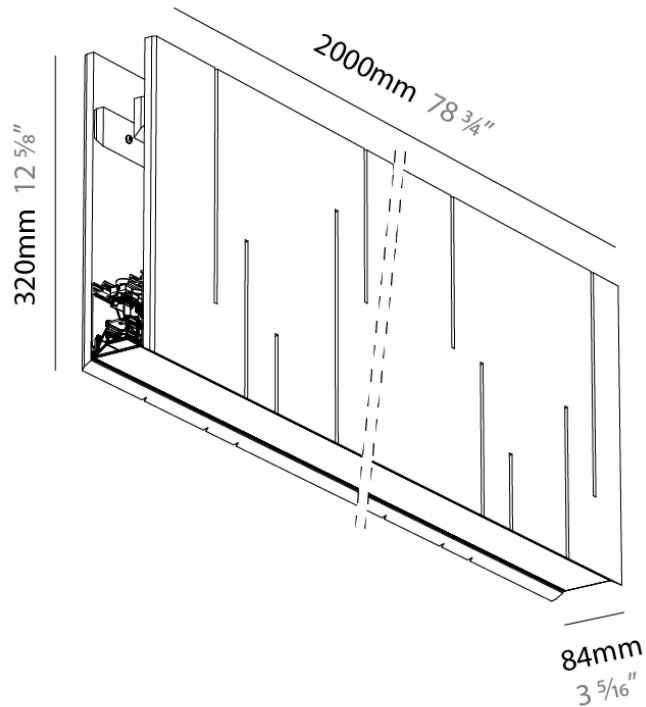

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300836-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - No Through Wiring - LED 43W, Tunable White (2700K-6500K), Max. 6041lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 43
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 4426 - 6041
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

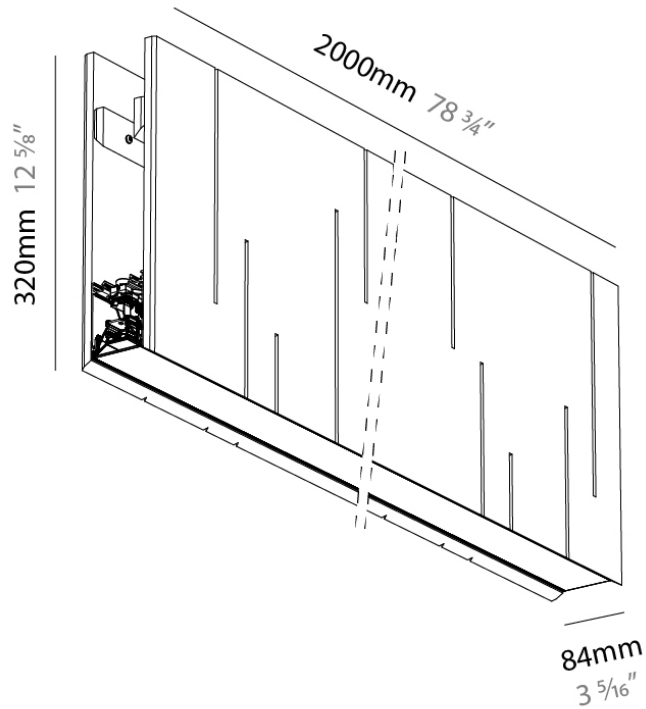

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300837-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 86 3/5" - No Through Wiring - LED 47.3W, 2700K / 3000K / 3500K / 4000K, Max. 5856lm, CRI90

GENERAL

Series: Unity _____
 Partner: Prolicht _____
 Division: Architectural _____
 Installation: Suspension _____
 Product Type: Acoustic _____
 Mounting Location: Ceiling _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 2200 _____
 Length (in): 86 3/5 _____
 Width (mm): 84 _____
 Width (in): 3 1/3 _____
 Height (mm): 320 _____
 Height (in): 12 5/8 _____
 Fixture Finish: BLK _____
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF _____
 Fixture Material: Acoustic _____
 Primary Material: Acoustic _____

ELECTRICAL


Input Wattage Range: 30 - 49 W _____
 Lamp Type: LED (Zhaga Standard) _____
 Input Wattage (W): 47.3 _____
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____

LED

Delivered Lumen Range: 5000 - 9999 lm _____
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000 _____
 Max. Delivered Lumen (lm): 5610 / 5692 / 5752 / 5856 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

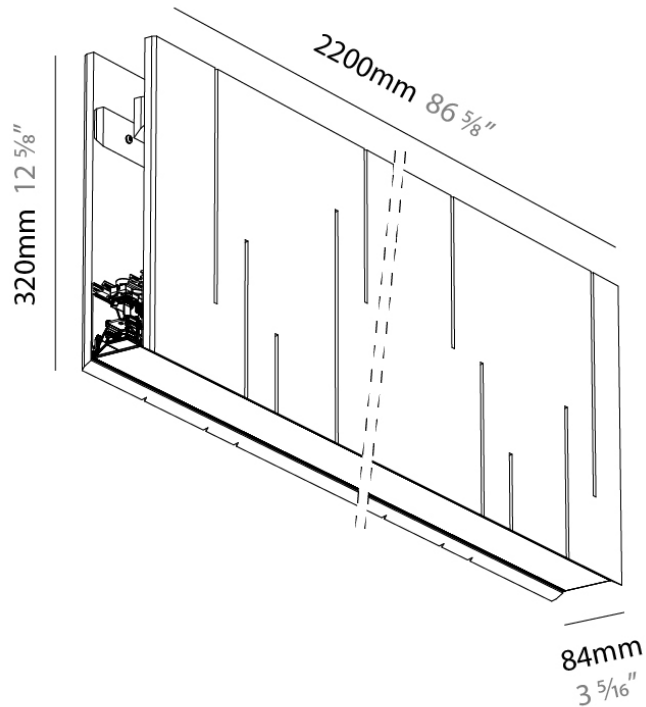

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300838-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 78 3/4" - No Through Wiring - LED 47.3W, Tunable White (2700K-6500K), Max. 6645lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2200
 Length (in): 86 3/5
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 47.3
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 4866 - 6645
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

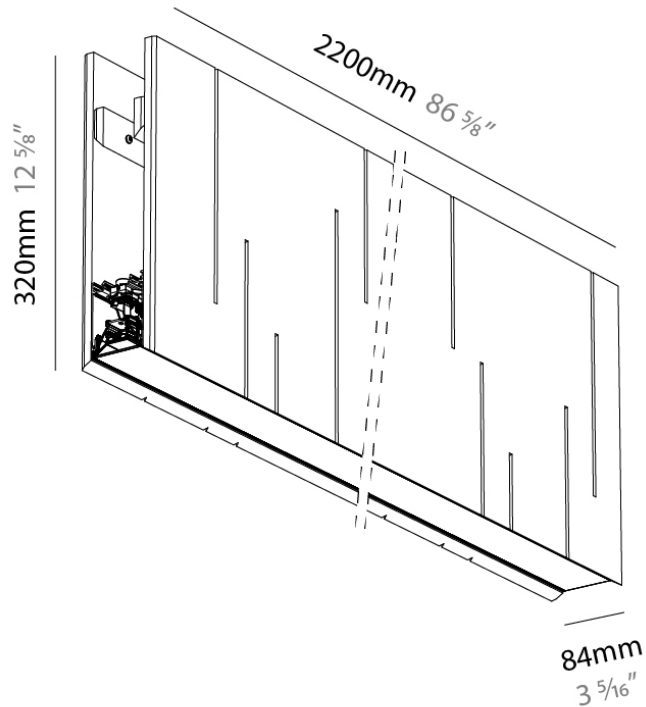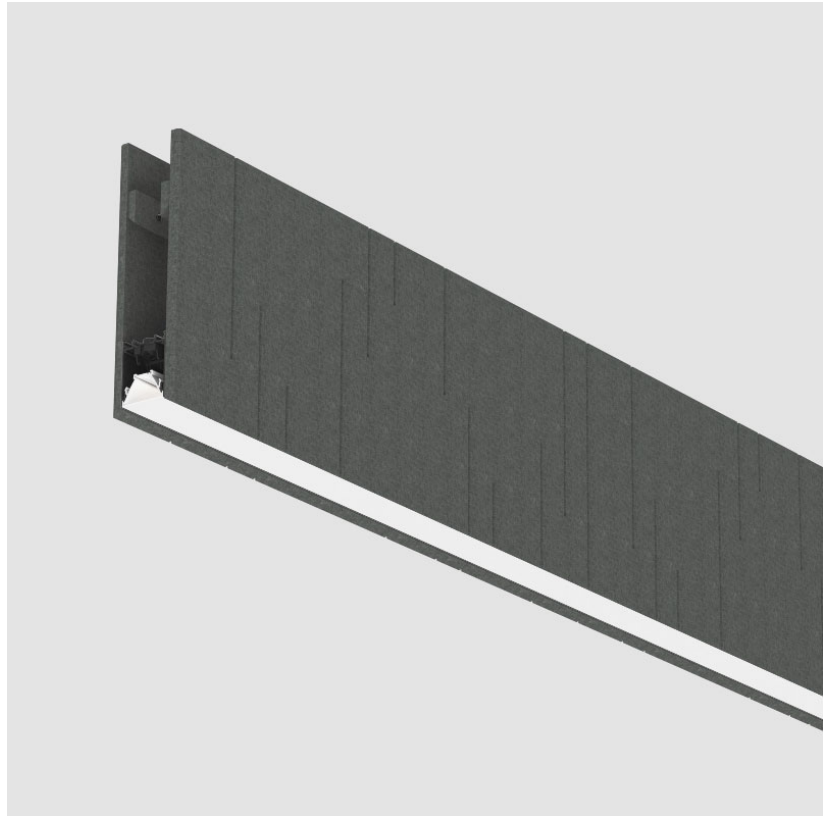

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300839-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - No Through Wiring - LED 51.6W, 2700K / 3000K / 3500K / 4000K, Max. 6394lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 6125 / 6215 / 6275 / 6394
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

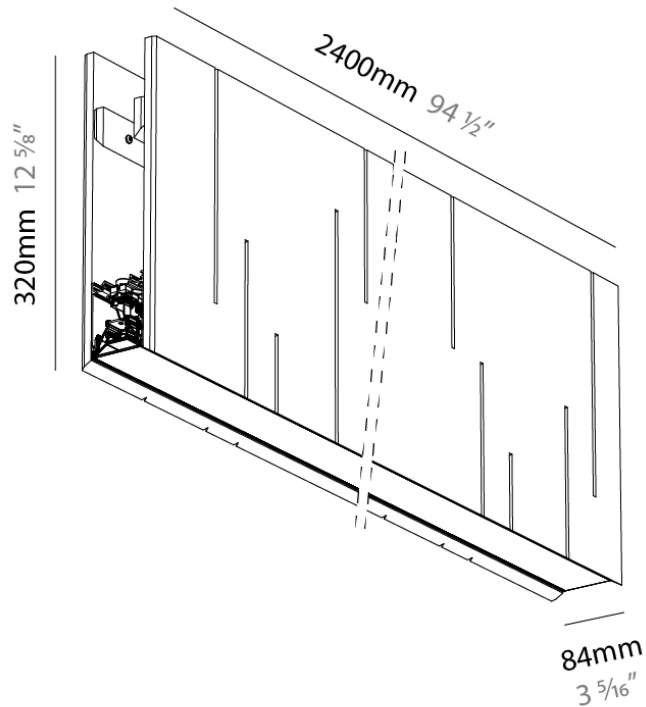

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300840-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - No Through Wiring - LED 51.6W, Tunable White (2700K-6500K), Max. 7249lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 5314 - 7249
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

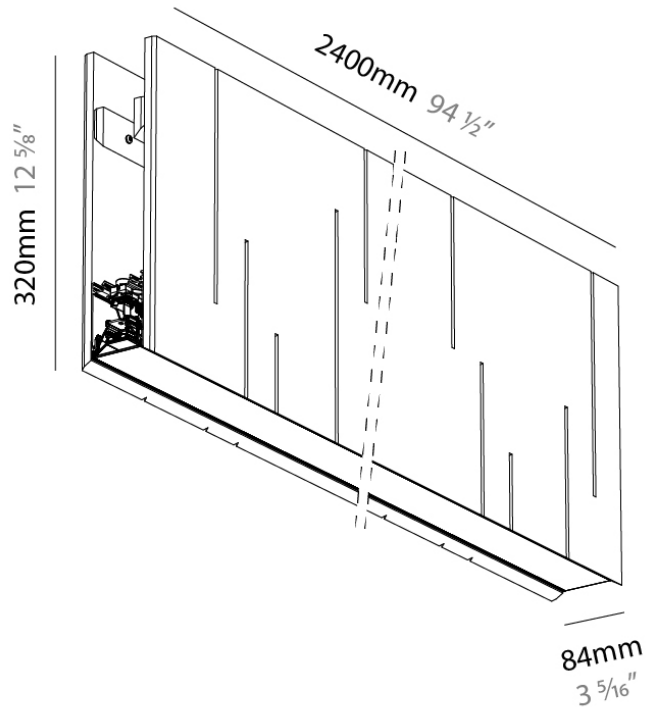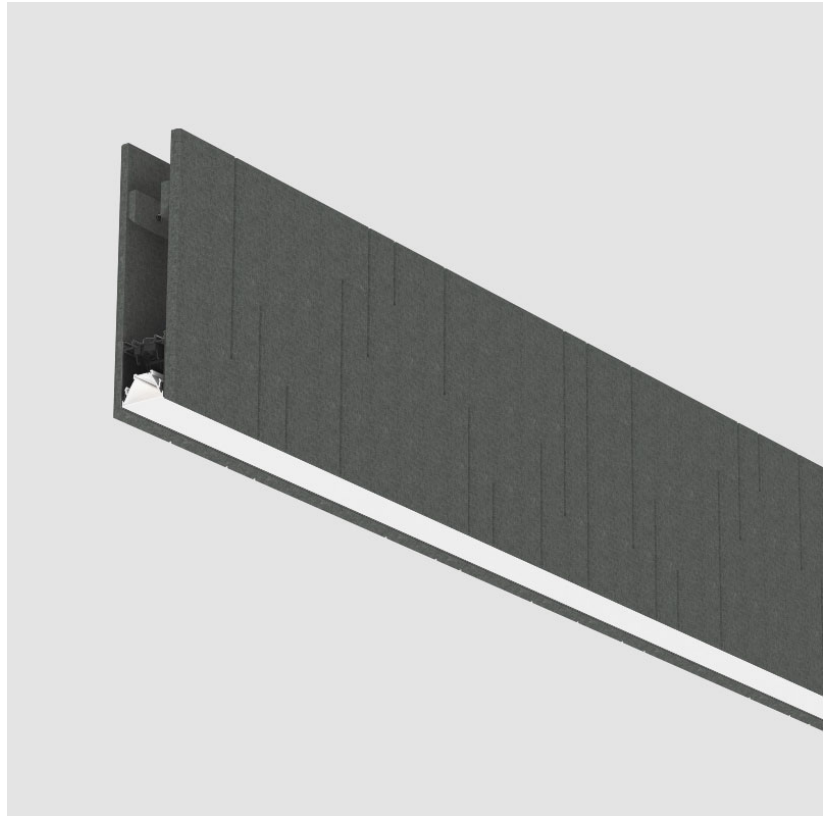

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300841-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - No Through Wiring - LED 55.9W, 2700K / 3000K / 3500K / 4000K, Max. 6925lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 55.9
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 6633 / 6730 / 6798 / 6925
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

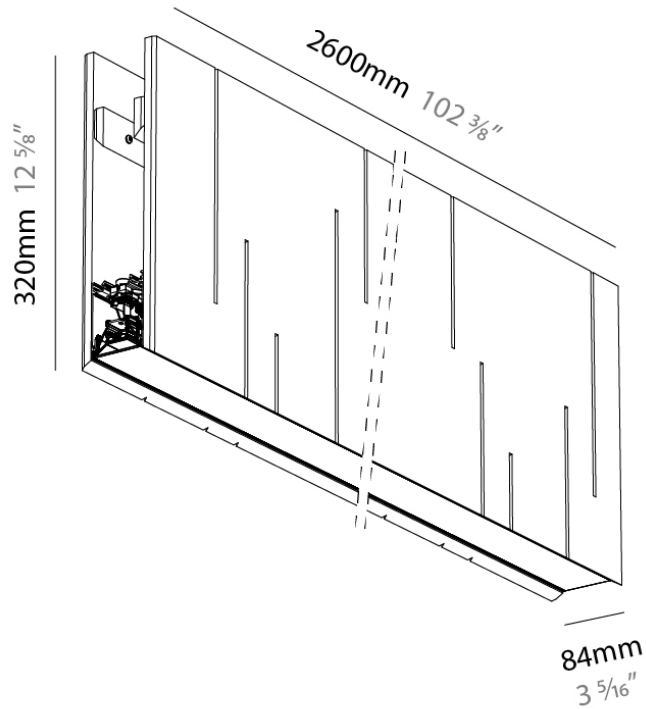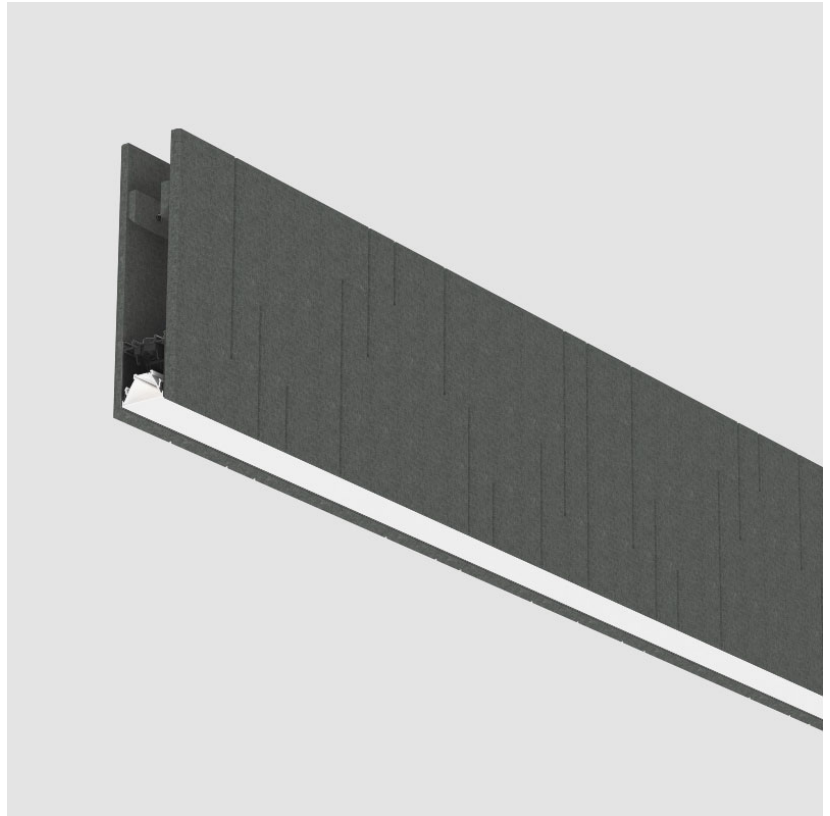

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300842-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - No Through Wiring - LED 55.9W, Tunable White (2700K-6500K), Max. 7853lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 55.9
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 5754 - 7853
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

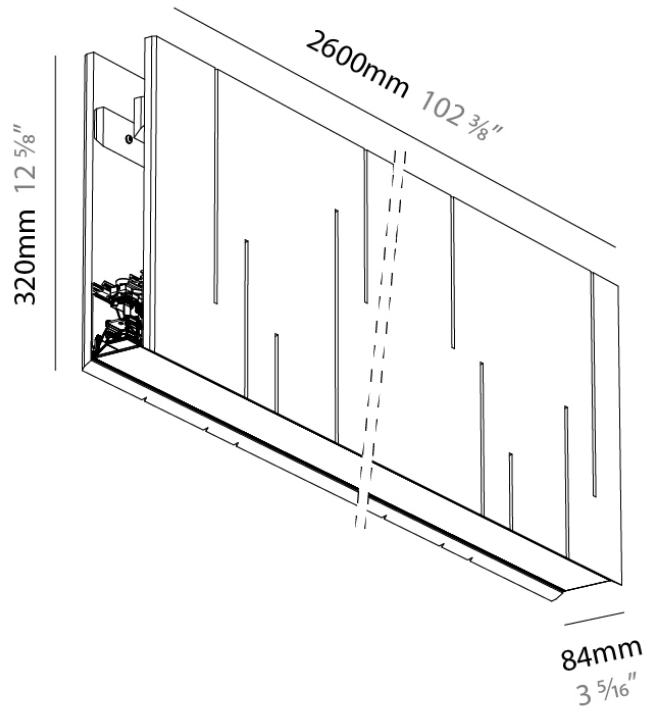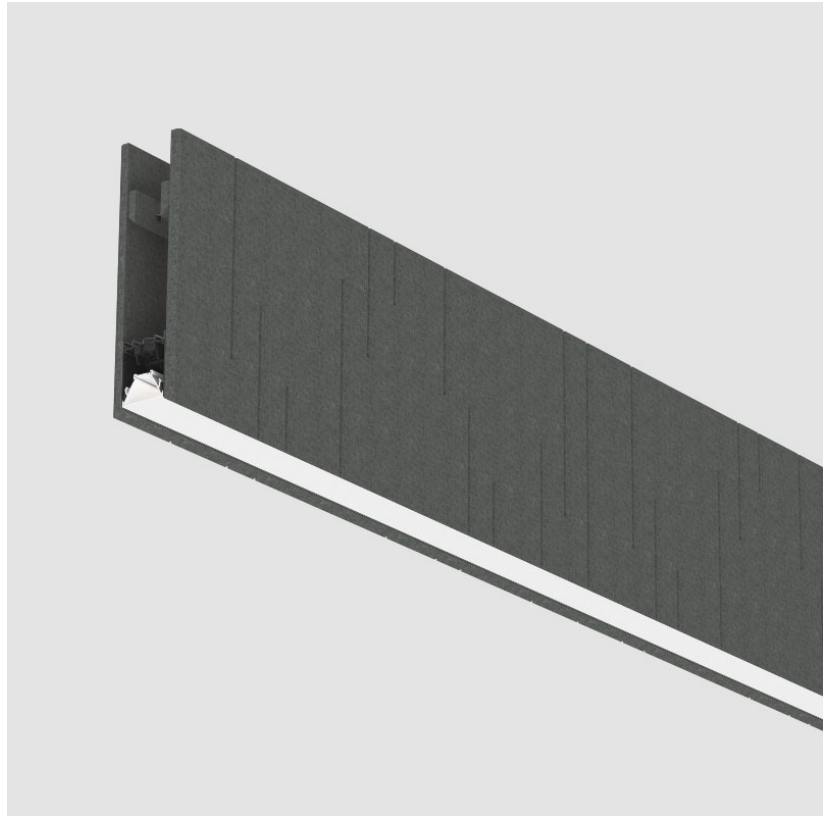

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300843-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - No Through Wiring - LED 60.2W, 2700K / 3000K / 3500K / 4000K, Max. 7455lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60.2
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 7141 / 7246 / 7321 / 7455
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

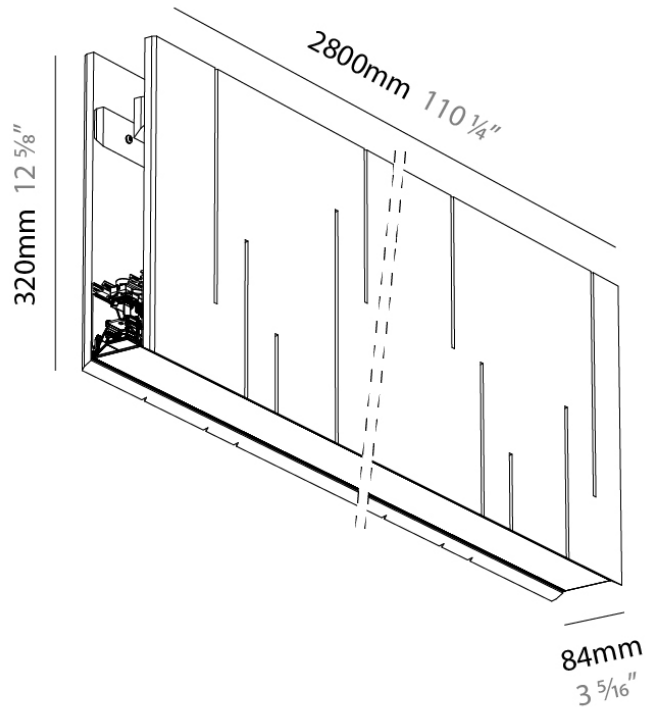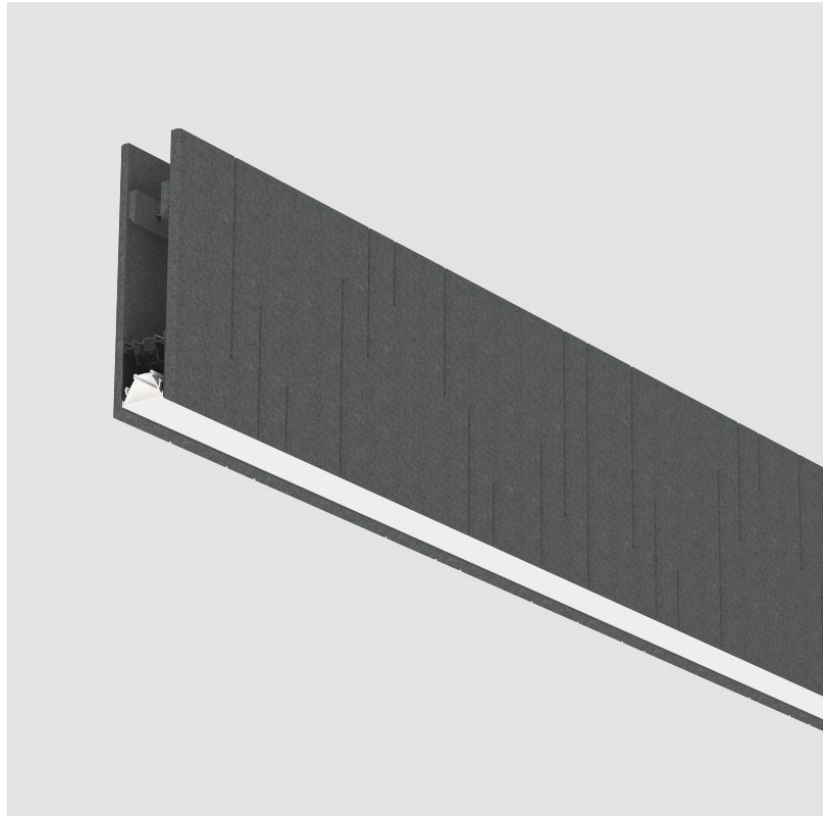

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300844-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - No Through Wiring - LED 60.2W, Tunable White (2700K-6500K), Max. 8457lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60.2
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 6195 - 8457
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

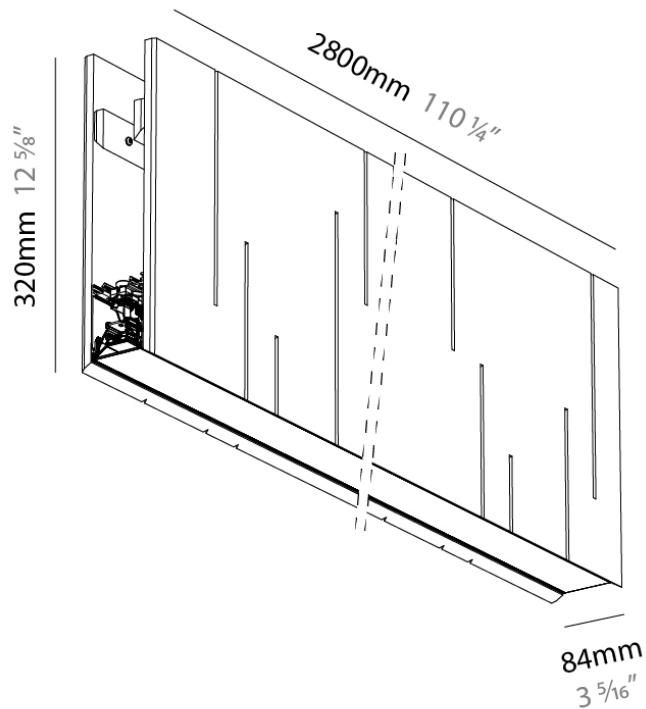

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300845-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - Through Wiring - LED 17.2W, 2700K / 3000K / 3500K / 4000K, Max. 2129lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 17.2
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2039 / 2069 / 2092 / 2129
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

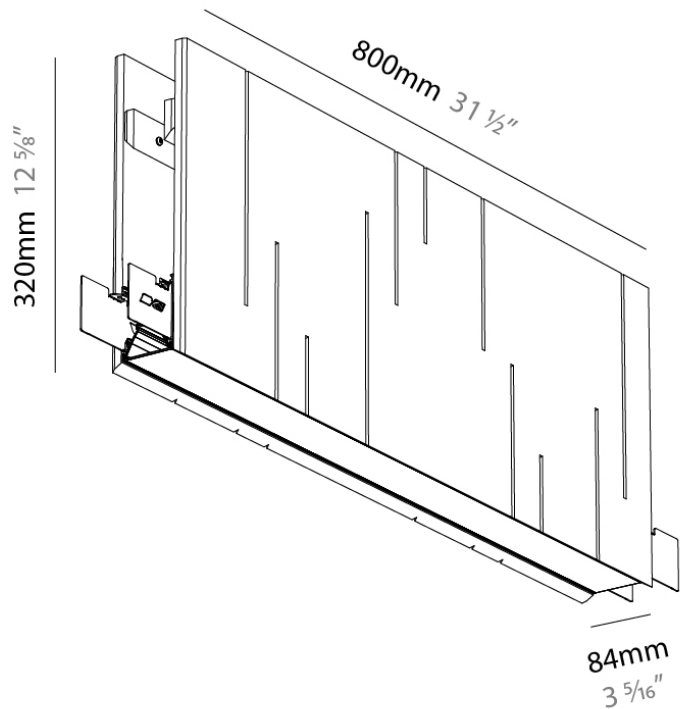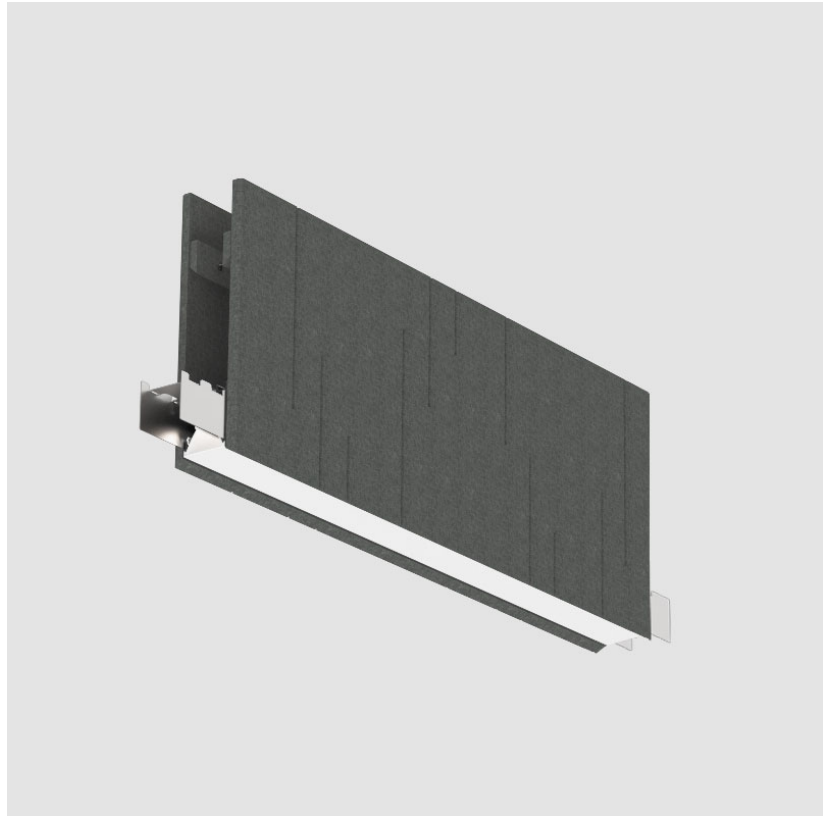

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300846-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - Through Wiring - LED 17.2W, Tunable White (2700K-6500K), Max. 2416lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 17.2
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 1769-2416
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

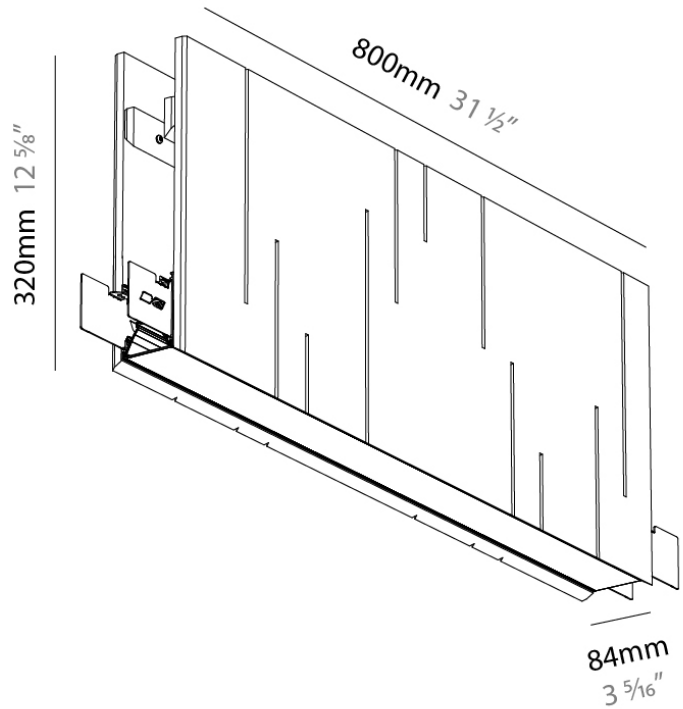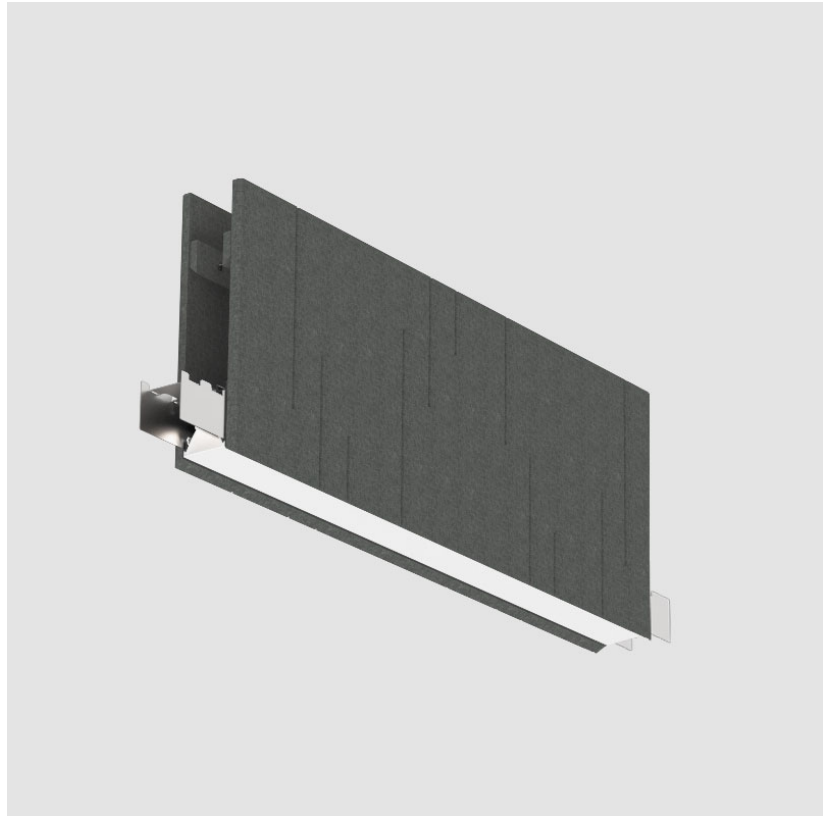

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300847-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 39 3/8" - Through Wiring - LED 21.5W, 2700K / 3000K / 3500K / 4000K, Max. 2659lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21.5
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2547 / 2585 / 2615 / 2659
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

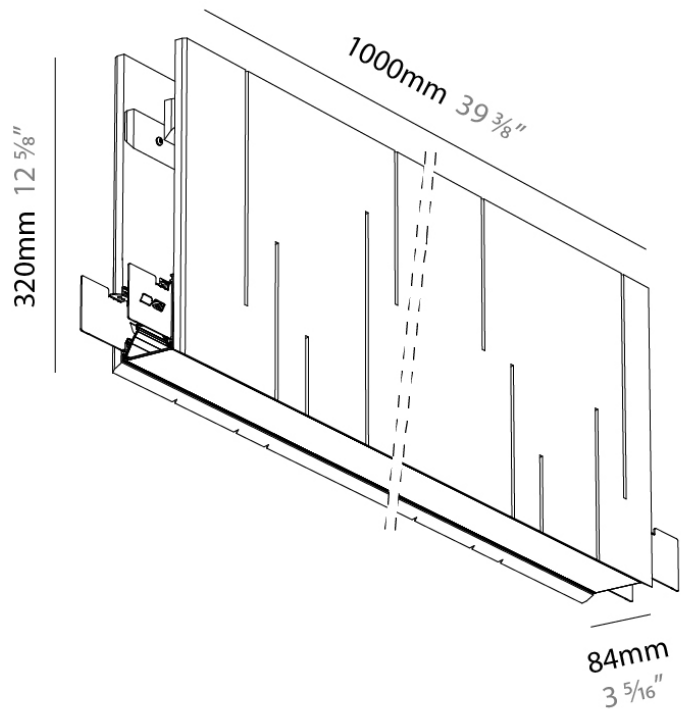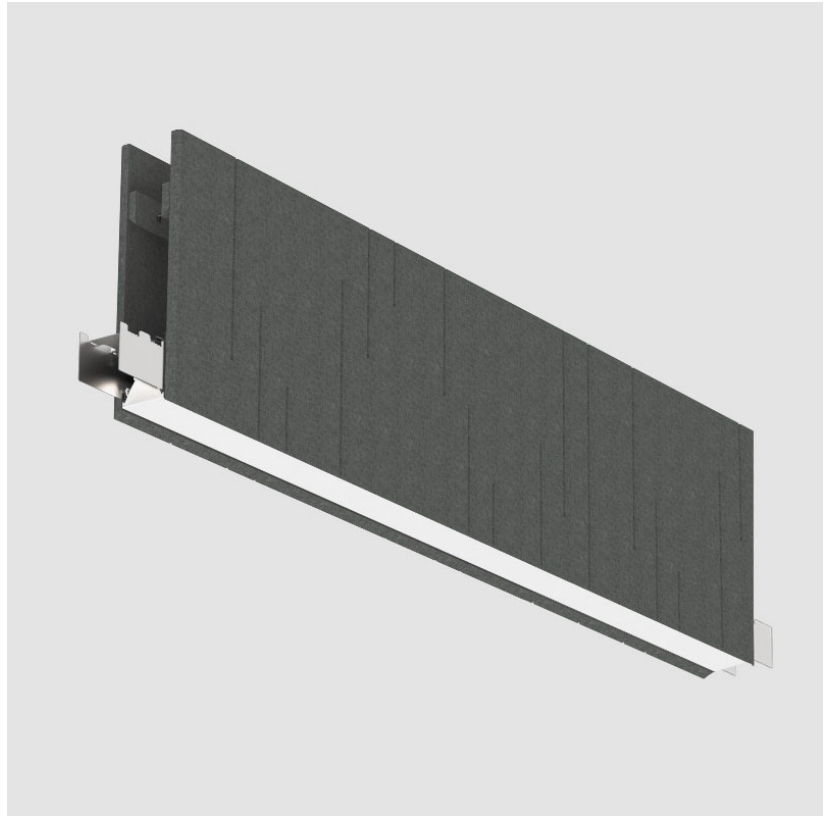

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300848-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 31 1/2" - Through Wiring - LED 21.5W, Tunable White (2700K-6500K), Max. 3021lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21.5
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 2210-3021
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

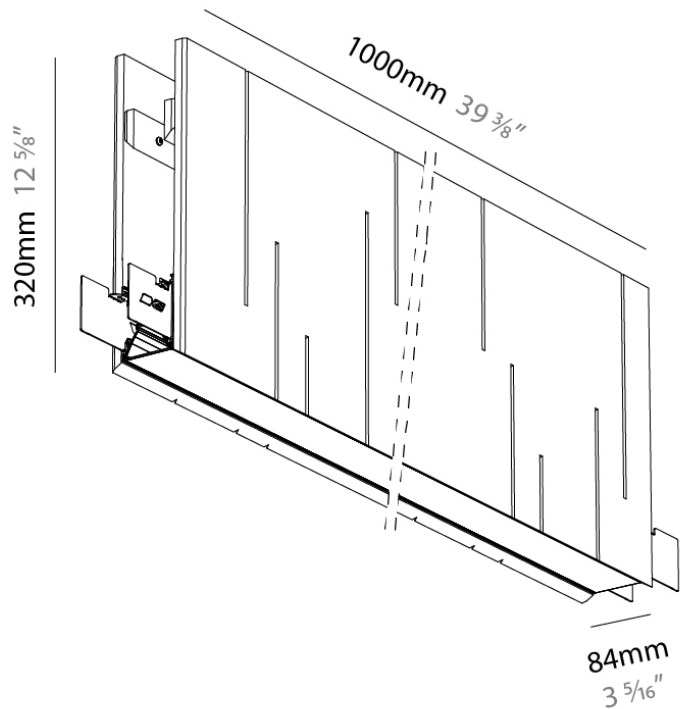

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300849-

DESCRIPTION

Unity - Acoustic Suspension, L = 1200mm / 47 1/4" - Through Wiring - LED 25.8W, 2700K / 3000K / 3500K / 4000K, Max. 3197lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3063 / 3108 / 3137 / 3197
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

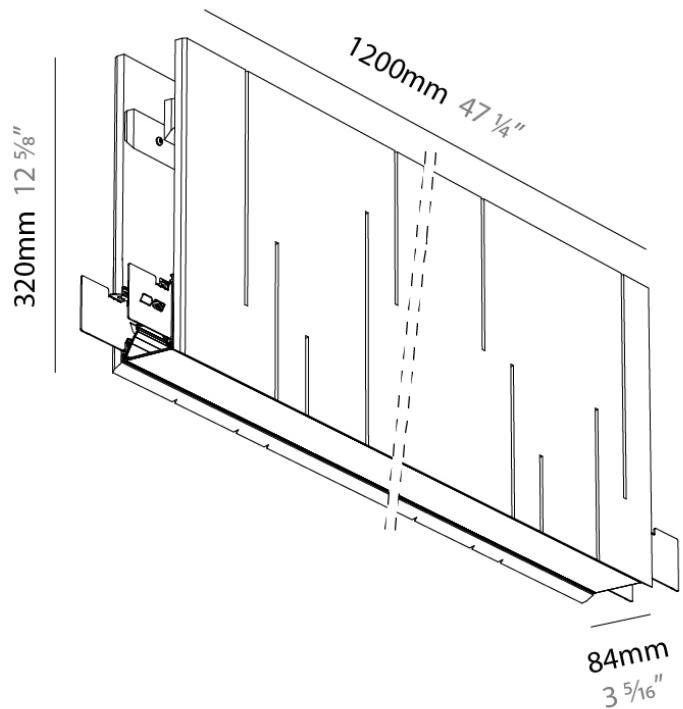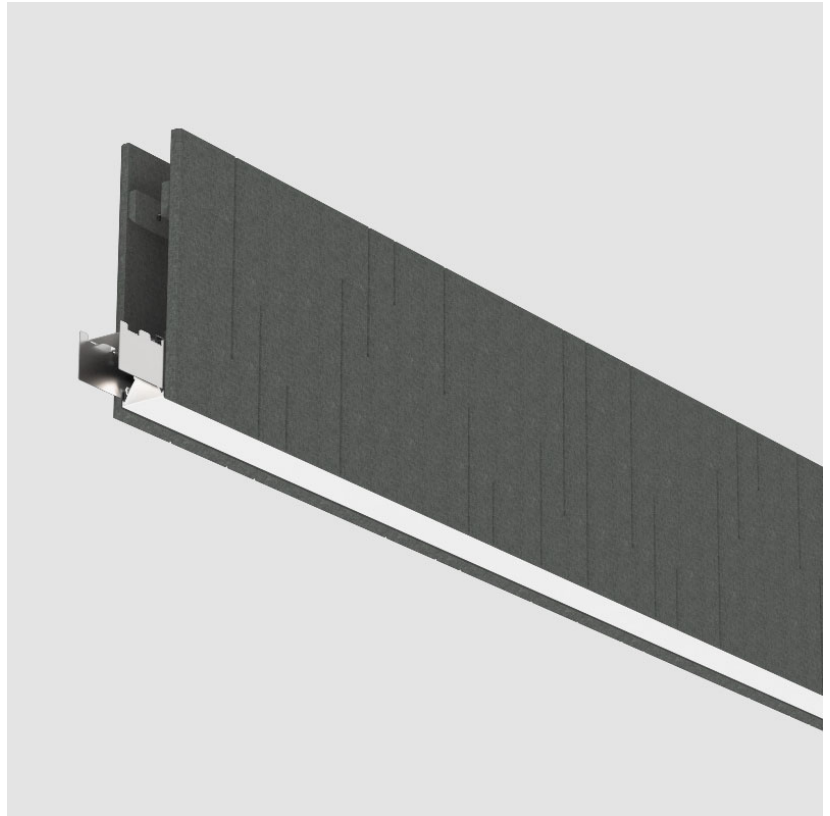

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300850-

DESCRIPTION

Unity - Acoustic Suspension, L = 1200mm / 47 1/4" - Through Wiring - LED 25.8W, Tunable White (2700K-6500K), Max. 3625lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.8
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 2657-3625
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

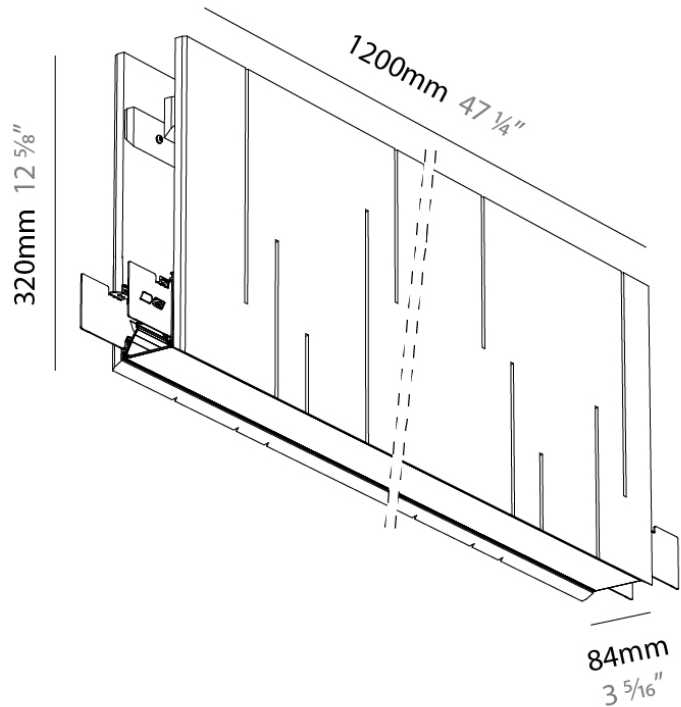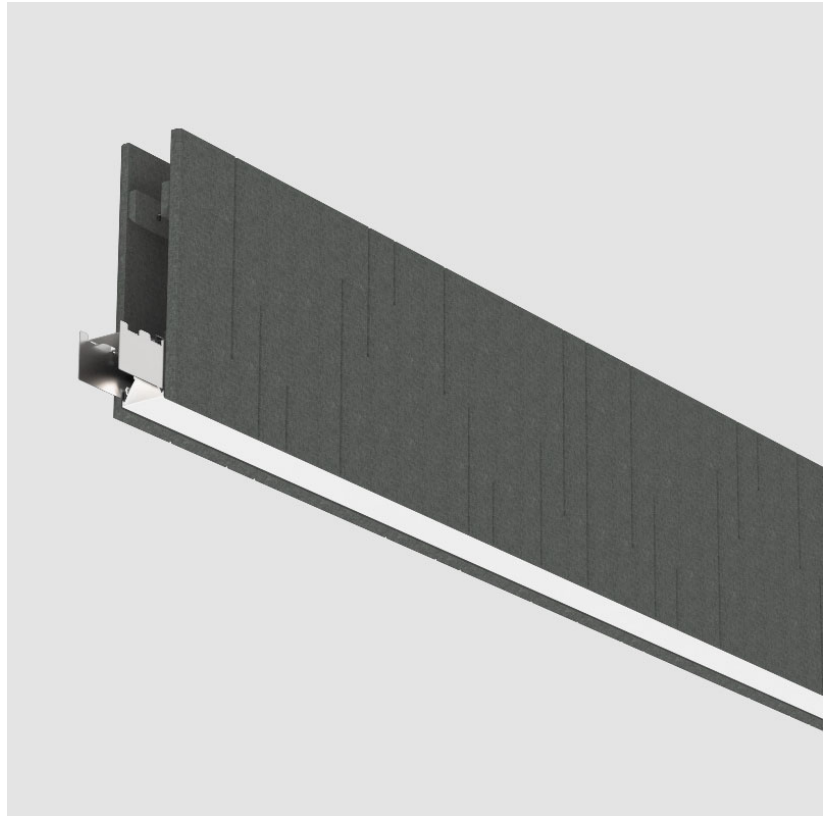

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300851-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - Through Wiring - LED 30.1W, 2700K / 3000K / 3500K / 4000K, Max. 3728lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1400
 Length (in): 55 1/8
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30.1
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3571 / 3623 / 3660 / 3728
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

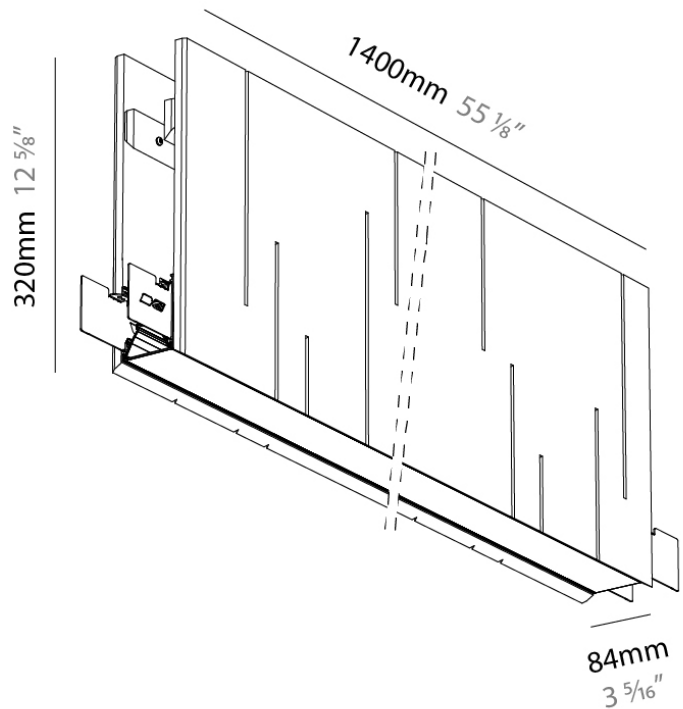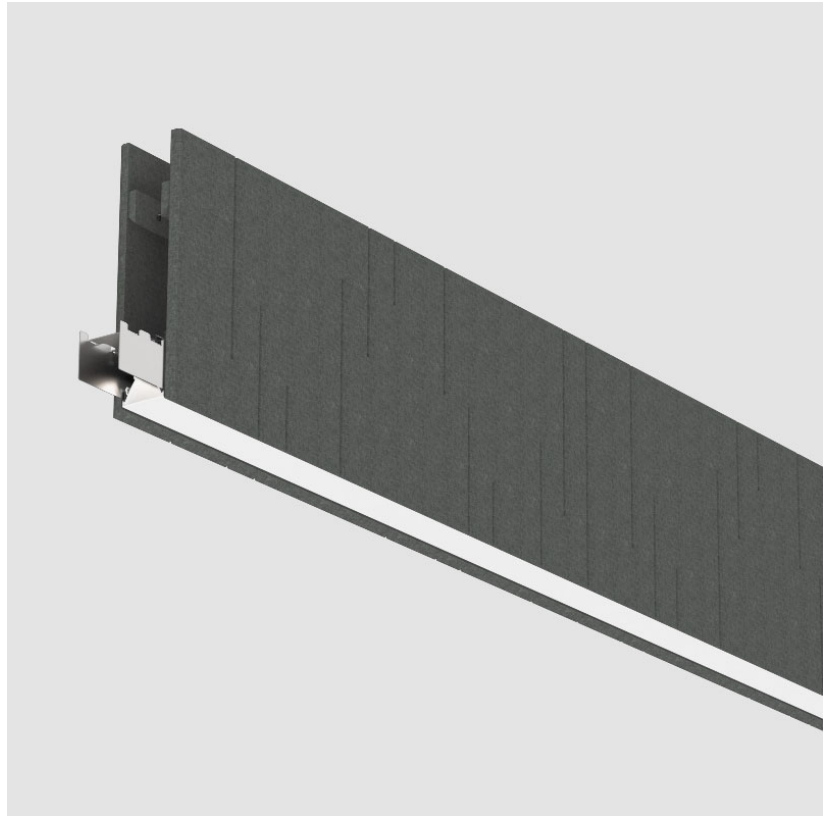

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300852-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - Through Wiring - LED 30.1W, Tunable White (2700K-6500K), Max. 4229lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1400
 Length (in): 55 1/8
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 30.1
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3097-4229
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

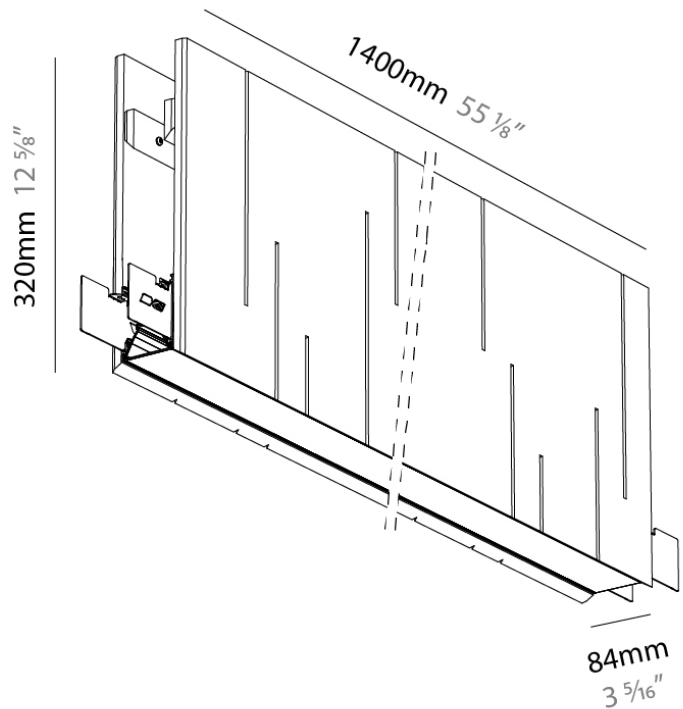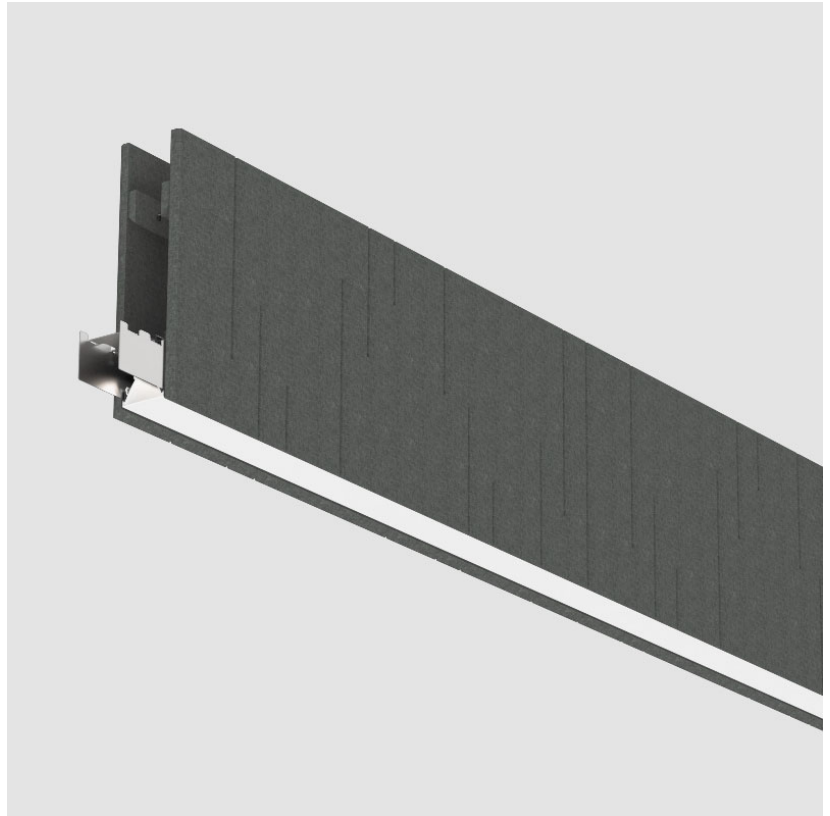

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300853-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - Through Wiring
 - LED 34.4W, 2700K / 3000K / 3500K / 4000K, Max. 4258lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1600
 Length (in): 63
 Width (mm): 84
 Width (in): 3 1/4
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 34.4
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 4079 / 4138 / 4183 / 4258
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

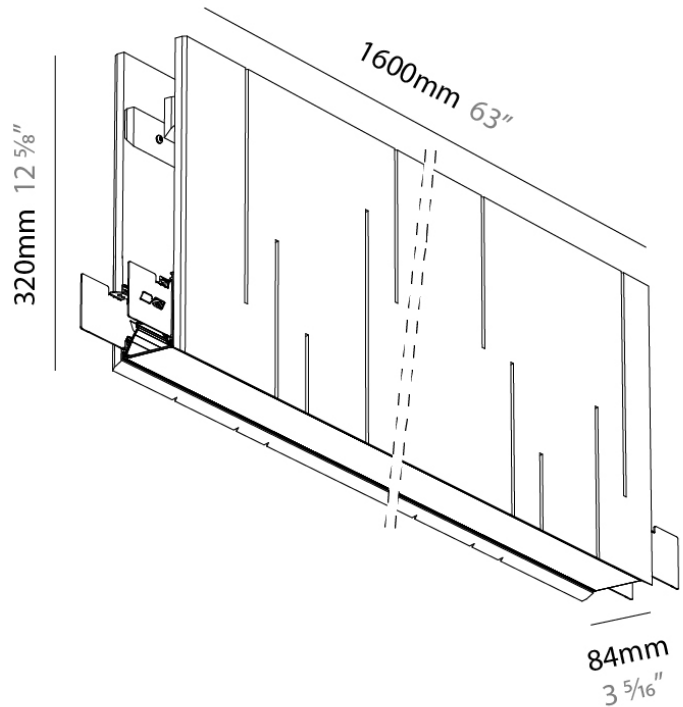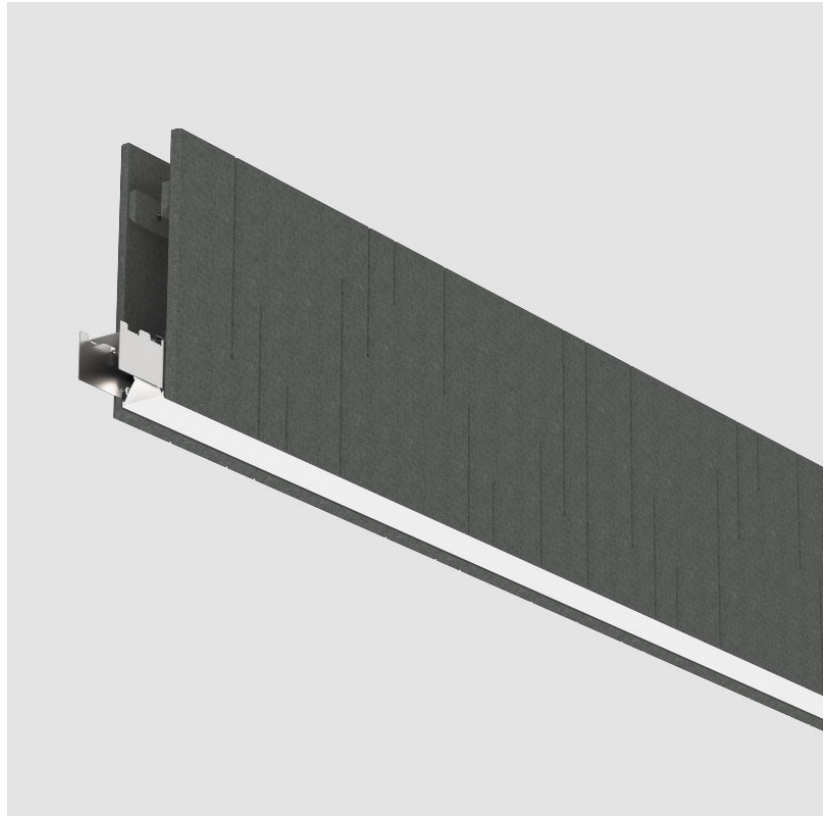

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300854-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - Through Wiring
 - LED 34.4W, Tunable White (2700K-6500K), Max. 4833lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1600
 Length (in): 63
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 3/5
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 34.4
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3538 - 4833
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

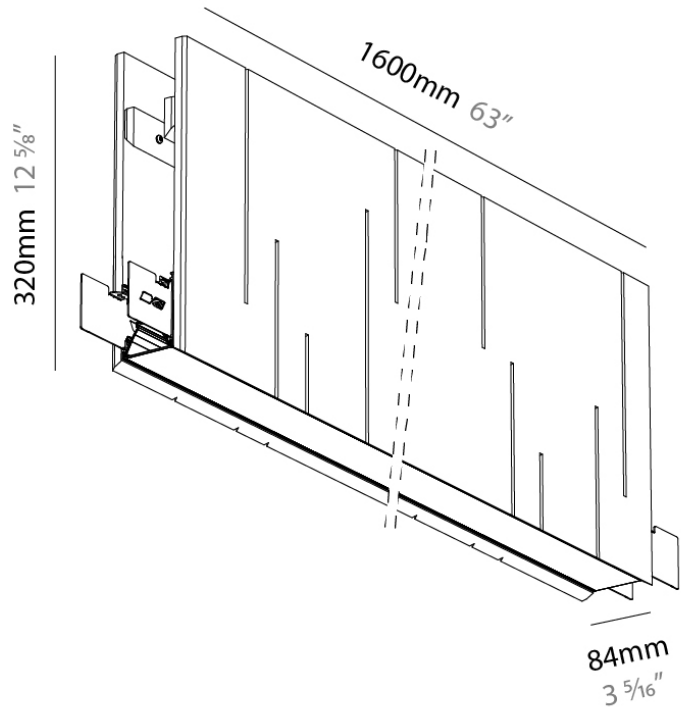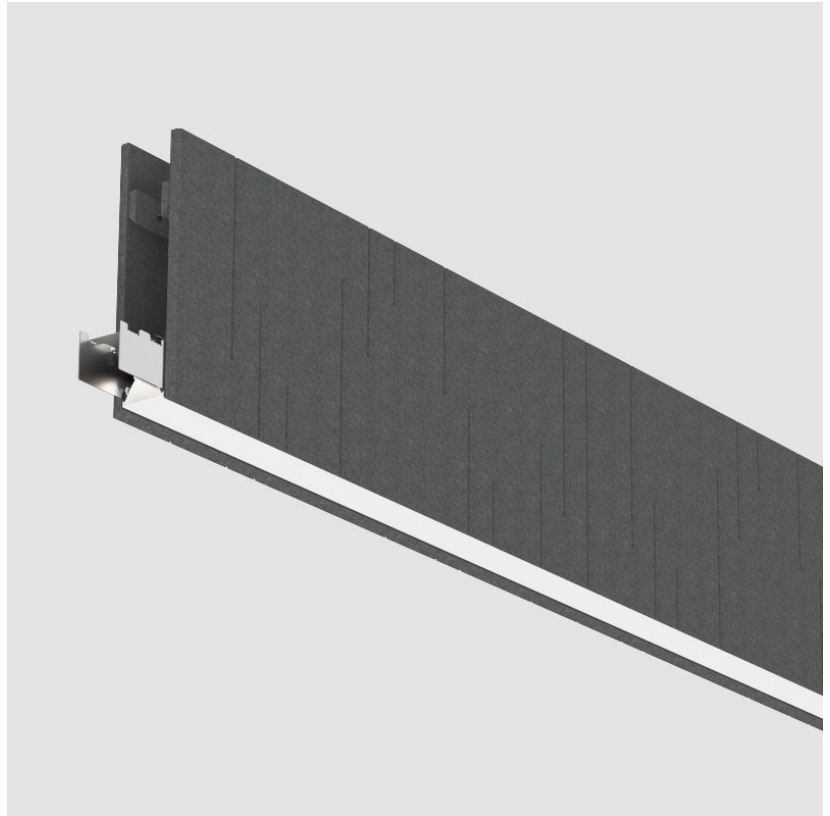

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300855-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - Through Wiring - LED 38.7W, 2700K / 3000K / 3500K / 4000K, Max. 4796lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 4594 / 4661 / 4706 / 4796
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

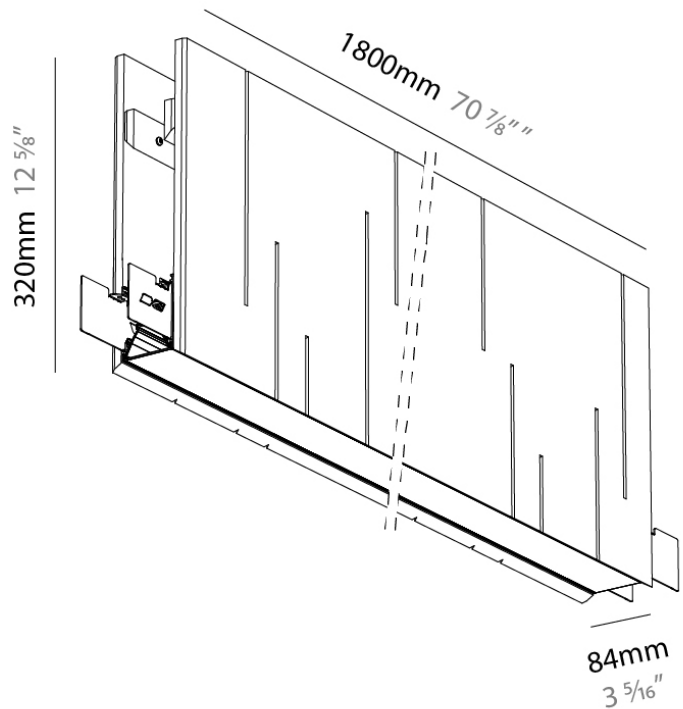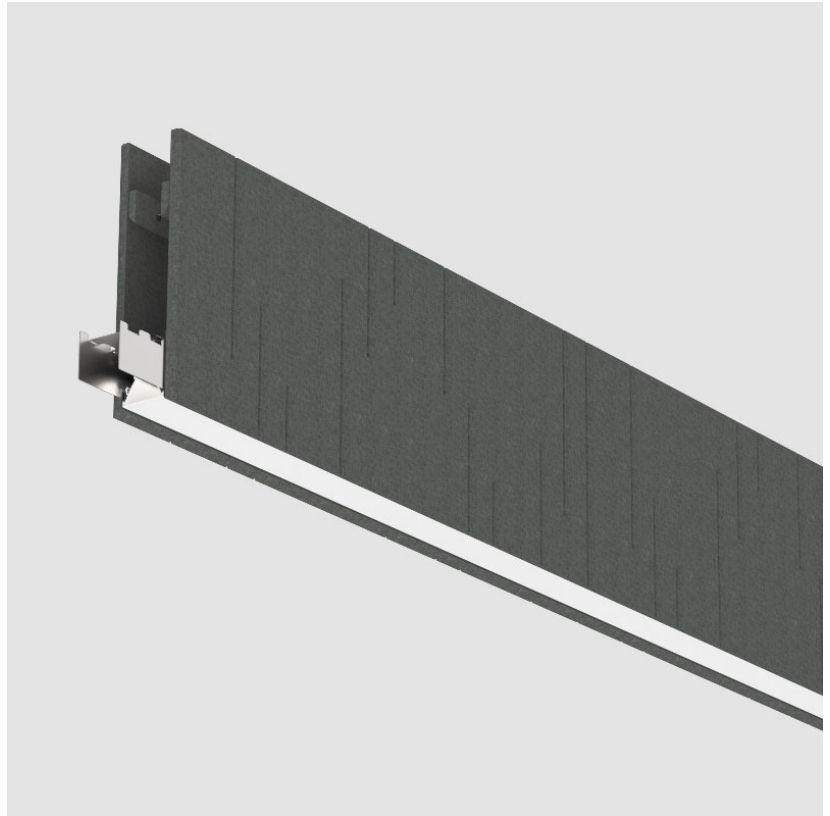

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300856-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - Through Wiring - LED 38.7W, Tunable White (2700K-6500K), Max. 5437lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 3985 - 5437
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

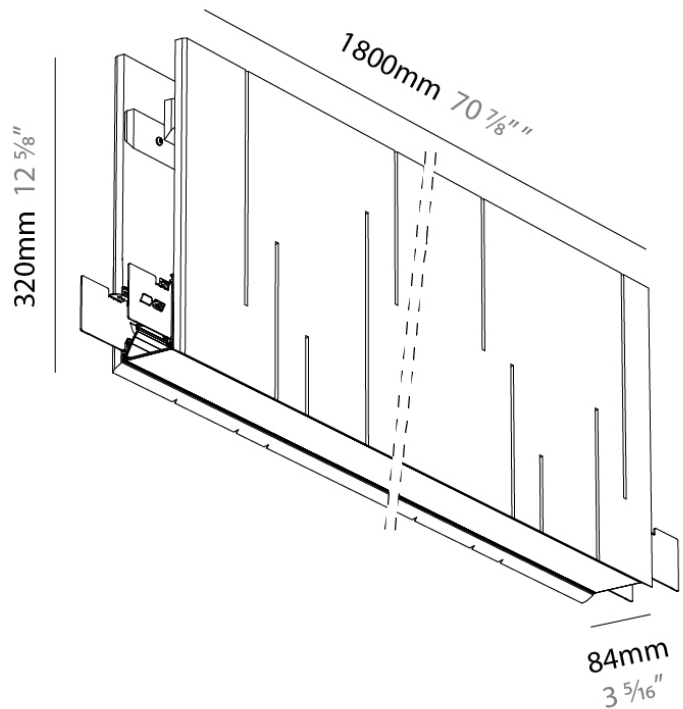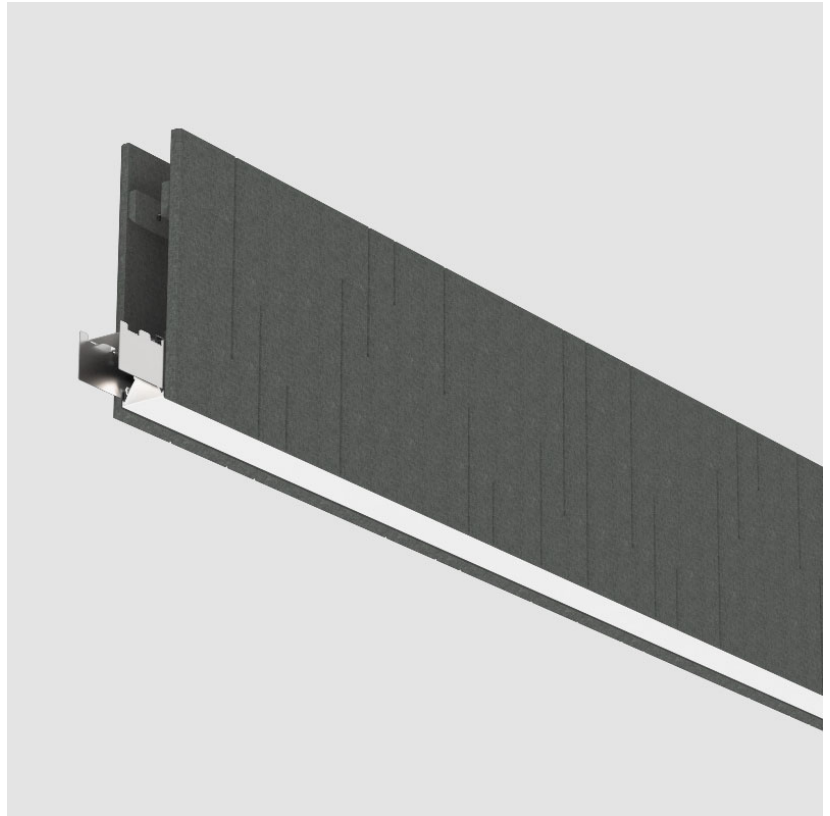

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300857-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - Through Wiring - LED 43W, 2700K / 3000K / 3500K / 4000K, Max. 5326lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 43
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 5102 / 5177 / 5229 / 5326
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

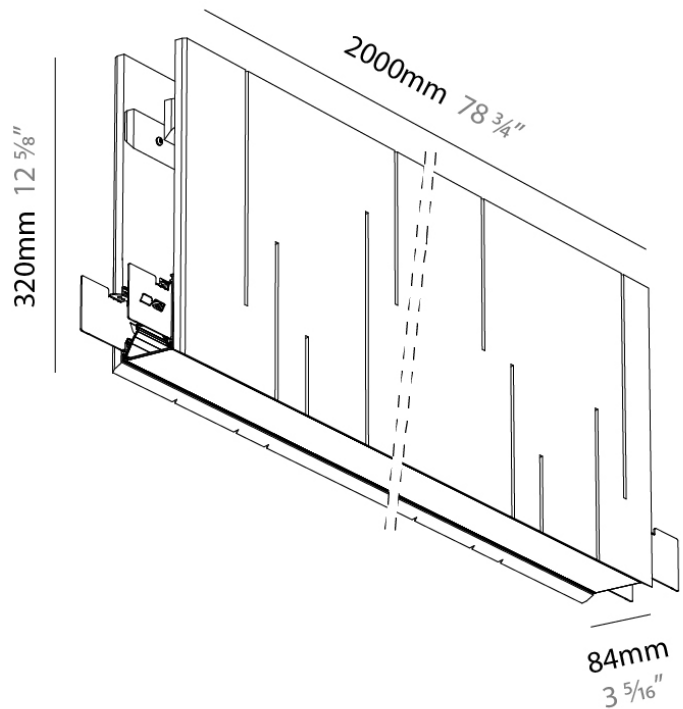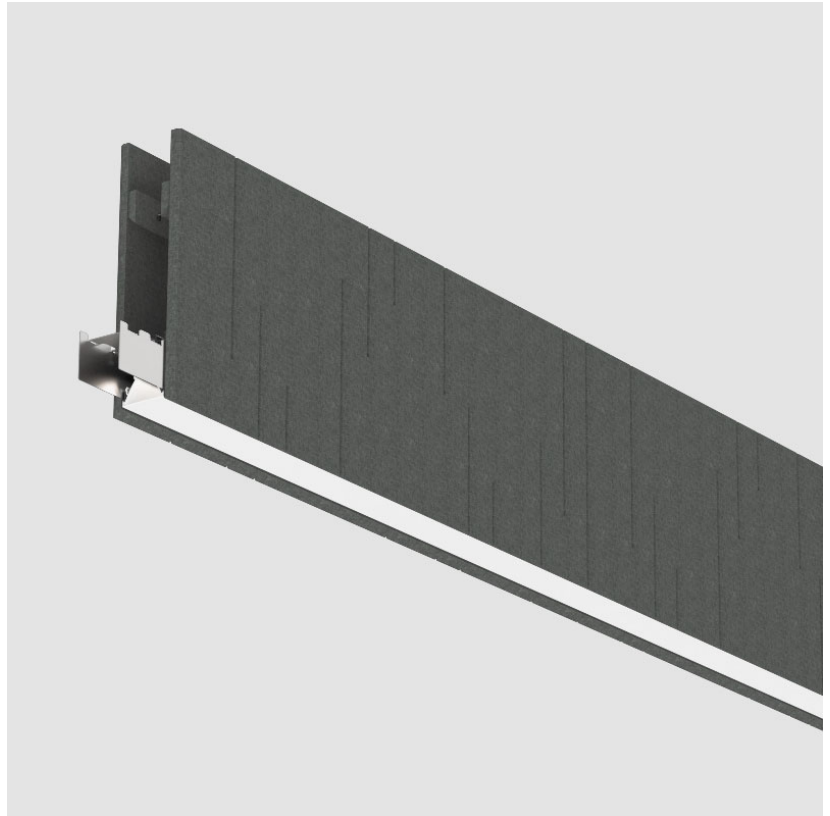

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300858-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - Through Wiring - LED 43W, Tunable White (2700K-6500K), Max. 6041lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 43
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 4426 - 6041
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

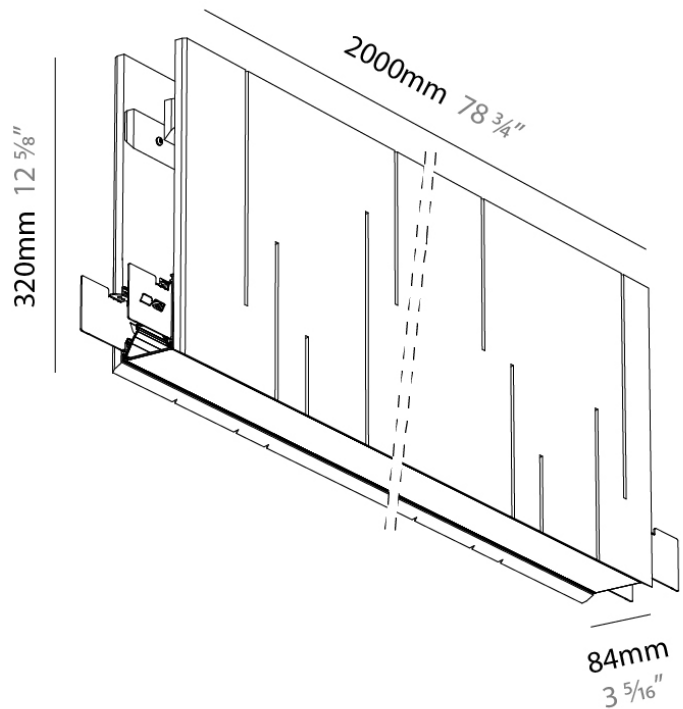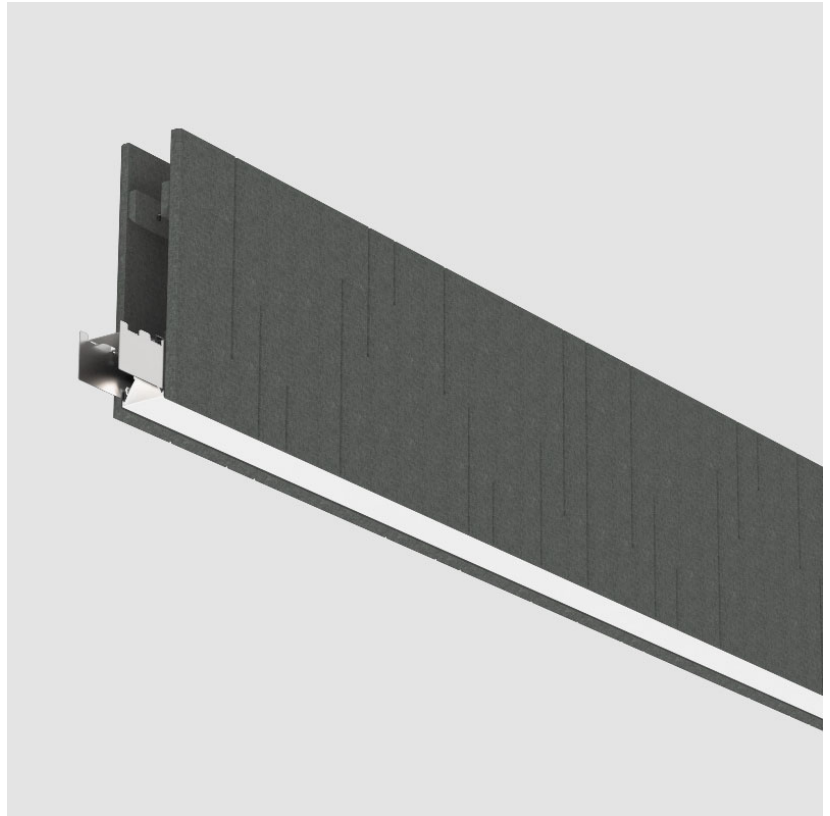

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300859-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 86 3/5" - Through Wiring - LED 47.3W, 2700K / 3000K / 3500K / 4000K, Max. 5856lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2200
 Length (in): 86 3/5
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 47.3
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 5610 / 5692 / 5752 / 5856
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

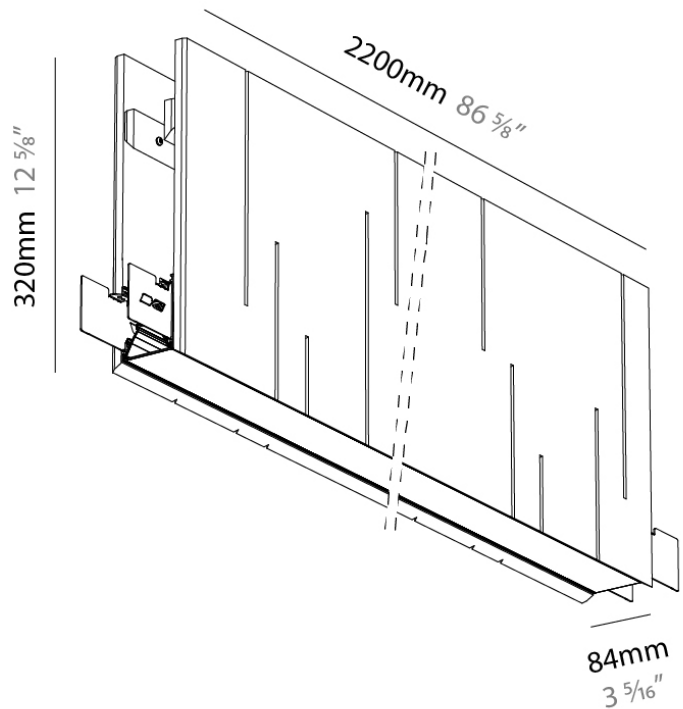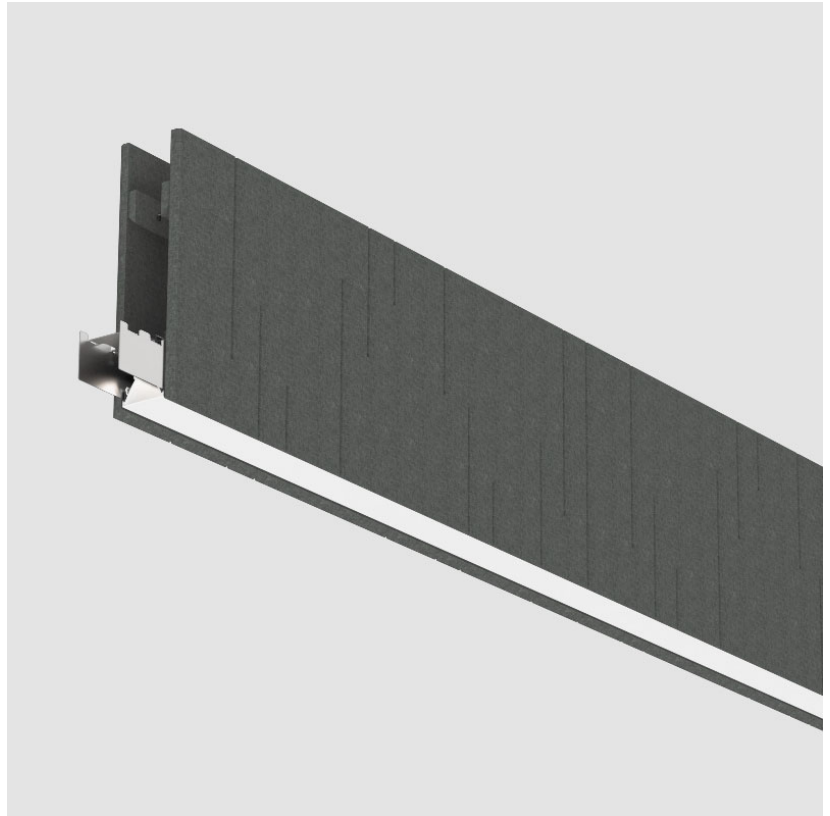

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300860-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 78 3/4" - Through Wiring - LED 47.3W, Tunable White (2700K-6500K), Max. 6645lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2200
 Length (in): 86 3/5
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 47.3
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 4866 - 6645
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

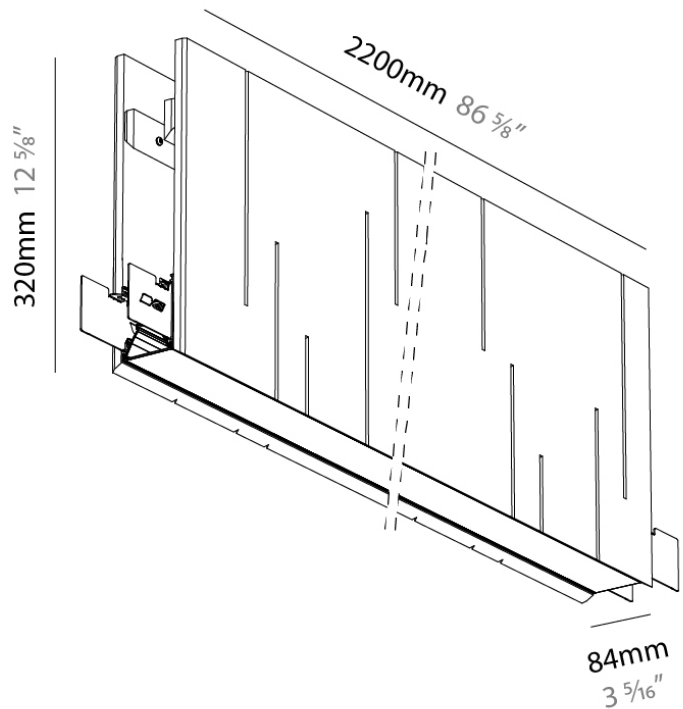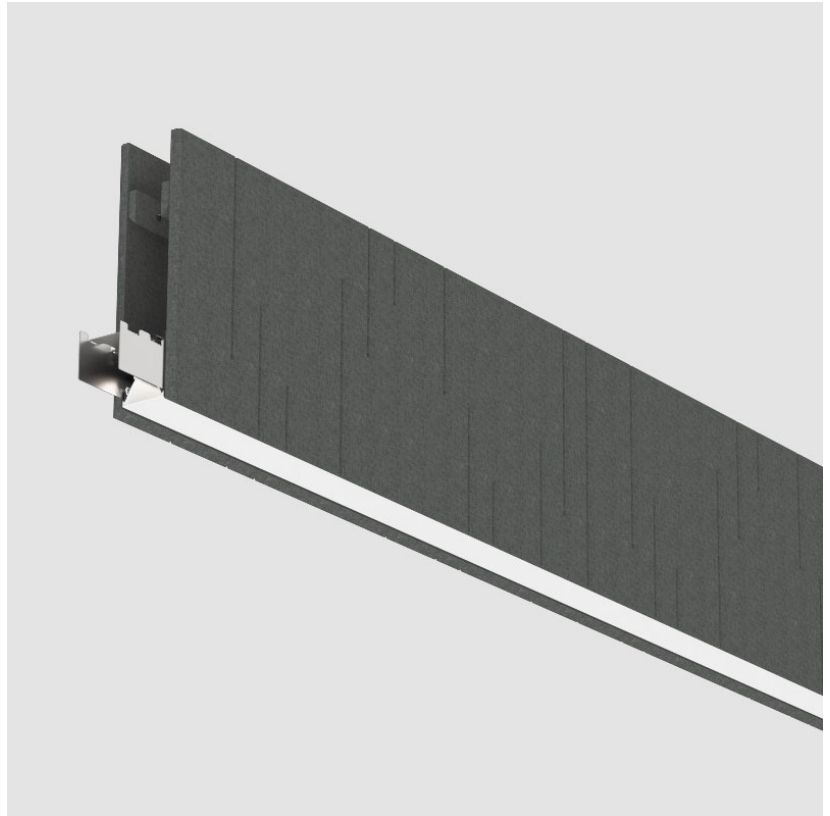

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300861-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - Through Wiring - LED 51.6W, 2700K / 3000K / 3500K / 4000K, Max. 6394lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 6125 / 6215 / 6275 / 6394
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

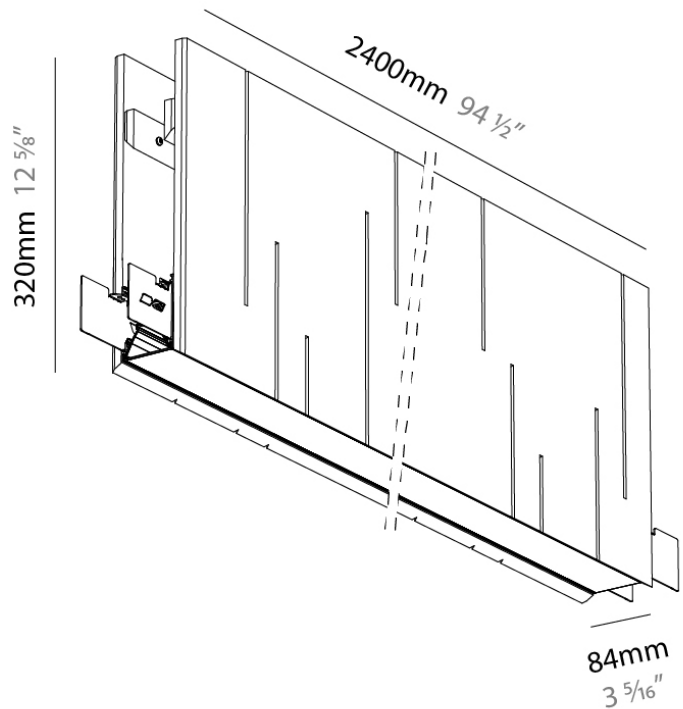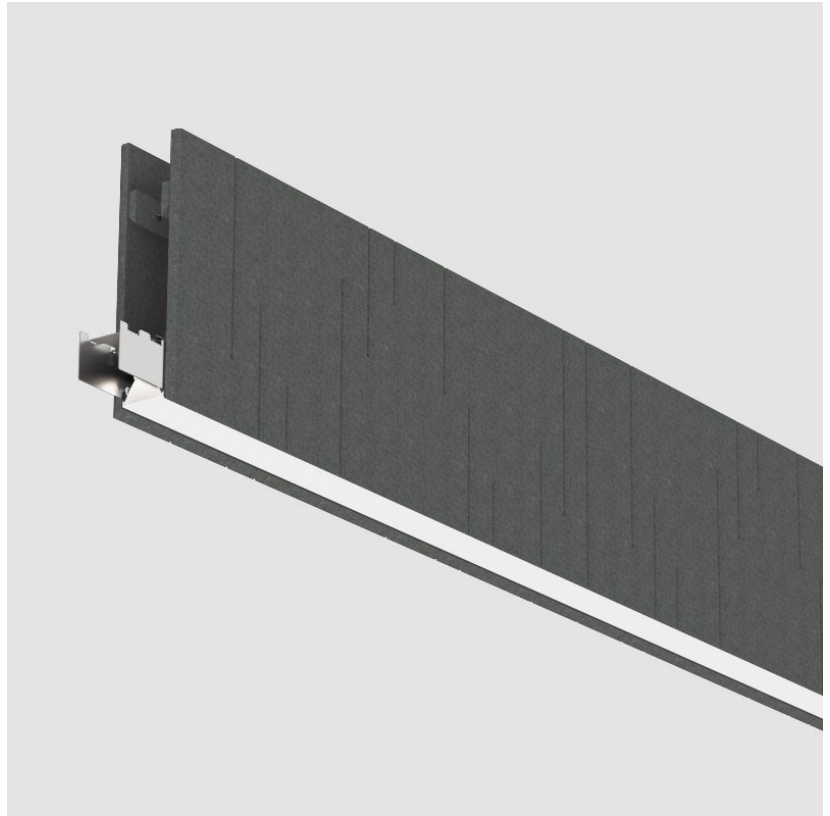

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300862-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - Through Wiring - LED 51.6W, Tunable White (2700K-6500K), Max. 7249lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 51.6
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 5314 - 7249
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

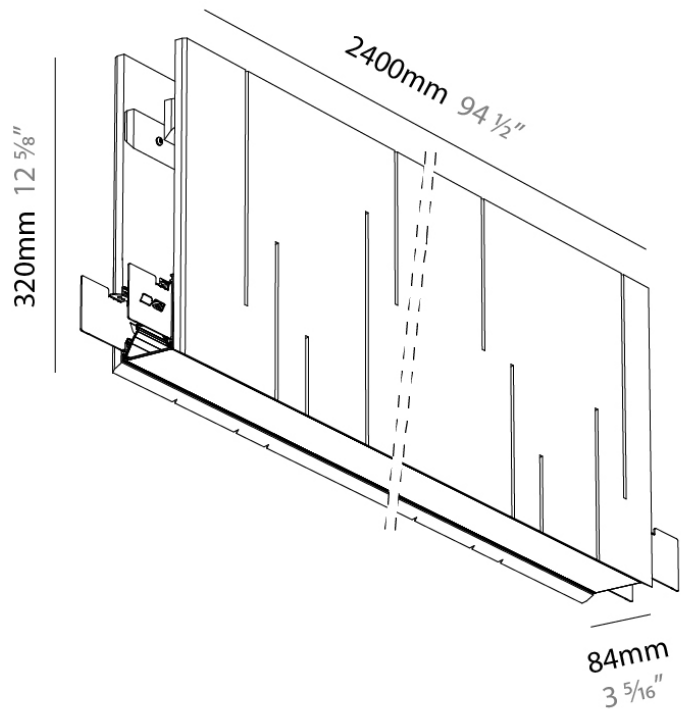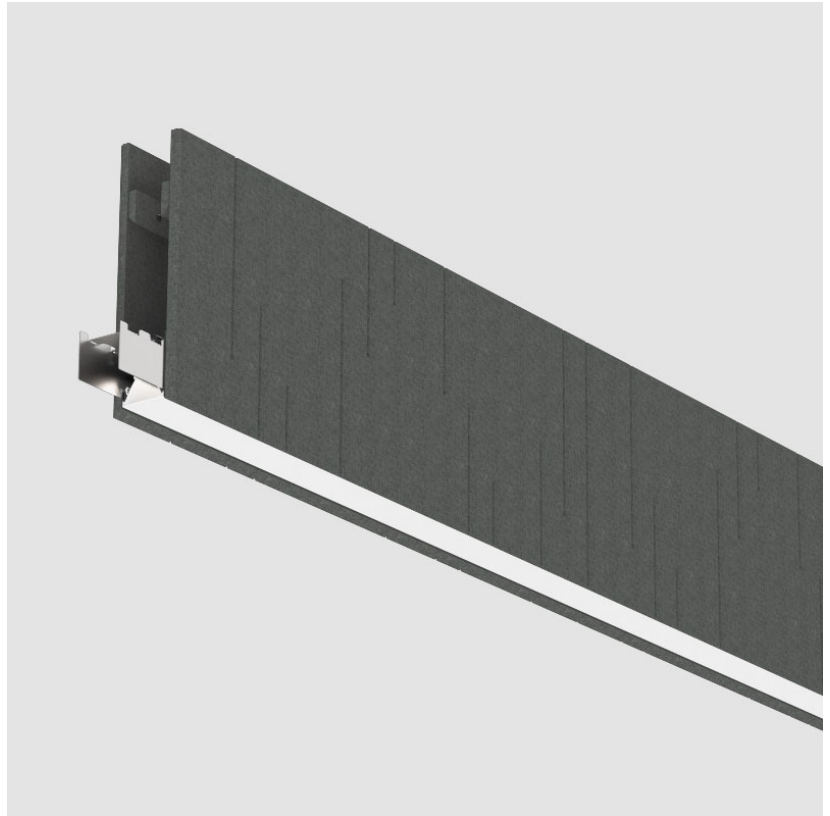

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300863-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - Through Wiring - LED 55.9W, 2700K / 3000K / 3500K / 4000K, Max. 6925lm, CRI90

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 55.9
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 6633 / 6730 / 6798 / 6925
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

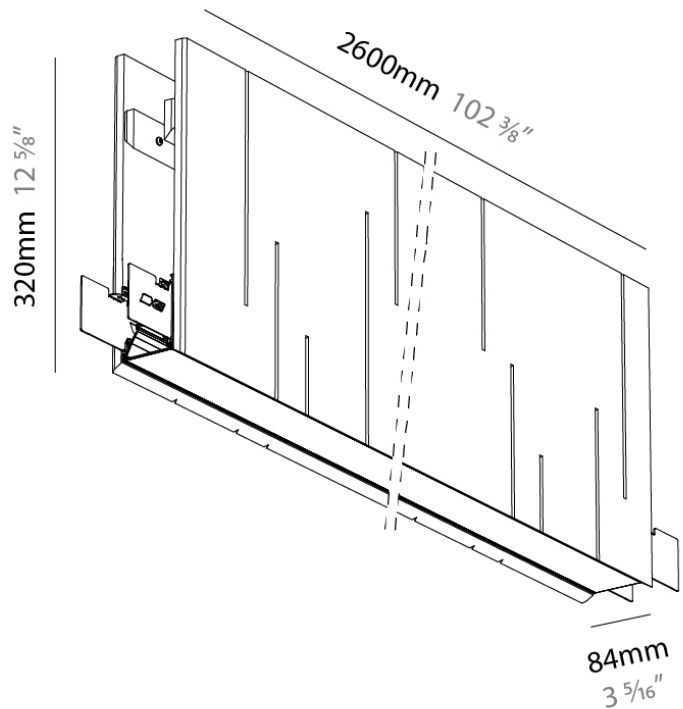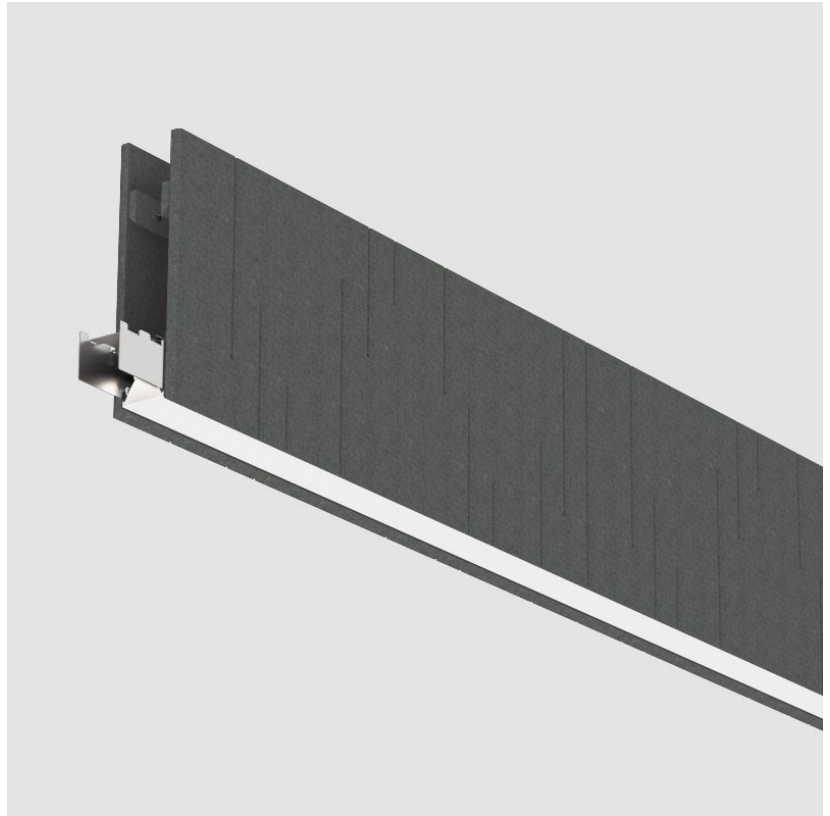

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300864-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - Through Wiring - LED 55.9W, Tunable White (2700K-6500K), Max. 7853lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 55.9
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 5754 - 7853
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

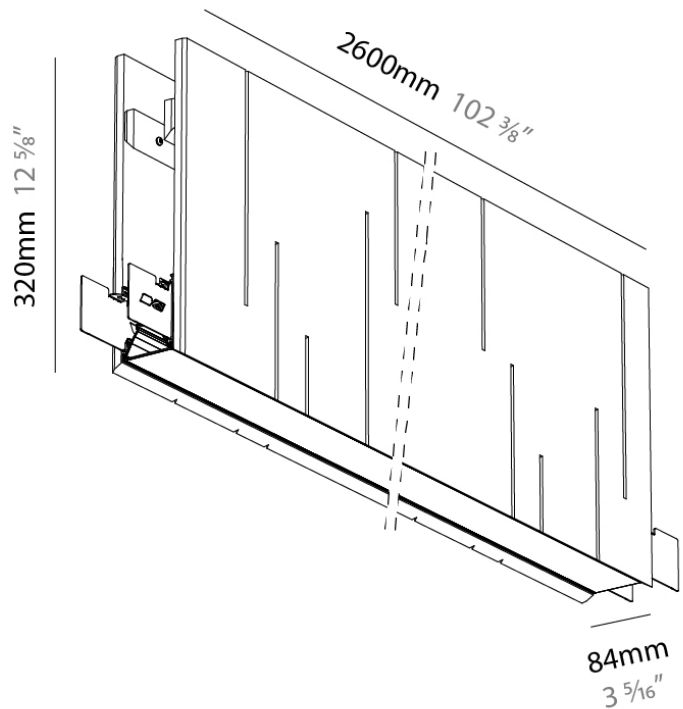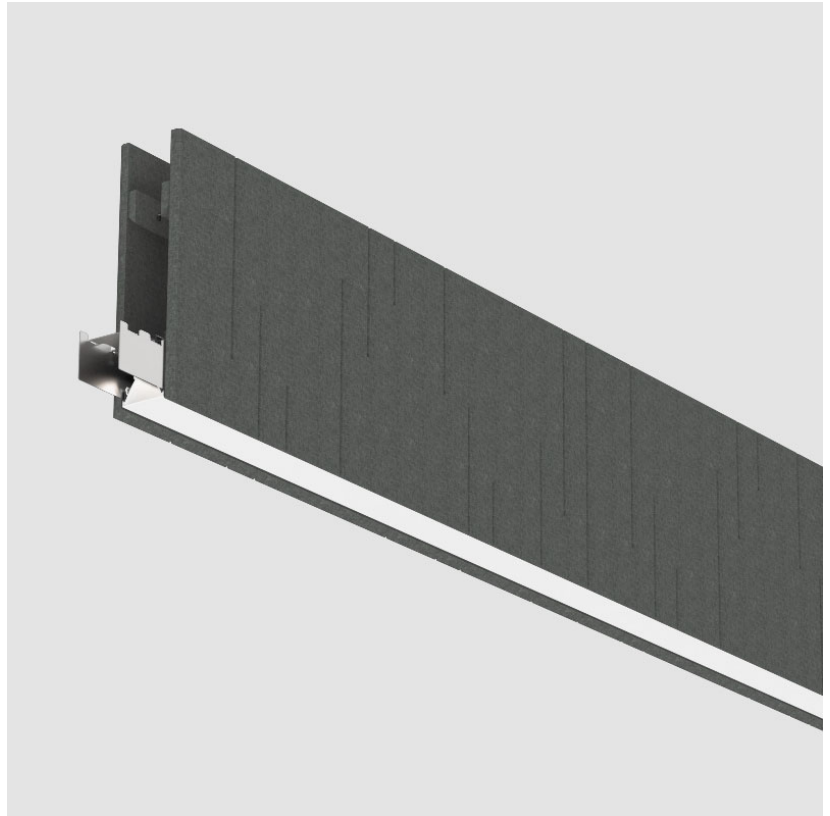

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300865-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - Through Wiring - LED 60.2W, 2700K / 3000K / 3500K / 4000K, Max. 7455lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60.2
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 7141 / 7246 / 7321 / 7455
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

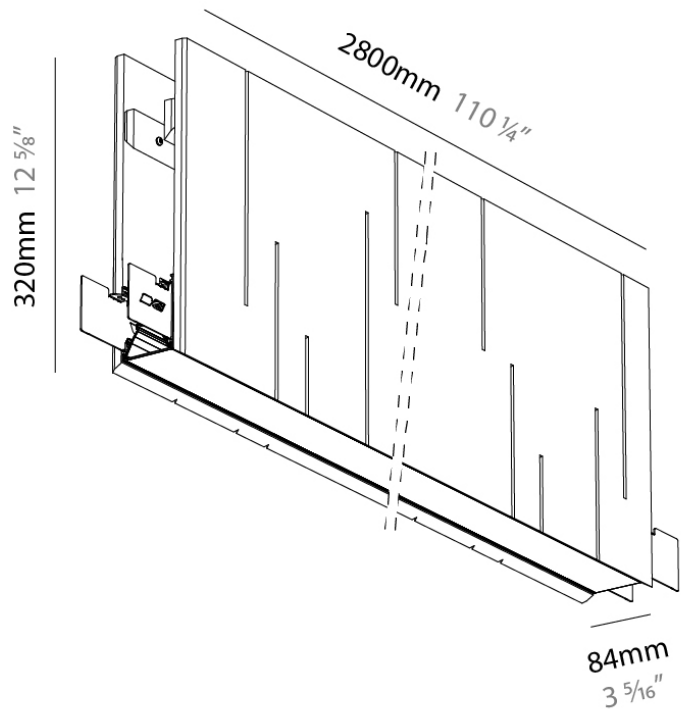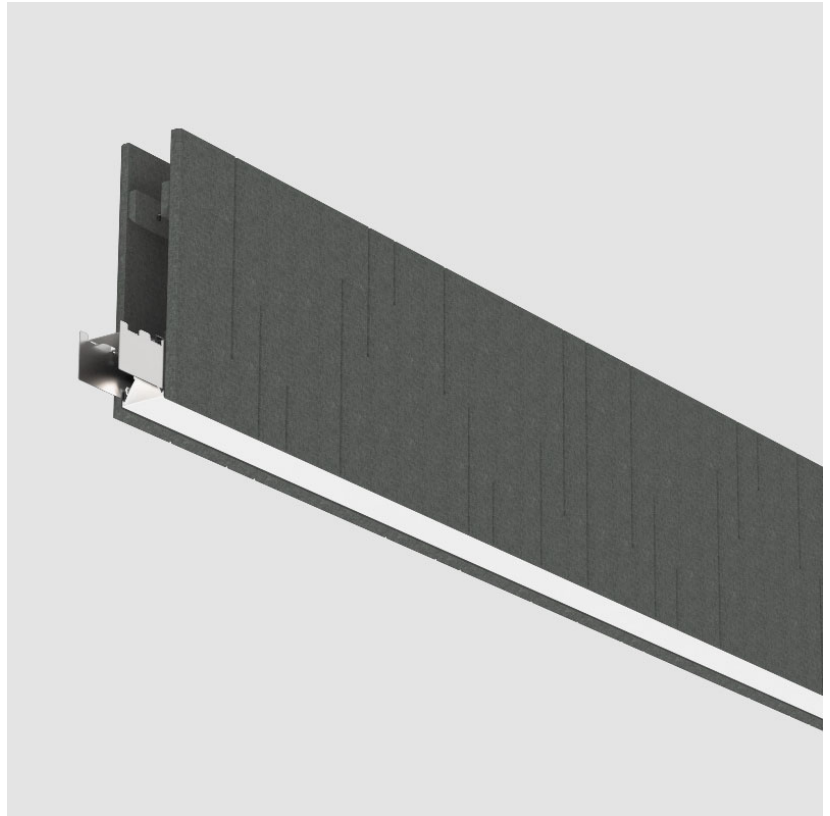

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300866-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - Through Wiring - LED 60.2W, Tunable White (2700K-6500K), Max. 8457lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 60.2
 Dimming: Dali Dimming / Matter
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-6500 Tunable White
 Max. Delivered Lumen (lm): 6195 - 8457
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

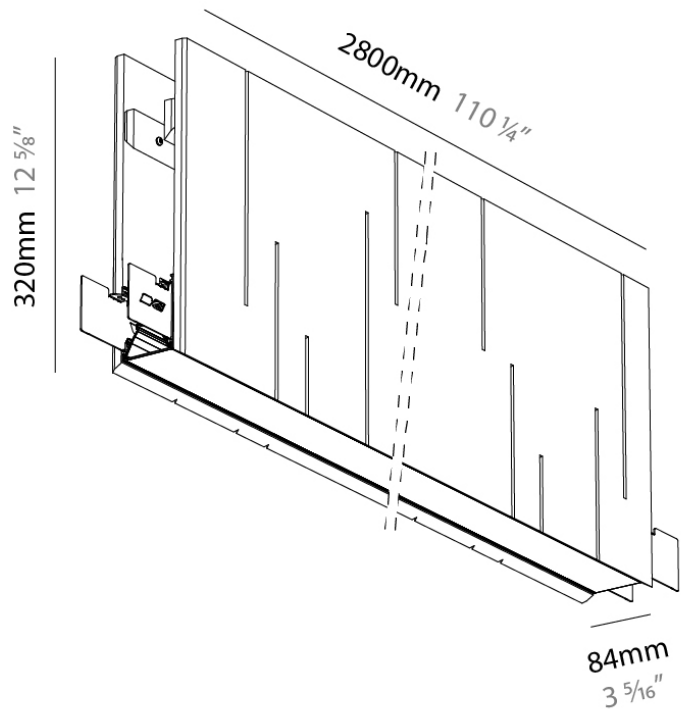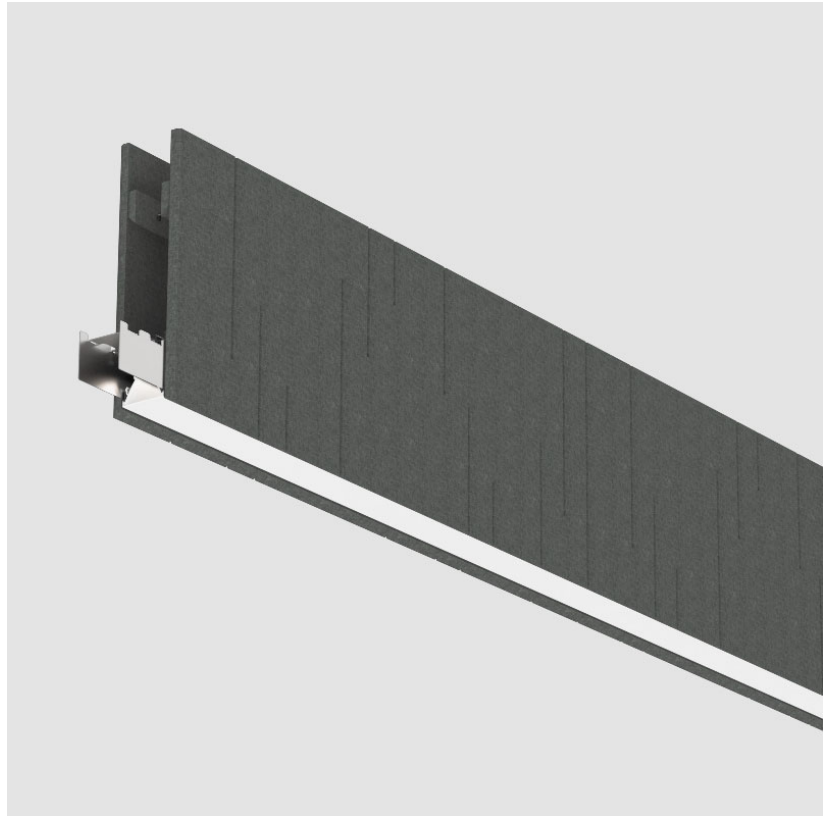

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300867-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED
25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3724lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ⁵/₈
Width (mm): 1260
Width (in): 49 ⁵/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Holder Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.2
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3567 / 3619 / 3654 / 3724
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

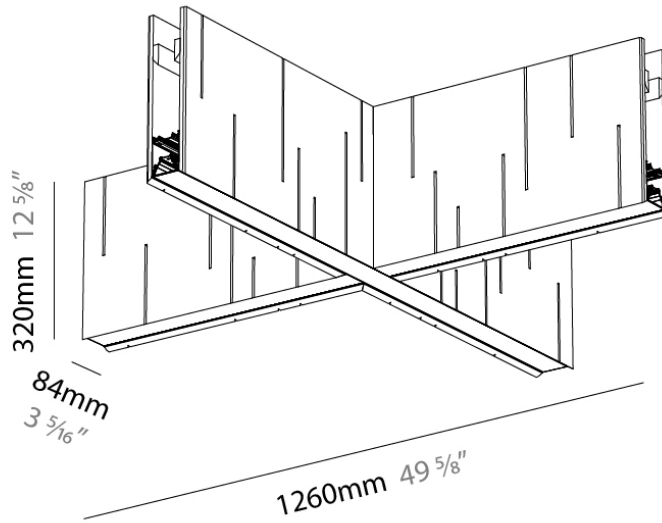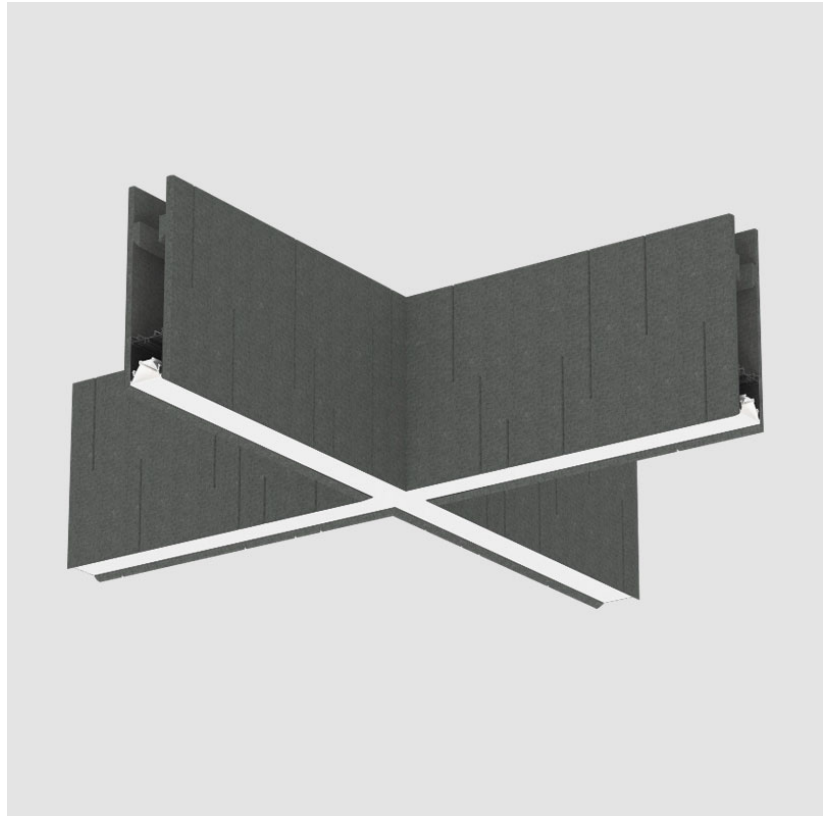

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300868-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - No Through Wiring - LED
 25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3612lm, CRI90 -
 Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ³/₅
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
 / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3460 / 3510 / 3544 / 3612
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

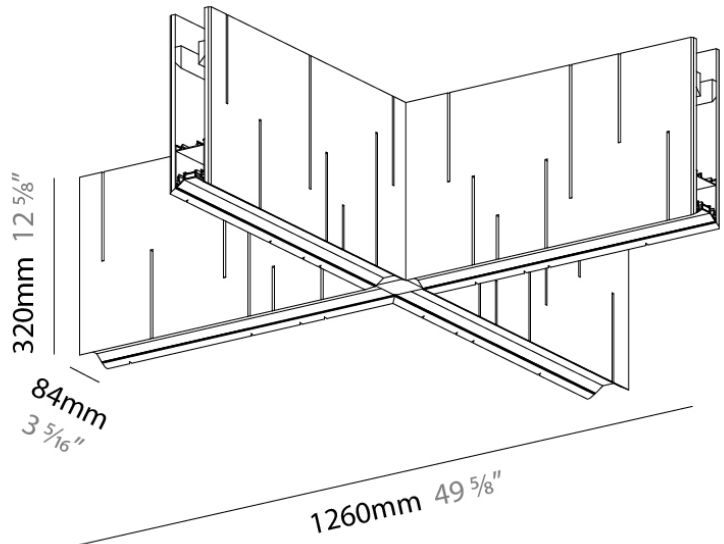

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300869-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED 18.8W, 2700K / 3000K / 3500K / 4000K, Max. 2502lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 3/5
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 3/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2396 / 2432 / 2455 / 2502
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

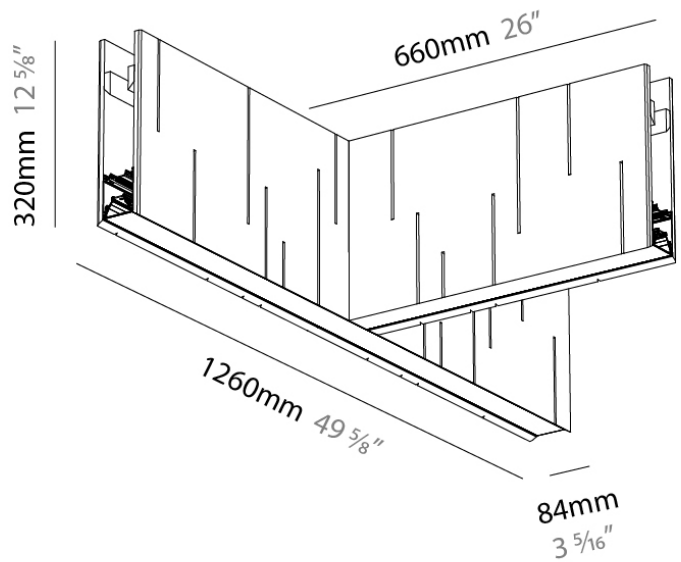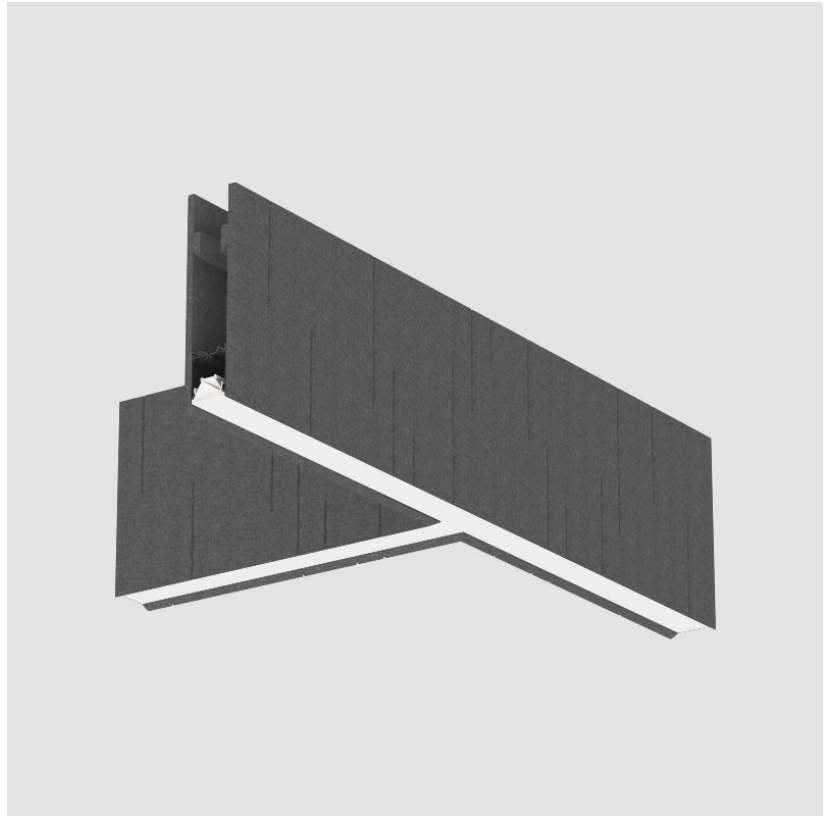

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300870-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED 18.8W, 2700K / 3000K / 3500K / 4000K, Max. 2709lm, CRI90 - Non-Dimming - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 3/5
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 5/8
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2595 / 2633 / 2658 / 2709
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

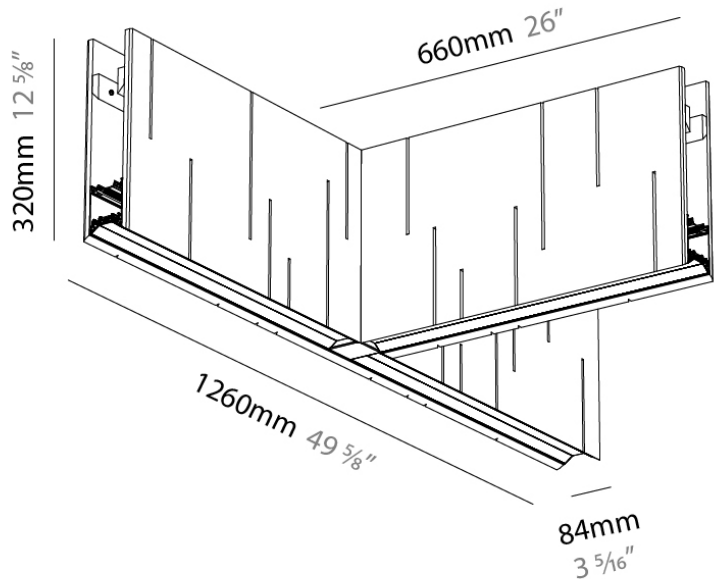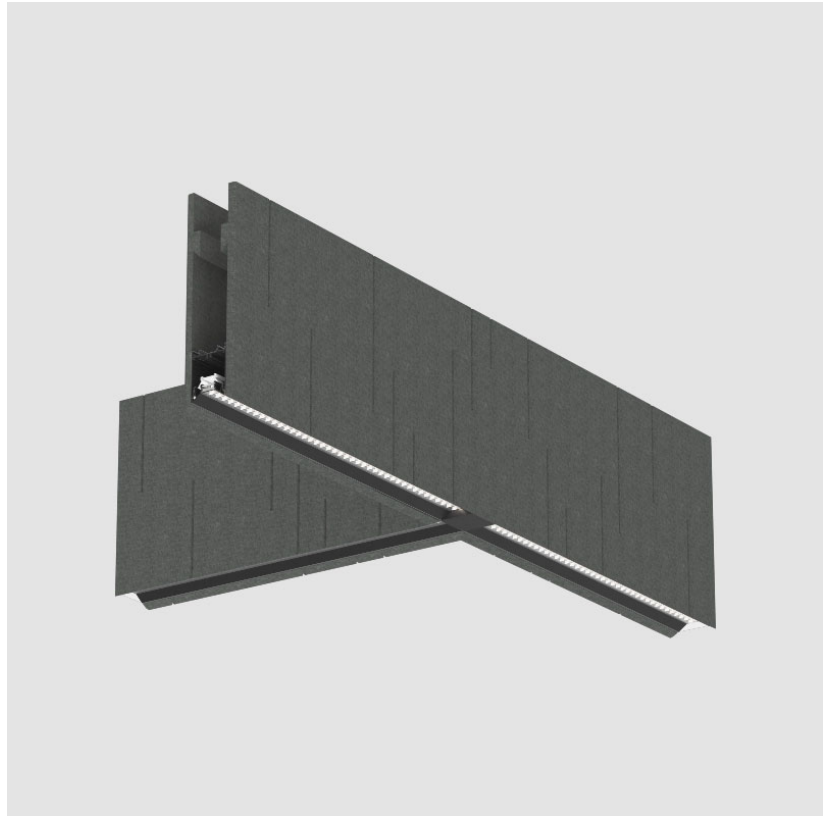

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300871-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - No Through Wiring - LED 12.5W, 2700K / 3000K / 3500K / 4000K, Max. 1862lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1598 / 1621 / 1637 / 1668
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

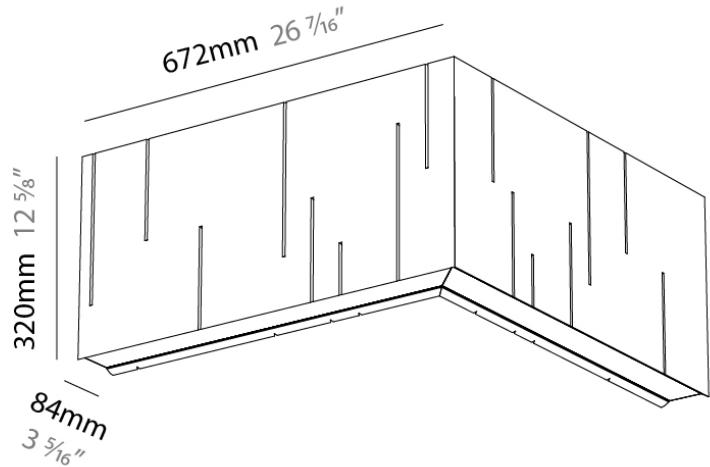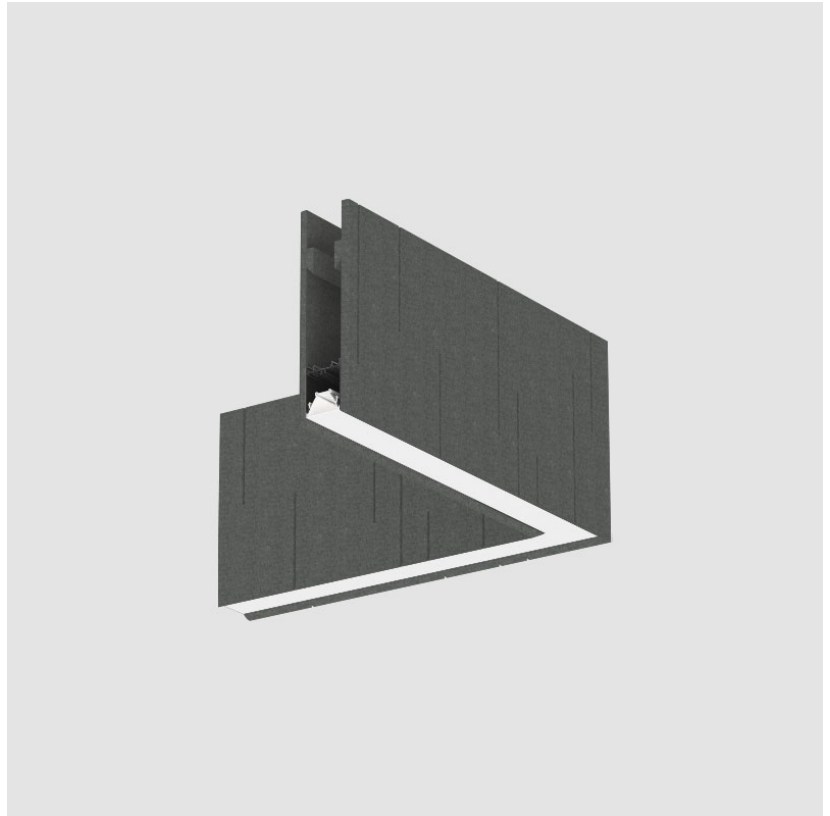

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300872-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - No Through Wiring - LED 12.6W, 2700K / 3000K / 3500K / 4000K, Max. 1806lm, CRI90 - Non-Dimming - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1730 / 1755 / 1772 / 1806
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

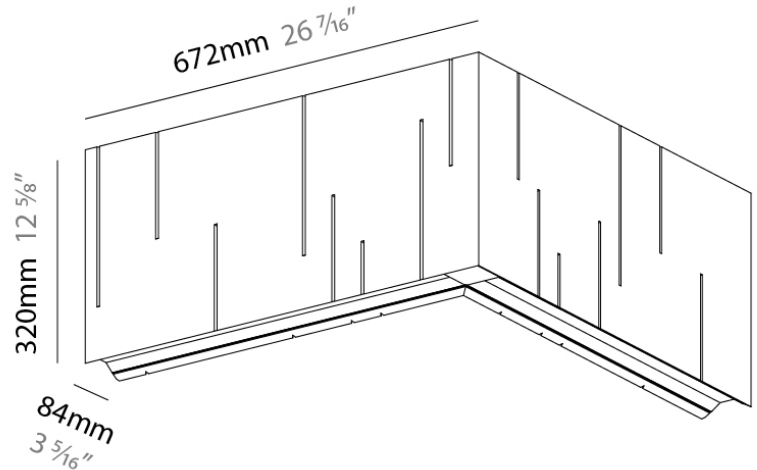

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300873-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - No Through Wiring - LED
 25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3322lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1490
 Length (in): 58 ²/₃
 Width (mm): 1290
 Width (in): 50 ⁷/₉
 Height (mm): 320
 Height (in): 12 ³/₅
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3182 / 3229 / 3264 / 3322
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

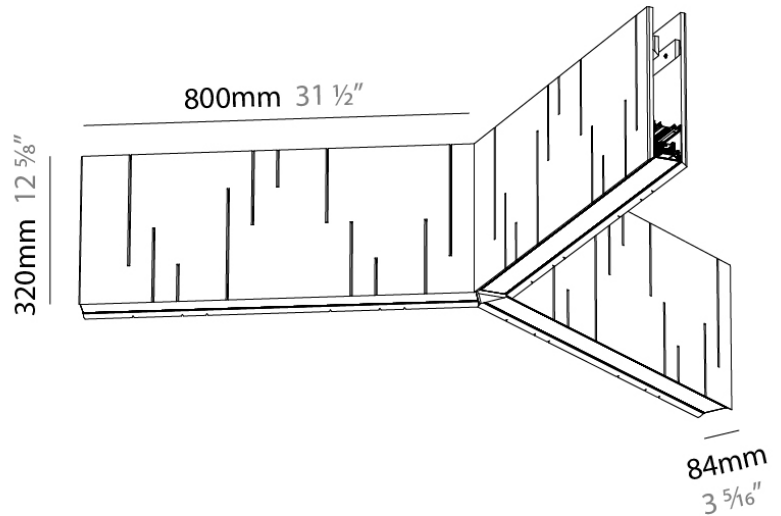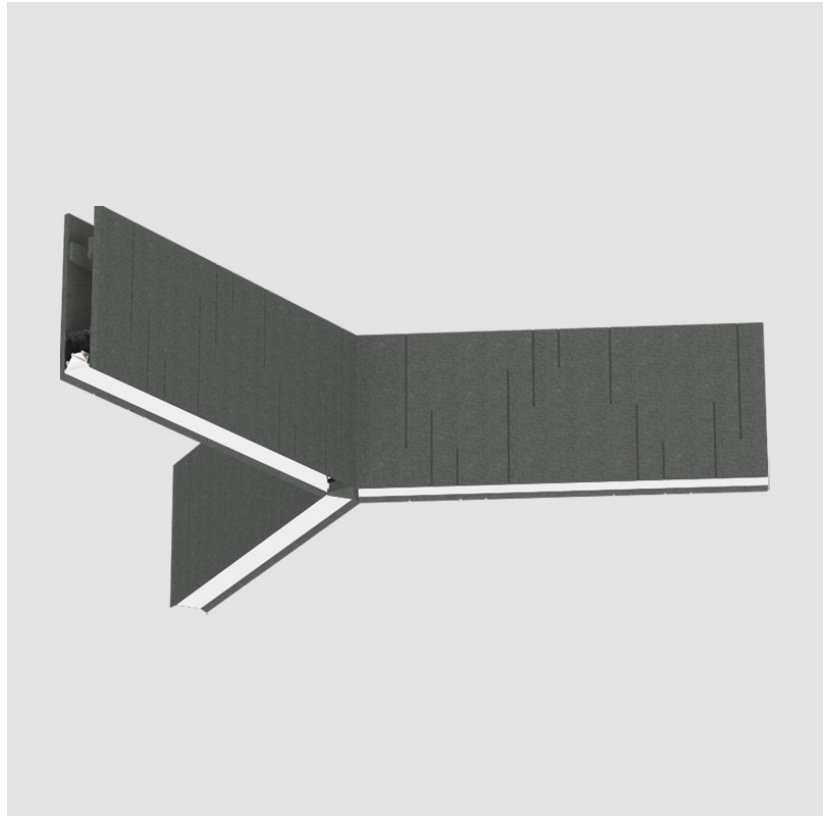

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300874-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3724lm, CRI90

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ⁵/₈
Width (mm): 1260
Width (in): 49 ⁵/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Holder Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.2
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3567 / 3619 / 3654 / 3724
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

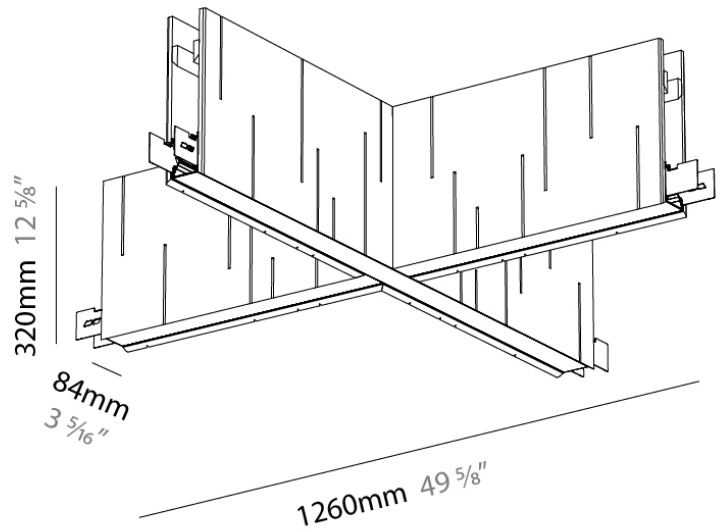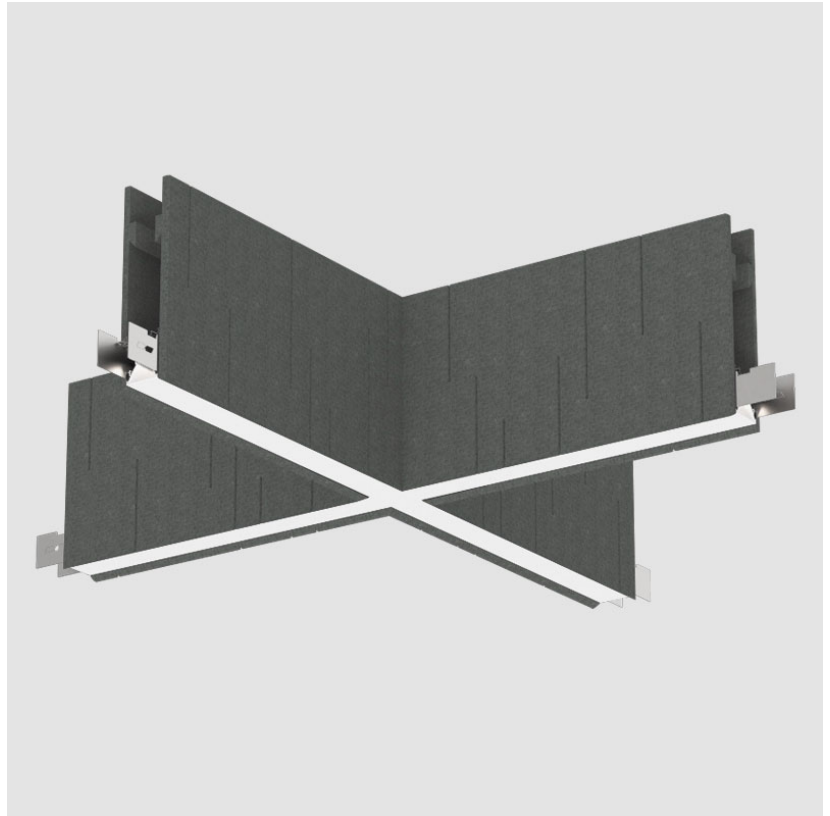

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300875-

DESCRIPTION

Unity - Acoustic Suspension, X-Shape - Through Wiring - LED
25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3612lm, CRI90 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 1260
Width (in): 49 ³/₈
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO /
DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 25.2
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 3460 / 3510 / 3544 / 3612
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

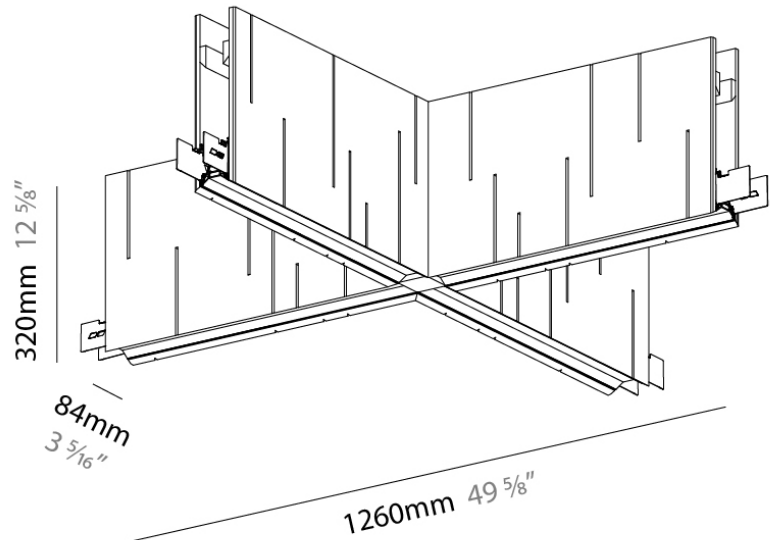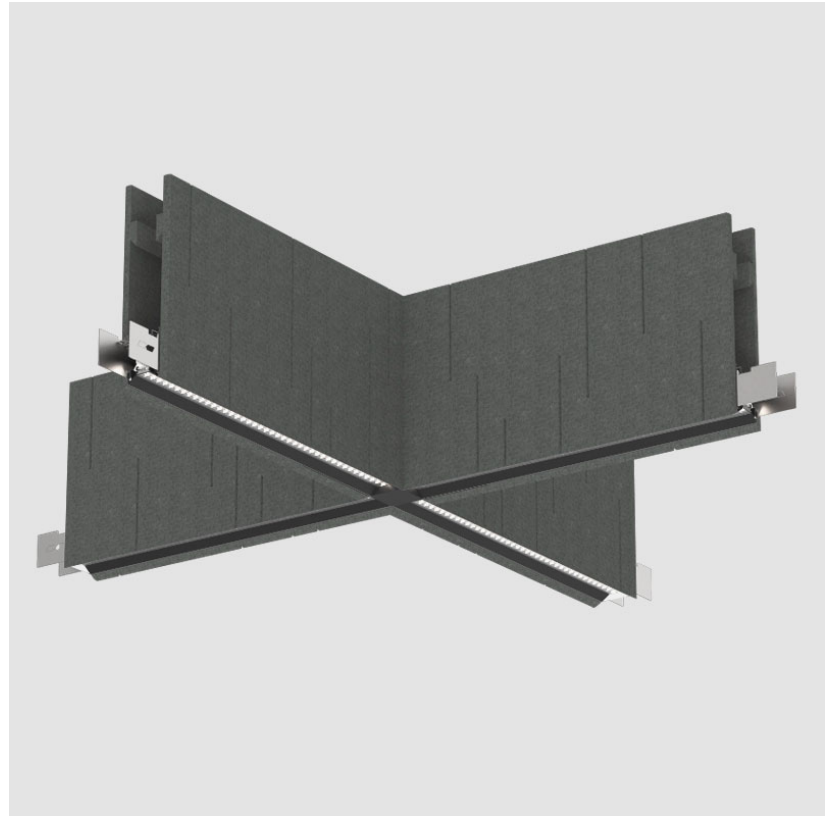

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300876-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
 18.8W, 2700K / 3000K / 3500K / 4000K, Max. 2502lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 3/5
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2396 / 2432 / 2455 / 2502
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

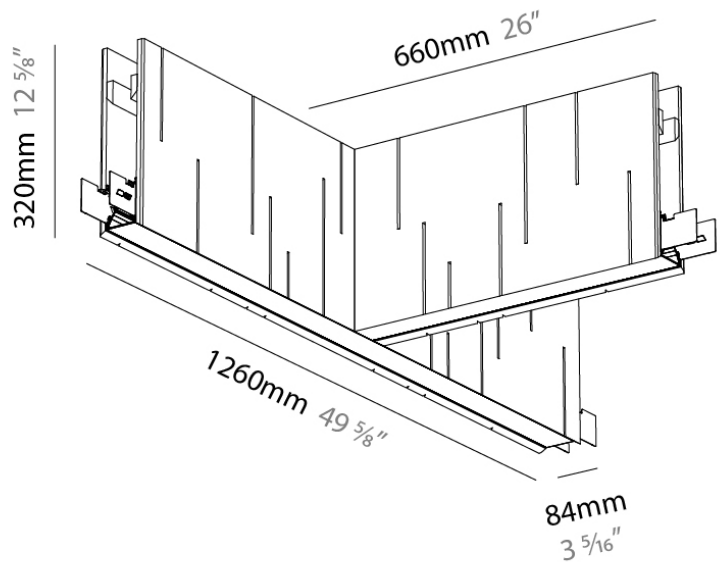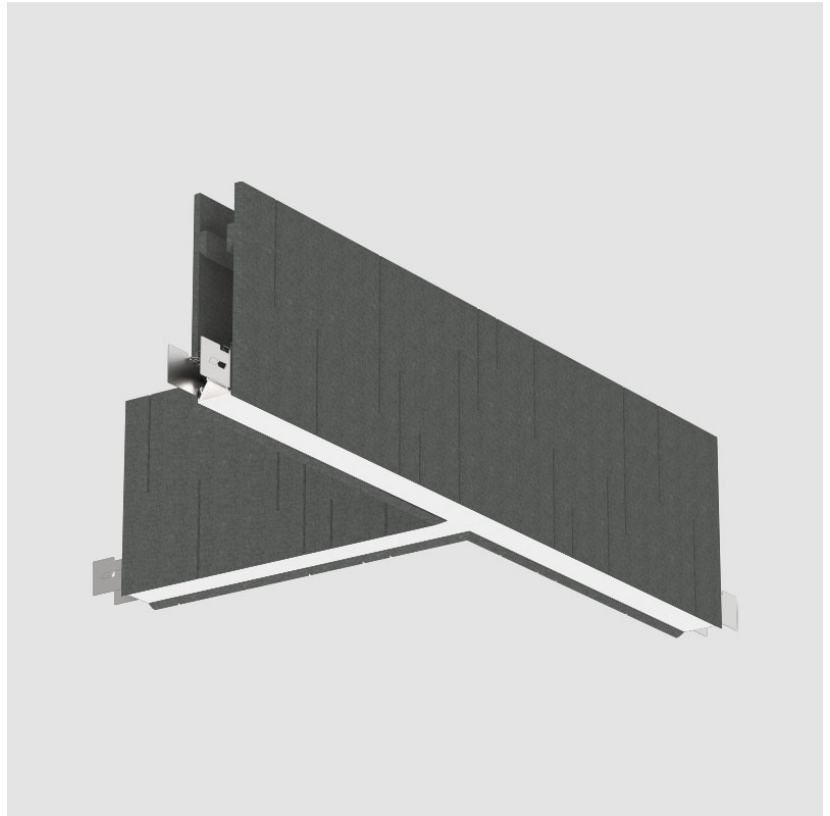

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300877-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
 18.8W, 2700K / 3000K / 3500K / 4000K, Max. 2709lm, CRI90 - Non-Dimming - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolight
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₈
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 3999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2595 / 2633 / 2658 / 2709
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

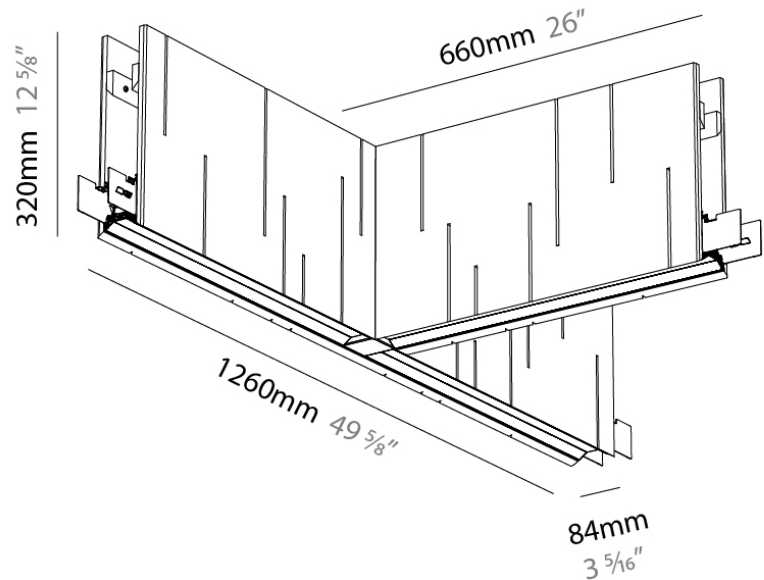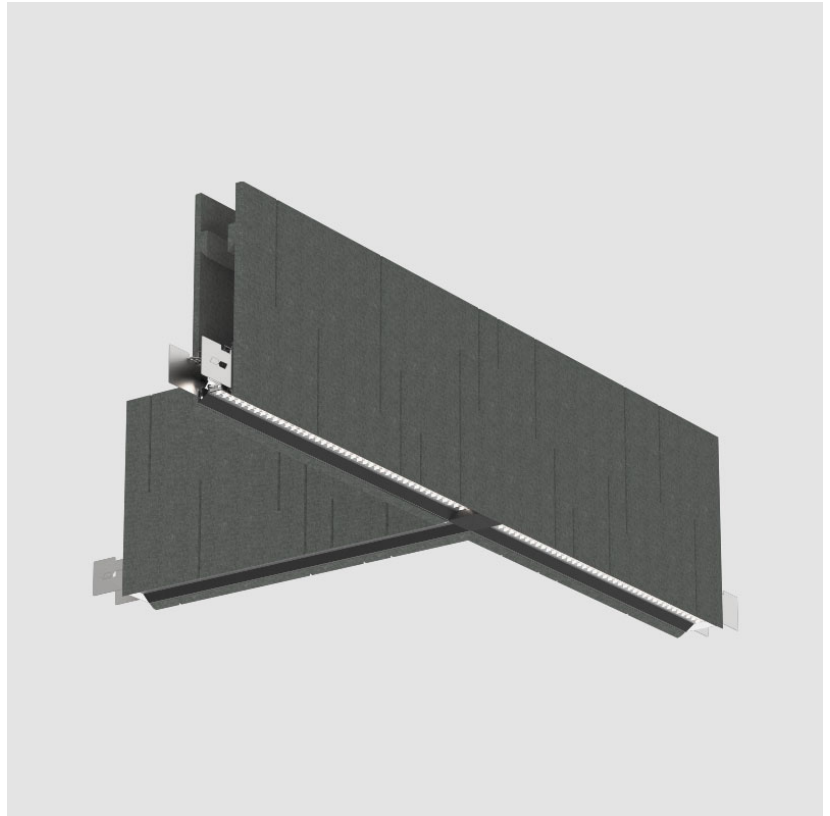

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300878-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
12.5W, 2700K / 3000K / 3500K / 4000K, Max. 1862lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 1260
Width (in): 49 ³/₅
Height (mm): 320
Height (in): 12 ³/₅
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 12.5
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 1598 / 1621 / 1637 / 1668
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

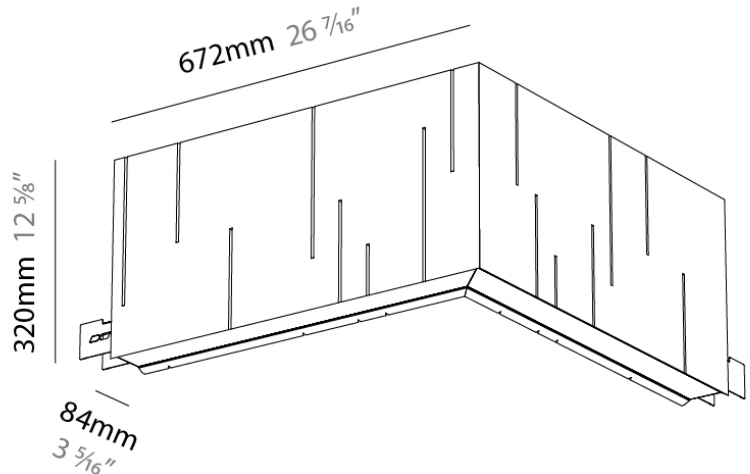

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300879-

DESCRIPTION

Unity - Acoustic Suspension, L-Shape - Through Wiring - LED
 12.6W, 2700K / 3000K / 3500K / 4000K, Max. 1806lm, CRI90 - Non-Dimming - Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 ³/₅
 Width (mm): 1260
 Width (in): 49 ³/₅
 Height (mm): 320
 Height (in): 12 ⁵/₈
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1730 / 1755 / 1772 / 1806
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

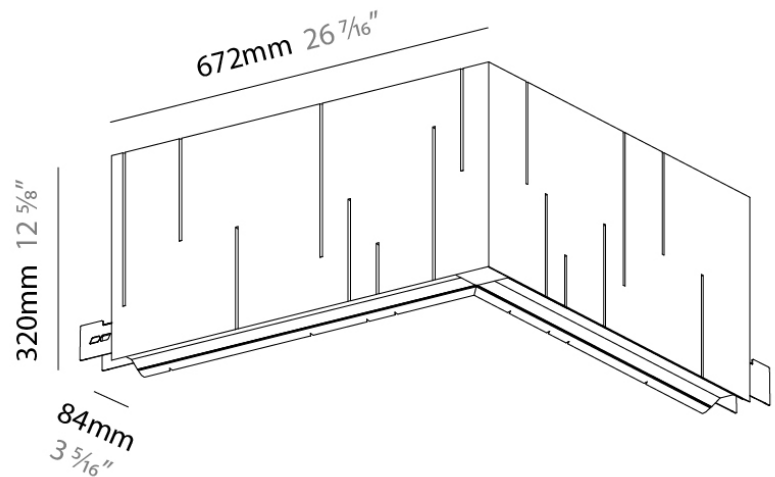

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300880-

DESCRIPTION

Unity - Acoustic Suspension, Y-Shape - Through Wiring - LED
 25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3322lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1490
 Length (in): 58 2/3
 Width (mm): 1290
 Width (in): 50 7/8
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3182 / 3229 / 3264 / 3322
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

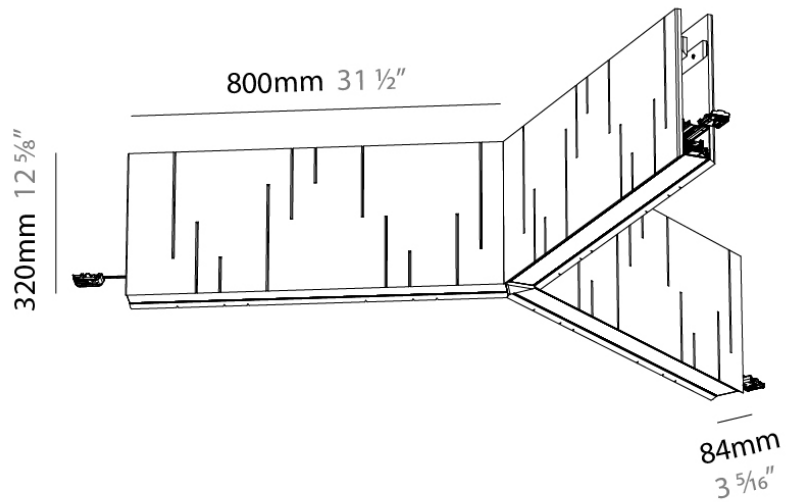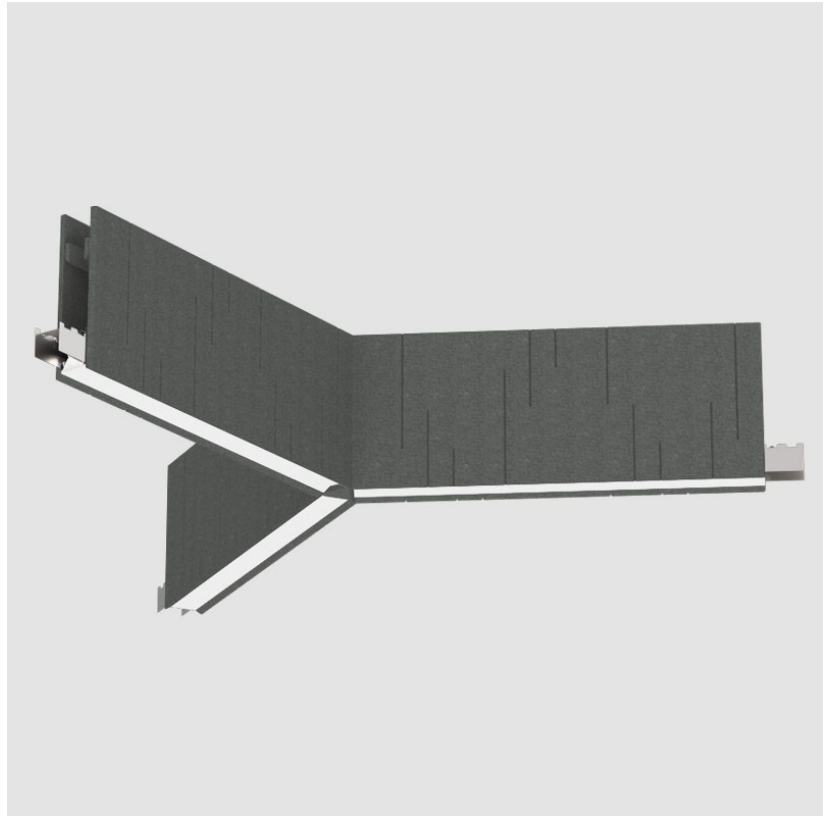

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300881-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - No Through Wiring - LED 8.4W, 2700K / 3000K / 3500K / 4000K, Max. 1107lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 8.4
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1061 / 1076 / 1088 / 1107
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

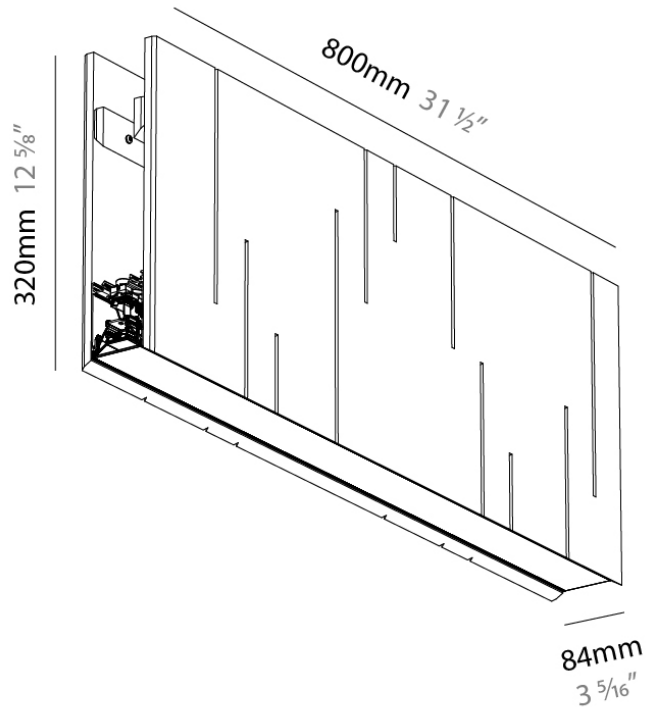

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300882-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 39 3/8" - No Through Wiring - LED 10.5W, 2700K / 3000K / 3500K / 4000K, Max. 1334lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10..5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1278 / 1297 / 1312 / 1334
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

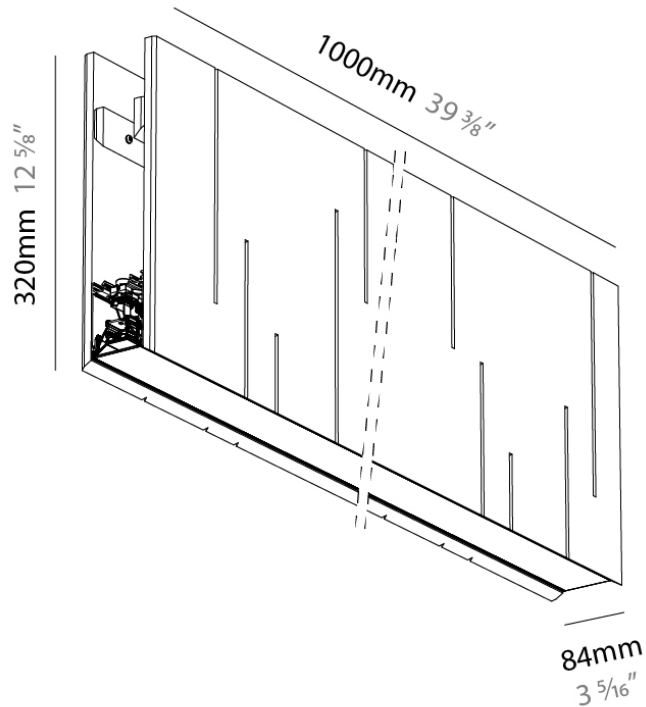

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300883-

DESCRIPTION

Unity - Acoustic Suspension, L = 1200mm / 47 1/4" - No Through Wiring - LED 12.6W, 2700K / 3000K / 3500K / 4000K, Max. 1612lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.6
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1544 / 1566 / 1582 / 1612
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

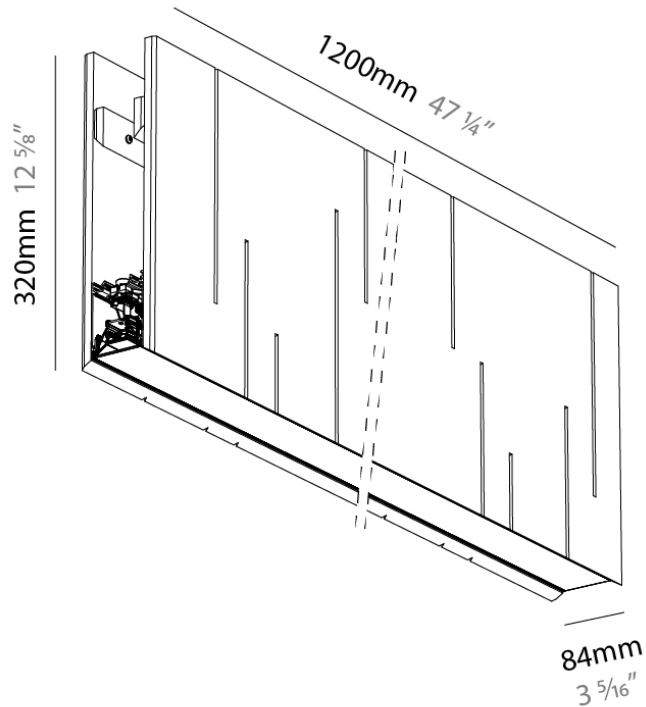

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300884-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - No Through Wiring - LED 14.7W, 2700K / 3000K / 3500K / 4000K, Max. 1876lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14.7
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1797 / 1823 / 1842 / 1876
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

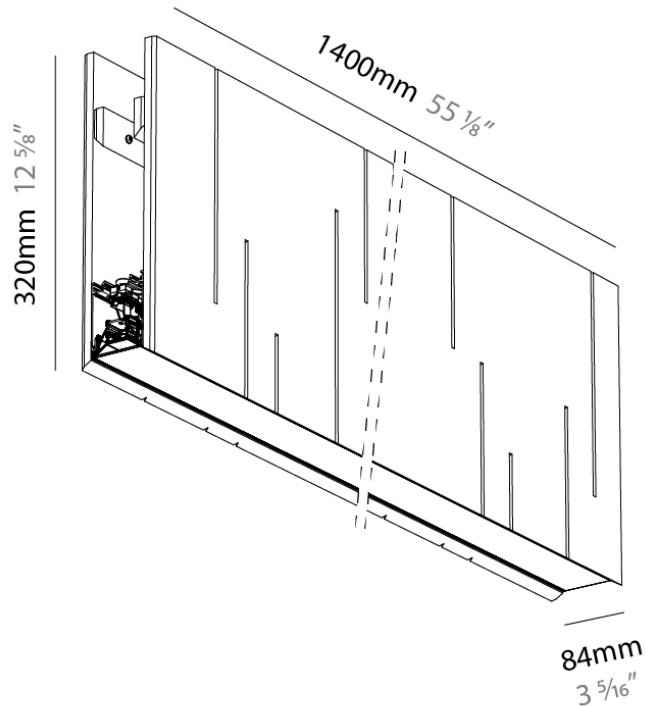

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300885-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - No Through Wiring - LED 16.8W, 2700K / 3000K / 3500K / 4000K, Max. 2140lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2050 / 2080 / 2103 / 2140
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

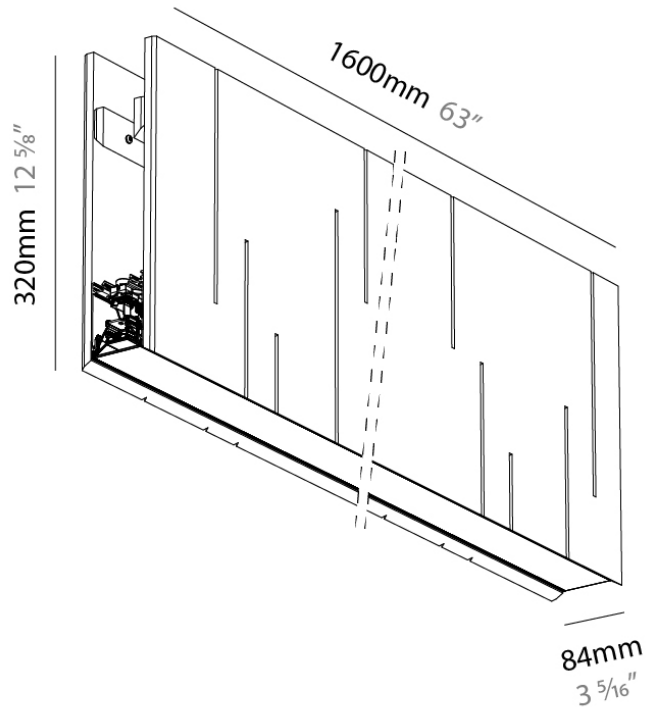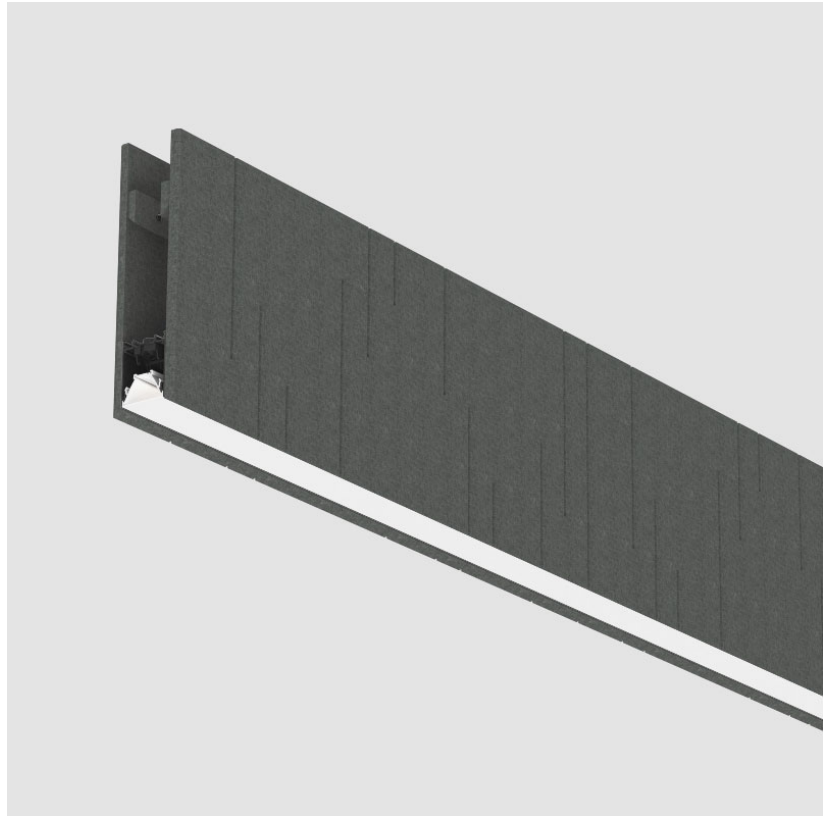

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300886-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - No Through Wiring - LED 18.9W, 2700K / 3000K / 3500K / 4000K, Max. 2417lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.9
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2316 / 2350 / 2372 / 2417
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

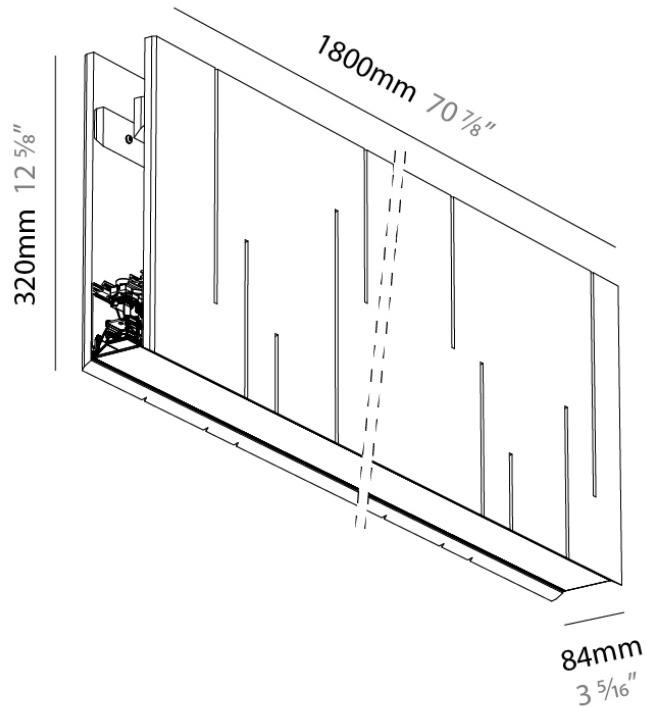

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300887-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - No Through Wiring - LED 21W, 2700K / 3000K / 3500K / 4000K, Max. 2682lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2569 / 2607 / 2633 / 2682
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

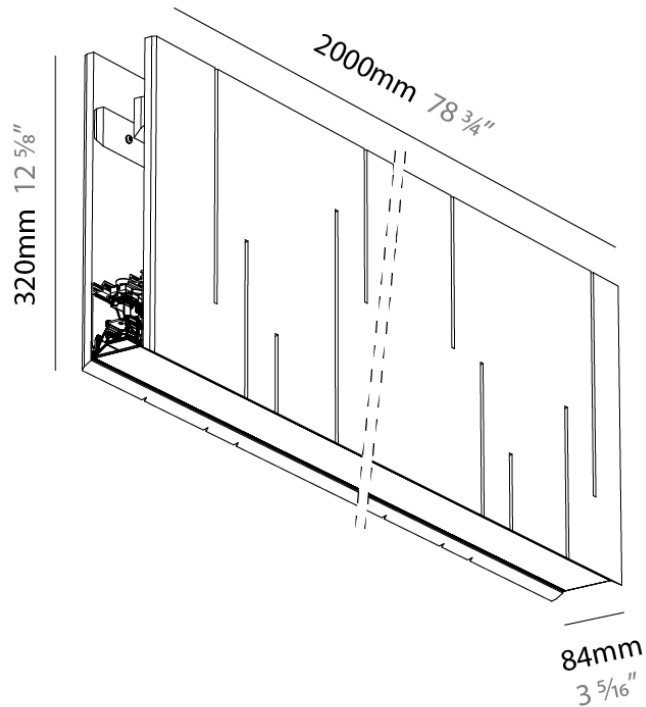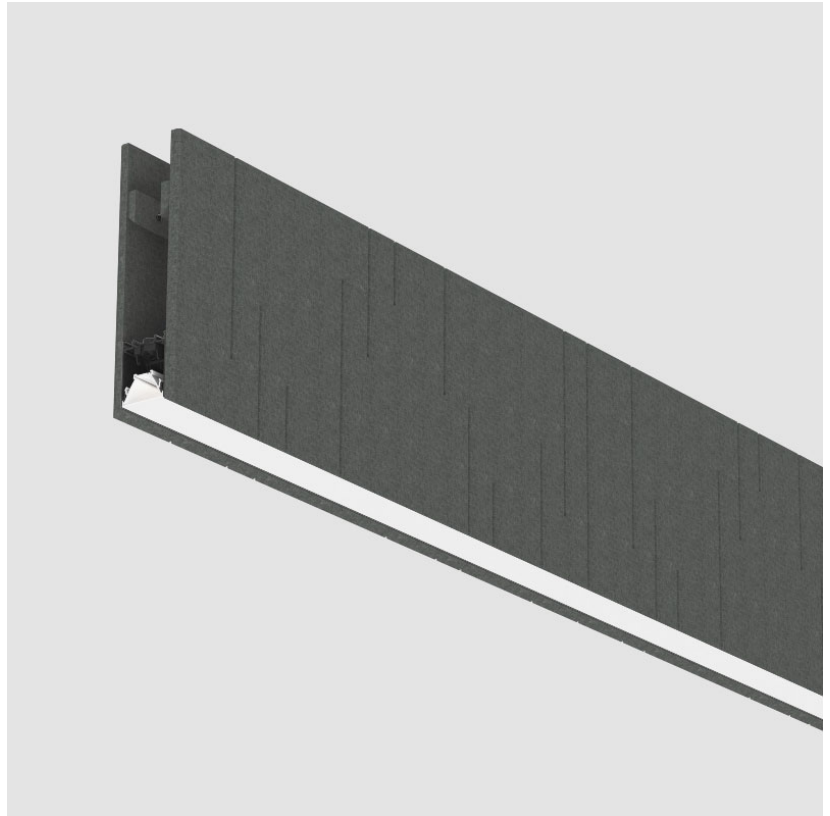

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300888-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 86 3/5" - No Through Wiring - LED 23.1W, 2700K / 3000K / 3500K / 4000K, Max. 2946lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2200
 Length (in): 86 3/5
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 23.1
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2822 / 2863 / 2893 / 2946
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

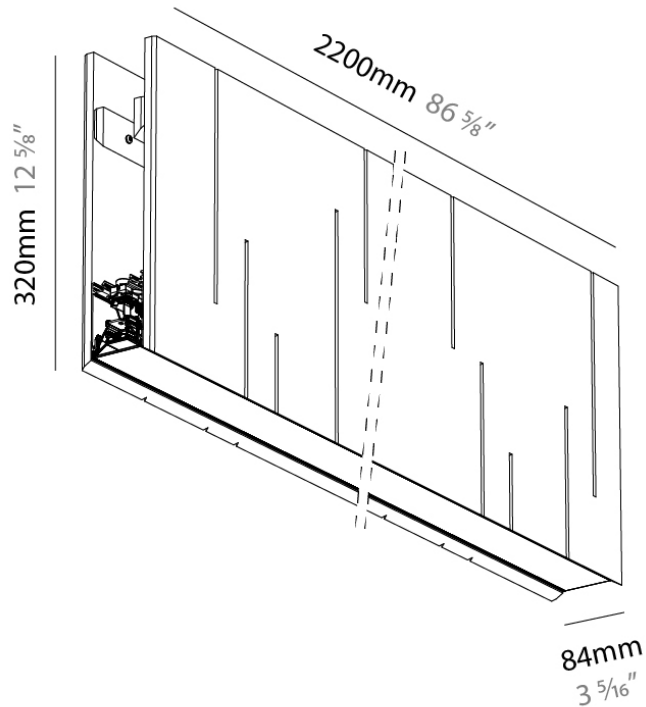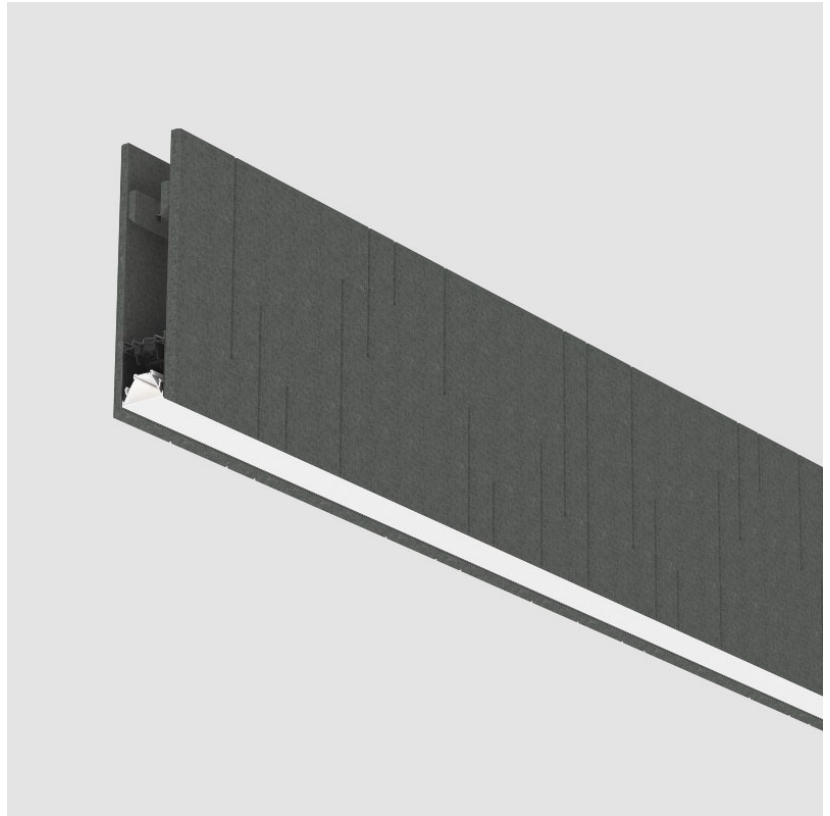

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300889-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - No Through Wiring - LED 25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3223lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3088 / 3133 / 3163 / 3223
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

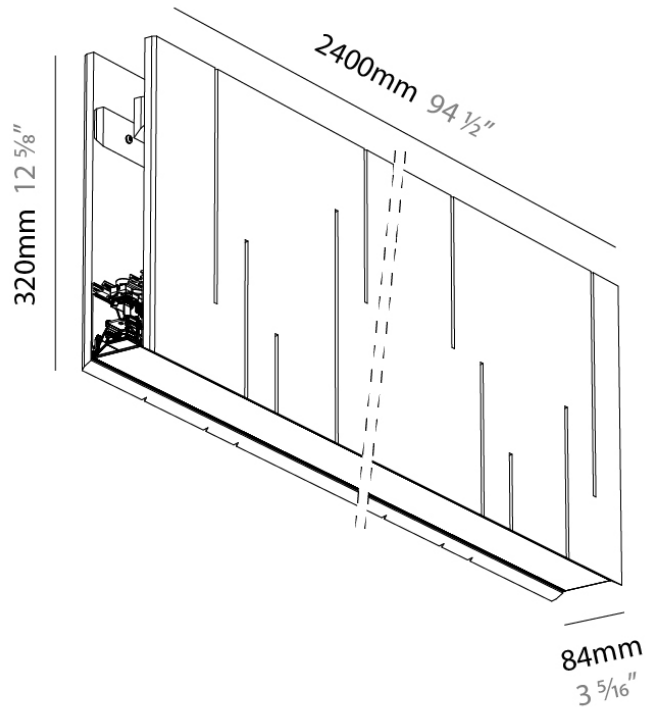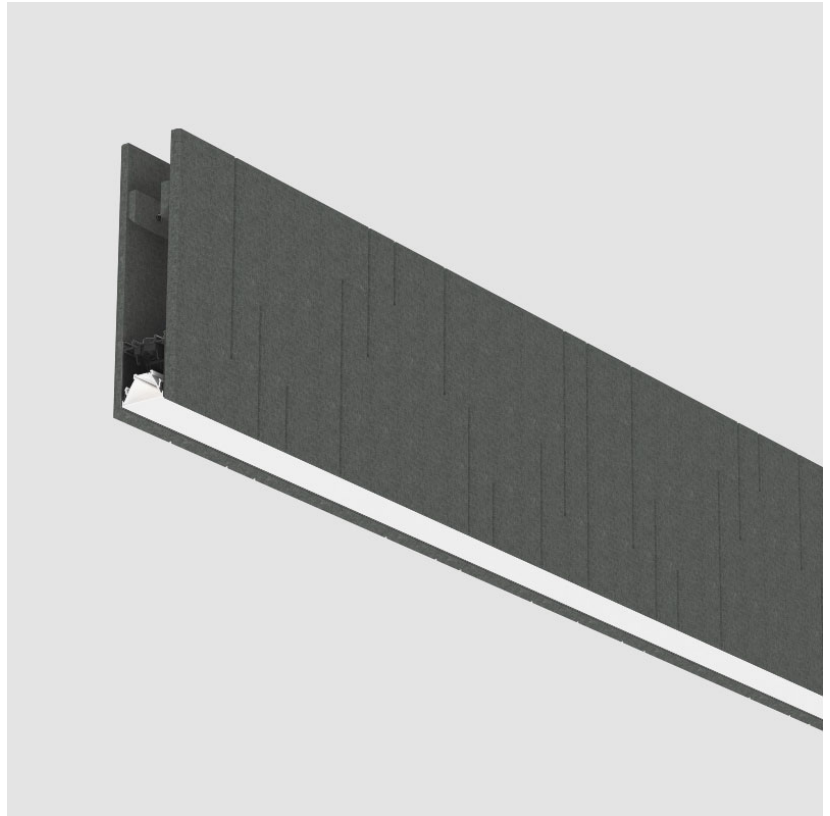

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300890-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - No Through Wiring - LED 27.3W, 2700K / 3000K / 3500K / 4000K, Max. 3488lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 27.3
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3488 / 3390 / 3424 / 3488
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

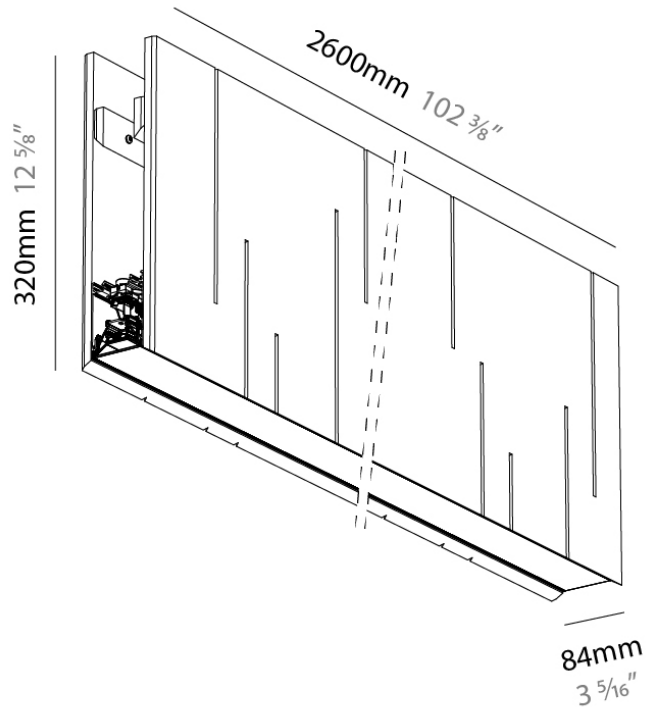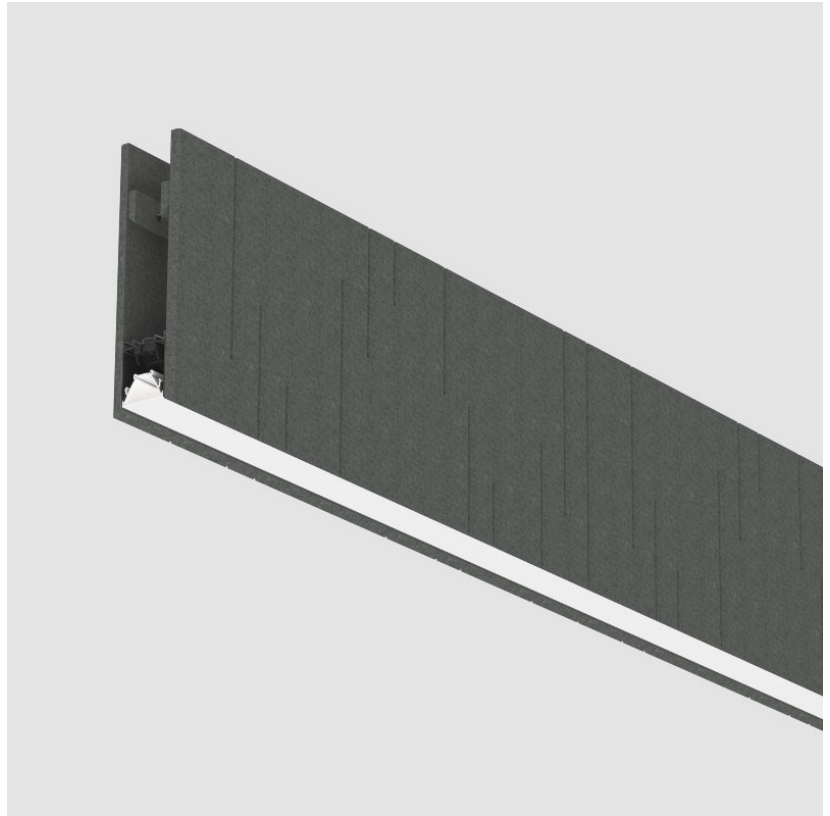

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300891-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - No Through Wiring - LED 29.4W, 2700K / 3000K / 3500K / 4000K, Max. 3752lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 29.4
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3594 / 3647 / 3684 / 3752
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

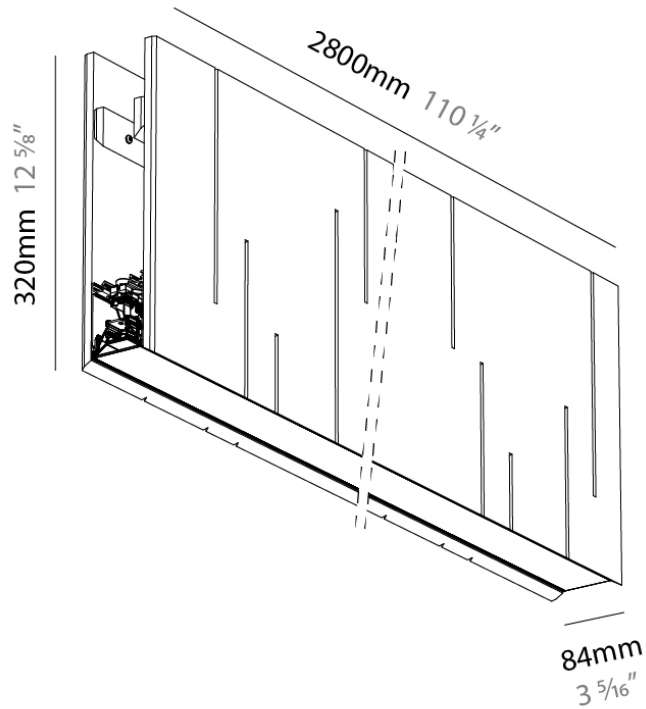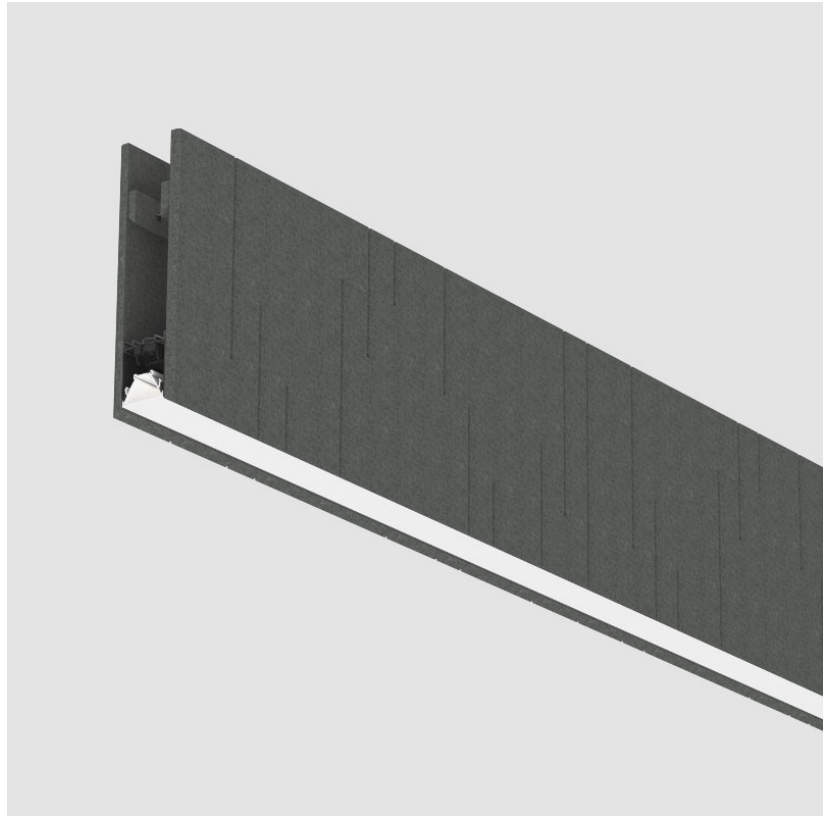

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300892-

DESCRIPTION

Unity - Acoustic Suspension, L = 800mm / 31 1/2" - Through Wiring - LED 8.4W, 2700K / 3000K / 3500K / 4000K, Max. 1070lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 800
 Length (in): 31 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 8.4
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1025 / 1040 / 1051 / 1070
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

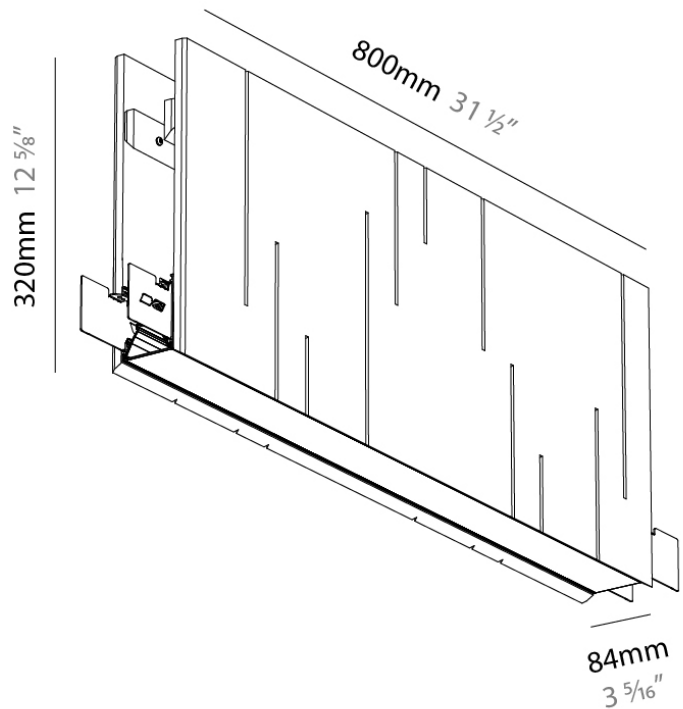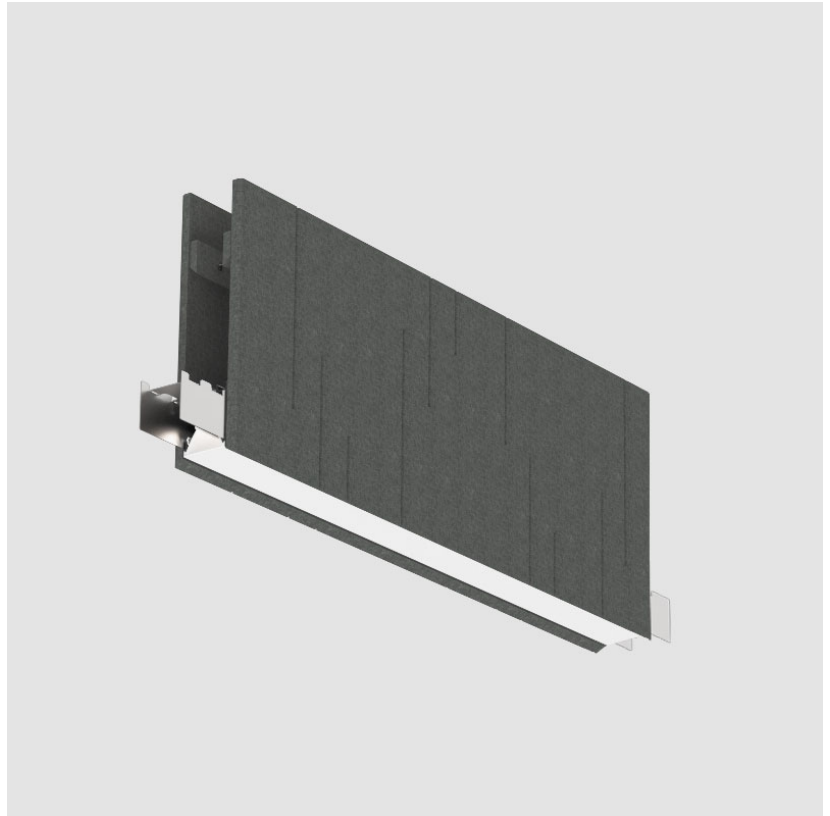

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300893-

DESCRIPTION

Unity - Acoustic Suspension, L = 1000mm / 39 3/8" - Through Wiring - LED 10.5W, 2700K / 3000K / 3500K / 4000K, Max. 1334lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 10..5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1278 / 1297 / 1312 / 1334
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

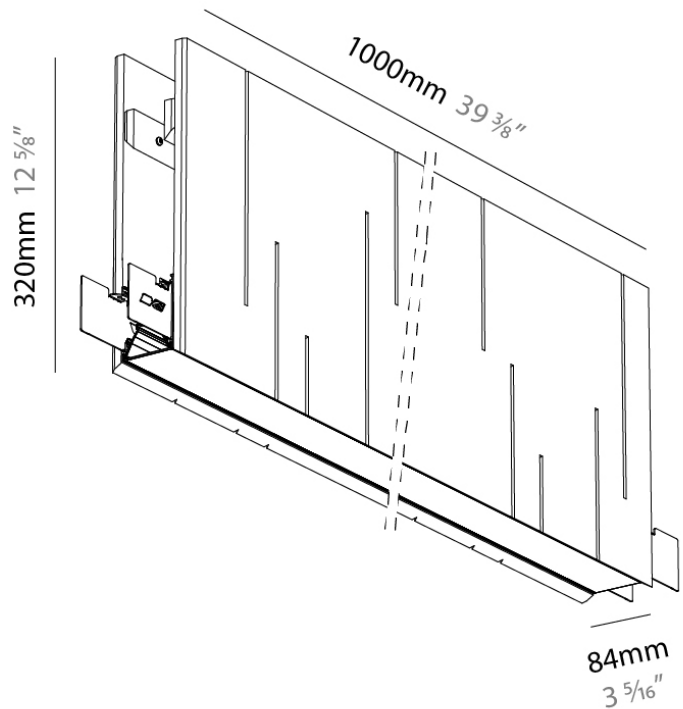

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300894-

DESCRIPTION

Unity - Acoustic Suspension, L = 1200mm / 47 1/4" - Through Wiring - LED 12.6W, 2700K / 3000K / 3500K / 4000K, Max. 1612lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 12.6
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1544 / 1566 / 1582 / 1612
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

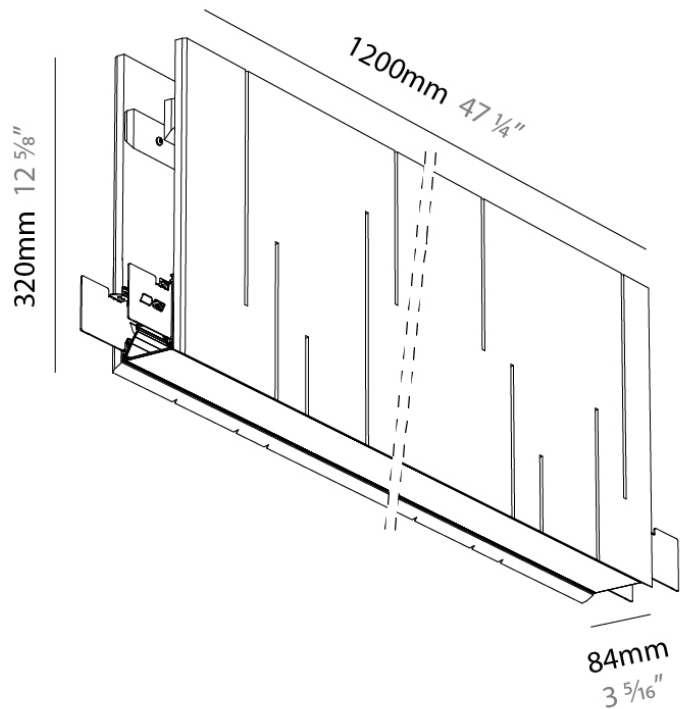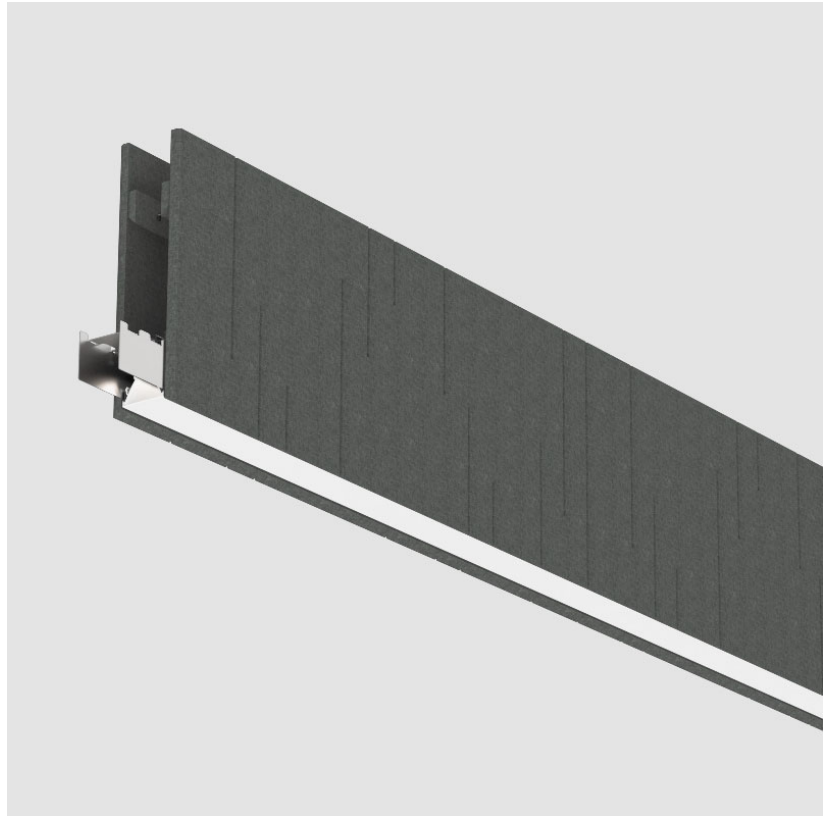

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300895-

DESCRIPTION

Unity - Acoustic Suspension, L = 1400mm / 55 1/8" - Through Wiring - LED 14.7W, 2700K / 3000K / 3500K / 4000K, Max. 1876lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 14.7
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 1000 - 1999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 1797 / 1823 / 1842 / 1876
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

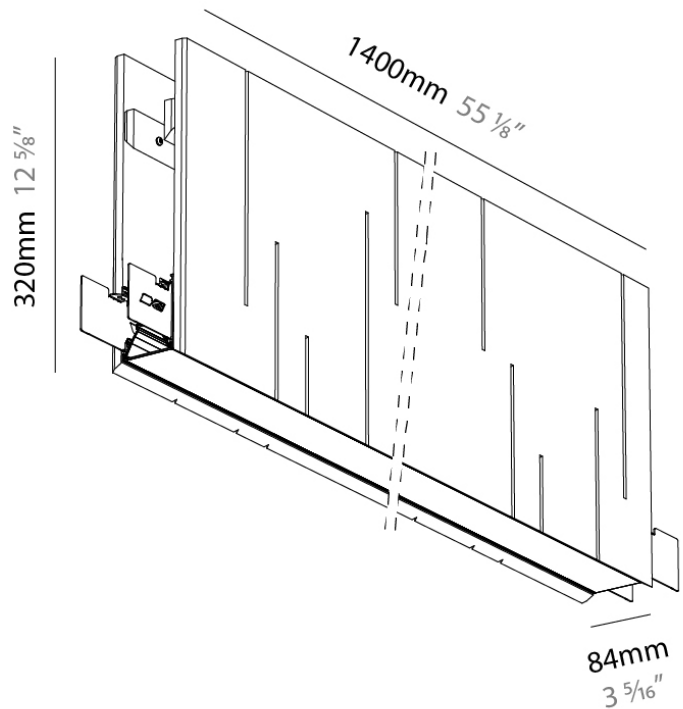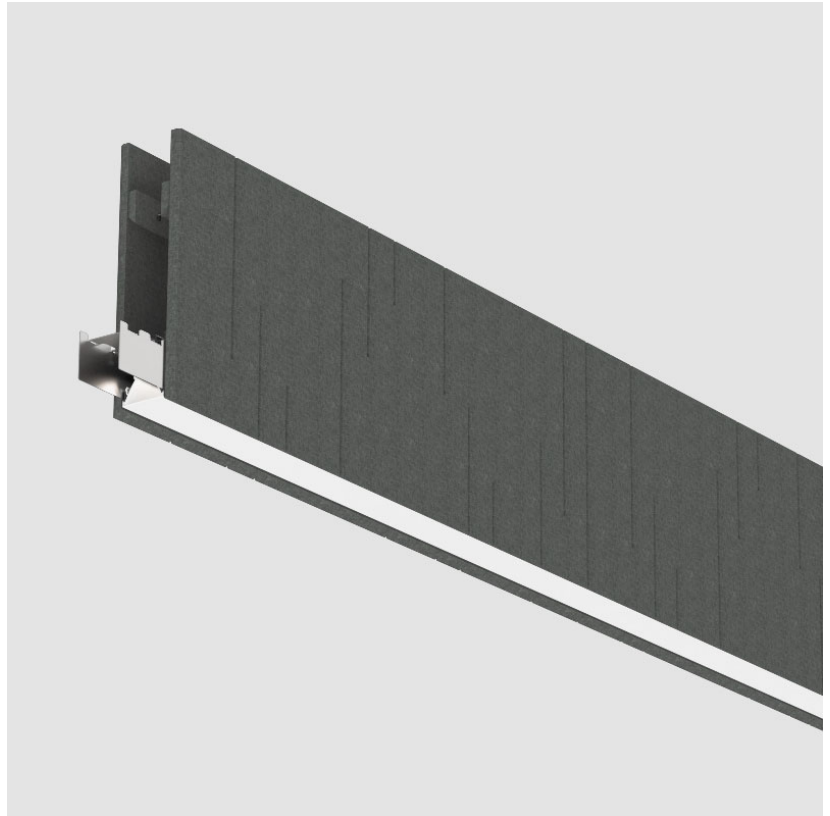

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300896-

DESCRIPTION

Unity - Acoustic Suspension, L = 1600mm / 63" - Through Wiring
 - LED 16.8W, 2700K / 3000K / 3500K / 4000K, Max. 2140lm, CRI90
 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1200
 Length (in): 47 1/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 16.8
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2050 / 2080 / 2103 / 2140
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

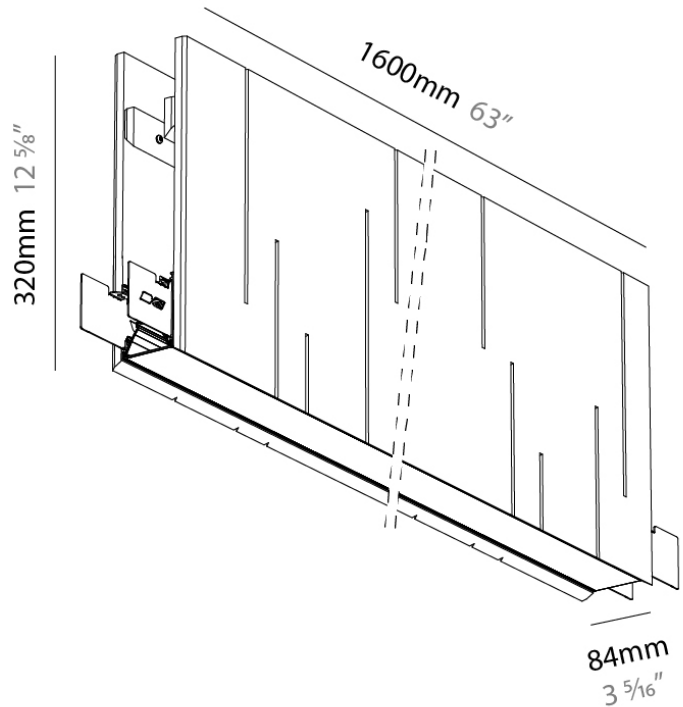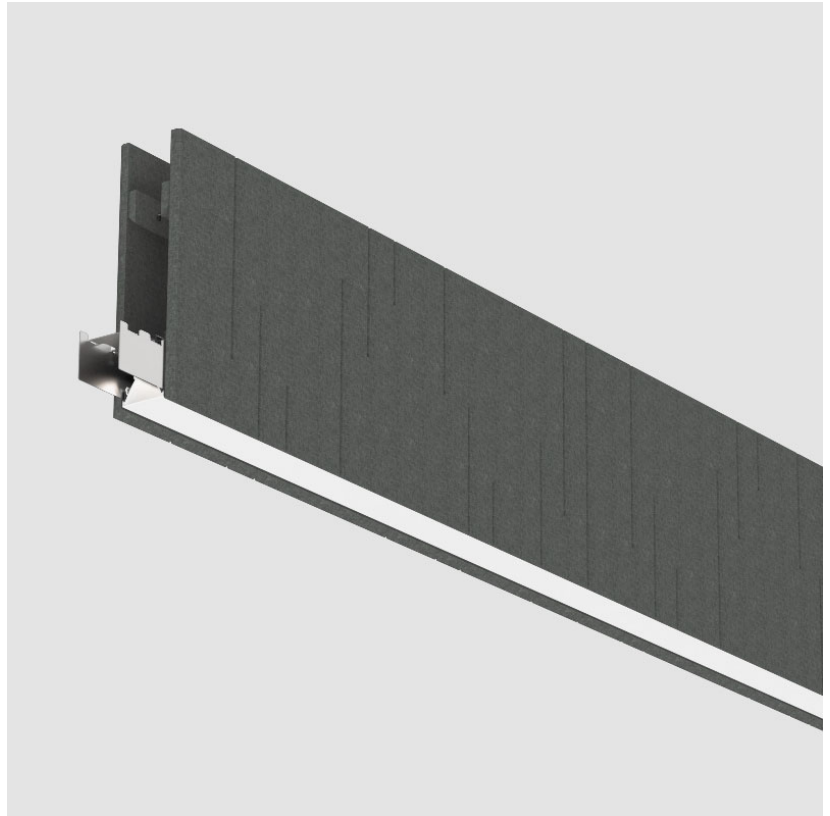

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300897-

DESCRIPTION

Unity - Acoustic Suspension, L = 1800mm / 70 6/7" - Through Wiring - LED 18.9W, 2700K / 3000K / 3500K / 4000K, Max. 2417lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1800
 Length (in): 70 6/7
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 18.9
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2316 / 2350 / 2372 / 2417
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

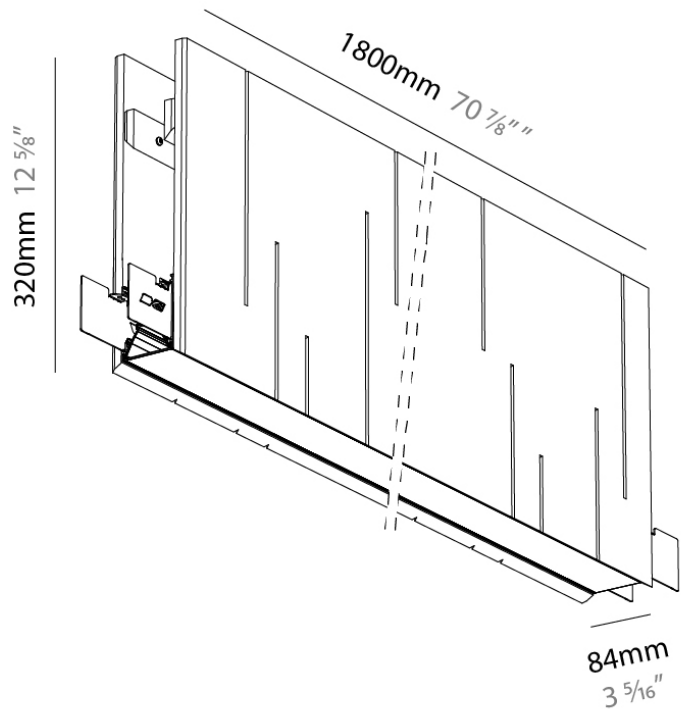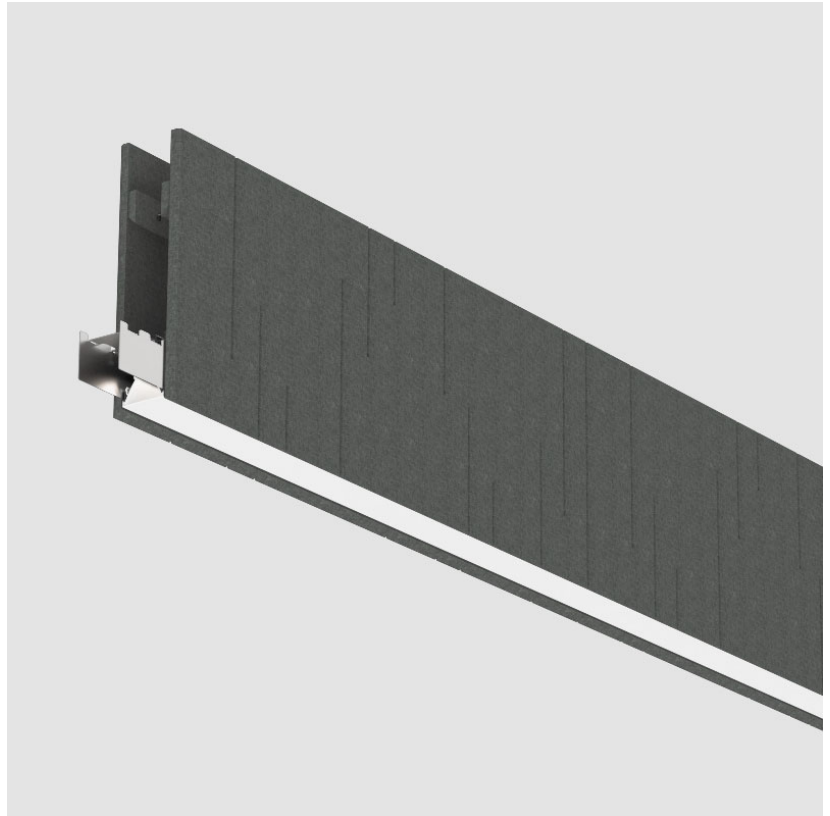

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300898-

DESCRIPTION

Unity - Acoustic Suspension, L = 2000mm / 78 3/4" - Through Wiring - LED 21W, 2700K / 3000K / 3500K / 4000K, Max. 2682lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 21
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2569 / 2607 / 2633 / 2682
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

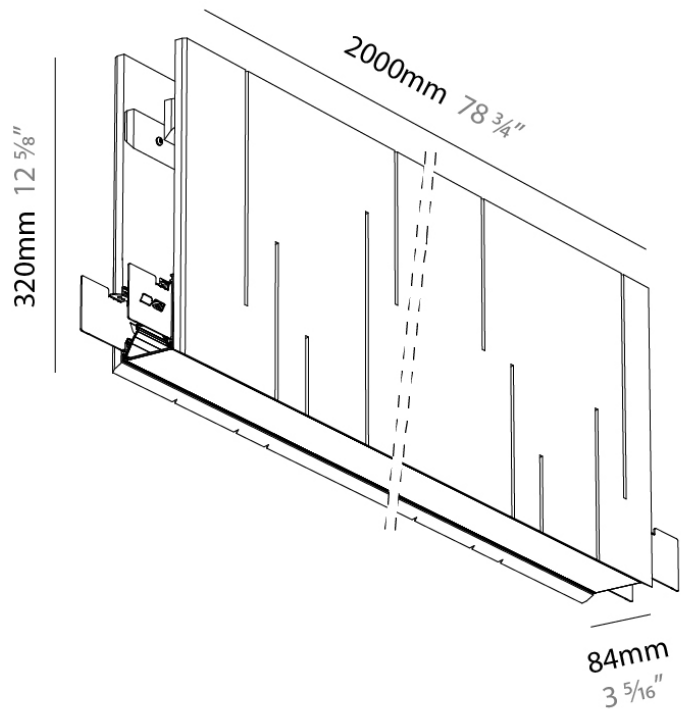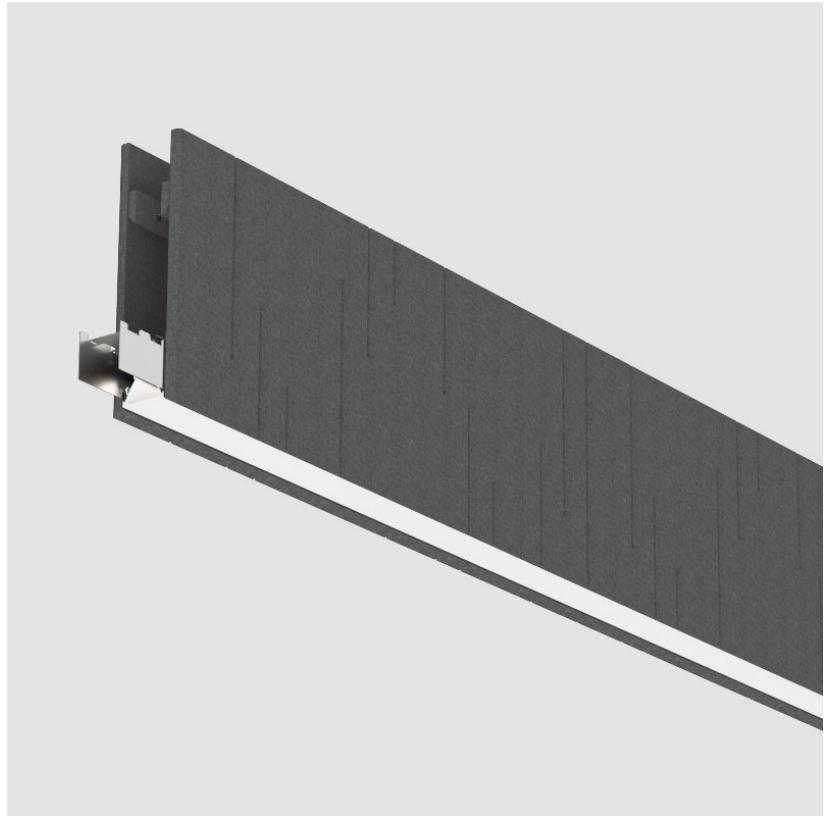

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300899-

DESCRIPTION

Unity - Acoustic Suspension, L = 2200mm / 86 3/5" - Through Wiring - LED 23.1W, 2700K / 3000K / 3500K / 4000K, Max. 2946lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2200
 Length (in): 86 3/5
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 23.1
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 2822 / 2863 / 2893 / 2946
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

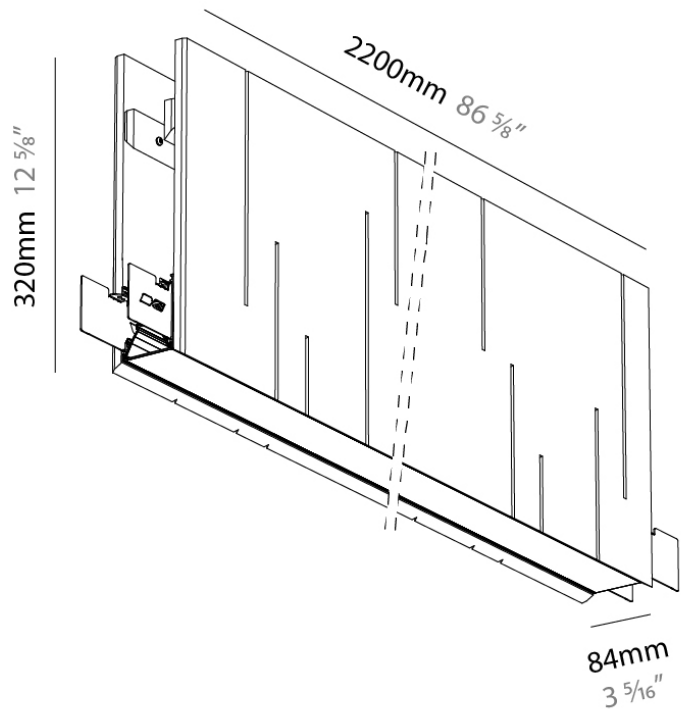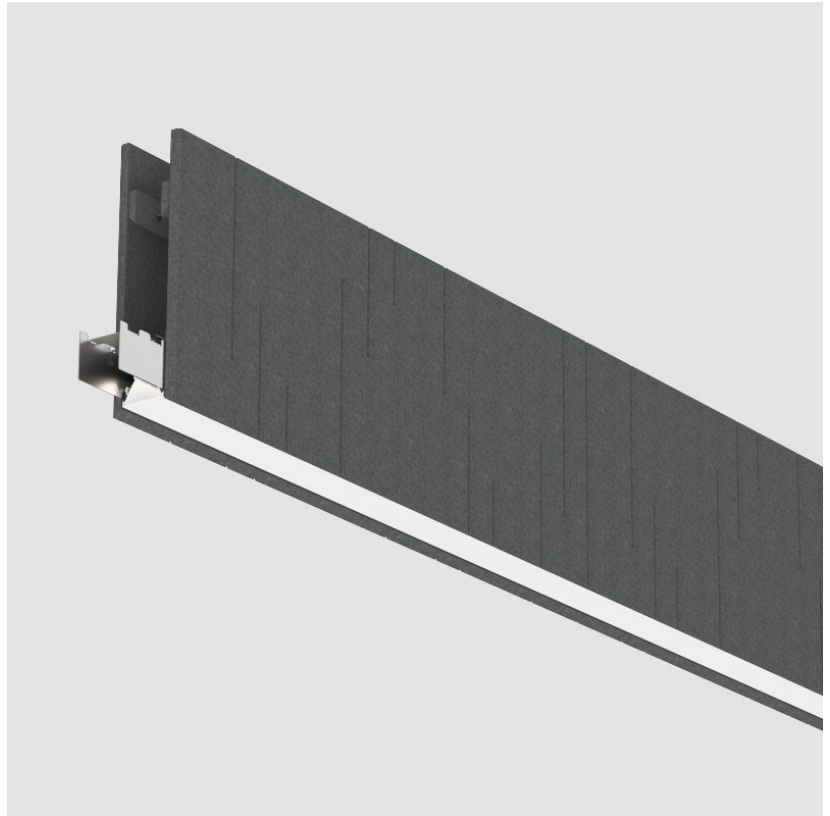

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300900-

DESCRIPTION

Unity - Acoustic Suspension, L = 2400mm / 94 1/2" - Through Wiring - LED 25.2W, 2700K / 3000K / 3500K / 4000K, Max. 3223lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2400
 Length (in): 94 1/2
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 25.2
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3088 / 3133 / 3163 / 3223
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

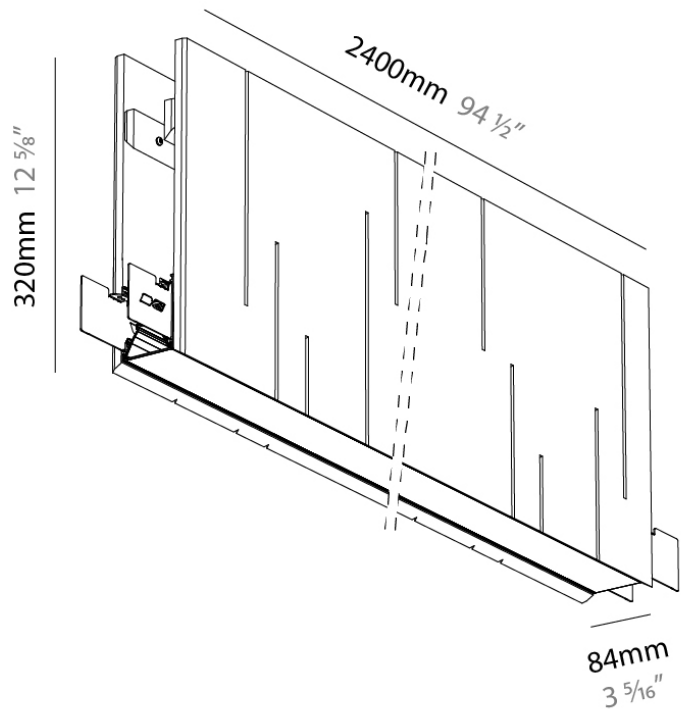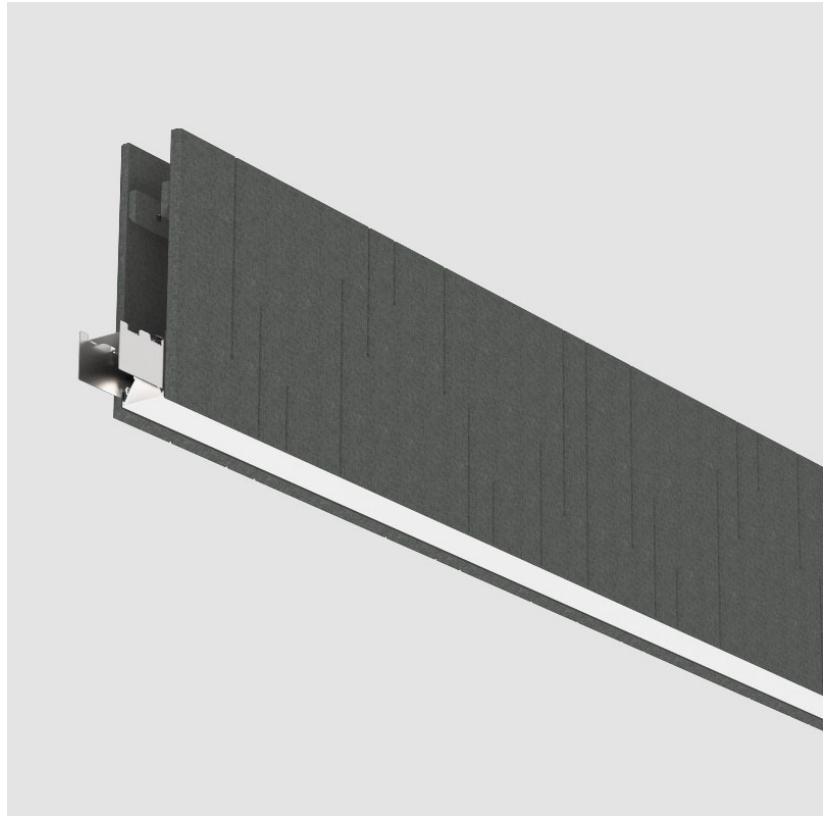

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300901-

DESCRIPTION

Unity - Acoustic Suspension, L = 2600mm / 102 1/3" - Through Wiring - LED 27.3W, 2700K / 3000K / 3500K / 4000K, Max. 3488lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2600
 Length (in): 102 1/3
 Width (mm): 84
 Width (in): 3 1/3
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 27.3
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3488 / 3390 / 3424 / 3488
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

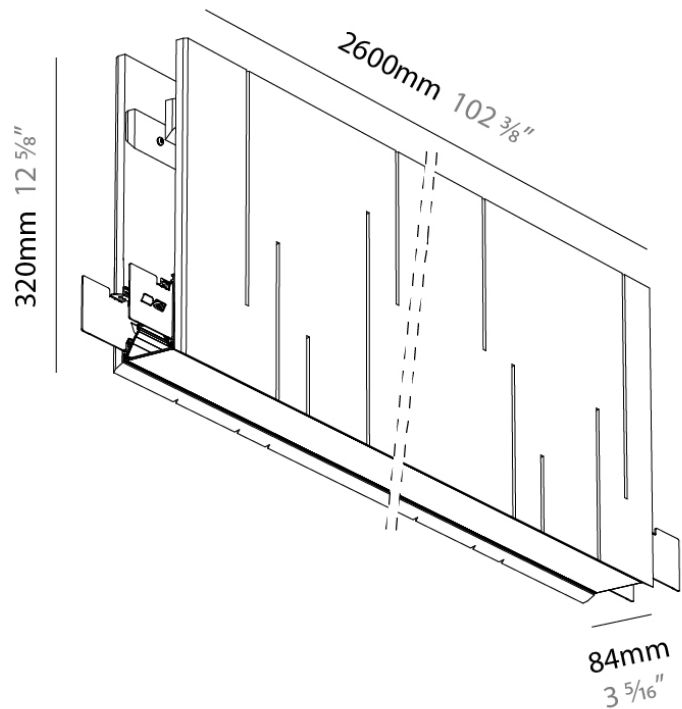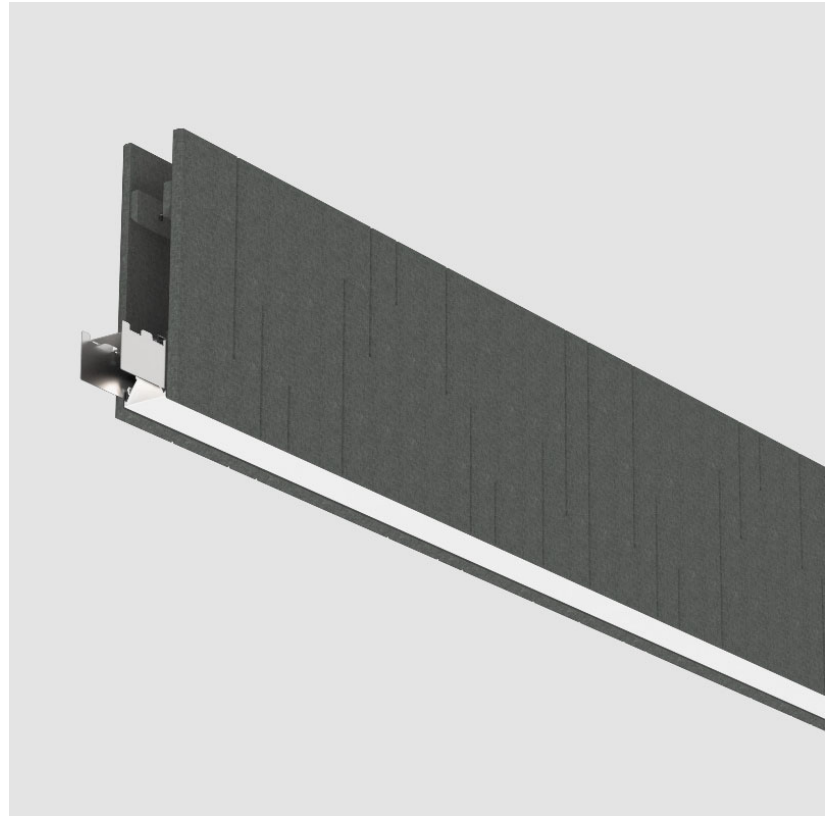

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300902-

DESCRIPTION

Unity - Acoustic Suspension, L = 2800mm / 110 1/4" - Through Wiring - LED 29.4W, 2700K / 3000K / 3500K / 4000K, Max. 3752lm, CRI90 - Non-Dimming

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 2800
 Length (in): 110 1/4
 Width (mm): 84
 Width (in): 3 5/16
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 20 - 29 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 29.4
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 3000 - 4999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 3594 / 3647 / 3684 / 3752
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

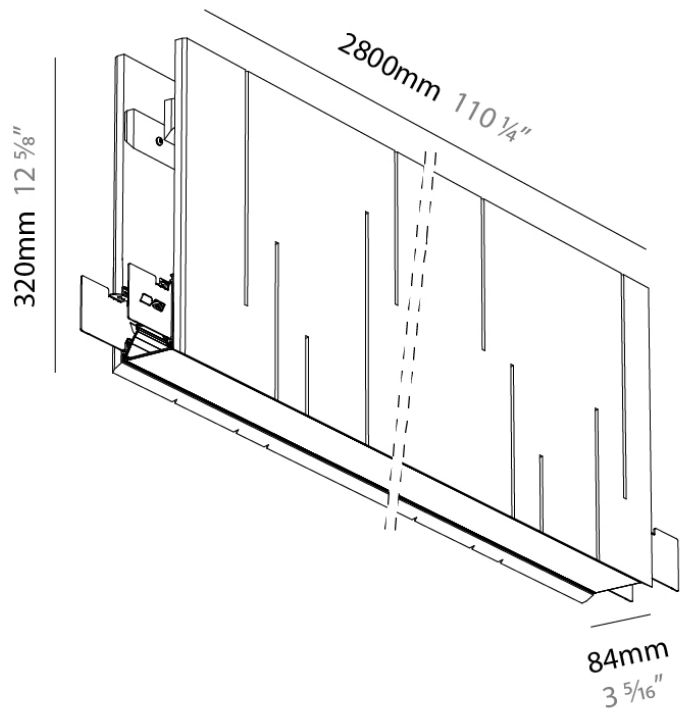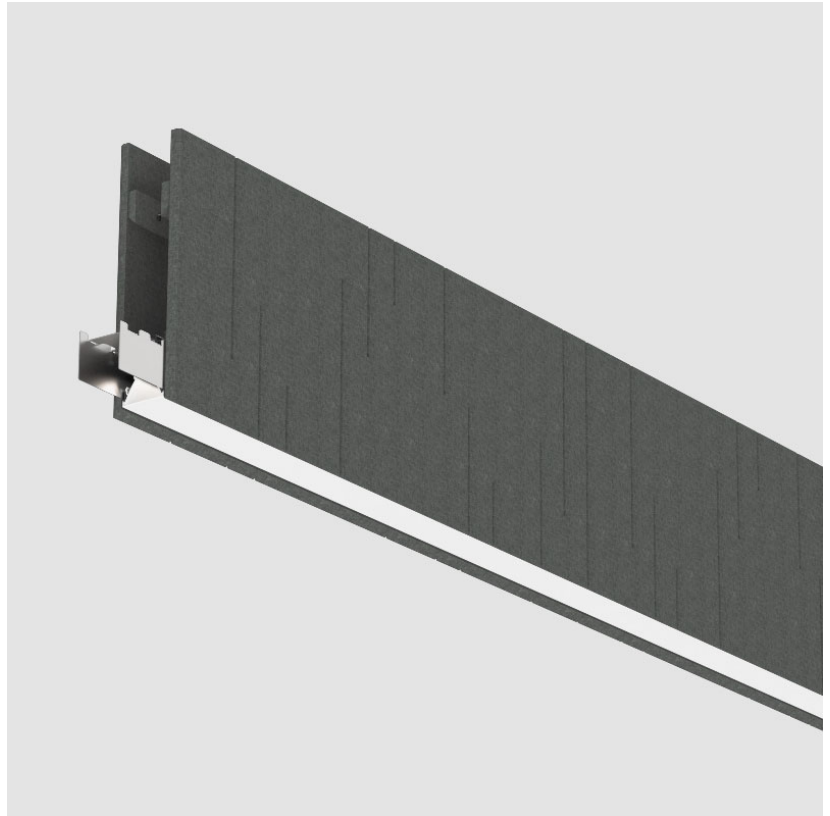

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300903-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED
38.7W, 2700K / 3000K / 3500K / 4000K, Max. 5540lm, CRI90

GENERAL

Series: Unity
Partner: Prolight
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 5/8
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 5/8
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 5307 / 5385 / 5437 / 5540
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

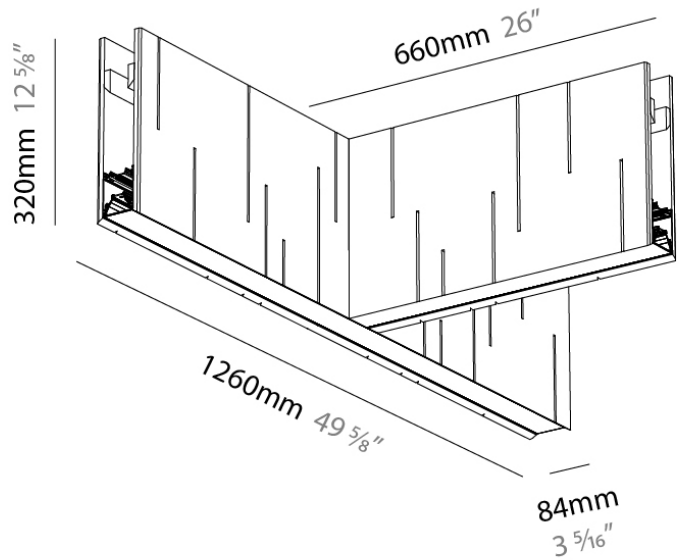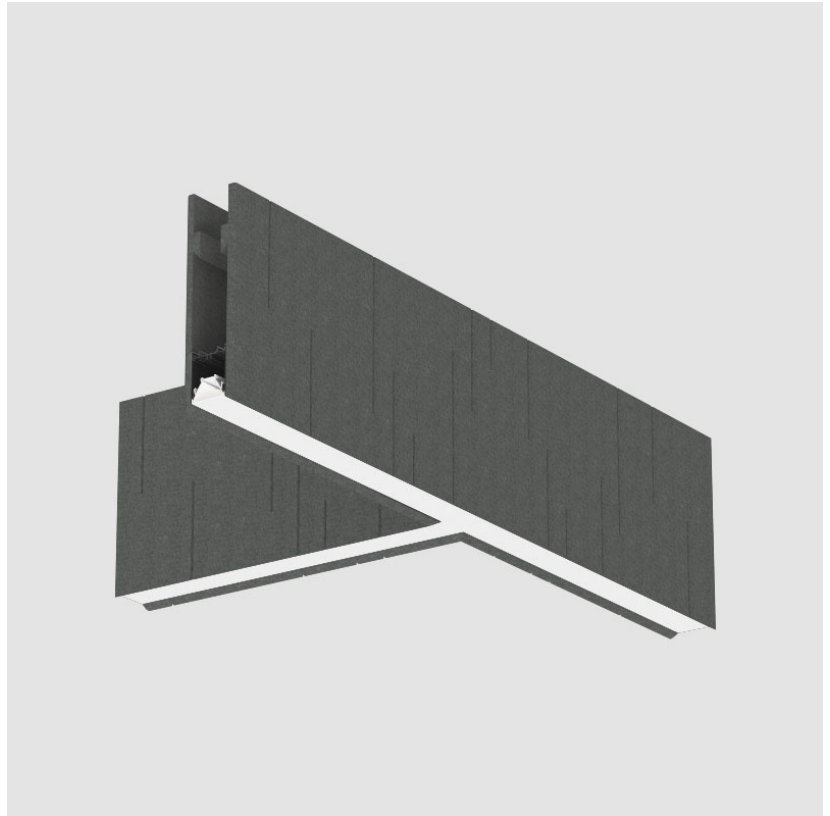

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300904-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED 38.7W, Tunable White (2700K-6500K), Max. 5437lm, CRI90

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 3/5
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 5/8
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700-5000 Tunable White
 Max. Delivered Lumen (lm): 5148-5273
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

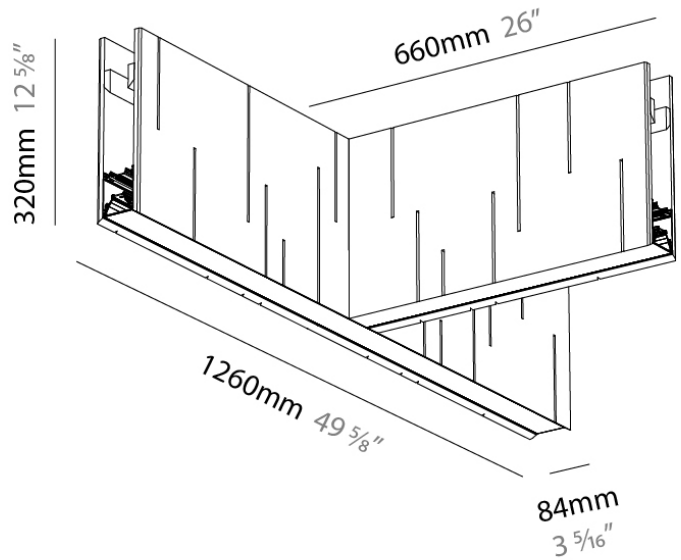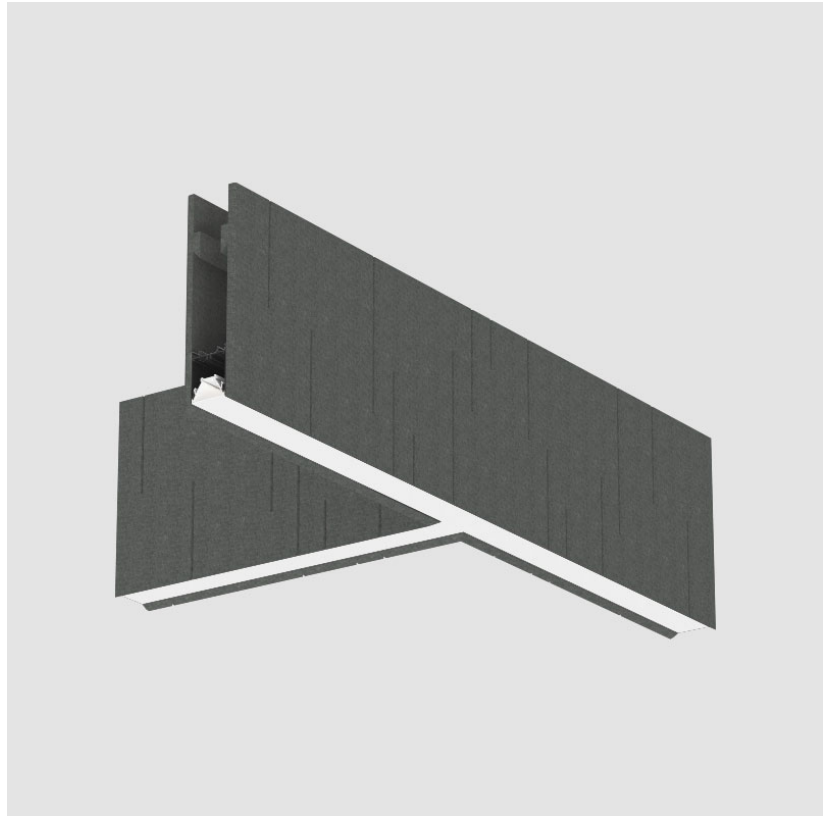

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300905-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
38.7W, 2700K / 3000K / 3500K / 4000K, Max. 5540lm, CRI90

GENERAL

Series: Unity
Partner: Prolight
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 ⁵/₈
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 5307 / 5385 / 5437 / 5540
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

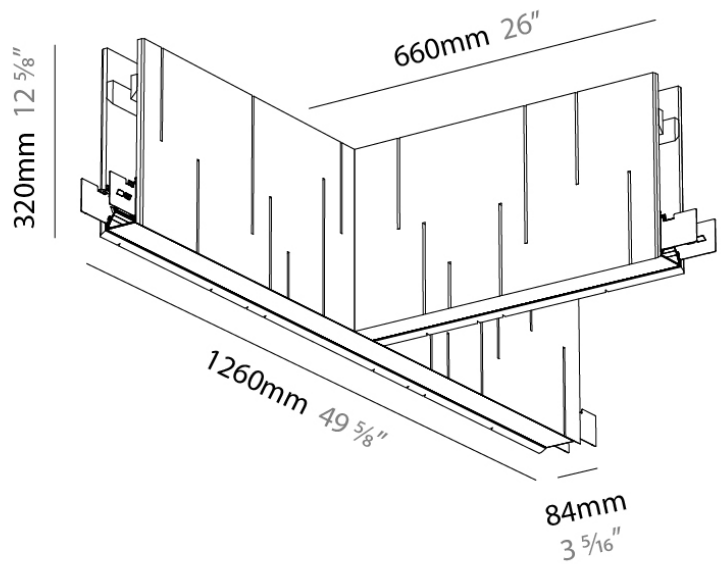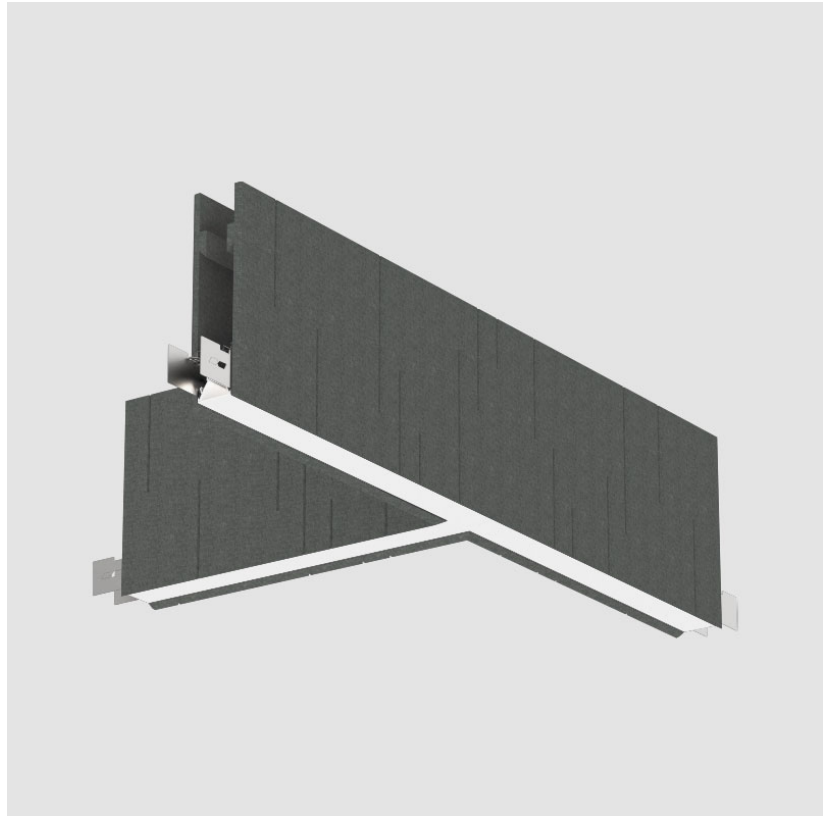

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300906-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
38.7W, Tunable White (2700K-6500K), Max. 5437lm, CRI90

GENERAL

Series: Unity
Partner: Prolight
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 ⁵/₈
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700-5000 Tunable White
Max. Delivered Lumen (lm): 5148-5273
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

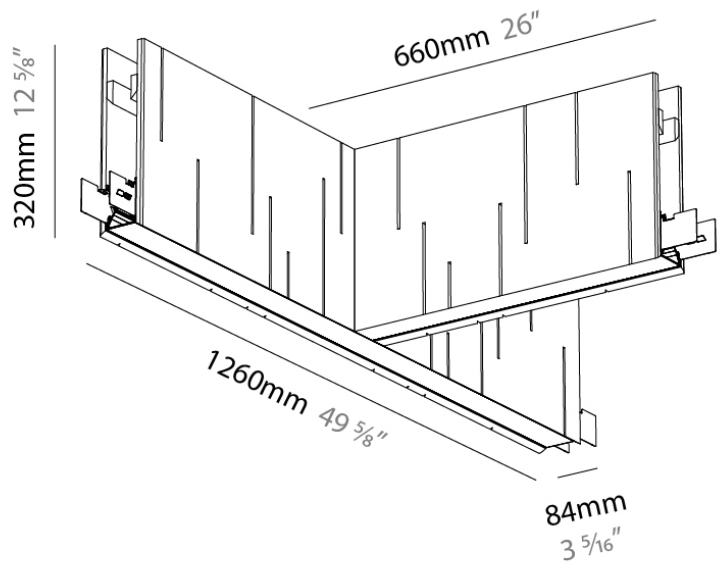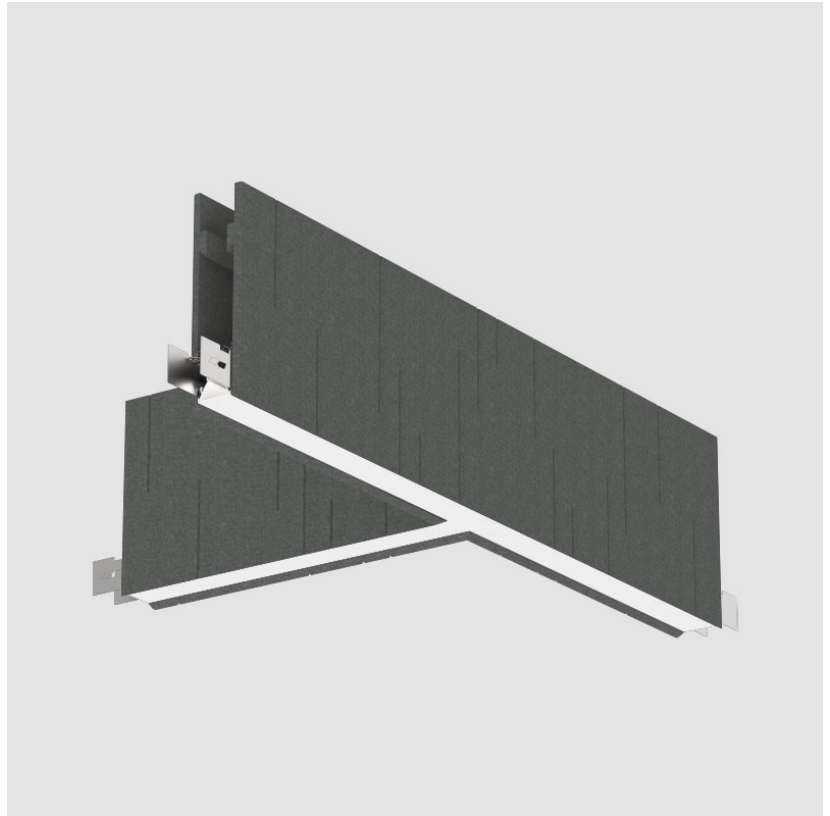

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300907-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED
 38.7W, 2700K / 3000K / 3500K / 4000K, Max. 5374lm, CRI90 -
 Raster Diffuser

GENERAL

Series: Unity
 Partner: Prolicht
 Division: Architectural
 Installation: Suspension
 Product Type: Acoustic
 Mounting Location: Ceiling
 Light Distribution: Direct

PHYSICAL

Shape: Rectangle
 Length (mm): 1260
 Length (in): 49 3/5
 Width (mm): 660
 Width (in): 26
 Height (mm): 320
 Height (in): 12 5/8
 Diffuser: Raster
 Fixture Finish: BLK
 Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
 / DPE / BES / SHB / ARE / ANE / VRD / CRF
 Fixture Material: Acoustic
 Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 38.7
 Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
 Color Temperature (°K): 2700 / 3000 / 3500 / 4000
 Max. Delivered Lumen (lm): 5148 / 5223 / 5273 / 5374
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

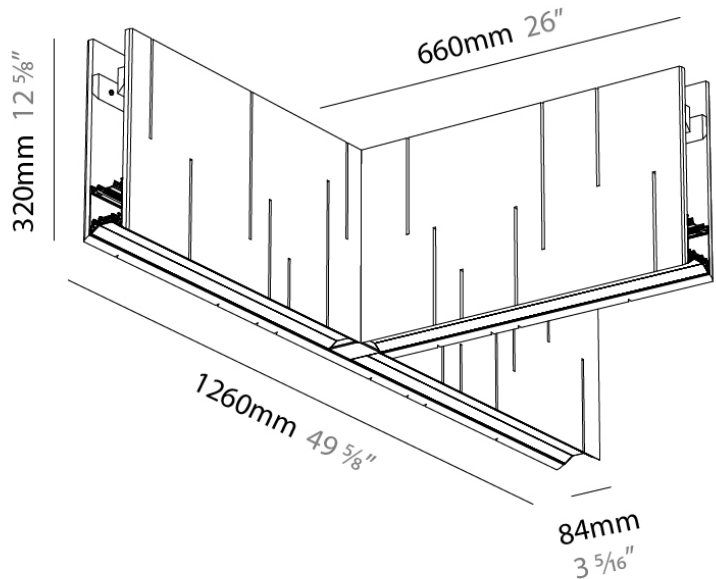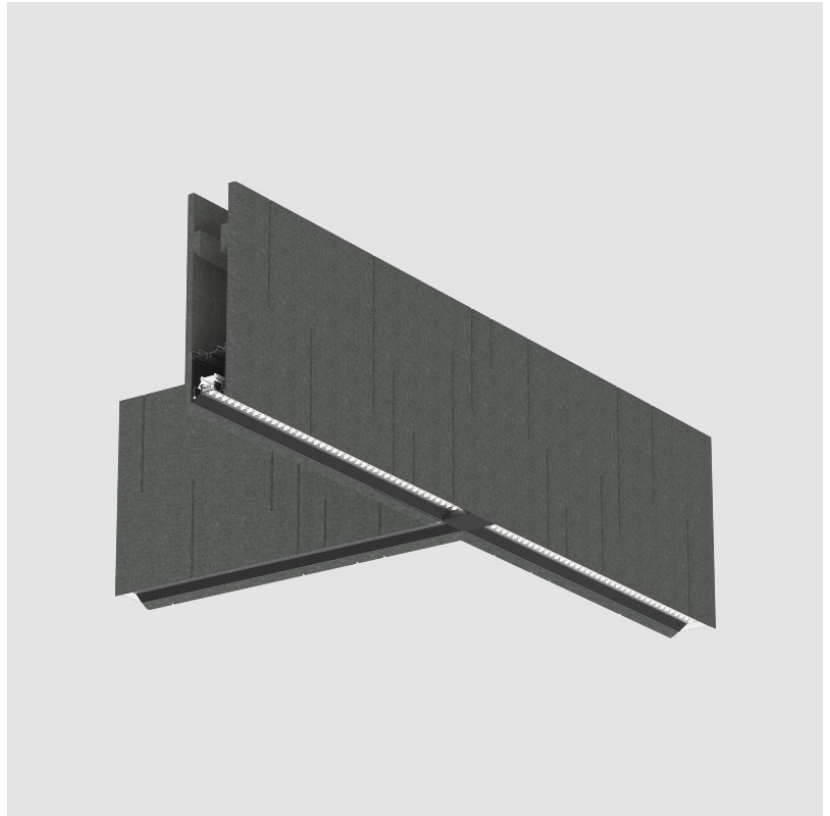

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300908-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - No Through Wiring - LED
38.7W, Tunable White (2700K-6500K), Max. 5273lm, CRI90 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₅
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
/ DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700-5000 Tunable White
Max. Delivered Lumen (lm): 5148-5273
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

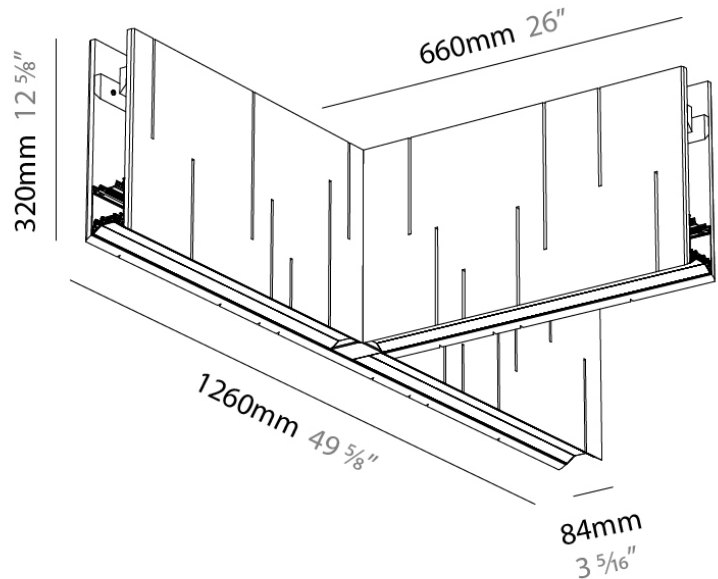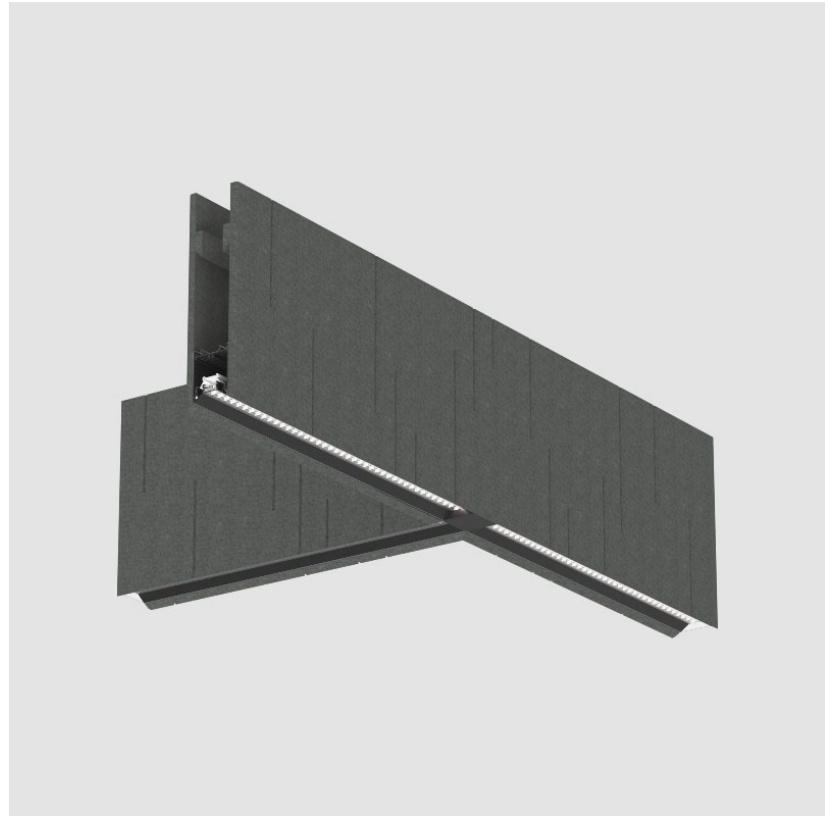

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300909-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
38.7W, 2700K / 3000K / 3500K / 4000K, Max. 5374lm, CRI90 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO /
DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 50 - 79 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 5148 / 5223 / 5273 / 5374
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

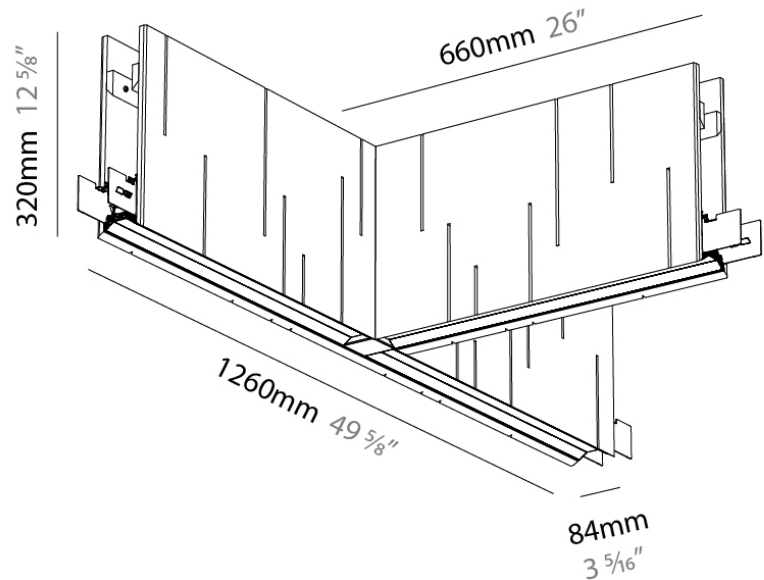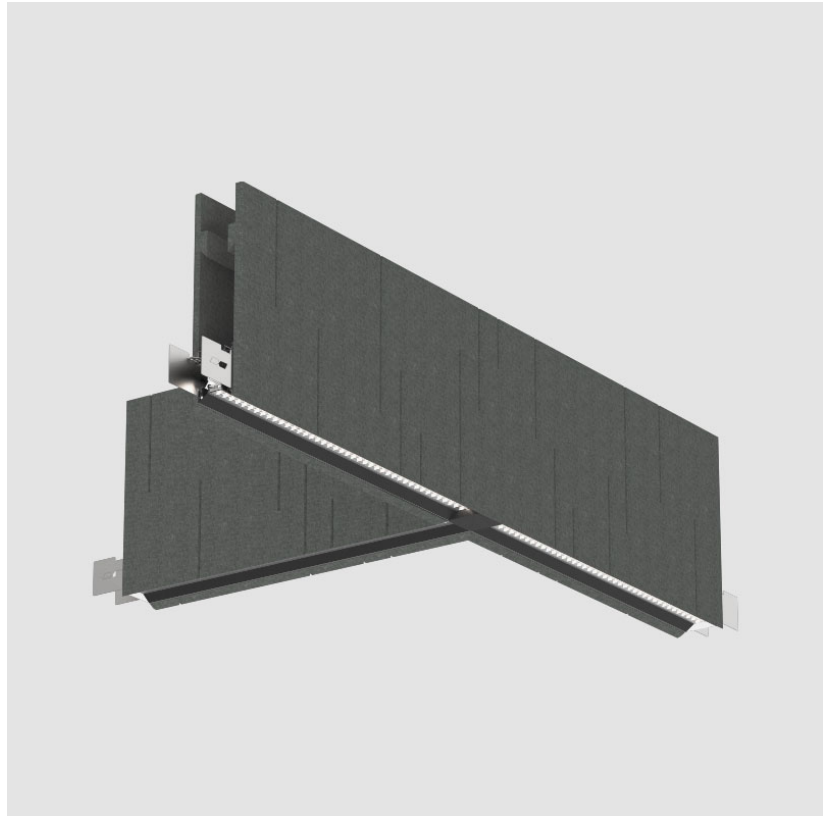

A3UNI-MOD-SUS-SYS COMPONENTS SUSPENSION

A300910-

DESCRIPTION

Unity - Acoustic Suspension, T-Shape - Through Wiring - LED
38.7W, Tunable White (2700K-6500K), Max. 5437lm, CR190 -
Raster Diffuser

GENERAL

Series: Unity
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Acoustic
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1260
Length (in): 49 ³/₈
Width (mm): 660
Width (in): 26
Height (mm): 320
Height (in): 12 ⁵/₈
Diffuser: Raster
Fixture Finish: BLK
Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO
/ DPE / BES / SHB / ARE / ANE / VRD / CRF
Fixture Material: Acoustic
Primary Material: Acoustic

ELECTRICAL



Input Wattage Range: 30 - 49 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 38.7
Dimming: Non-Dimming / 0-10V Dimming / Matter Dimming
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277

LED

Delivered Lumen Range: 5000 - 9999 lm
Color Temperature (°K): 2700-5000 Tunable White
Max. Delivered Lumen (lm): 5148-5273
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

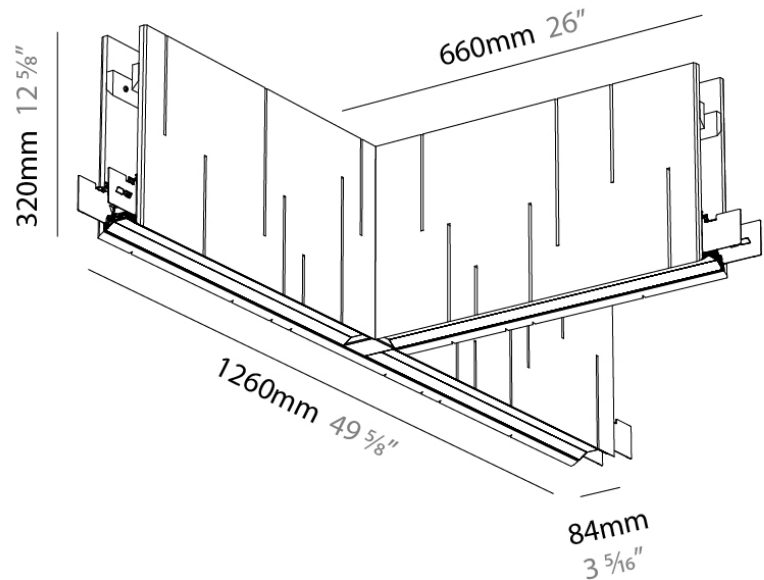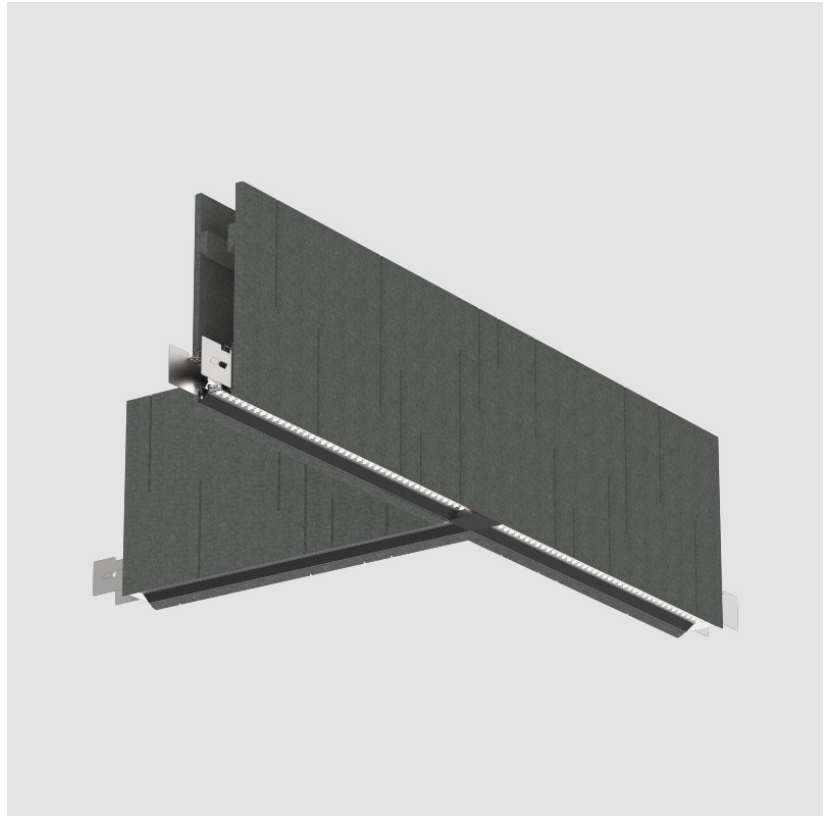

A3UNI-MOD-SUS-SYS COMPONENTS

A380632

DESCRIPTION

Slider - Suspension - Linear Connector

GENERAL

Series: Slider

Partner: Prolicht

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 150

Length (in): 5 ⁷/₈

Width (mm): 56

Width (in): 2 ³/₁₆

Height (mm): 56

Height (in): 2 ³/₁₆

Fixture Material: Extruded Aluminum


LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

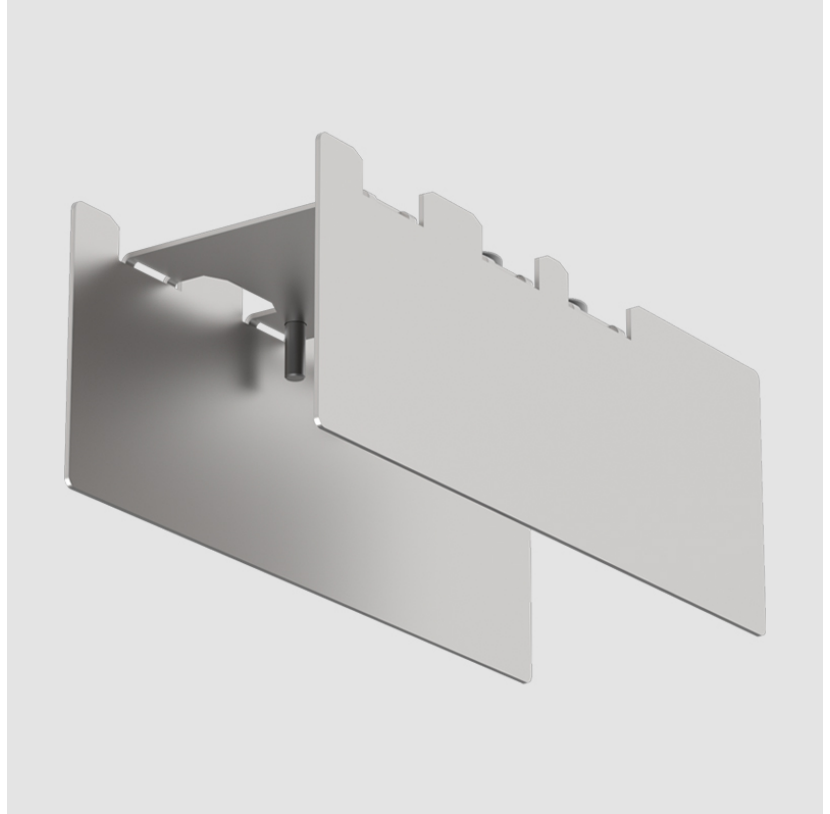

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A3UNI-MOD-SUS-SYS COMPONENTS

A380634-

DESCRIPTION

Slider - Round Canopy for Suspension for Dali Dimm

GENERAL

Series: Slider
 Partner: Prolicht
 Division: Architectural

PHYSICAL


Diameter (mm): 81
 Diameter (in): 3 ³/₁₆
 Height (mm): 41
 Height (in): 1 ⁵/₈
 Fixture Finish: BLK / WHI
 Fixture Material: Extruded Aluminum
 Cable Details: 2,000mm / 78 3/4" or 6,000mm / 236 1/4" - Cable finishes - White, Black, Orange, Red

LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

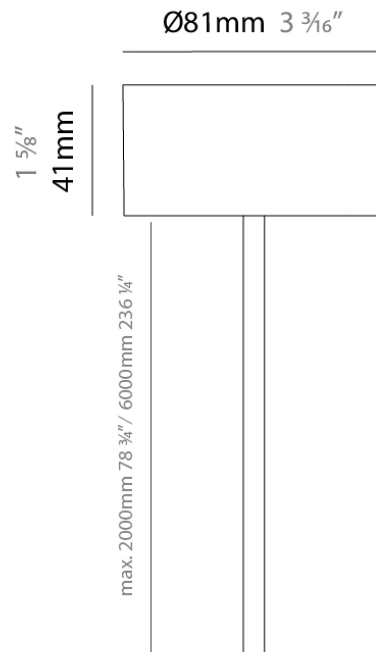

A3UNI-MOD-SUS-SYS COMPONENTS

A380635-

DESCRIPTION

Slider - Square Canopy for Suspension

GENERAL

Series: Slider
 Partner: Prolicht
 Division: Architectural

PHYSICAL


Length (mm): 90
 Length (in): 3 ⁹/₁₆
 Width (mm): 90
 Width (in): 3 ⁹/₁₆
 Height (mm): 25
 Height (in): 1
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum
 Cable Details: 2,000mm / 78 3/4" or 6,000mm / 236 1/4" - Cable finishes - White, Black, Orange, Red

LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

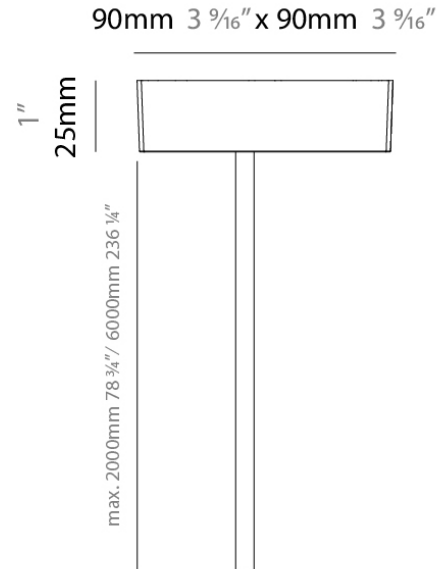

PROJECT
TYPE
NOTES
QUANTITY
DATE

A3UNI-MOD-SUS-SYS COMPONENTS

A380636-

DESCRIPTION

Slider - Square Canopy for Suspension for Dali Dimm

GENERAL

Series: Slider
 Partner: Prolicht
 Division: Architectural

PHYSICAL


Length (mm): 90
 Length (in): 3 ⁹/₁₆
 Width (mm): 90
 Width (in): 3 ⁹/₁₆
 Height (mm): 25
 Height (in): 1
 Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
 Fixture Material: Extruded Aluminum
 Cable Details: 2,000mm / 78 3/4" or 6,000mm / 236 1/4" - Cable finishes - White, Black, Orange, Red

LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

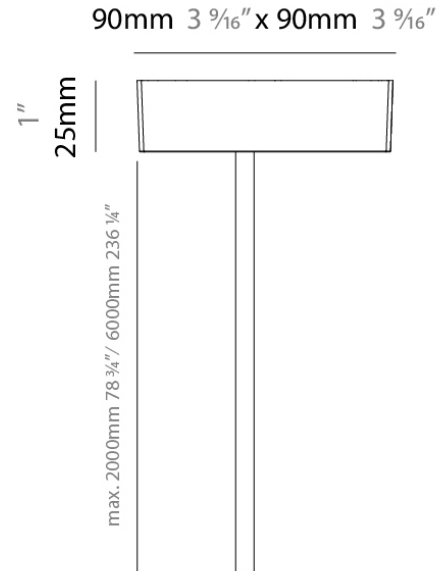

A3UNI-MOD-SUS-SYS COMPONENTS

A380776-

DESCRIPTION

Unity Acoustic - Endcap Unity Baffle - Winter Sky (11)

GENERAL

Series: Unity

Partner: Prolicht

Division: Architectural

Product Type: Acoustic

PHYSICAL

Acoustic Finish: SFW / CYW / SEE / SYN / MTS / PMB / TTN / CYB / STO / DPE / BES / SHB / ARE / ANE / VRD / CRF

Primary Material: Acoustic


ELECTRICAL

Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

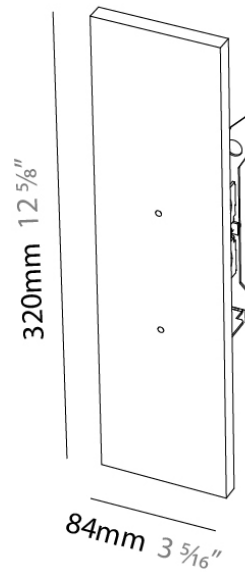

A3UNI-MOD-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380777


DESCRIPTION
 Unity Acoustic - 2000mm/78 3/4" Suspension Cable including mounting plate and clips

GENERAL
 Series: Unity
 Partner: Prolight
 Division: Architectural
 Product Type: Acoustic

PHYSICAL
 Primary Material: Acoustic

ELECTRICAL
 Dimming: Non-Dimmable

RATINGS AND CERTIFICATIONS
 Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

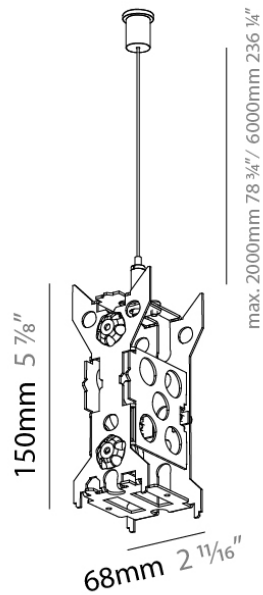

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)