

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T080-

DESCRIPTION

35 Track - Suspension 48V Track - 2000mm/78 3/4"

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling

PHYSICAL


Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Length (mm): 2000
Length (in): 78 3/4
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48
Upon Request: 0-10Vdc dimming / DALI dimming

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

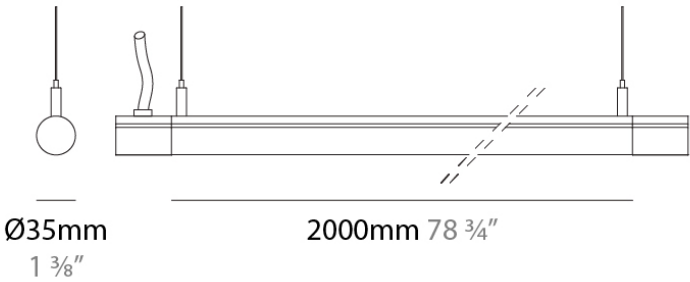

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T081-

DESCRIPTION

35 Track - Suspension 48V Track - 3000mm/118 1/8"

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling

PHYSICAL


Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Length (mm): 3000
Length (in): 118 1/8
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48
Upon Request: 0-10Vdc dimming / DALI dimming

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

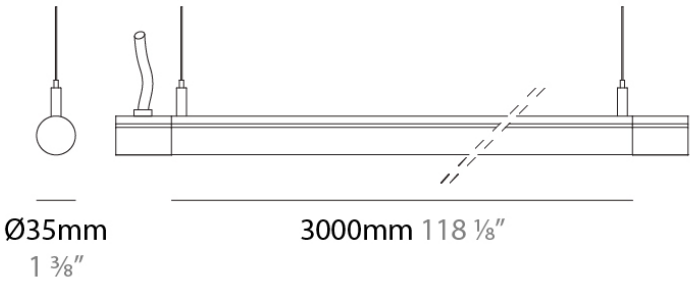

A535TRK-SUS-SYS COMPONENTS

A5T082-

DESCRIPTION

35 Track - Right End Feed - 48V

GENERAL

Series: 35 Track

Partner: Ivela

Division: Architectural

PHYSICAL

Shape: Cylinder

Diameter (mm): 35

Diameter (in): 1 3/8

Length (mm): 55

Length (in): 2 3/16

Height (mm): 35

Height (in): 1 3/8

Fixture Finish: BLK / WHI

Fixture Material: Aluminum

ELECTRICAL



Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

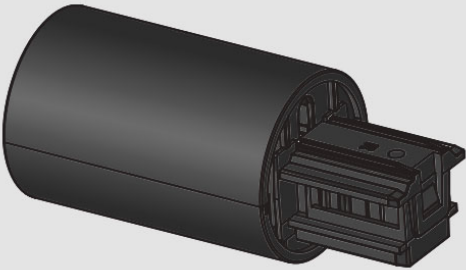

A535TRK-SUS-SYS COMPONENTS

A5T083-

DESCRIPTION
35 Track - Left End Feed - 48V -


GENERAL
Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Length (mm): 55
Length (in): 2 3/16
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL
Input Voltage (V): 48

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A535TRK-SUS-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T084-

DESCRIPTION

35 Track - Central Feed Connector - 48V

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL


Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Length (mm): 85
Length (in): 3 3/8
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

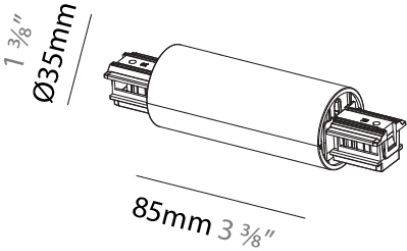

A535TRK-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A5T085-

DESCRIPTION

35 Track - Straight Electrical Connector

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL



Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

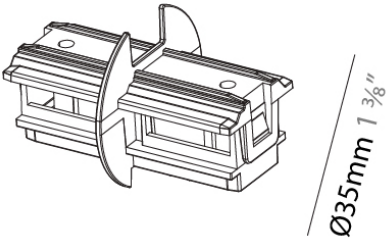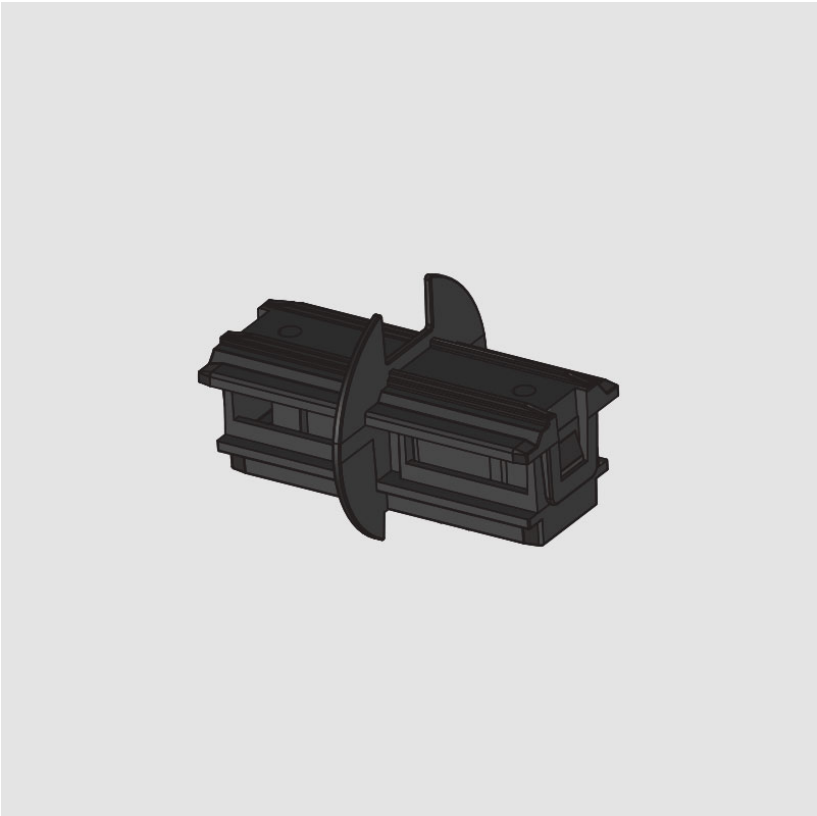

A535TRK-SUS-SYS COMPONENTS

A5T086-



DESCRIPTION
35 Track - Straight Mechanical Connector

GENERAL
Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

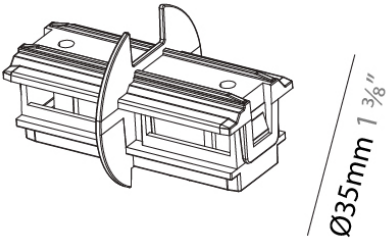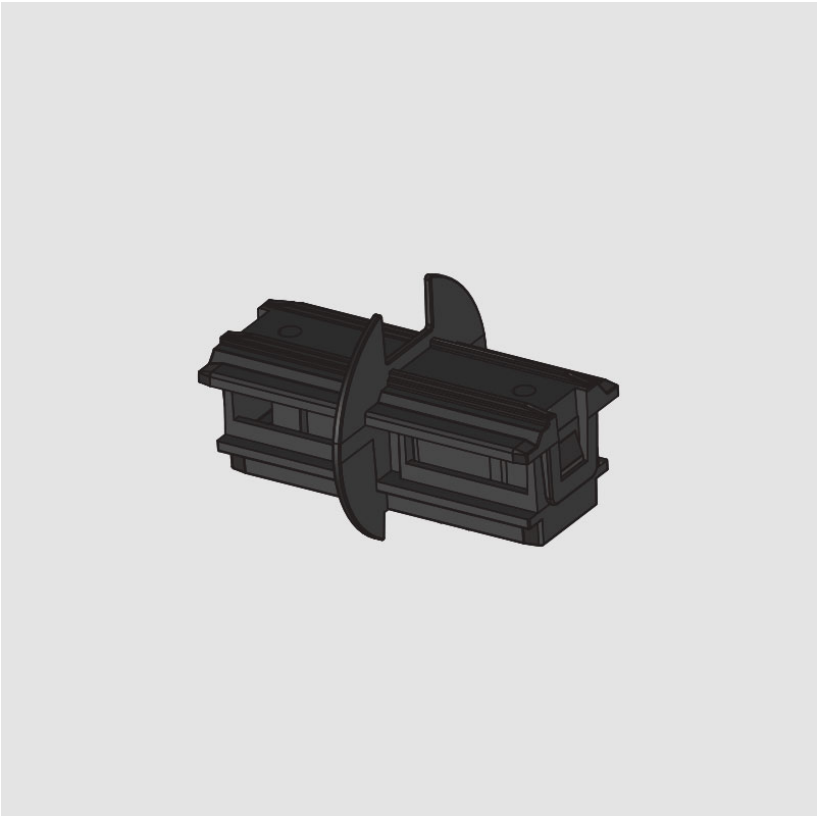

A535TRK-SUS-SYS COMPONENTS

A5T087-

DESCRIPTION

35 Track - Inside L Connector -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL

Length (mm): 58
Length (in): 2 5/16
Fixture Finish: BLK / WHI
Fixture Material: Aluminum


ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

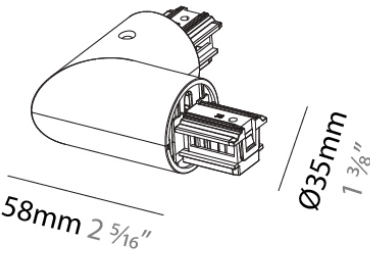

A535TRK-SUS-SYS COMPONENTS

A5T088-

DESCRIPTION

35 Track - Outside L Connector

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL

Length (mm): 58
Length (in): 2 5/16
Fixture Finish: BLK / WHI
Fixture Material: Aluminum


ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

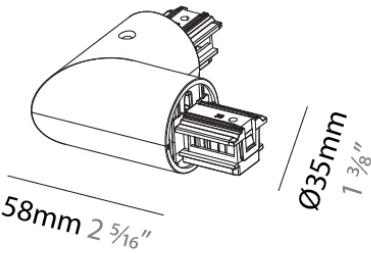

A535TRK-SUS-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T089-

DESCRIPTION

35 Track - Flexible Connector

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL


Length (mm): 58
Length (in): 2 5/16
Width (mm): 55
Width (in): 2 3/16
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

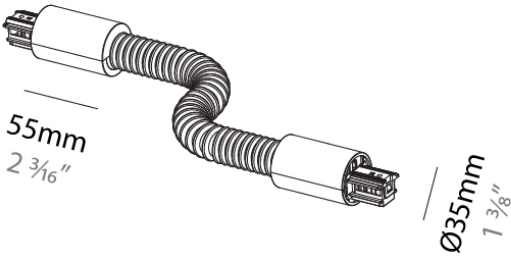

A535TRK-SUS-SYS COMPONENTS

A5T090-

DESCRIPTION

35 Track - Suspension Kit with Ring, 3000mm Wire and Wire Lock -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural


PHYSICAL

Diameter (mm): 35
Diameter (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

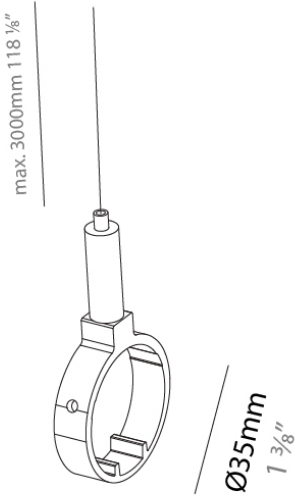

A535TRK-SUS-SYS COMPONENTS

A5T091-

DESCRIPTION

35 Track - Suspension Kit with Ring and Rod 1000mm -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural


PHYSICAL

Diameter (mm): 35
Diameter (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

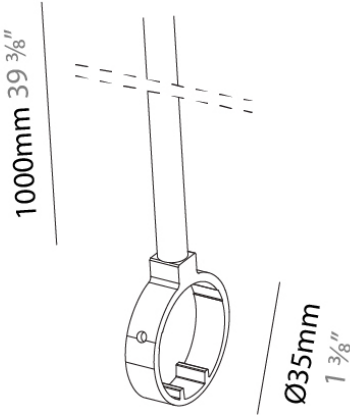

A535TRK-SUS-SYS COMPONENTS

A5T092-

DESCRIPTION

35 Track - Track Cover 1000mm -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural


PHYSICAL

Length (mm): 1000
Length (in): 39 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

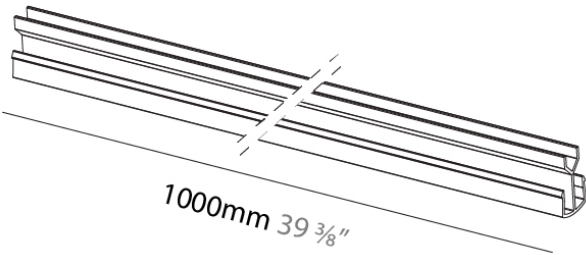

A535TRK-SUS-SYS COMPONENTS

A5T093-

DESCRIPTION

35 Track - Dead End Cap -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural



PHYSICAL

Shape: Round
Diameter (mm): 35
Diameter (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

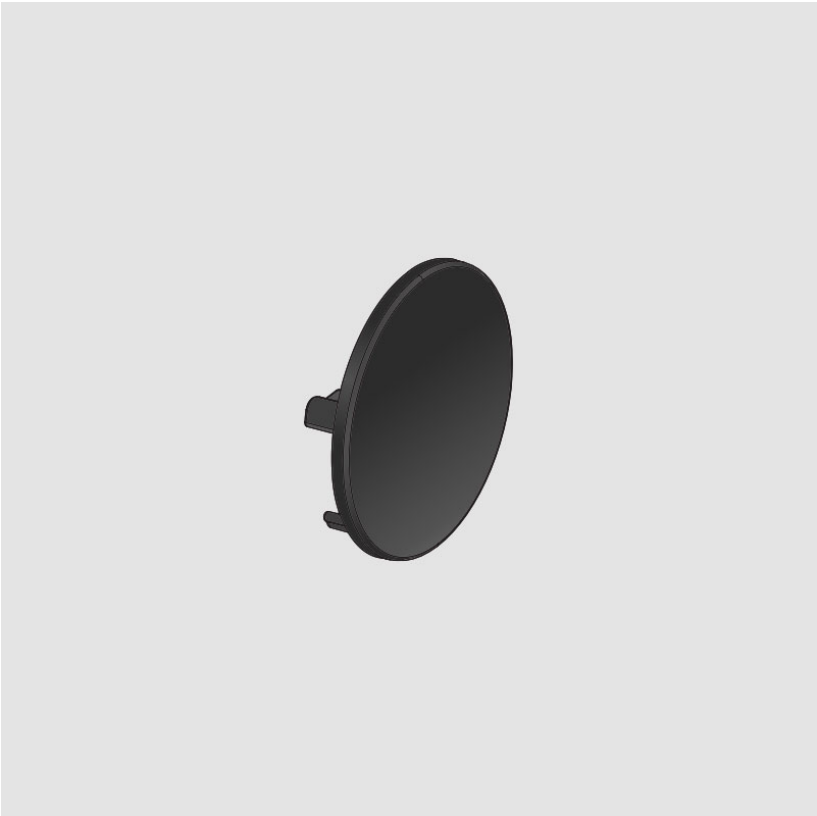

A535TRK-SUS-SYS COMPONENTS

A5T094-


DESCRIPTION
35 Track - Mechanical Straight Connection 35/35 Track

GENERAL
Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL
Shape: Round
Length (mm): 85
Length (in): 3 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

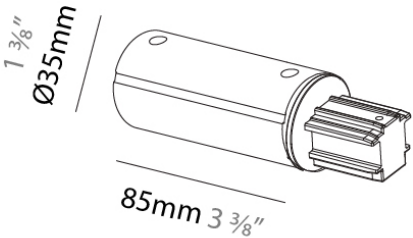

A535TRK-SUS-SYS COMPONENTS

A5T095-

DESCRIPTION

35 Track - Mechanical L Connection 35/35 Track

GENERAL

Series: 35 Track

Partner: Ivela

Division: Architectural

PHYSICAL

Shape: Round

Length (mm): 58

Length (in): 2 5/16

Fixture Finish: BLK / WHI


Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

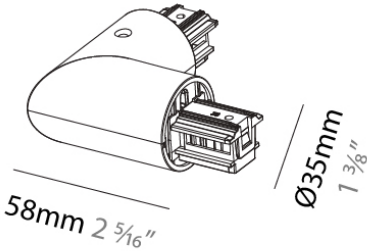

A535TRK-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A5T096-

DESCRIPTION

35 Track - Right Live End Feed Connector

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL


Shape: Round
Length (mm): 85
Length (in): 3 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

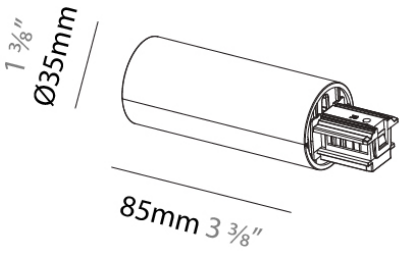

A535TRK-SUS-SYS COMPONENTS

A5T097

DESCRIPTION

35 Track - 3000mm/118 1/8", Wired Strip LED Kit 48V - 25W/m, 2585lm/m, 3000K

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL

Length (mm): 3000
Length (in): 118 1/8

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 25 per meter / 7.62 per foot
Input Voltage (V): 48

LED

Delivered Lumen Range: 2000 - 2999 lm
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 2585 per meter / 788 per foot
CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



A535TRK-SUS-SYS COMPONENTS TRACK

A5T098-

DESCRIPTION

35 Track - Minirooler, 48VDC, 17W LED, 2700K, 3000K, 4000K,
Max 1339lm, CRI:90, Beam Angles: 12°, 20°, 50°, 14°x41°, 41°x14°
- Black - Non-Dimming

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 340
Length (in): 13 3⁄8
Width (mm): 14
Width (in): 9⁄16
Height (mm): 14
Height (in): 9⁄16
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 17
Dimming: Non-Dimmable
Input Voltage (V): 48

LED

Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 15
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1139 - 1337
Nominal Lumen (lm): 1650
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 12 / 20 / 50 / 14x41 / 41x14

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

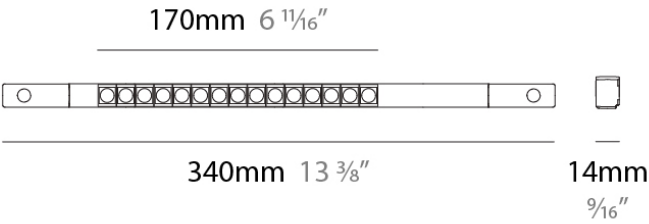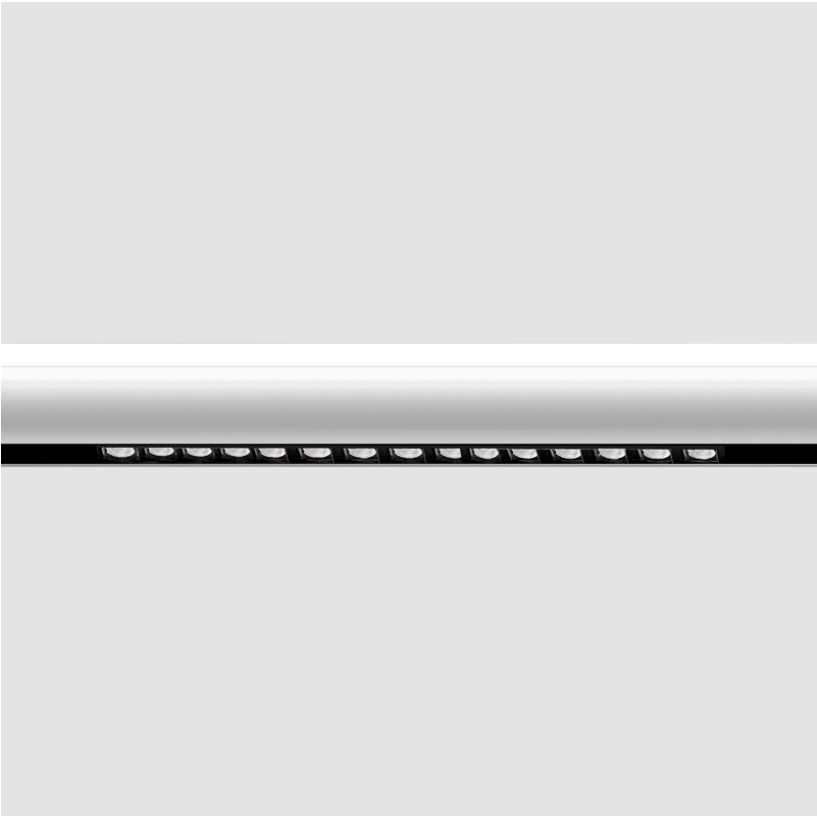

A535TRK-SUS-SYS COMPONENTS TRACK

A5T101-

DESCRIPTION

35 Track - Minirooler Adjustable, 48VDC Long, 16.5W LED, 2700K, 3000K, 4000K, Max 1337lm, CRI:90, Beam Angles: 12°, 20°, 50°, 14°x41°, 41°x14° - Dimmable

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 185
Length (in): 7 5/16
Width (mm): 23
Width (in): 7/8
Height (mm): 31
Height (in): 1 1/4
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 16.5
Dimming: Phase Dimming / 0-10V Dimming
Driver Included: No
Driver Location: Remote
Input Voltage (V): 48

LED


Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 15
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1139 - 1337
Nominal Lumen (lm): 1650
CRI: >90 CRI
Efficiency (%): 81
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 12 / 20 / 50 / 14x41 / 41x14
Adjustability: Rotational 327°; Tilt 200°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

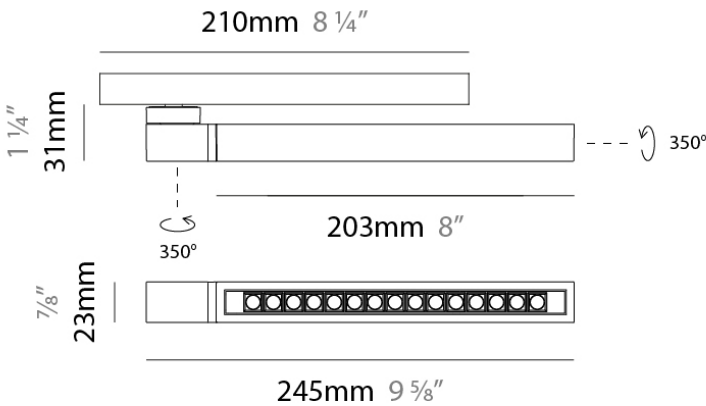

A535TRK-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A5T112-

DESCRIPTION

35 Track - Nanoperfetto-Suspension 7.3W, 2700K / 3000K / 4000K, Max 656lm, 48V, CRI:90, Beam Angles: 14°, 21°, 38°, 52°, 15°+41°

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Pendant
Mounting Location: Ceiling
Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 36
Diameter (in): 1 7/16
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 7.3
Dimming: Non-Dimmable
Input Voltage (V): 120
Output Voltage (V): 48

LED


Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): Max 656
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Optic°: Asymmetric optical lens
Beam Angle: 14, 21, 38, 52, 15+41

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

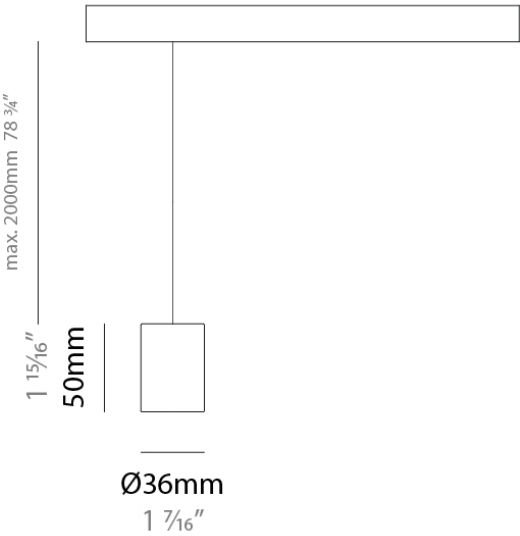

A535TRK-SUS-SYS COMPONENTS TRACK

A5T117-

DESCRIPTION

35 Track - Microperfetto Spot Ø53mm - 48V - 20.7W 2700K / 3000K / 4000K, Beam Angle - 16° / 24° / 30° / 45° / 55° - Dimmable

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
Shape: Cylinder
Diameter (mm): 53
Diameter (in): 2 1/16
Length (mm): 210
Length (in): 8 1/4
Height (mm): 95
Height (in): 3 3/4
Diffuser: Termoplastic
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Lamp Type: LED
Input Wattage (W): 20.7
Total Output Wattage (W): 18
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED

Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1362 / 1436 / 1632
Nominal Lumen (lm): 1946 / 2052 / 2319
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 16,24,30,45,55
Adjustability: Rotational 355°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

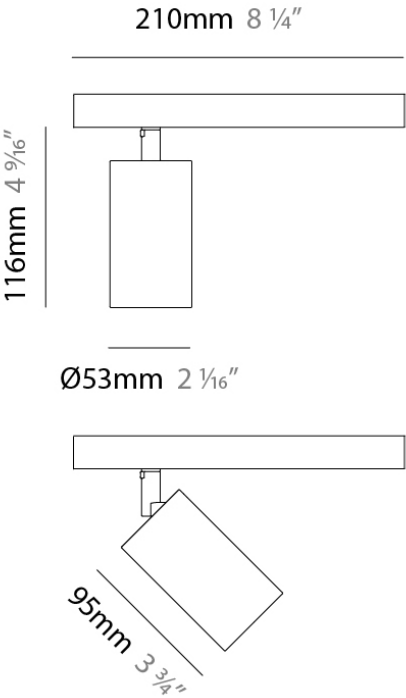

A535TRK-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A5T118-

DESCRIPTION

35 Track - Left Live End Feed Connector 35/35

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL


Shape: Round
Length (mm): 85
Length (in): 3 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

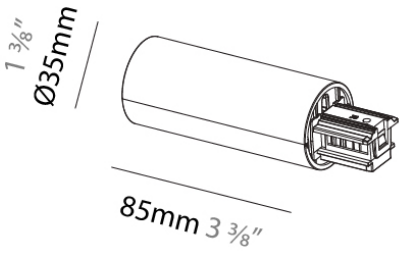

A535TRK-SUS-SYS COMPONENTS

A5T119

DESCRIPTION

35 Track - 2000mm/78 3/4" Smoked Diffuser

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural


PHYSICAL

Length (mm): 2000
Length (in): 78 3/4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

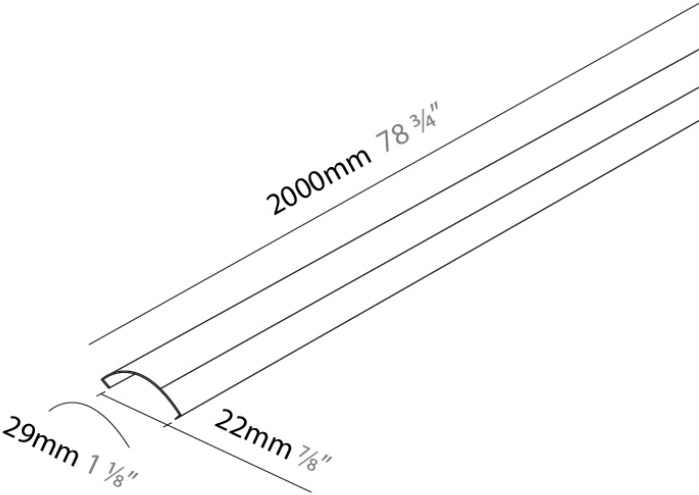

A535TRK-SUS-SYS COMPONENTS

A5T120


DESCRIPTION
35 Track - 3000mm/118 1/8" Smoked Diffuser

GENERAL
Series: 35 Track
Partner: Ivela
Division: Architectural

PHYSICAL
Length (mm): 3000
Length (in): 118 1/8

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

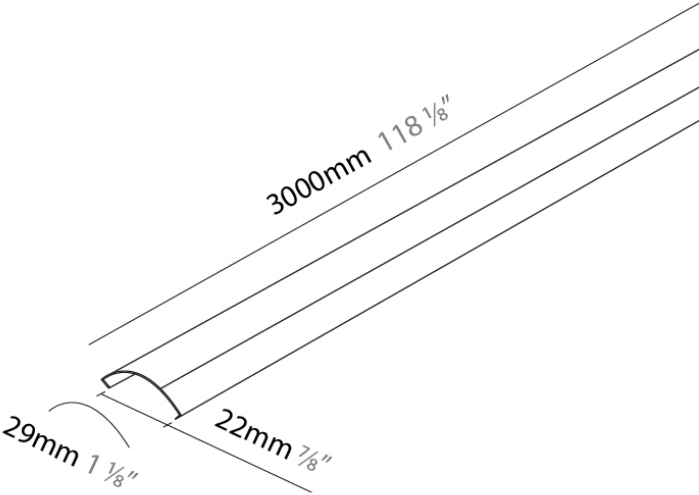

A535TRK-SUS-SYS COMPONENTS TRACK

A5T121-

DESCRIPTION

35 Track - Microperfetto Spot Ø53mm - 48V - 24.15W 2700K / 3000K / 4000K, Beam Angle - 16° / 24° / 30° / 45° / 55° - Dimmable

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
Shape: Cylinder
Diameter (mm): 53
Diameter (in): 2 1/16
Length (mm): 210
Length (in): 8 1/4
Height (mm): 95
Height (in): 3 3/4
Diffuser: Termoplastic
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 24.15
Total Output Wattage (W): 21
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED

Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1543 / 1644 / 1777
Nominal Lumen (lm): 2205 / 2349 / 2539
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 16,24,30,45,55
Adjustability: Rotational 355°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

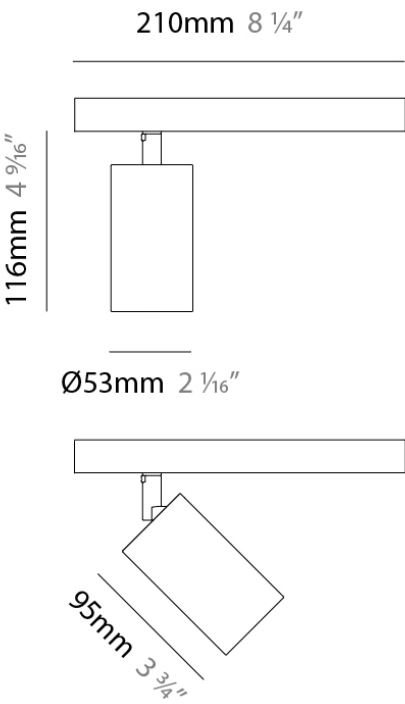

A535TRK-SUS-SYS COMPONENTS TRACK

A5T122-

DESCRIPTION

35 Track - Microperfetto Spot Ø53mm - 48V - 29.9W 2700K / 3000K / 4000K, Beam Angle - 16° / 24° / 30° / 45° / 55° - Dimmable

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
Shape: Cylinder
Diameter (mm): 53
Diameter (in): 2 1/16
Length (mm): 210
Length (in): 8 1/4
Height (mm): 95
Height (in): 3 3/4
Diffuser: Termoplastic
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 29.9
Total Output Wattage (W): 26
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 48

LED

Delivered Lumen Range: 1000 - 1999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 1813 / 1890 / 1919
Nominal Lumen (lm): 2590 / 2700 / 2740
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 16,24,30,45,55
Adjustability: Rotational 355°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

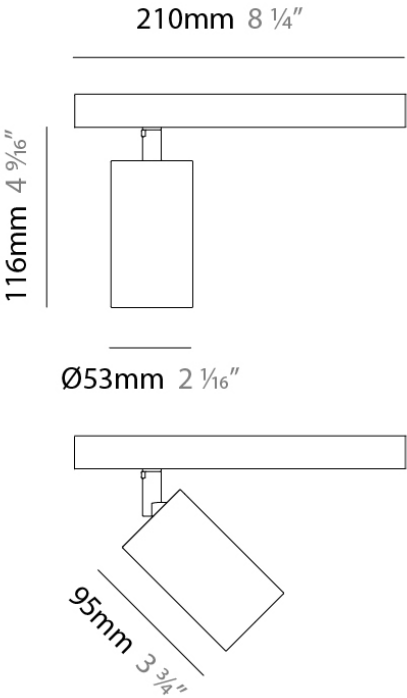

A535TRK-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T126-

DESCRIPTION

35 Track - Linea 48Vdc, 400mm/15 3/4", 7.2W, 2700K / 3000K / 4000K, CRI:90, Non-Dimming

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Linear Profiles
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Cylinder
Length (mm): 400
Length (in): 15 3/4
Width (mm): 14
Width (in): 9/16
Height (mm): 19
Height (in): 3/4
Diffuser: Opal Polycarbonate
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 7.2
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED


Color Temperature (°K): 2700 / 3000 / 4000
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

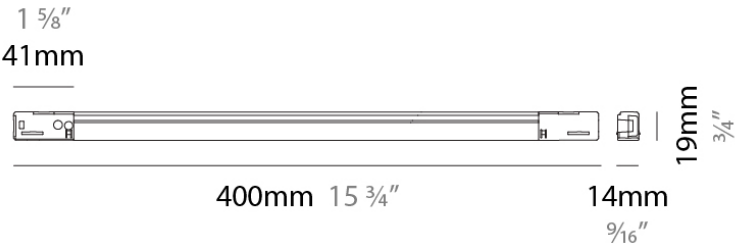

A535TRK-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T127-

DESCRIPTION

35 Track - Linea 48Vdc, 600mm/23 5/8", 12W, 2700K / 3000K / 4000K, CRI:90, Non-Dimming

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Linear Profiles
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Cylinder
Length (mm): 600
Length (in): 23 5/8
Width (mm): 14
Width (in): 9/16
Height (mm): 19
Height (in): 3/4
Diffuser: Opal Polycarbonate
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED
Input Wattage (W): 12
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED


Color Temperature (°K): 2700 / 3000 / 4000
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

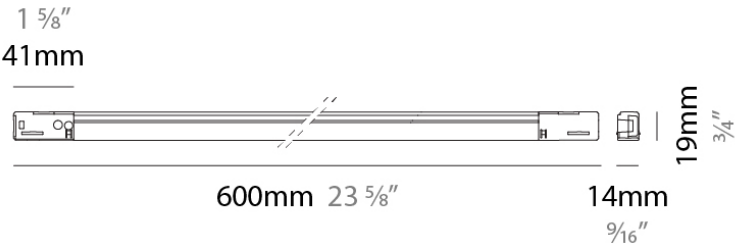

A535TRK-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T128-

DESCRIPTION

35 Track - Linea 48Vdc, 900mm/35 7/16", 19W, 2700K / 3000K / 4000K, CRI:90, Non-Dimming

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Linear Profiles
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Cylinder
Length (mm): 900
Length (in): 35 7/16
Width (mm): 14
Width (in): 9/16
Height (mm): 19
Height (in): 3/4
Diffuser: Opal Polycarbonate
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED
Input Wattage (W): 19
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED


Color Temperature (°K): 2700 / 3000 / 4000
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

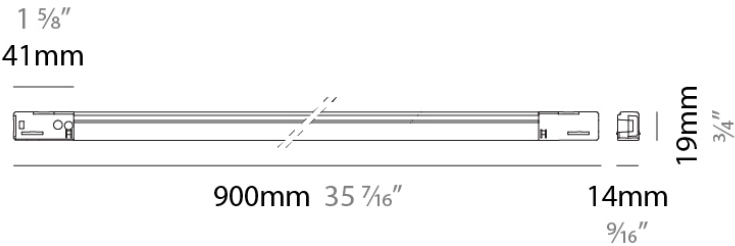

A535TRK-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A5T129-

DESCRIPTION

35 Track - Linea 48Vdc, 1900mm/74 13/16", 43W, 2700K / 3000K / 4000K, CRI:90, Non-Dimming

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Linear Profiles
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Cylinder
Length (mm): 1900
Length (in): 74 13/16
Width (mm): 14
Width (in): 9/16
Height (mm): 19
Height (in): 3/4
Diffuser: Opal Polycarbonate
Fixture Finish: BLK / WHI
Fixture Material: Aluminum / Polycarbonate

ELECTRICAL

Input Wattage Range: 30 - 49 W
Lamp Type: LED
Input Wattage (W): 43
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Output Voltage (V): 48

LED


Color Temperature (°K): 2700 / 3000 / 4000
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20
Glare Rating: ≤ 16

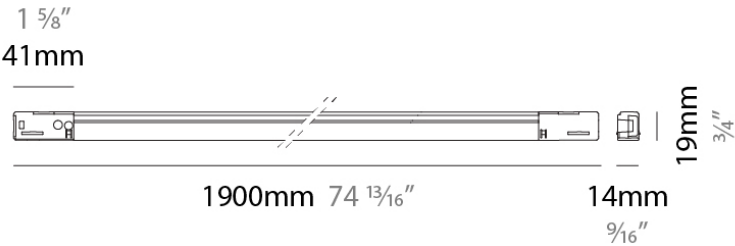

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A5T130-

DESCRIPTION

35 Track - Suspension 48V Track - 1000mm/39 3/8" -

GENERAL

Series: 35 Track
Partner: Ivela
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling

PHYSICAL


Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Length (mm): 1000
Length (in): 39 3/8
Height (mm): 35
Height (in): 1 3/8
Fixture Finish: BLK / WHI
Fixture Material: Aluminum

ELECTRICAL

Input Voltage (V): 48
Upon Request: 0-10Vdc dimming / DALI dimming

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

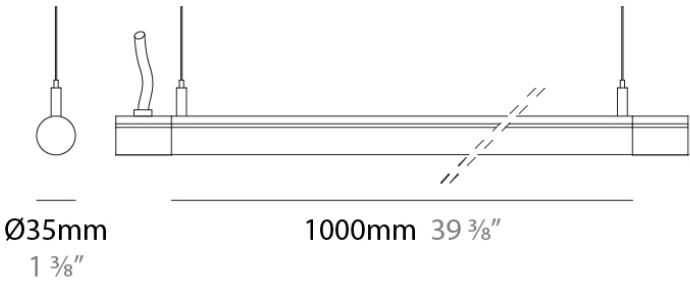

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)