

A7LEVEL-MOD-SYS COMPONENTS

A7900052-

DESCRIPTION

Level LED Strip - 5.000mm / 196 7/8" - 65W - 2700K / 3000K - 48V

GENERAL

Series: Level _____
 Partner: Letroh _____
 Division: Architectural _____
 Product Type: Linear Profiles _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 5000 _____
 Length (in): 196 7/8 _____
 Width (mm): 10 _____
 Width (in): 3/8 _____
 Weight (kg): 0.95 _____
 Weight (lbs): 2.09 _____
 Fixture Material: Aluminum _____

ELECTRICAL



Total Output Wattage (W): 65W (13W/m) _____

LED

Color Temperature (°K): 2700 / 3000 _____
 Nominal Lumen (lm): 7150 / 7550 (1430/m / 1510/m) _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

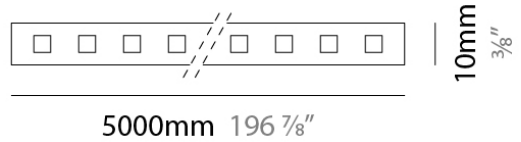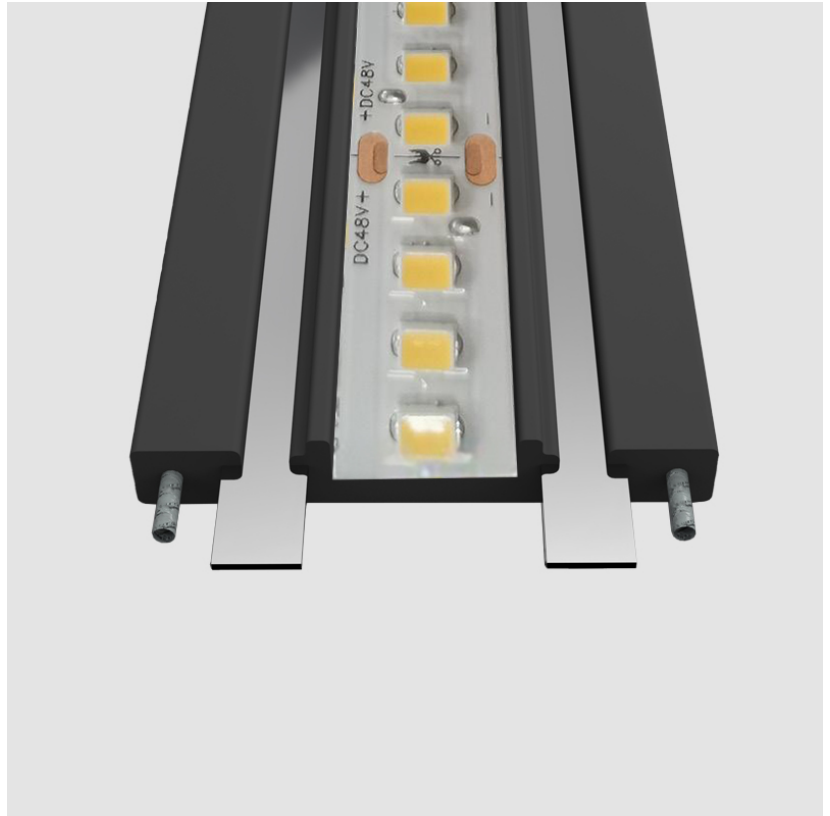

A7LEVEL-MOD-SYS COMPONENTS

A7900053-

DESCRIPTION
 Level LED Strip - 10.000mm / 393 11/16" - 130W - 2700K / 3000K - 48V


GENERAL
 Series: Level _____
 Partner: Letroh _____
 Division: Architectural _____
 Product Type: Linear Profiles _____

PHYSICAL
 Shape: Rectangle _____
 Length (mm): 10000 _____
 Length (in): 393 11/16 _____
 Width (mm): 10 _____
 Width (in): 3/8 _____
 Weight (kg): 0.75 _____
 Weight (lbs): 1.65 _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Total Output Wattage (W): 130W (13W/m) _____

LED
 Color Temperature (°K): 2700 / 3000 _____
 Nominal Lumen (lm): 14300 / 15100 (1430/m / 1510/m) _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

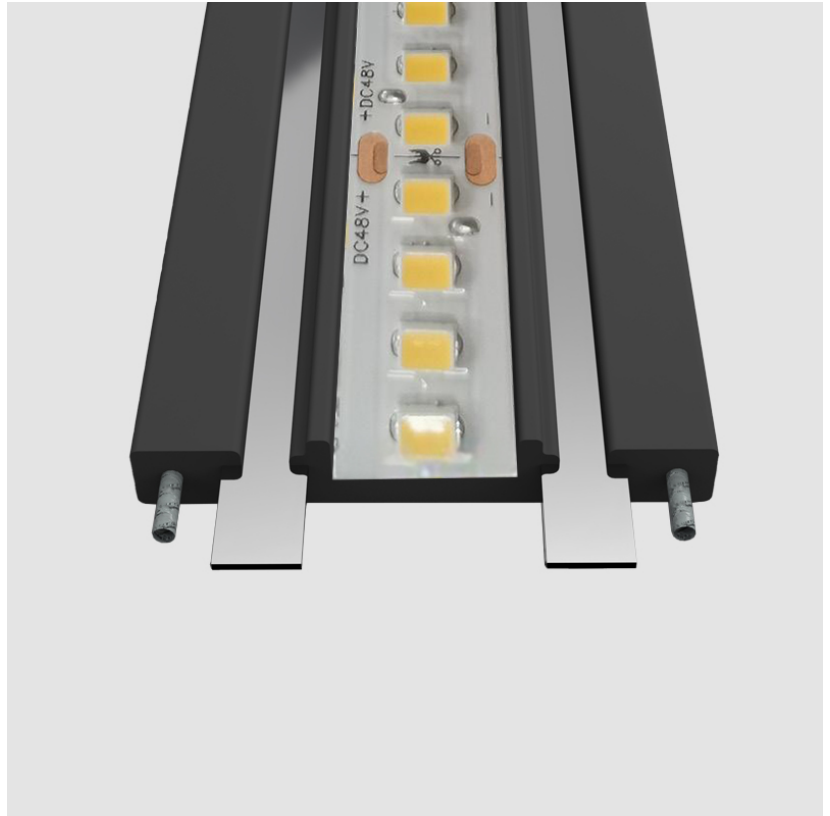

A7LEVEL-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


A7900054-

DESCRIPTION
 Level - Power feed - 2500mm

GENERAL
 Series: Level
 Partner: Letroh
 Division: Architectural
 Product Type: Linear Profiles

PHYSICAL
 Shape: Rectangle
 Diameter (mm): 100
 Diameter (in): 3 15/16
 Height (mm): 33
 Height (in): 1 5/16
 Max. Overall Height (mm): 2533
 Max. Overall Height (in): 99 3/4
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

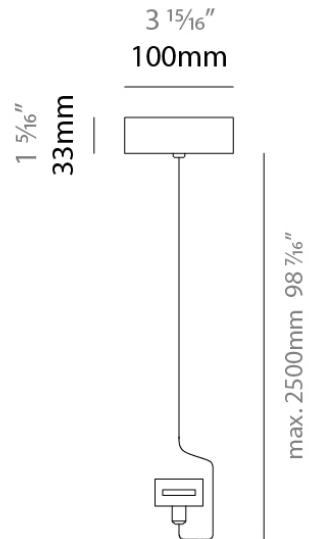

A7LEVEL-MOD-SYS COMPONENTS


A7900055-

DESCRIPTION
 Level - Cube Wall fixing

GENERAL
 Series: Level
 Partner: Letroh
 Division: Architectural
 Product Type: Linear Profiles

PHYSICAL
 Shape: Rectangle
 Length (mm): 80
 Length (in): 3 1/8
 Width (mm): 242
 Width (in): 9 1/2
 Height (mm): 80
 Height (in): 3 1/8
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

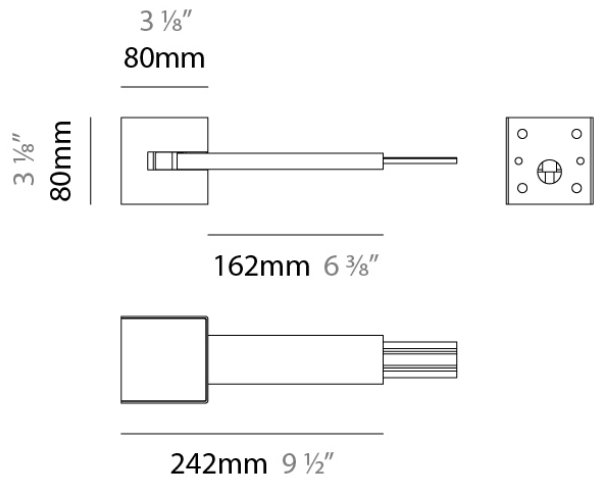

A7LEVEL-MOD-SYS COMPONENTS


A7900056-

DESCRIPTION
 Level - Cube ceiling fixing

GENERAL
 Series: Level
 Partner: Letroh
 Division: Architectural
 Product Type: Linear Profiles

PHYSICAL
 Shape: Rectangle
 Length (mm): 80
 Length (in): 3 1/8
 Width (mm): 242
 Width (in): 9 1/2
 Height (mm): 80
 Height (in): 3 1/8
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

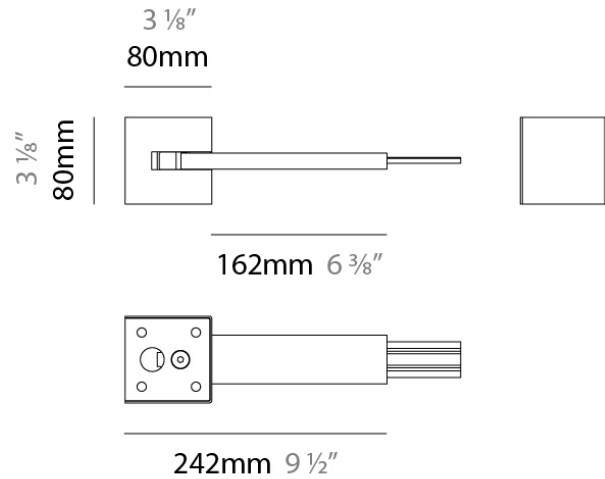

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS


A7900057-

DESCRIPTION
Level - Ceiling Spacer

GENERAL
Series: Level
Partner: Letroh
Division: Architectural
Product Type: Linear Profiles

PHYSICAL
Shape: Rectangle
Length (mm): 80
Length (in): 3 1/8
Width (mm): 80
Width (in): 3 1/8
Height (mm): 263
Height (in): 10 3/8
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

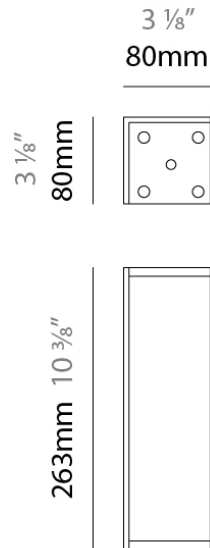

A7LEVEL-MOD-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A7900058-

DESCRIPTION

Compacto - Lens - 20° / 40° / 60°

GENERAL

Series: Compacto

Partner: Letroh

Division: Architectural

OPTICAL

Optic°: 20 / 40 / 60

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



A7LEVEL-MOD-SYS COMPONENTS

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

A7900061-

DESCRIPTION

Level - Wire Support

GENERAL

Series: Level

Partner: Letroh

Division: Architectural

Product Type: Linear Profiles

PHYSICAL

Shape: Round

Max. Overall Height (mm): 2000


Max. Overall Height (in): 78 ³/₄"

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

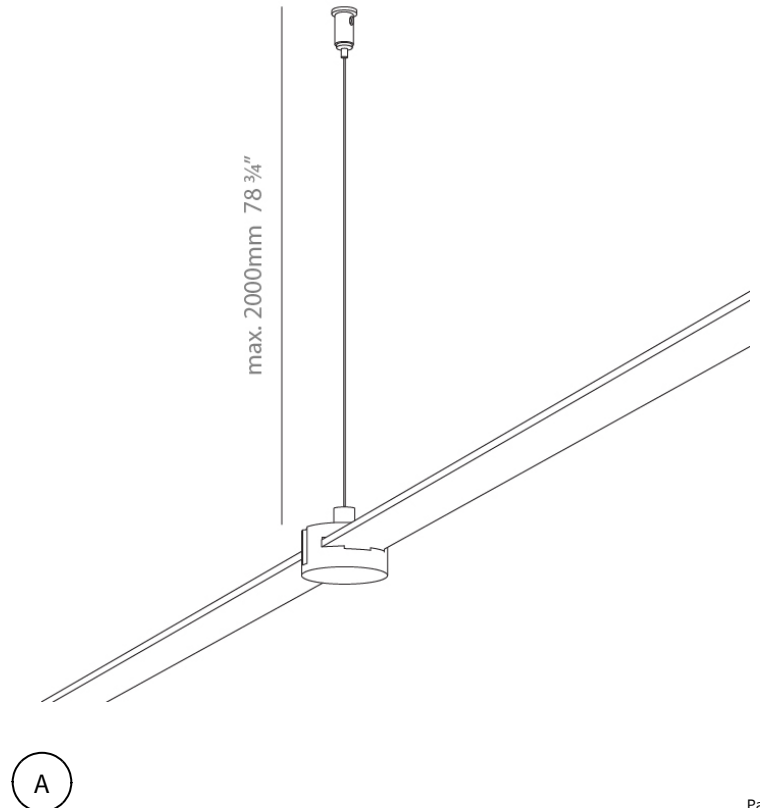

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7LEVEL-MOD-SYS COMPONENTS SURFACE


A7T00027-

DESCRIPTION
Level Cable - 5000mm / 196 7/8"

GENERAL
Series: Level
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall / Ceiling
Light Distribution: Downlight

PHYSICAL
Shape: Rectangle
Length (mm): 5000
Length (in): 196 7/8
Width (mm): 33
Width (in): 1 5/16
Height (mm): 4
Height (in): 3/16
Weight (kg): 0.95
Weight (lbs): 2.09
Fixture Finish: TRA / BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

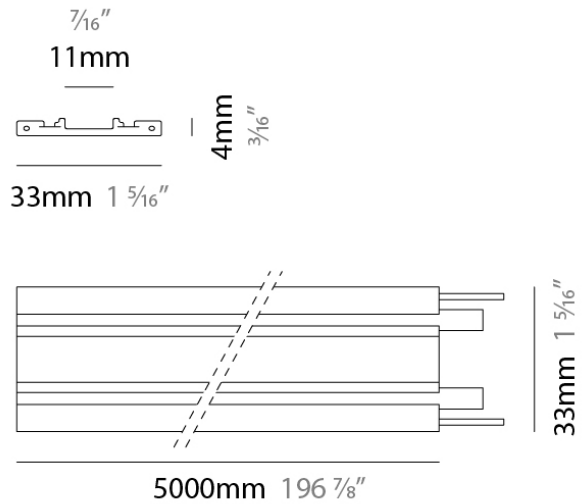

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS SURFACE


A7T00028-

DESCRIPTION
Level Cable - 10,000mm / 393 11/16"

GENERAL
Series: Level
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall / Ceiling
Light Distribution: Downlight

PHYSICAL
Shape: Rectangle
Length (mm): 10000
Length (in): 393 11/16
Width (mm): 33
Width (in): 1 5/16
Height (mm): 4
Height (in): 3/16
Weight (kg): 0.19
Weight (lbs): 0.42
Fixture Finish: TRA / BLK / WHI
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

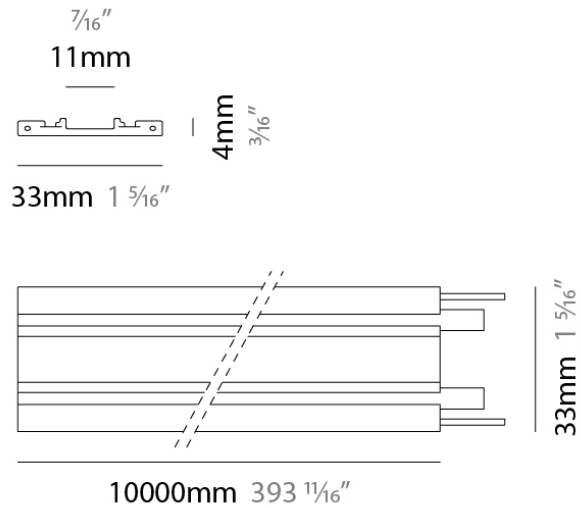

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00029-

DESCRIPTION

Level - Zoom - Adjustable Spot, 16.5W, 48V, 350mA, CRI 97, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Cylinder
 Diameter (mm): 85
 Diameter (in): 3 3/8
 Height (mm): 130
 Height (in): 5 1/8
 Weight (kg): 0.33
 Weight (lbs): 0.73
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 16.5
 Total Output Wattage (W): 12.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Housing: ENCP50
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Constant Current (MA): 350
 Upon Request: Dali Dimming

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 831 / 878
 Nominal Lumen (lm): 1010 / 1068
 CRI: >97 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 12 - 46
 Adjustability: Tilting and rotating

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

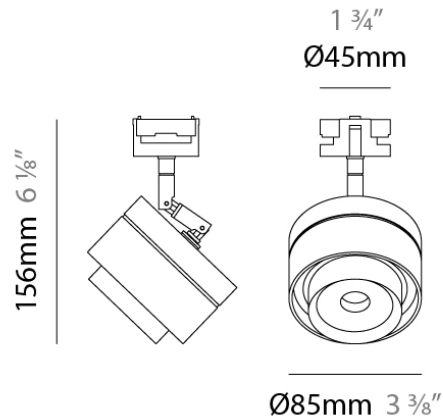

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00030-

DESCRIPTION

Level - Zoom - Fixed Spot, 16.5W, 48V, 350mA, CRI 97, Dimmable Converter Included

GENERAL

Series: Level _____
 Partner: Letroh _____
 Division: Architectural _____
 Installation: Track _____
 Product Type: Linear Profiles _____
 Mounting Location: Ceiling _____
 Light Distribution: Downlight _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 85 _____
 Diameter (in): 3 3/8 _____
 Height (mm): 90 _____
 Height (in): 3 9/16 _____
 Weight (kg): 0.33 _____
 Weight (lbs): 0.73 _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED _____
 Input Wattage (W): 16.5 _____
 Total Output Wattage (W): 12.8 _____
 Dimming: Non-Dimmable / 0-10V Dimming _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Housing: ENCP50 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 48 _____
 Upon Request: Dali Dimming _____

LED


Delivered Lumen Range: 500 - 1999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 831 / 878 _____
 Nominal Lumen (lm): 1010 / 1068 _____
 CRI: >97 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Optic°: 12 - 46 _____
 Adjustability: Fixed _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

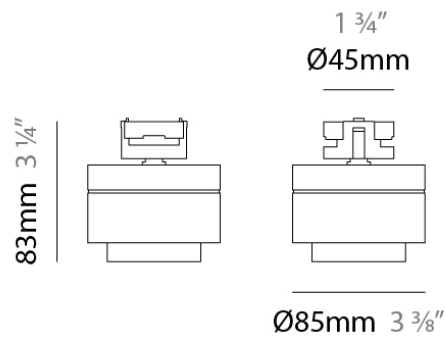

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00031-

DESCRIPTION

Level - Zoom - Suspension, 16.5W, 48V, 350mA, CRI 97, Dimmable Converted Included

GENERAL

Series: Level _____
 Partner: Letroh _____
 Division: Architectural _____
 Installation: Track _____
 Product Type: Spots _____
 Mounting Location: Ceiling _____
 Light Distribution: Downlight _____

PHYSICAL

Aperture Sizes - Downlights: 1" _____
 Shape: Cylinder _____
 Diameter (mm): 85 _____
 Diameter (in): 3 3/8 _____
 Height (mm): 75 _____
 Height (in): 2 15/16 _____
 Max. Overall Height (mm): 2075 _____
 Max. Overall Height (in): 81 11/16 _____
 Weight (kg): 0.42 _____
 Weight (lbs): 0.93 _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED _____
 Input Wattage (W): 16.5 _____
 Total Output Wattage (W): 12.8 _____
 Dimming: Non-Dimmable / 0-10V Dimming _____
 Driver Included: No _____
 Driver Location: Remote _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Housing: ENCP50 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 48 _____
 Upon Request: Dali Dimming _____

LED


Delivered Lumen Range: 500 - 1999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 831 / 878 _____
 Nominal Lumen (lm): 1010 / 1068 _____
 CRI: >97 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Optic°: 12 - 46 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

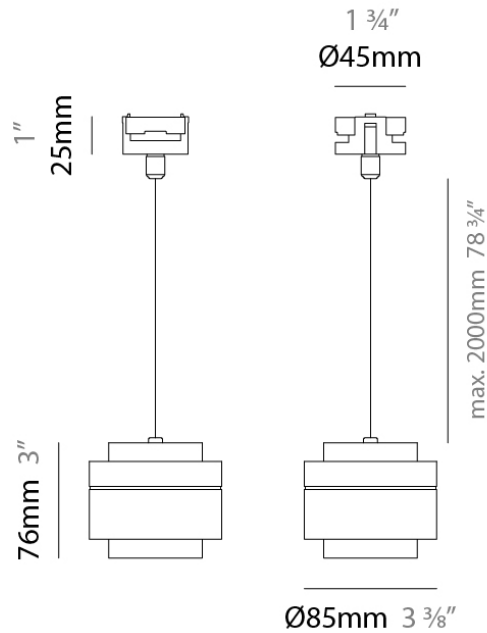

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00032-

DESCRIPTION

Level - Mini - Adjustable Spot 11.2W, 48V, 250mA, CRI 97

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 3/4
 Height (mm): 109
 Height (in): 4 5/16
 Weight (kg): 0.12
 Weight (lbs): 0.26
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.2
 Bulb Included: Bulb Included
 Total Output Wattage (W): 7.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Housing: ENCP50
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: Dali Dimming

LED

Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 728 / 770
 CRI: >97 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

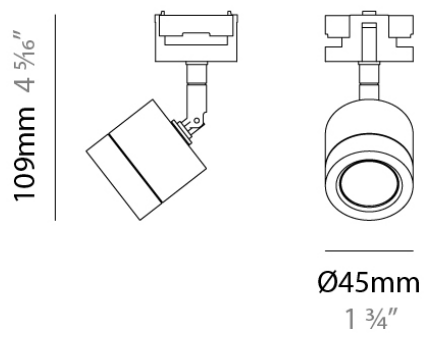

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00033-

DESCRIPTION

Level - Mini - Fixed Spot 11.2W, 48V, 250mA, CRI 97

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 3/4
 Height (mm): 69
 Height (in): 2 11/16
 Weight (kg): 0.12
 Weight (lbs): 0.26
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.2
 Total Output Wattage (W): 7.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Housing: ENCP50
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: Dali Dimming

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 728 / 770
 CRI: >97 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

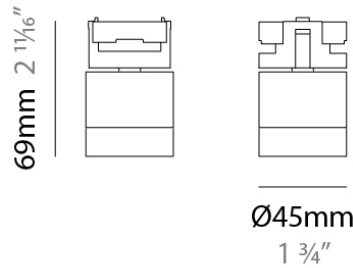

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00034-

DESCRIPTION

Level - Mini - Fixed Spot Diffuser - 11.2W, 48V, 250mA, CRI 97

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 3/4
 Height (mm): 69
 Height (in): 2 11/16
 Weight (kg): 0.11
 Weight (lbs): 0.24
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.2
 Total Output Wattage (W): 7.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Housing: ENCP50
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: Dali Dimming

LED

Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 728 / 770
 CRI: >97 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

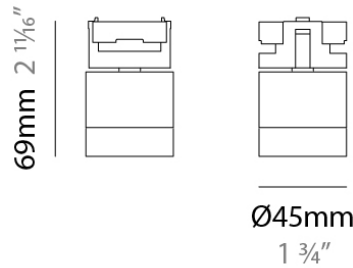

A7LEVEL-MOD-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7T00035-

DESCRIPTION
 Level - Mini - Suspension Spot - 11.2W, 48V, 250mA, CRI 97


GENERAL
 Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL
 Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Diameter (mm): 45
 Diameter (in): 1 3/4
 Height (mm): 69
 Height (in): 2 11/16
 Max. Overall Height (mm): 2069
 Max. Overall Height (in): 81 7/16
 Weight (kg): 0.23
 Weight (lbs): 0.51
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL
 Input Wattage Range: 10 - 19 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 11.2
 Total Output Wattage (W): 7.8
 Dimming: Non-Dimmable / 0-10V Dimming
 Driver Included: No
 Driver Location: Remote
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Housing: ENCP50
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48
 Upon Request: Dali Dimming

LED
 Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 728 / 770
 CRI: >97 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

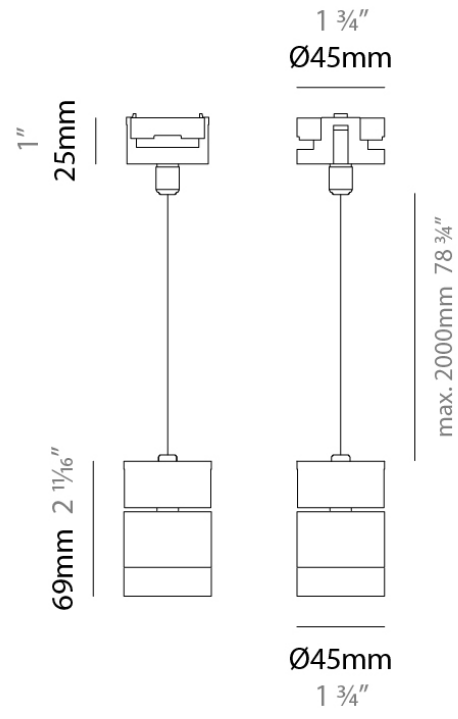

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00039-

DESCRIPTION

Level - Studio - Light Source with Diffuser, 490mm/19 5/16", On/Off, 9W LED, 2700K / 3000K, Max 850lm, 48V, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Oblong
 Length (mm): 490
 Length (in): 19 5/16
 Height (mm): 55
 Height (in): 2 3/16
 Weight (kg): 0.48
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 800 / 850
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

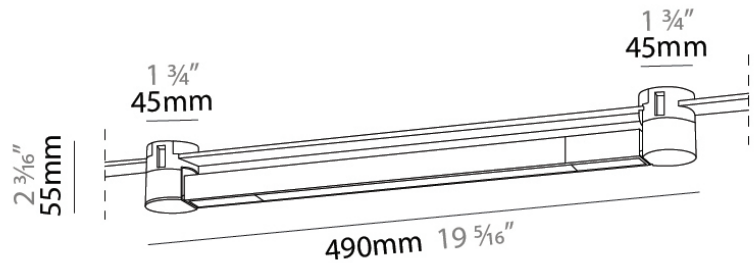

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00040-

DESCRIPTION

Level - Studio - Dark Light Source with Diffuser, 490mm/195/16", On/Off, 9W LED, 2700K / 3000K, 750lm, 48V, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Oblong
 Length (mm): 490
 Length (in): 19 5/16
 Height (mm): 55
 Height (in): 2 3/16
 Weight (kg): 0.48
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 9
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 700 / 750
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

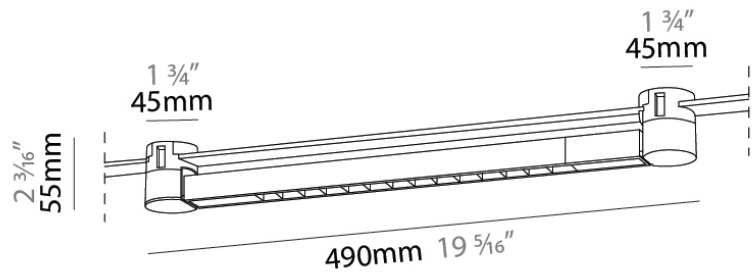

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00041-

DESCRIPTION

Level - Studio - Light Source with Diffuser, 770mm/30 5/16", On/Off, 18W LED, 2700K / 3000K, Max 1700lm, 48V, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Oblong
 Length (mm): 770
 Length (in): 30 5/16
 Height (mm): 55
 Height (in): 2 3/16
 Weight (kg): 0.69
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 18
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48

LED


Delivered Lumen Range: 500 - 1999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 700 / 750
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

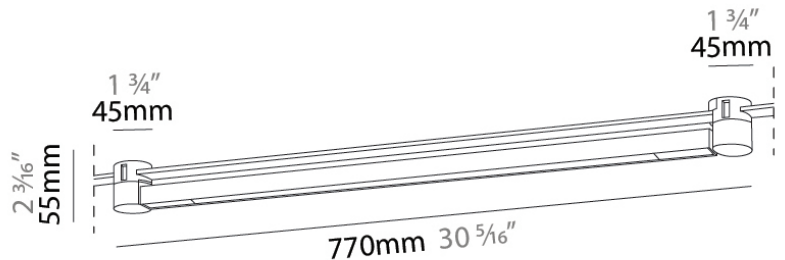

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00042-

DESCRIPTION

Level - Studio - Dark Light Source with Diffuser, 770mm/30 5/16", On/Off, 18W LED, 2700K / 3000K, Max 1500lm, 48V, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Oblong
 Length (mm): 770
 Length (in): 30 5/16
 Height (mm): 55
 Height (in): 2 3/16
 Weight (kg): 0.69
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 18
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48

LED


Delivered Lumen Range: 1000 - 2999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 1400 / 1500
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

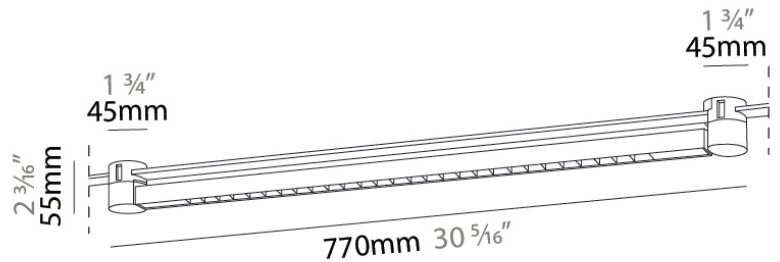

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00043-

DESCRIPTION

Level - Studio - Suspension Light Source with Diffuser, 965mm/38", On/Off, 27W LED, 2700K / 3000K, Max 2550lm, 48V, Dimmable Converter Included

GENERAL

Series: Level _____
 Partner: Letroh _____
 Division: Architectural _____
 Installation: Track _____
 Product Type: Linear Profiles _____
 Mounting Location: Ceiling _____
 Light Distribution: Downlight _____

PHYSICAL

Shape: Oblong _____
 Length (mm): 965 _____
 Length (in): 38 _____
 Height (mm): 55 _____
 Height (in): 2 ³/₁₆ _____
 Max. Overall Height (mm): 2055 _____
 Max. Overall Height (in): 80 ⁷/₈ _____
 Weight (kg): 0.89 _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____
 Cable Details: 2,000mm / 78 3/4" _____

ELECTRICAL

Input Wattage Range: 20 - 29 W _____
 Lamp Type: LED _____
 Input Wattage (W): 27 _____
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming _____
 Driver Included: No _____
 Driver Location: External _____
 Driver Type: Constant Voltage - Universal _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 - 277 _____
 Output Voltage (V): 48 _____

LED


Delivered Lumen Range: 2000 - 2999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 2400 / 2550 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Adjustability: Rotational 90° _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

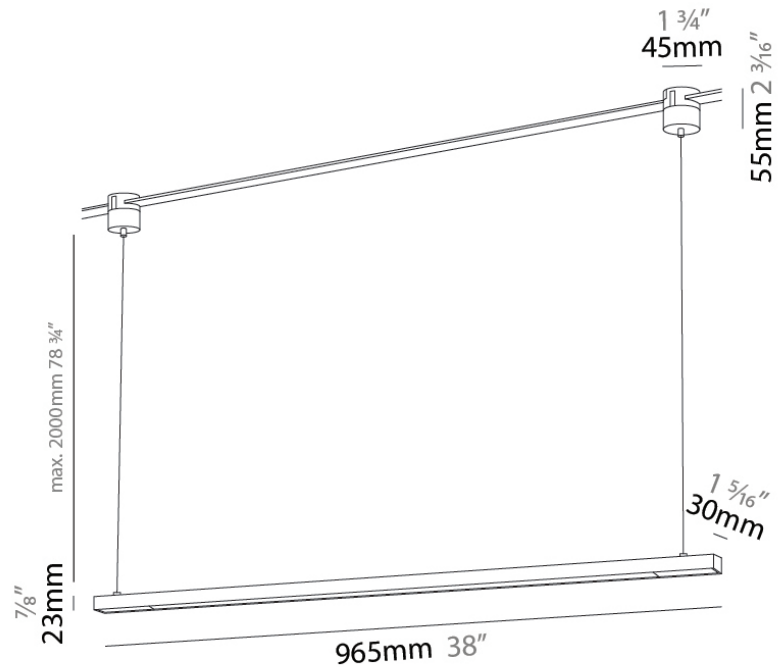

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7LEVEL-MOD-SYS COMPONENTS TRACK

A7T00044-

DESCRIPTION

Level - Studio - Suspension Dark Light Source with Diffuser, 965mm/38", On/Off, 27W LED, 2700K / 3000K, Max 2550lm, 48V, Dimmable Converter Included

GENERAL

Series: Level
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Linear Profiles
 Mounting Location: Ceiling
 Light Distribution: Downlight

PHYSICAL

Shape: Oblong
 Length (mm): 965
 Length (in): 38
 Height (mm): 55
 Height (in): 2 ³/₁₆
 Max. Overall Height (mm): 2055
 Max. Overall Height (in): 80 ⁷/₈
 Weight (kg): 0.89
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum
 Cable Details: 2,000mm / 78 3/4"

ELECTRICAL

Input Wattage Range: 20 - 29 W
 Lamp Type: LED
 Input Wattage (W): 27
 Dimming: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming
 Driver Included: No
 Driver Location: External
 Driver Type: Constant Voltage - Universal
 Driver Class: Class 2
 Input Voltage (V): 120 - 277
 Output Voltage (V): 48

LED


Delivered Lumen Range: 2000 - 2999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 2400 / 2550
 CRI: >90 CRI
 Lamp Life (hrs): 50000

OPTICAL

Adjustability: Rotational 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

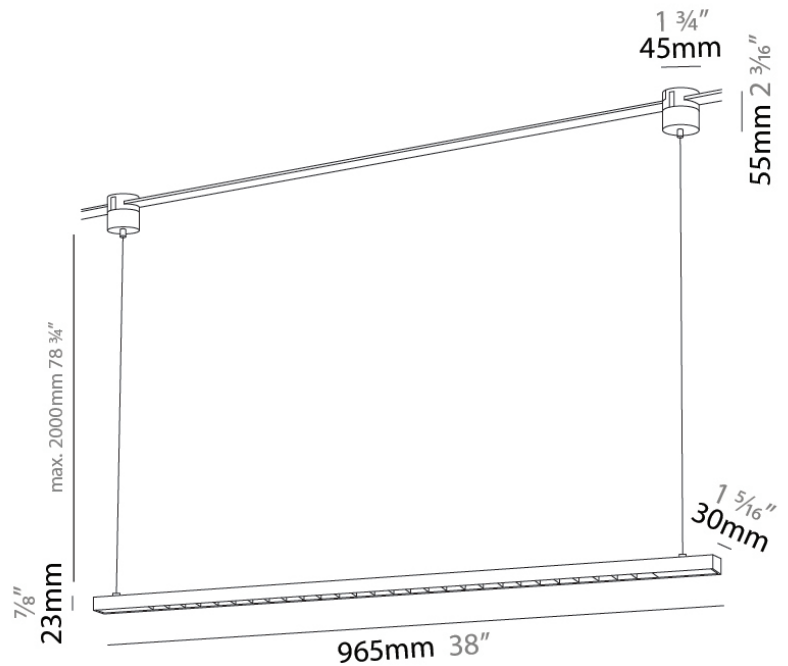

A7LEVEL-MOD-SYS COMPONENTS

A7T00111-100W

PROJECT

TYPE

NOTES

QUANTITY

DATE

DESCRIPTION

0-10V Dimming Kit, 100W, ENCP6

GENERAL

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 178

Length (in): 7

Width (mm): 105

Width (in): 4 $\frac{1}{8}$

Height (mm): 54

Height (in): 2 $\frac{1}{8}$

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 80 - 99 W

Lamp Type: LED

Input Wattage (W): 100

Total Output Wattage (W): 80

Dimming: 0-10V Dimming

Driver Included: Yes

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP6

Input Voltage (V): 120 - 277

Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards



A7LEVEL-MOD-SYS COMPONENTS

A7T00111-40W

DESCRIPTION

0-10V Dimming Kit, 40W, ENCP6

GENERAL

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 178

Length (in): 7

Width (mm): 105

Width (in): 4 $\frac{1}{8}$

Height (mm): 54

Height (in): 2 $\frac{1}{8}$

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 30 - 49 W

Lamp Type: LED

Input Wattage (W): 40

Total Output Wattage (W): 32

Dimming: 0-10V Dimming

Driver Included: Yes

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP6

Input Voltage (V): 120 - 277

Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT

TYPE

NOTES

QUANTITY

DATE



A7LEVEL-MOD-SYS COMPONENTS

A7T00111-60W

DESCRIPTION

0-10V Dimming Kit, 60W, ENCP6

GENERAL

Division: Architectural

PHYSICAL

Shape: Rectangle

Length (mm): 178

Length (in): 7

Width (mm): 105

Width (in): 4 $\frac{1}{8}$

Height (mm): 54

Height (in): 2 $\frac{1}{8}$

Fixture Material: Metal

ELECTRICAL

Input Wattage Range: 50 - 79 W

Lamp Type: LED

Input Wattage (W): 60

Total Output Wattage (W): 48

Dimming: 0-10V Dimming

Driver Included: Yes

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP6

Input Voltage (V): 120 - 277

Output Voltage (V): 48

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT

TYPE

NOTES

QUANTITY

DATE



A7LEVEL-MOD-SYS COMPONENTS

ENCP50

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 670

Length (in): 26 ³/₈

Width (mm): 44

Width (in): 1 ³/₄

Height (mm): 38


Height (in): 1 ¹/₂

Gasket: 1554JGASKET

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

IP rating: IP20

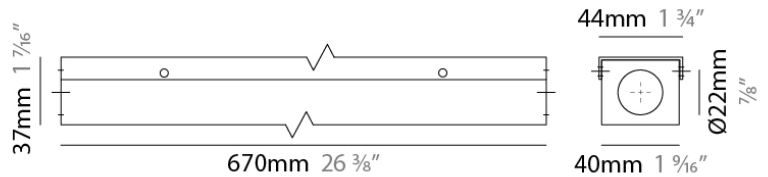

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)