

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900001

DESCRIPTION

NODO SYSTEM-Direct - Surface Support for Wall or Ceiling Every 81cm Allows For Load of 10Kg/m

GENERAL


Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL

Length (mm): 57
 Length (in): 2 ¼
 Width (mm): 7
 Width (in): 1/4
 Height (mm): 48
 Height (in): 1 7/8
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

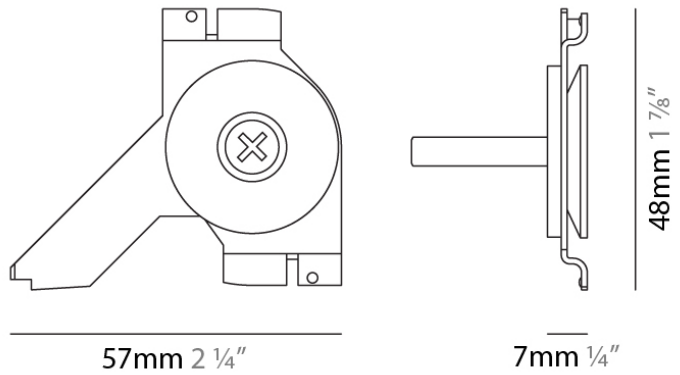

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900002

DESCRIPTION

NODO SYSTEM-Ceiling Support Kit with 200cm Suspension Cable Every 81cm Allows For Load of 10Kg/m

GENERAL


Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL

Length (mm): 50
 Length (in): 1 ¹⁵/₁₆
 Height (mm): 2000
 Height (in): 78 ³/₄
 Fixture Finish: SSR
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

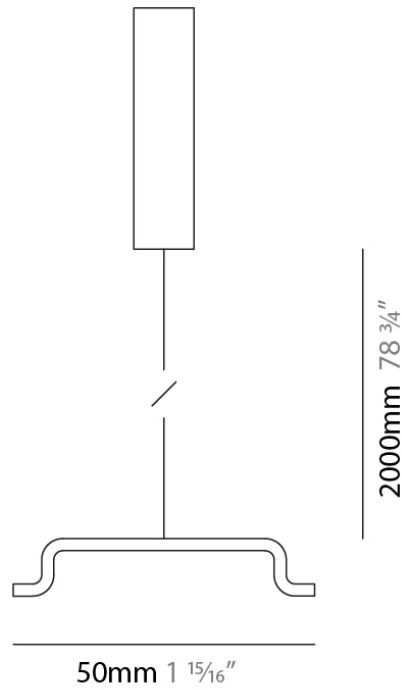

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS



A7900003-

DESCRIPTION
End Cap - Right Side

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural

PHYSICAL
Shape: Rectangle
Width (mm): 32
Width (in): 1 ¼
Height (mm): 62
Depth (mm): 4
Height (in): 2 ⅞
Depth (in): 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Insulating Plastic / Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

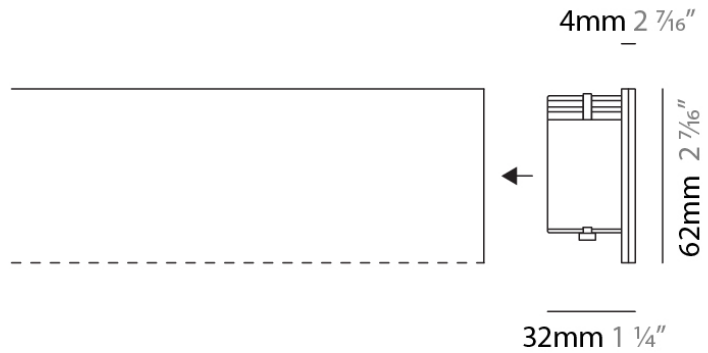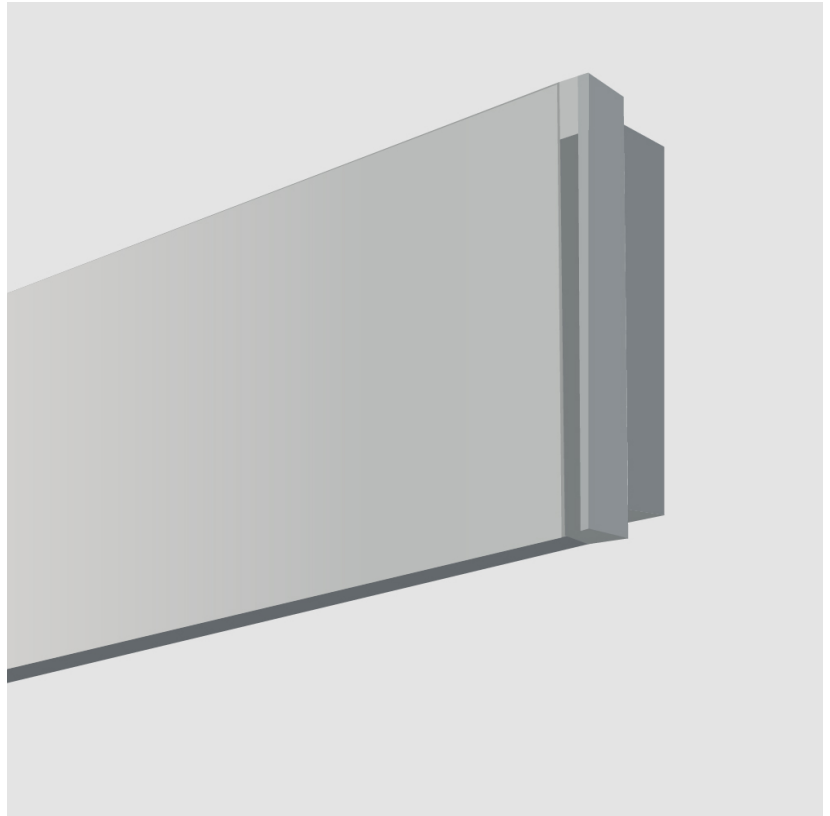

---- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS


A7900004-

DESCRIPTION
 End Cap - Left Side


GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Width (mm): 32
 Width (in): 1 ¼
 Height (mm): 62
 Depth (mm): 4
 Height (in): 2 ⅞
 Depth (in): 3/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Insulating Plastic / Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

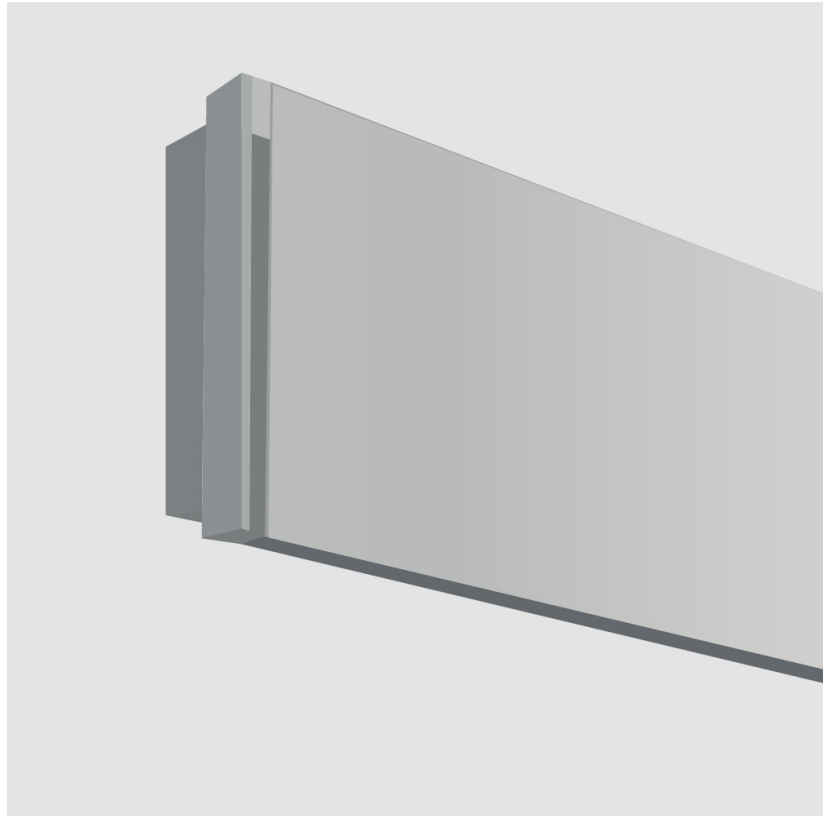

4mm 2 ⅞"

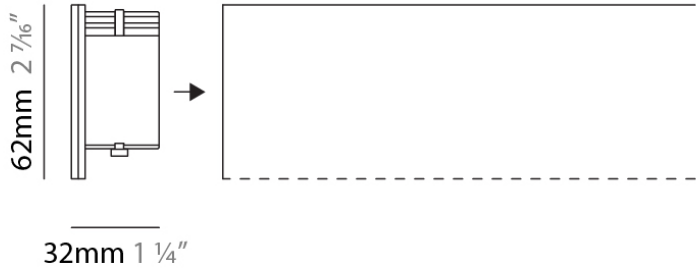

---- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900005-

DESCRIPTION

NODO SYSTEM-Right End Power Feed - to be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (Not Included)

GENERAL


Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 192 _____
 Length (in): 7 ⁹/₁₆ _____
 Width (mm): 20 _____
 Width (in): 13/16 _____
 Height (mm): 62 _____
 Height (in): 2 ⁷/₁₆ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

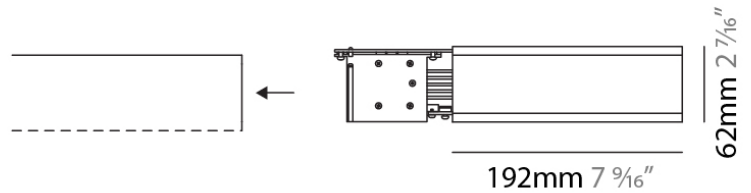

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900006-

DESCRIPTION

NODO SYSTEM-Left End Power Feed - to be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (Not Included)

GENERAL


Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 192 _____
 Length (in): 7 ⁹/₁₆ _____
 Width (mm): 20 _____
 Width (in): 13/16 _____
 Height (mm): 62 _____
 Height (in): 2 ⁷/₁₆ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

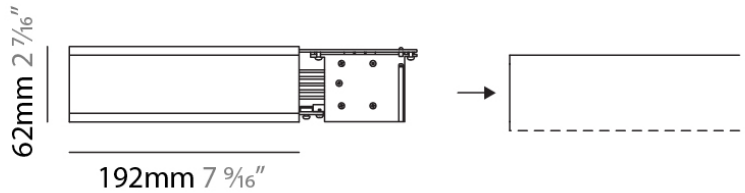

--- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900007-

DESCRIPTION

NODO SYSTEM - Central Power Feed To be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (not included)

GENERAL


Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 192
 Length (in): 7 ⁹/₁₆
 Width (mm): 25
 Width (in): 1
 Height (mm): 62
 Height (in): 2 ⁷/₁₆
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

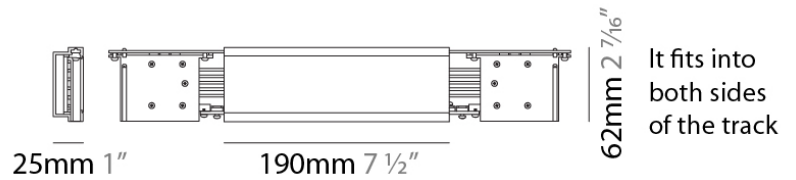

A7NODO-MOD-SYS COMPONENTS SURFACE

A7900008

DESCRIPTION

Cable Clamp Kit

GENERAL

Series: Nodo

Partner: Letroh

Division: Architectural

Installation: Surface

Product Type: Linear Profiles

Mounting Location: Ceiling

PHYSICAL


Shape: Rectangle

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

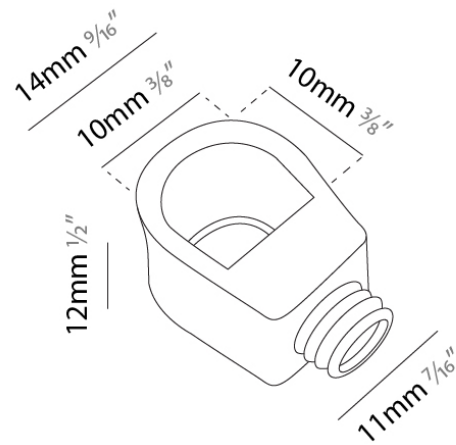

A7NODO-MOD-SYS COMPONENTS


A7900010-

DESCRIPTION
 Nodo System - Linear Insulating Coupling

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 200
 Length (in): 7 7/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

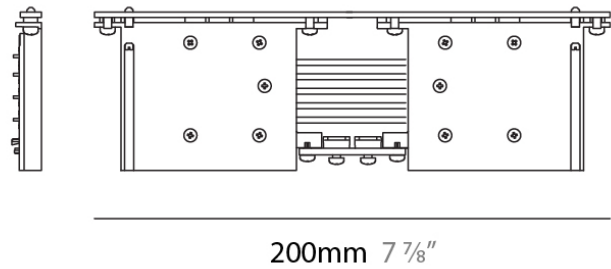

It fits between two tracks



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


A7900013-

DESCRIPTION
 NODO SYSTEM - 90° Joint - Internal -

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 190 + 190
 Length (in): 7 1/2
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

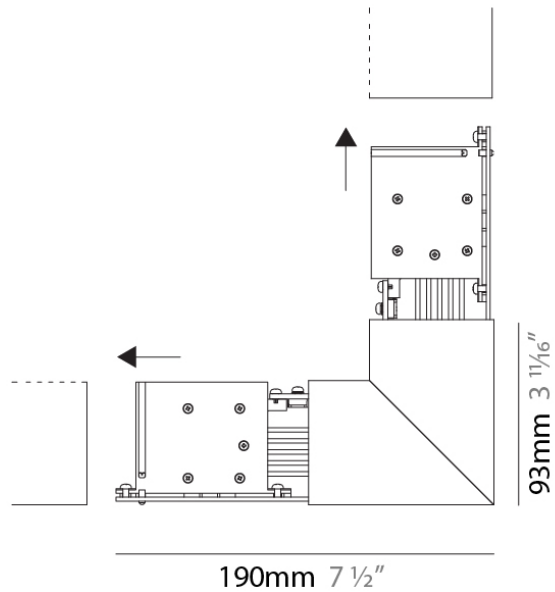

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


A7900014-

DESCRIPTION
 NODO SYSTEM-90° Joint - External

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Length (mm): 93 + 93
 Length (in): 3 11/16
 Width (mm): 25
 Width (in): 1
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

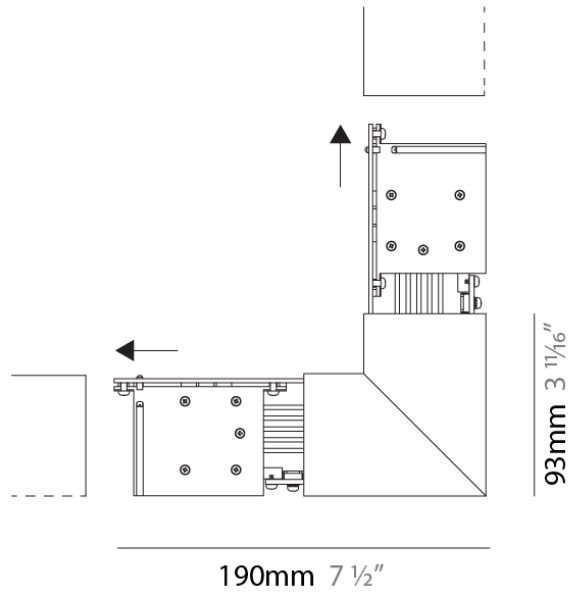

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


A7900015-

DESCRIPTION
 NODO SYSTEM-Angular Joint - Internal

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 150 + 150
 Length (in): 5 7/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

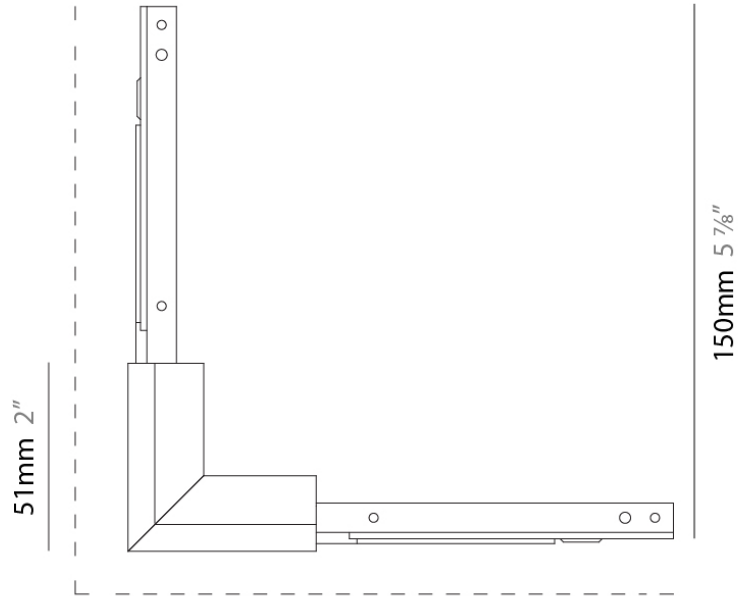

--- INDICATES WALL



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS


A7900016-

DESCRIPTION
 NODO SYSTEM-Angular Joint - External -

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Length (mm): 51 + 51
 Length (in): 2 + 2
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

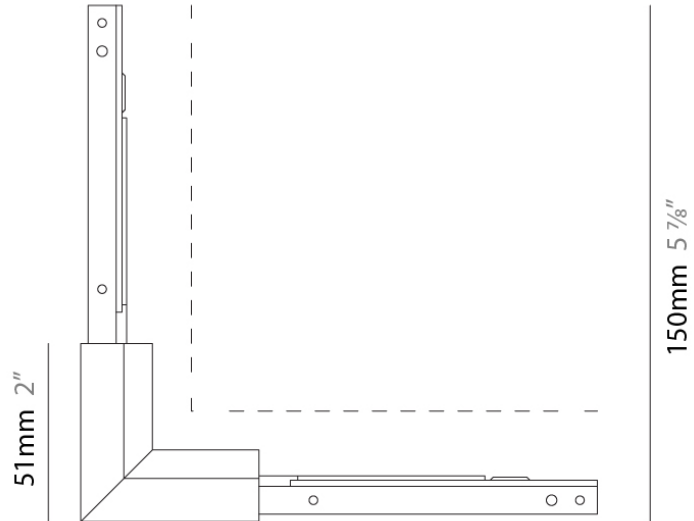

----- INDICATES WALL



A7NODO-MOD-SYS COMPONENTS

A7900022-

DESCRIPTION

NODO BOX-Large Box - 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 2000W.

GENERAL

Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____

PHYSICAL



Shape: Rectangle _____
 Length (mm): 102 _____
 Length (in): 4 _____
 Width (mm): 74 _____
 Width (in): $2 \frac{15}{16}$ _____
 Height (mm): 86 _____
 Height (in): $3 \frac{3}{8}$ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Max. Wattage Per Lamp (W): 2000 _____
 Input Voltage (V): 127 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

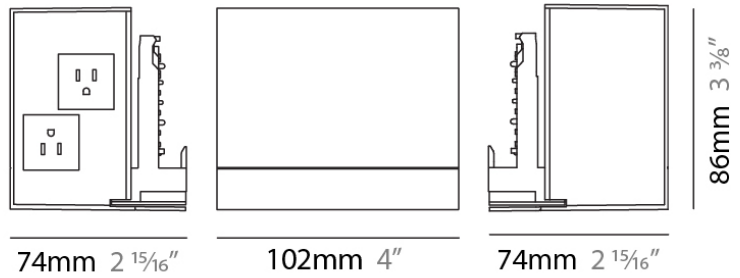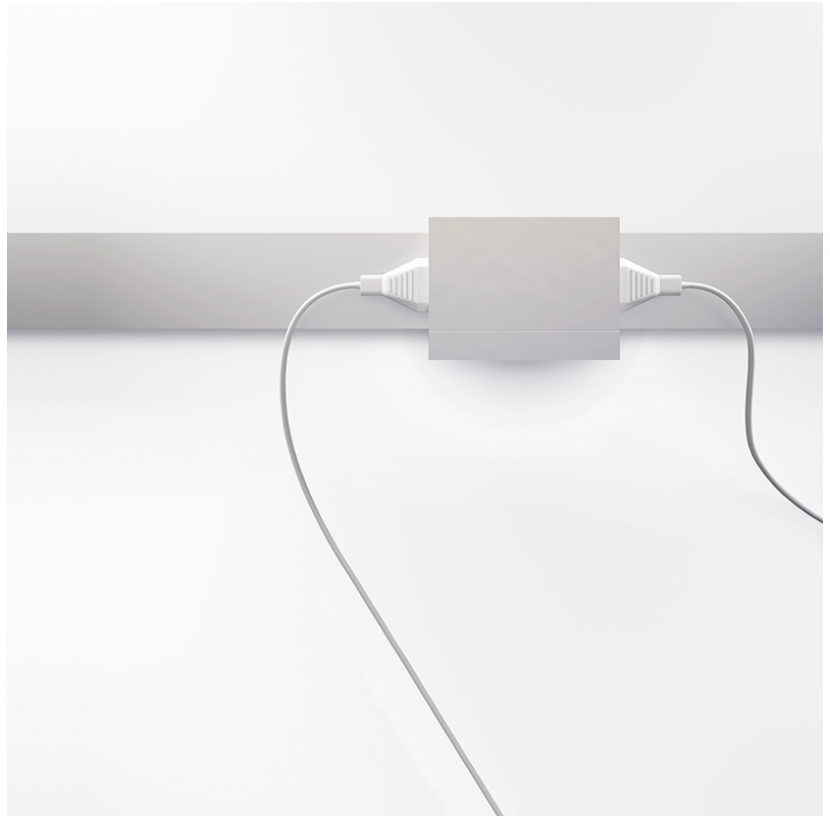

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS



A7900029-

DESCRIPTION
 NODO-Adjustable Joint -

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 160 + 160
 Length (in): 6 5/16
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

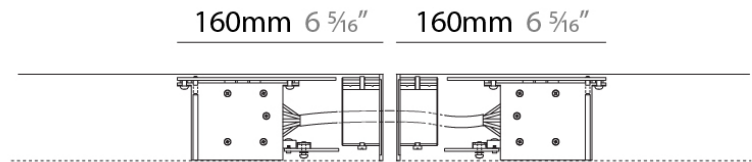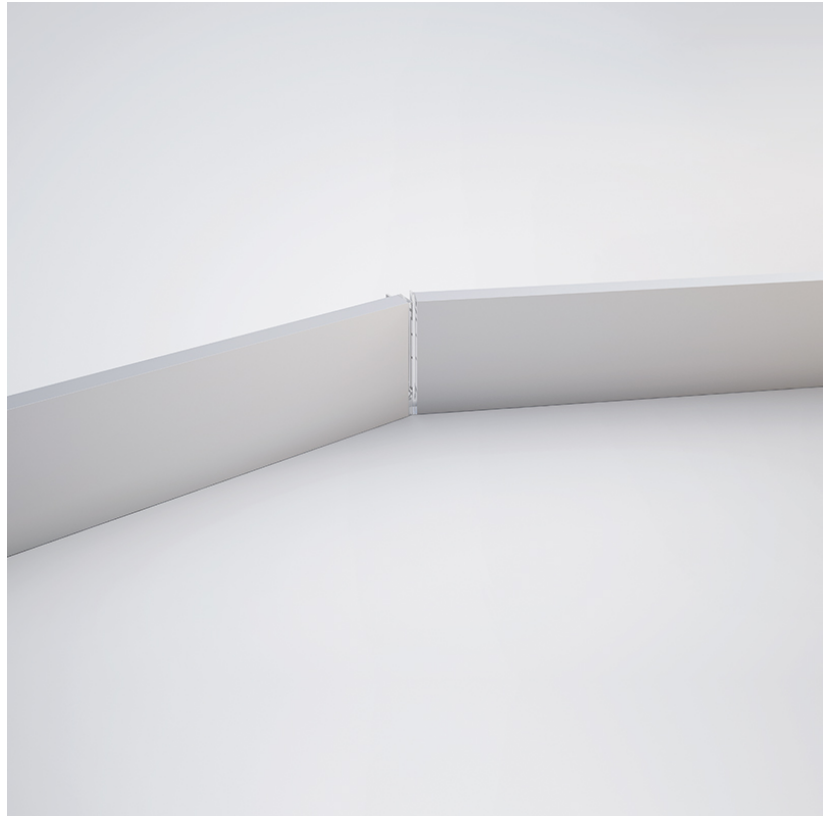

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900030-

DESCRIPTION

Nodo Desk - Plug Wiring - Right - Wiring covered in Anthracite Gray Fabric.

GENERAL


Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____

PHYSICAL

Length (mm): 2000 _____
 Length (in): 78 ³/₄ _____
 Fixture Finish: WHI / BLK _____
 Cable Details: 2000mm / 78 3/4" - 3 x 15mm² _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

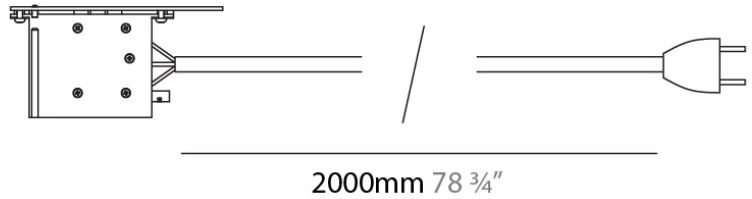

A7NODO-MOD-SYS COMPONENTS

A7900031-

DESCRIPTION

Nodo Desk - Plug Wiring - Left - Wiring covered in Anthracite Gray Fabric.

GENERAL


Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____
 Product Type: Linear Profiles _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 2000 _____
 Length (in): 78 ¾ _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____
 Cable Details: 2000mm / 78 ¾" - 3 x 15mm² _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

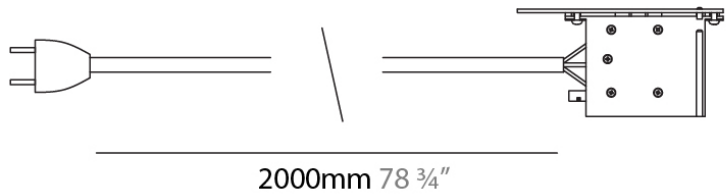

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900046-

DESCRIPTION

NODO BOX-Slim Box - 1 x 3 Prong Receptacle (Double Sided) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 102
 Length (in): 4
 Width (mm): 52
 Width (in): 2 ¹/₁₆
 Height (mm): 86
 Height (in): 3 ³/₈
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
 Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

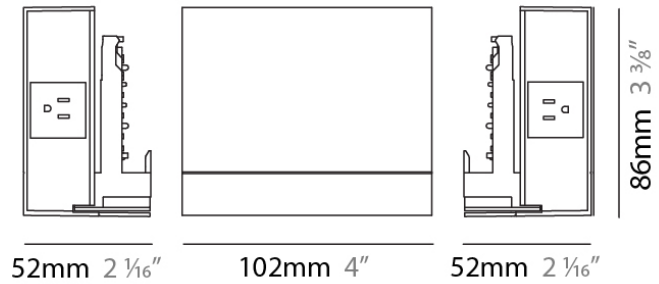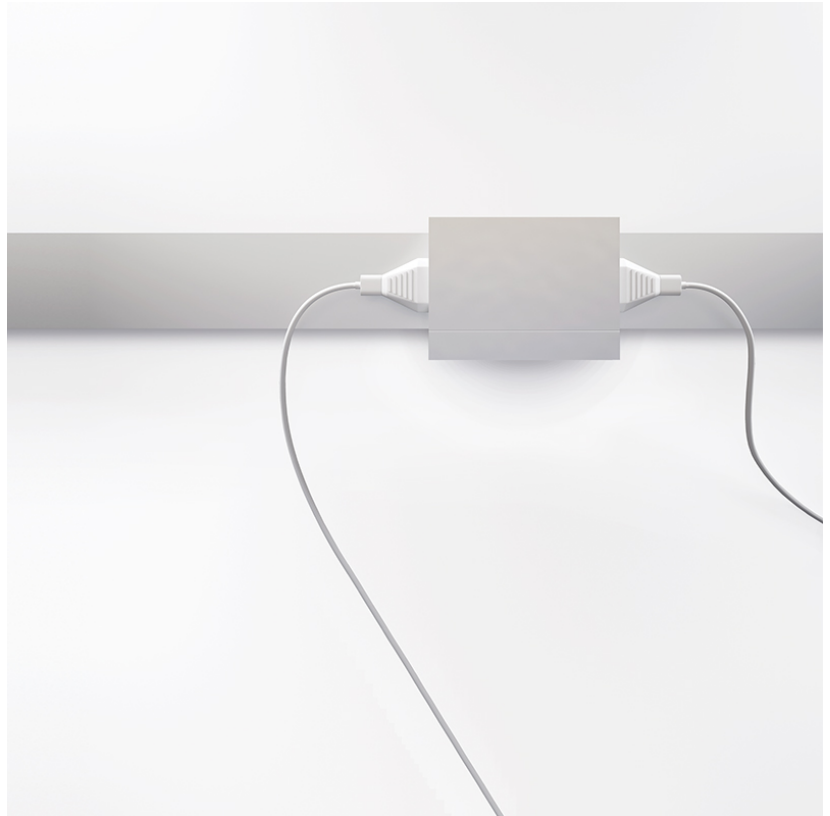

A7NODO-MOD-SYS COMPONENTS

A7900047-

DESCRIPTION

NODO BOX-Slim Box - 1 x USB Port (Single Side) + 1 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____

PHYSICAL



Shape: Rectangle _____
 Length (mm): 102 _____
 Length (in): 4 _____
 Width (mm): 52 _____
 Width (in): 2 1/16 _____
 Height (mm): 86 _____
 Height (in): 3 3/8 _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Max. Wattage Per Lamp (W): 2000 _____
 Input Voltage (V): 127 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

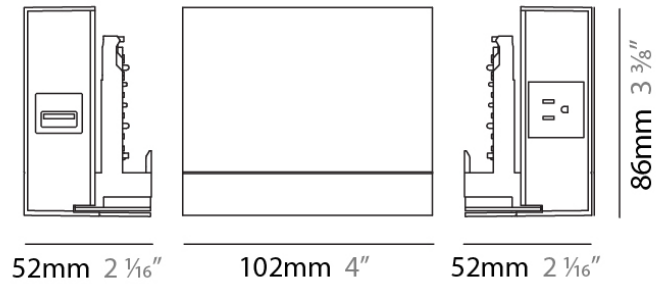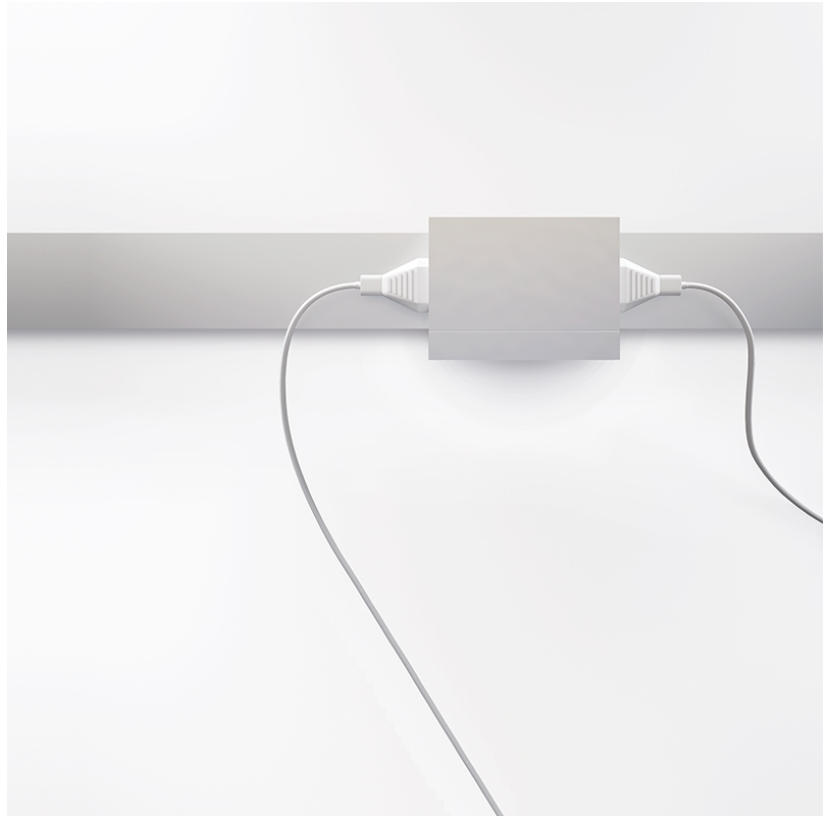

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900049-

DESCRIPTION

NODO BOX-Large Box - 2 x USB Port (Single Side) + 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 102
 Length (in): 4
 Width (mm): 74
 Width (in): 2 ¹⁵/₁₆
 Height (mm): 86
 Height (in): 3 ³/₈
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
 Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

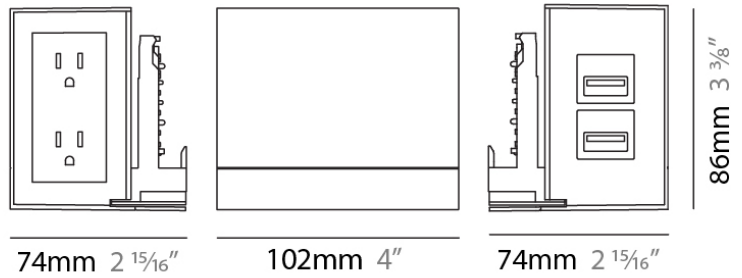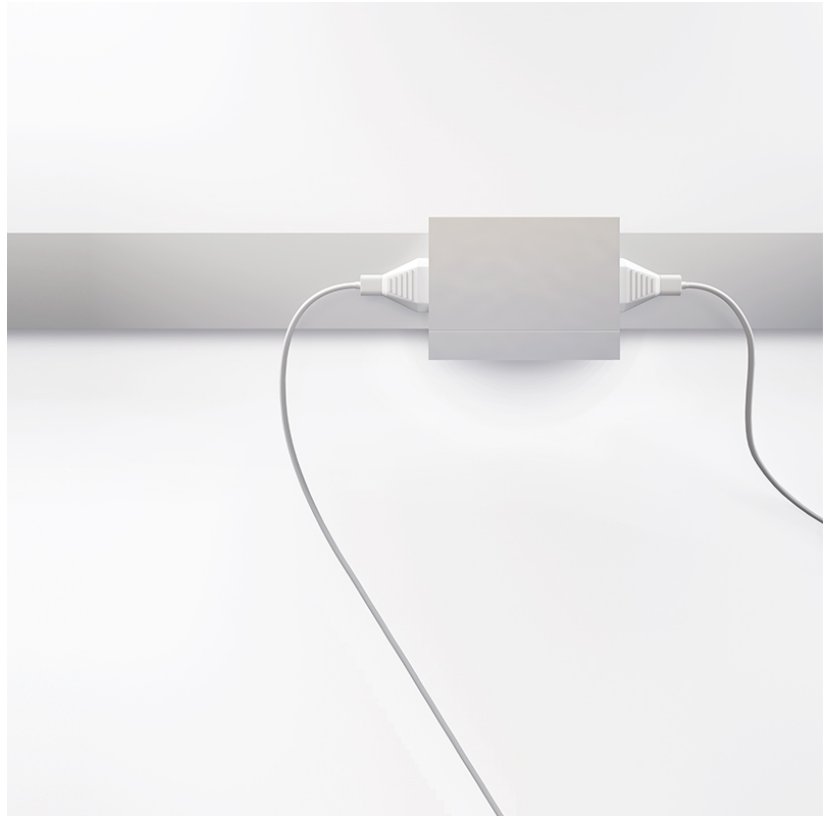

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900050-

DESCRIPTION

NODO BOX-Large Box - 2 x GFCI Receptacles - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
 Partner: Letroh
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 102
 Length (in): 4
 Width (mm): 74
 Width (in): 2 ¹⁵/₁₆
 Height (mm): 86
 Height (in): 3 ³/₈
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
 Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

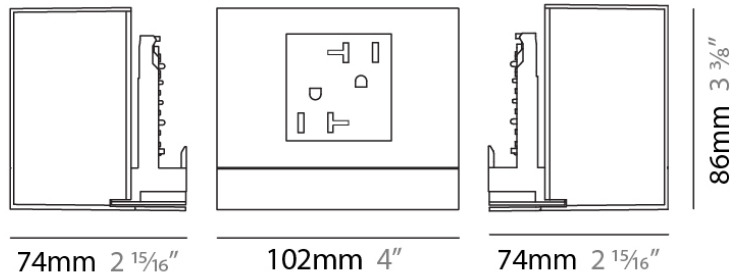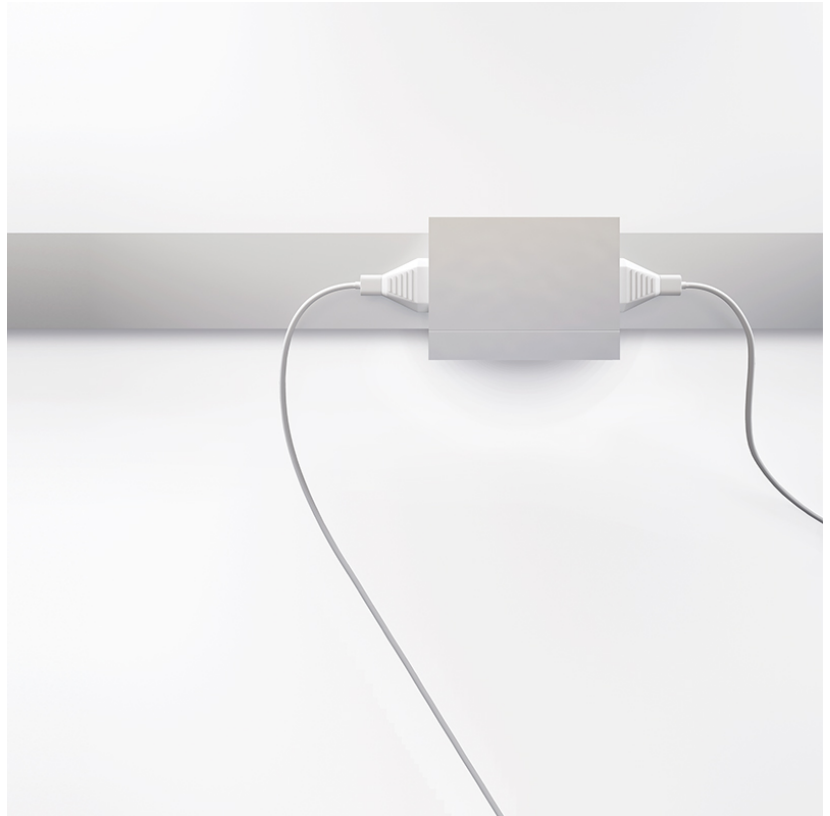

A7NODO-MOD-SYS COMPONENTS

A7T00007-

DESCRIPTION

NODO LIGHTS-Nuo - Right - Spotlight - 4.5W LED - 3000K - 400lm
 - 350mA - CRI90

GENERAL

Series: Nodo _____
 Subseries: Nuo _____
 Partner: Letroh _____
 Division: Architectural _____
 Light Distribution: Adjustable / Direct _____

PHYSICAL

Diameter (mm): 15 _____
 Diameter (in): 9/16 _____
 Length (mm): 100 _____
 Length (in): 3 15/16 _____
 Extension (mm): 520 _____
 Extension (in): 20 1/2 _____
 Weight (kg): 0.50 _____
 Weight (lbs): 1.1 _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL



Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED _____
 Input Wattage (W): 4.5 _____
 Dimming: Non-Dimmable _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - 120Vac _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Constant Current (mA): 350 _____

LED

Delivered Lumen Range: 100 - 499 lm _____
 Color Temperature (°K): 3000 _____
 Max. Delivered Lumen (lm): 400 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

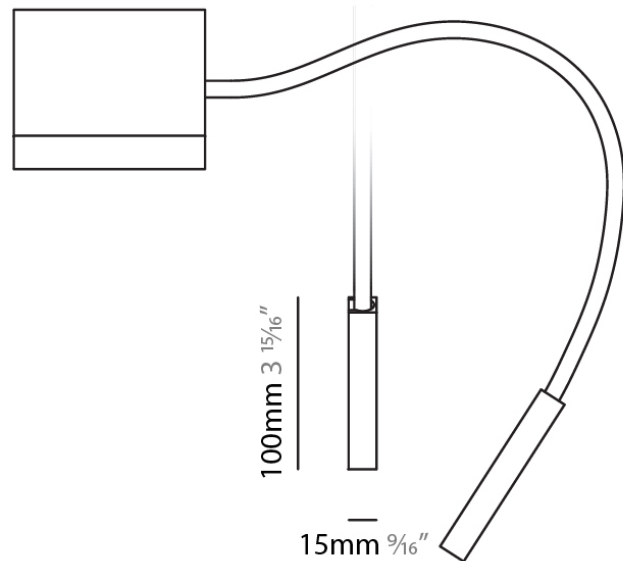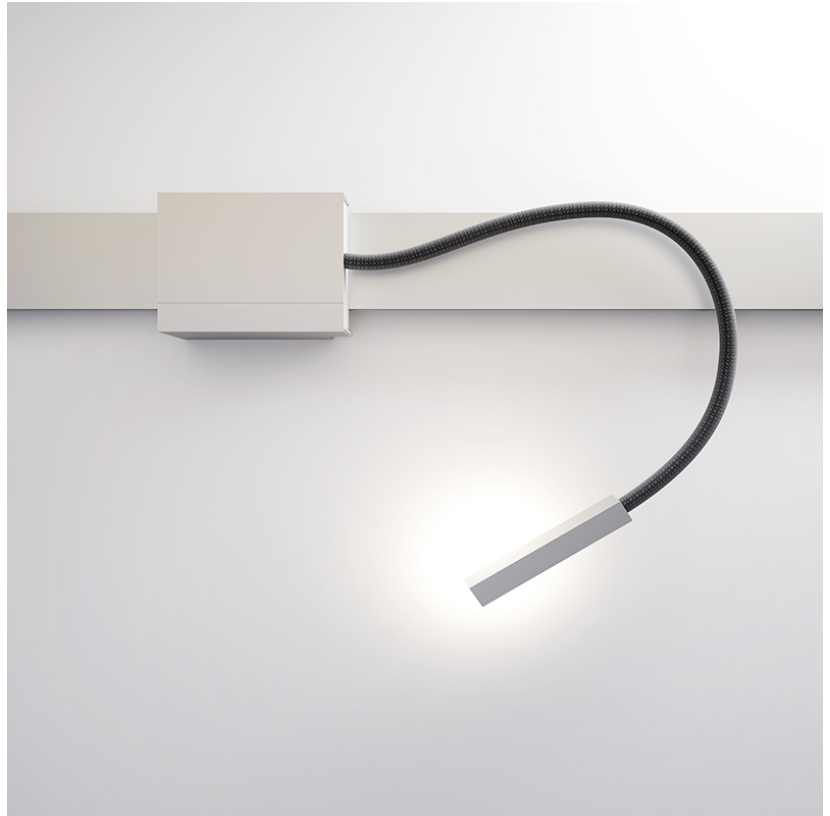

Hose: Ø9mm 3/8"
 Maximum extension 520mm 20 1/2"



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7T00008-

DESCRIPTION

NODO LIGHTS - Nuo - Left - Spotlight - 4.5W LED - 3000K - 350mA - CRI90 -

GENERAL

Series: Nodo
 Subseries: Nuo
 Partner: Letroh
 Division: Architectural

PHYSICAL

Diameter (mm): 15
 Diameter (in): 9/16
 Length (mm): 100
 Length (in): 3 15/16
 Extension (mm): 520
 Extension (in): 20 1/2
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 4.5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (MA): 350

LED

Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 400
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

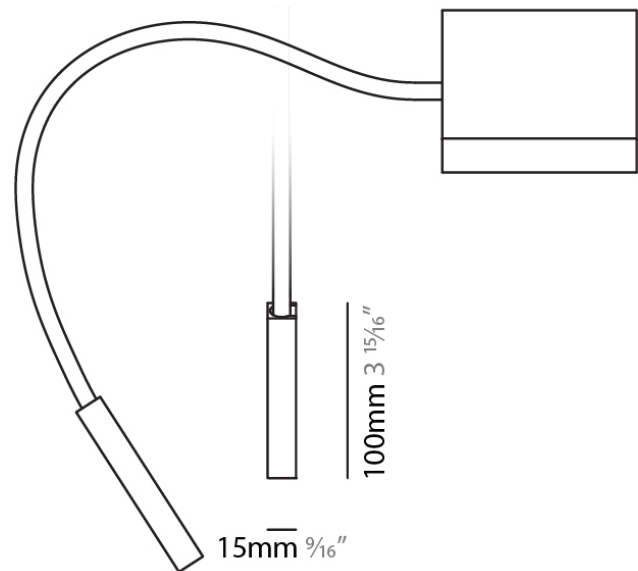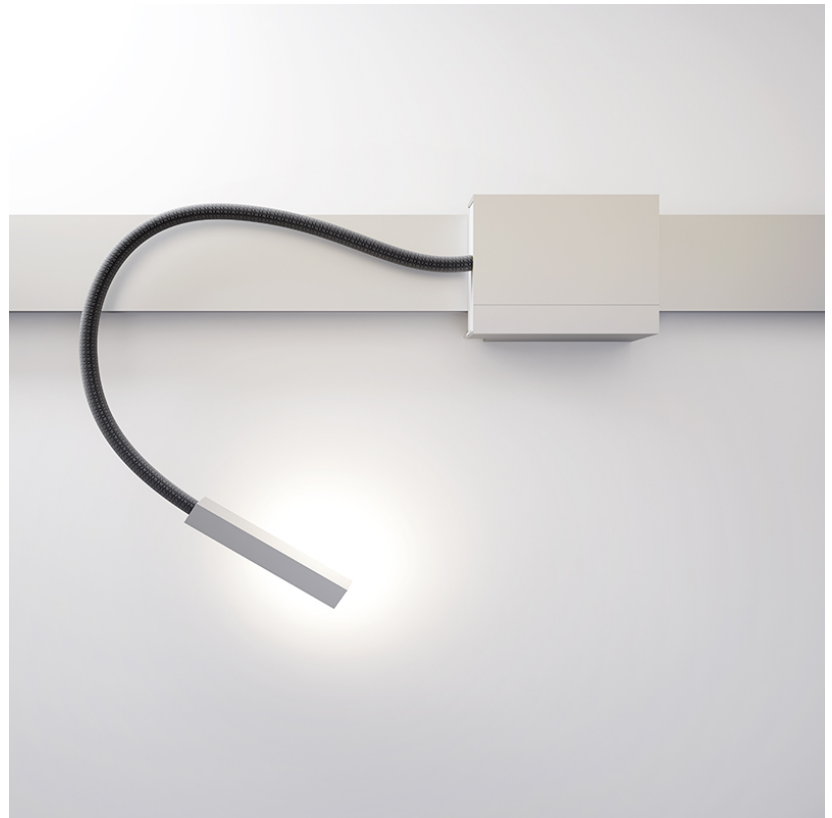

Hose: Ø9mm 3/8"
 Maximum extension 520mm 20 1/2"



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00011-

DESCRIPTION
1-Phase Track - 1000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2.205
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

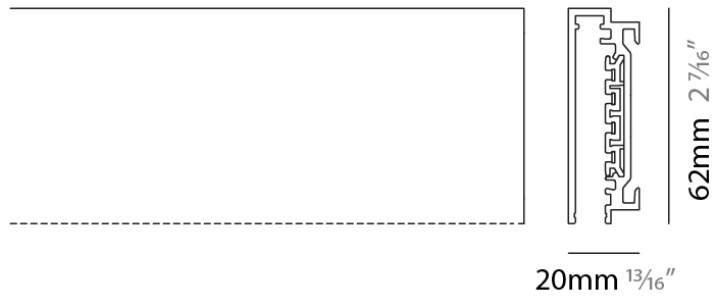

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00012-

DESCRIPTION
1-Phase Track - 2000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 ⅞
Weight (kg): 2
Weight (lbs): 4.41
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

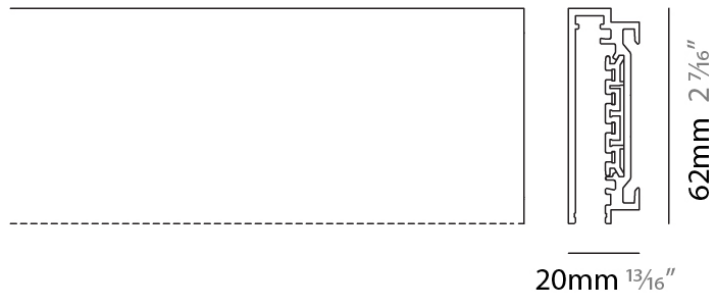

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00013-

DESCRIPTION
1-Phase Track - 3000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

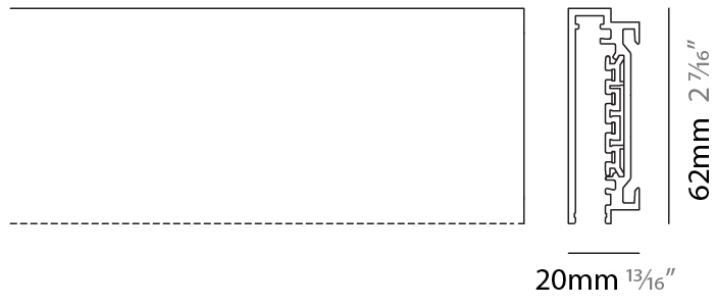

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00014-

DESCRIPTION
2-Phase Track - 1000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2.205
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

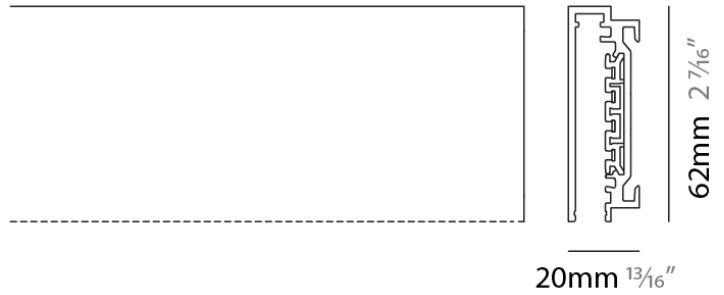

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00015-

DESCRIPTION
 2-Phase Track - 2000mm

GENERAL
 Series: Nodo
 Partner: Letroh
 Division: Architectural
 Installation: Surface
 Product Type: Linear Profiles
 Mounting Location: Wall

PHYSICAL
 Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Weight (kg): 2
 Weight (lbs): 4 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

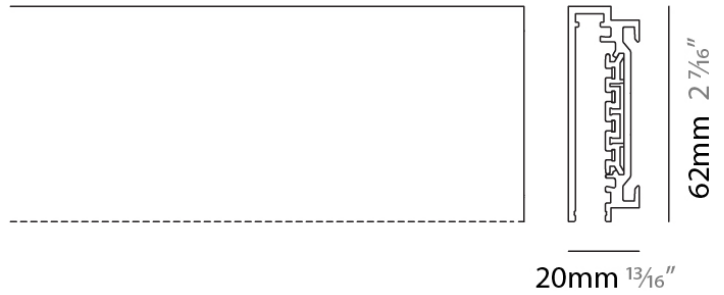

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00016-

DESCRIPTION
2-Phase Track - 3000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

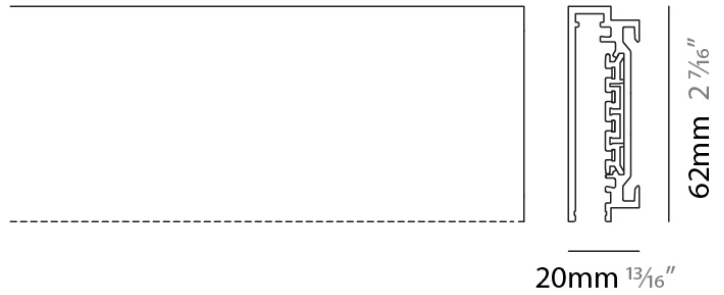

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00017-

DESCRIPTION
3-Phase Track - 1000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

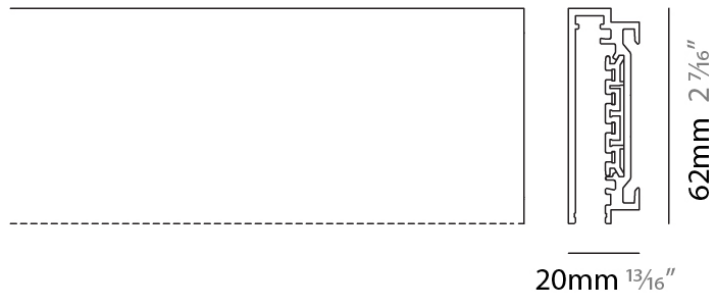

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00018-

DESCRIPTION
3-Phase Track - 2000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

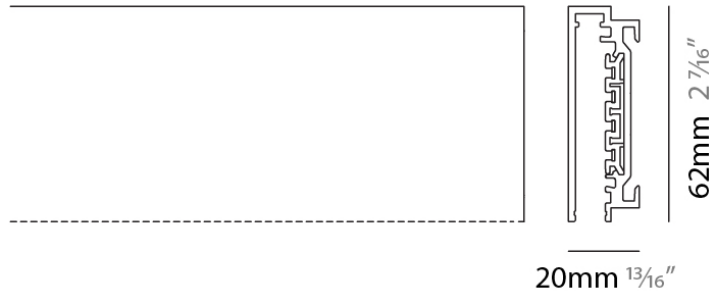

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00019-

DESCRIPTION
3-Phase Track - 3000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

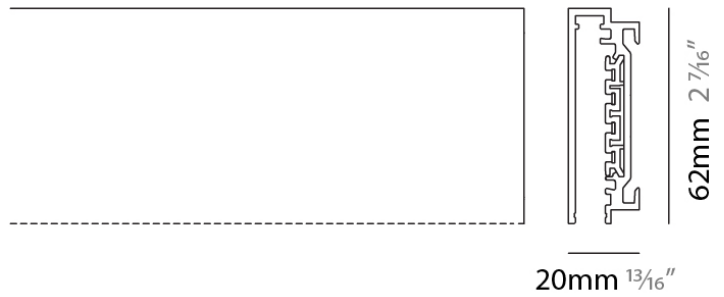

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

A7T00020-

DESCRIPTION

Wired Track - 1000mm

GENERAL


Series: Nodo
 Partner: Letroh
 Division: Architectural
 Installation: Surface
 Product Type: Linear Profiles
 Mounting Location: Wall

PHYSICAL

Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 ³/₈
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 ⁷/₁₆
 Weight (kg): 1
 Weight (lbs): 2 3/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

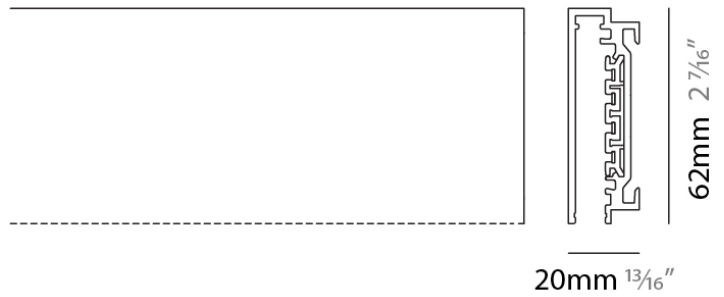

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00021-

DESCRIPTION
Wired Track - 2000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Square
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

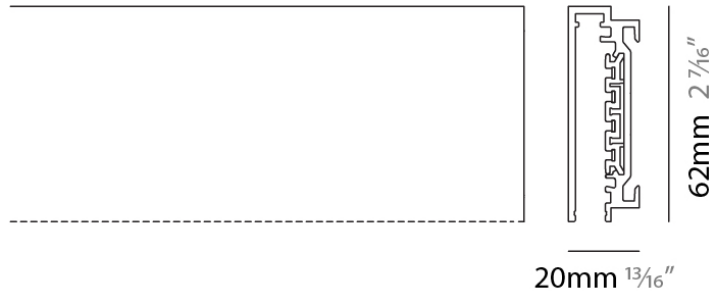

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00022-

DESCRIPTION
Wired Track - 3000mm

GENERAL
Series: Nodo
Partner: Letroh
Division: Architectural
Installation: Surface
Product Type: Linear Profiles
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

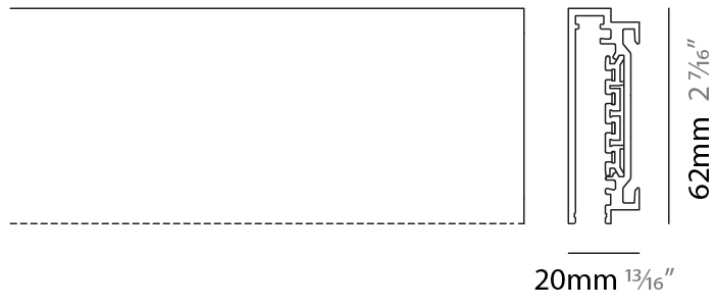

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS TRACK

A7T00025-

DESCRIPTION

Nodo - Bob - Track Spotlight - 13W LED - 2700K / 3000K - Optics
 30° / 40° / 60° / OV / RL / WW

GENERAL

Series: Nodo _____
 Partner: Letroh _____
 Division: Architectural _____
 Installation: Track _____
 Product Type: Linear Profiles _____
 Mounting Location: Wall _____
 Light Distribution: Adjustable / Direct _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 60 _____
 Diameter (in): 2 3/8 _____
 Length (mm): 101 _____
 Length (in): 4 _____
 Height (mm): 109 _____
 Height (in): 4 5/16 _____
 Weight (kg): 0.65 _____
 Weight (lbs): 1.43 _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED _____
 Input Wattage (W): 13 _____
 Total Output Wattage (W): 12 _____
 Dimming: Non-Dimmable _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - 120Vac _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Constant Current (MA): 350 _____

LED


Delivered Lumen Range: 1000 - 2999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 1100 / 1500 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Optic°: 30 / 40 / 60 / OV / RL / WW _____
 Adjustability: Rotational 360°; Tilt 90° _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

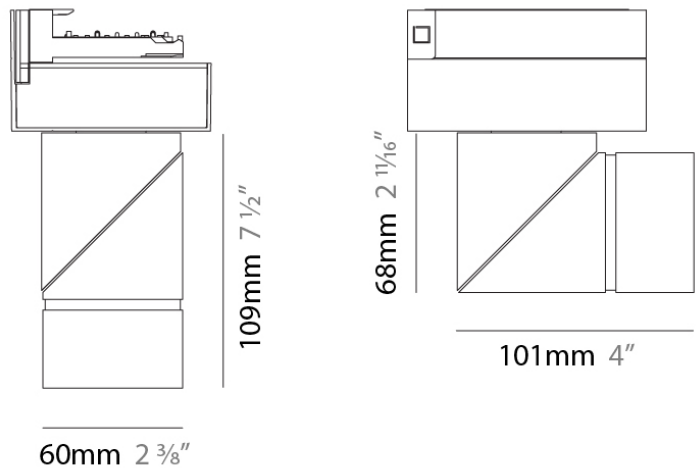

A7NODO-MOD-SYS COMPONENTS TRACK

A7T00045-

DESCRIPTION

NODO LIGHTS - Zoom Adjustable Spot - 1 x 13W LED, 2700K/3000K, 878lm, CRI97, Optic Range: 12° - 46°

GENERAL

Series: Nodo
 Partner: Letroh
 Division: Architectural
 Installation: Track
 Product Type: Spots
 Mounting Location: Ceiling
 Light Distribution: Adjustable / Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
 Shape: Cylinder
 Length (mm): 85
 Length (in): 3 3/8
 Height (mm): 114
 Height (in): 4 1/2
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 13
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - Universal
 Driver Class: Class 2
 Input Voltage (V): 120

LED


Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 831 / 878
 Nominal Lumen (lm): 1010 / 1068
 CRI: >97 CRI
 Lamp Life (hrs): 50000

OPTICAL

Optic°: 12 - 46
 Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

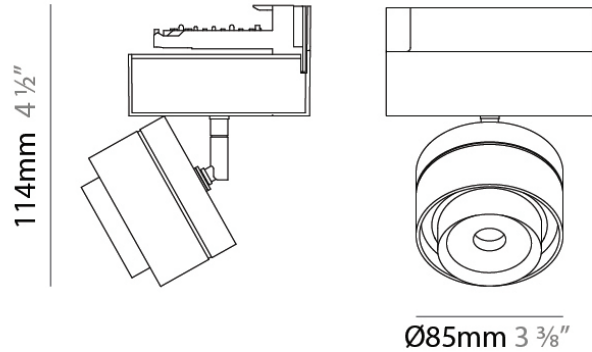

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)