

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900001

DESCRIPTION

NODO SYSTEM-Direct - Surface Support for Wall or Ceiling Every 81cm Allows For Load of 10Kg/m

GENERAL


Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL

Length (mm): 57
 Length (in): 2 ¼
 Width (mm): 7
 Width (in): 1/4
 Height (mm): 48
 Height (in): 1 7/8
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

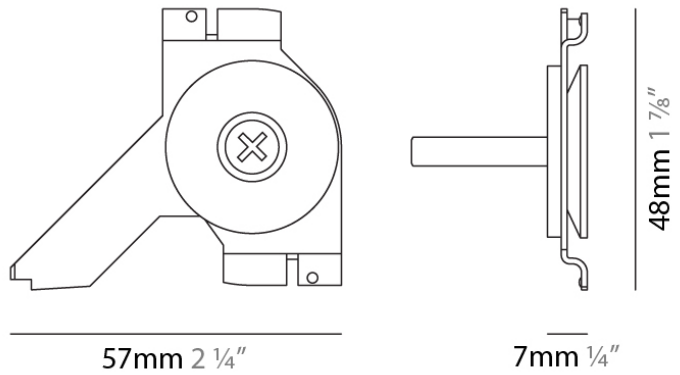

A7NODO-MOD-SYS COMPONENTS

A7900002

DESCRIPTION

NODO SYSTEM-Ceiling Support Kit with 200cm Suspension Cable Every 81cm Allows For Load of 10Kg/m

GENERAL


Series: Nodo _____
Brand: Letroh _____
Division: Architectural _____

PHYSICAL

Length (mm): 50 _____
Length (in): 1 ¹⁵/₁₆ _____
Height (mm): 2000 _____
Height (in): 78 ³/₄ _____
Fixture Finish: SSR _____
Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
IP rating: IP20 _____

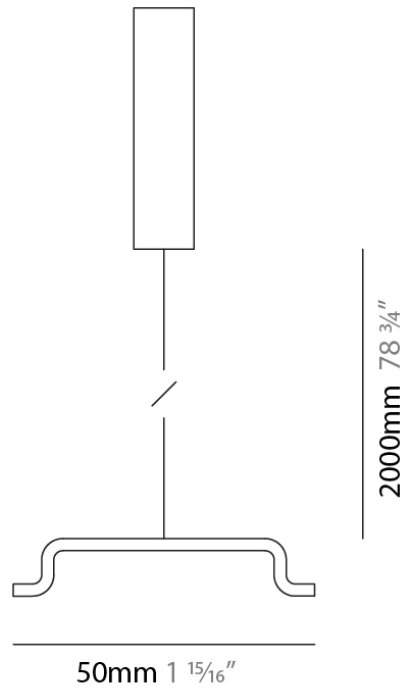

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS



A7900003-

DESCRIPTION
End Cap - Right Side

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL
Shape: Rectangle
Width (mm): 32
Width (in): 1 ¼
Height (mm): 62
Depth (mm): 4
Height (in): 2 ⅞
Depth (in): 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Insulating Plastic / Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

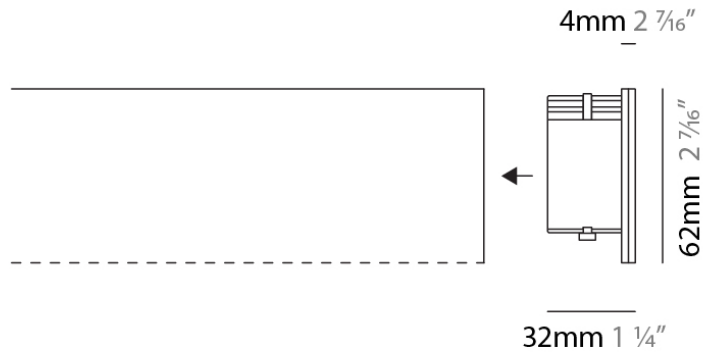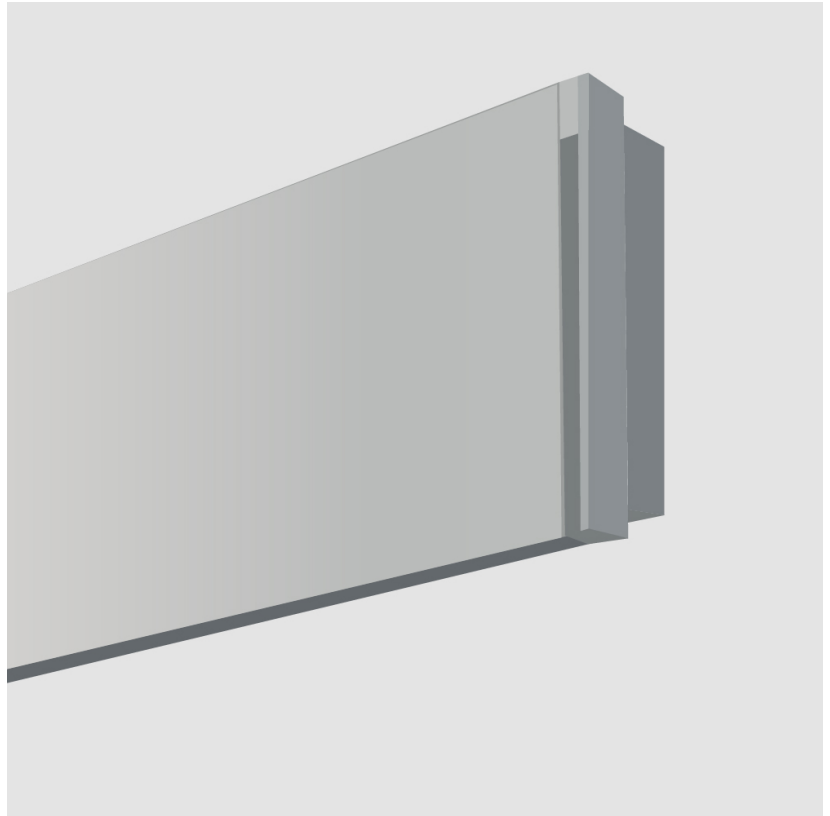

A7NODO-MOD-SYS COMPONENTS


A7900004-

DESCRIPTION
 End Cap - Left Side


GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Width (mm): 32
 Width (in): 1 ¼
 Height (mm): 62
 Depth (mm): 4
 Height (in): 2 ⅞
 Depth (in): 3/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Insulating Plastic / Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

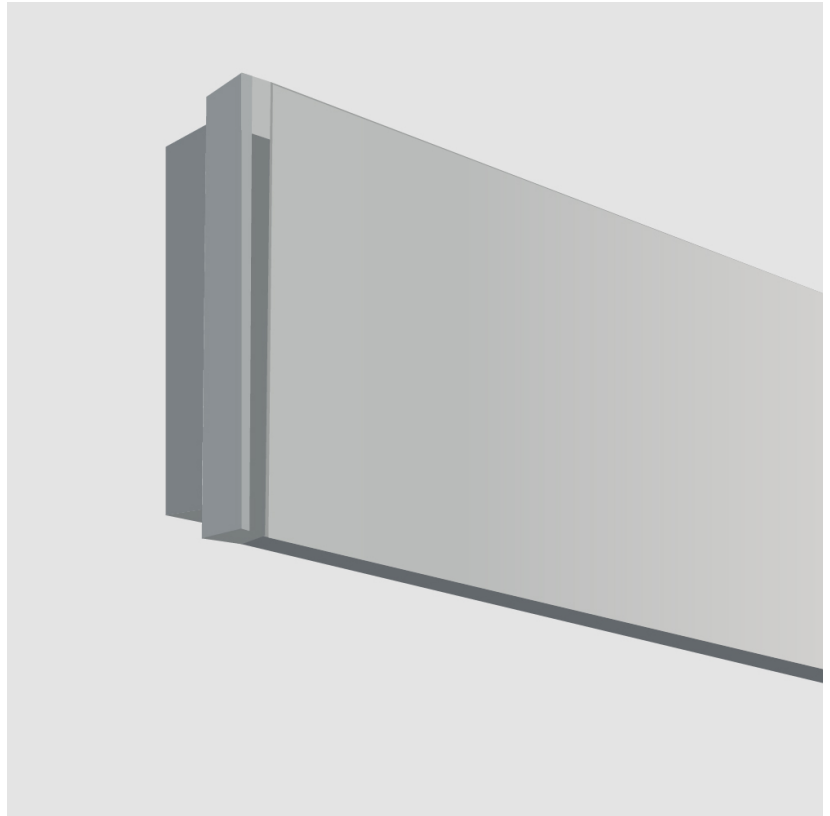

4mm 2 ⅞"

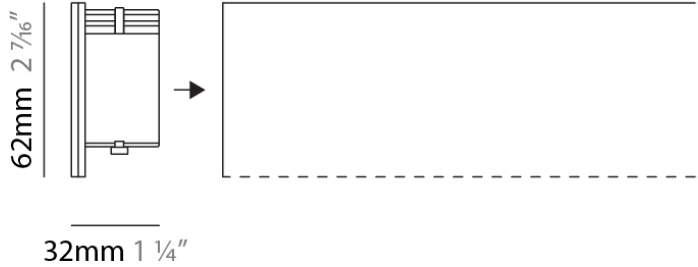

---- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900005-

DESCRIPTION

NODO SYSTEM-Right End Power Feed - to be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (Not Included)

GENERAL


Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 192 _____
 Length (in): 7 ⁹/₁₆ _____
 Width (mm): 20 _____
 Width (in): 13/16 _____
 Height (mm): 62 _____
 Height (in): 2 ⁷/₁₆ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

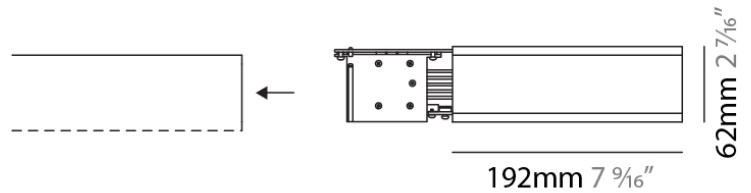

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900006-

DESCRIPTION

NODO SYSTEM-Left End Power Feed - to be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (Not Included)

GENERAL


Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 192 _____
 Length (in): 7 ⁹/₁₆ _____
 Width (mm): 20 _____
 Width (in): 13/16 _____
 Height (mm): 62 _____
 Height (in): 2 ⁷/₁₆ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

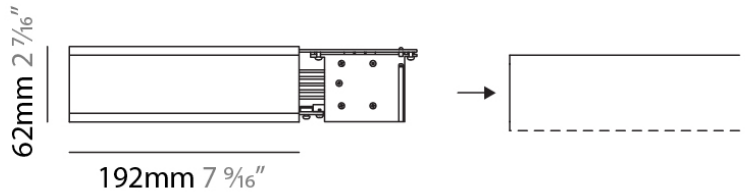

A7NODO-MOD-SYS COMPONENTS

A7900007-

DESCRIPTION

NODO SYSTEM - Central Power Feed To be used with min 5 x 1.5mm² Cable - Mount 3 16A fuses (not included)

GENERAL


Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
 Length (mm): 192 _____
 Length (in): 7 ⁹/₁₆ _____
 Width (mm): 25 _____
 Width (in): 1 _____
 Height (mm): 62 _____
 Height (in): 2 ⁷/₁₆ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

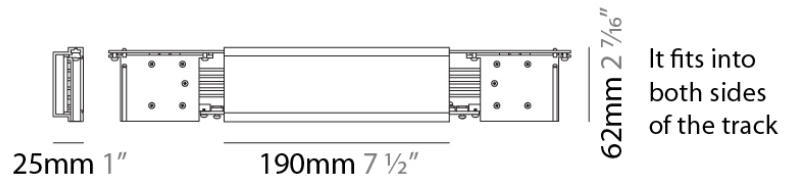

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS SURFACE

A7900008

DESCRIPTION

Cable Clamp Kit

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

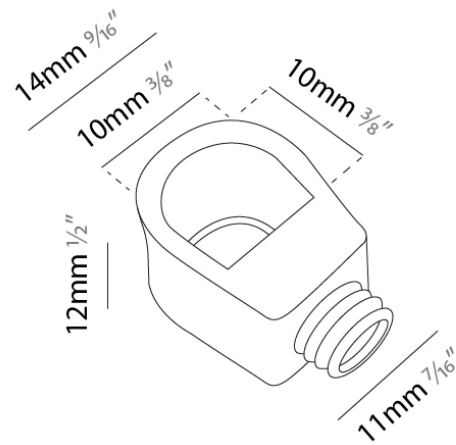

A7NODO-MOD-SYS COMPONENTS


A7900010-

DESCRIPTION
 Nodo System - Linear Insulating Coupling

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 200
 Length (in): 7 7/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

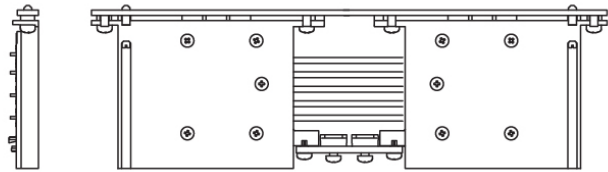

200mm 7 7/8"

It fits between two tracks



A7NODO-MOD-SYS COMPONENTS


A7900013-

DESCRIPTION
 NODO SYSTEM - 90° Joint - Internal -

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 190 + 190
 Length (in): 7 1/2
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

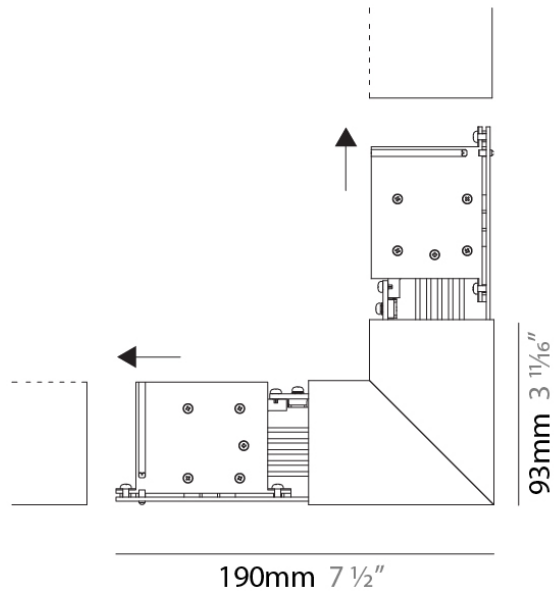

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS


A7900014-

DESCRIPTION
 NODO SYSTEM-90° Joint - External

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Length (mm): 93 + 93
 Length (in): 3 ¹¹/₁₆
 Width (mm): 25
 Width (in): 1
 Height (mm): 62
 Height (in): 2 ⁷/₁₆
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

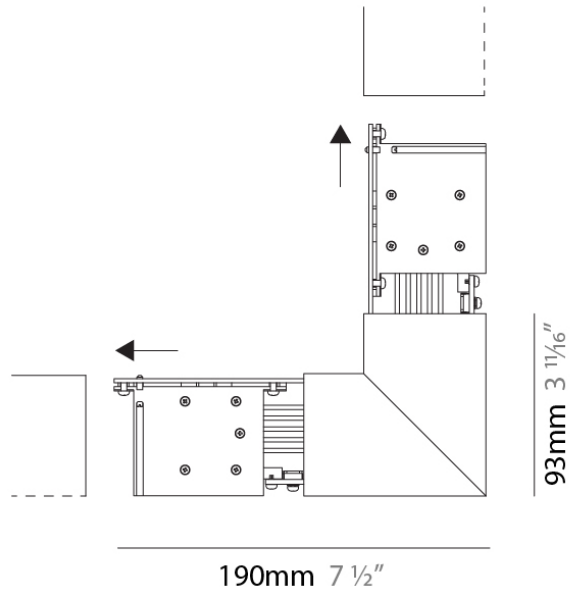

--- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS

A7900015-

DESCRIPTION

NODO SYSTEM-Angular Joint - Internal

GENERAL


Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 150 + 150
 Length (in): 5 7/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

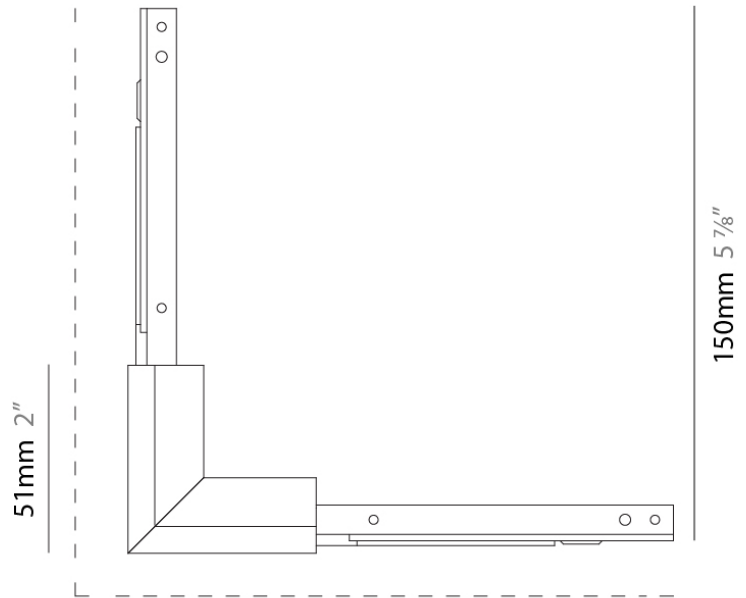

--- INDICATES WALL



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900016-

DESCRIPTION

NODO SYSTEM-Angular Joint - External -

GENERAL


Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL

Length (mm): 51 + 51
 Length (in): 2 + 2
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

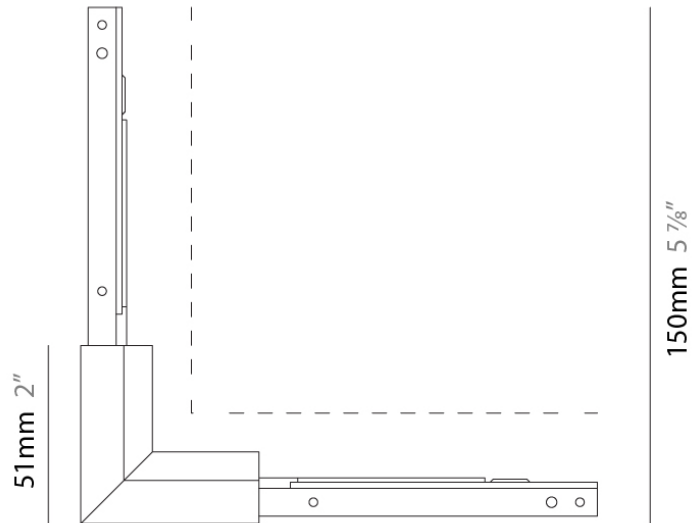

----- INDICATES WALL



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS

A7900022-

DESCRIPTION

NODO BOX-Large Box - 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 2000W.

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL



Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 74
Width (in): $2\frac{15}{16}$
Height (mm): 86
Height (in): $3\frac{3}{8}$
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

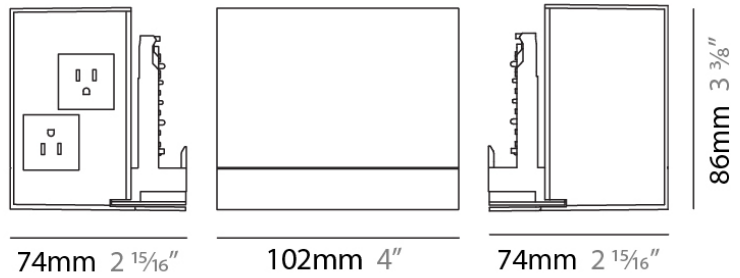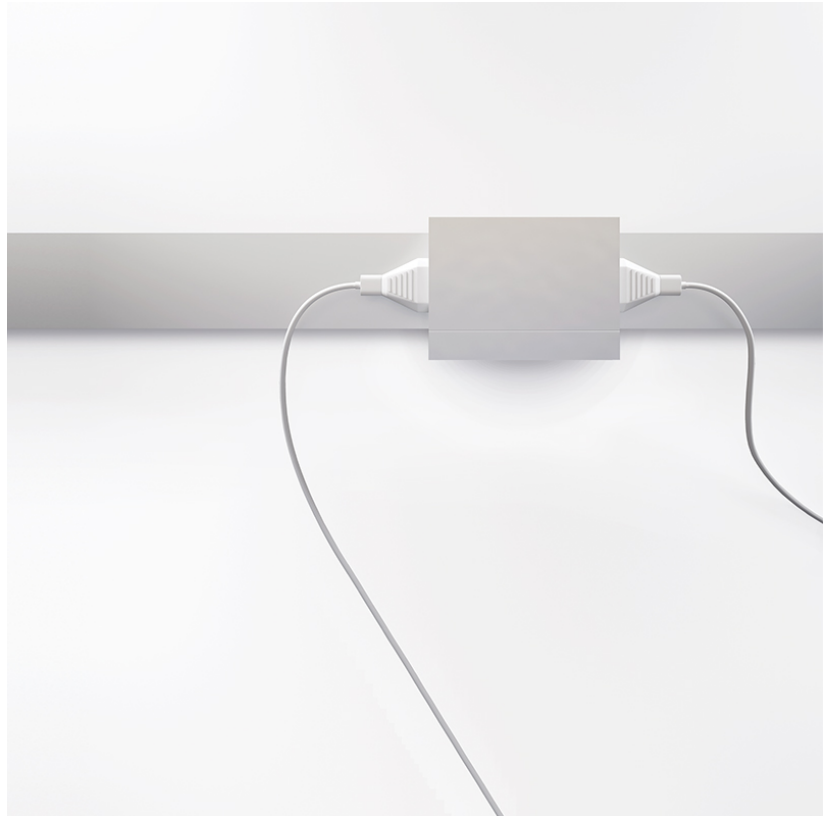

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS



A7900029-

DESCRIPTION
 NODO-Adjustable Joint -

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 160 + 160
 Length (in): 6 5/16
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Fixture Finish: WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

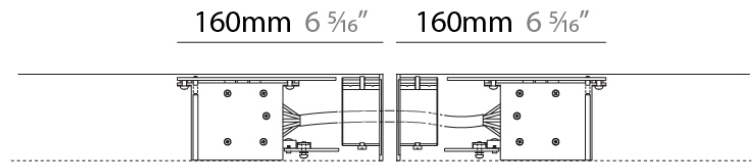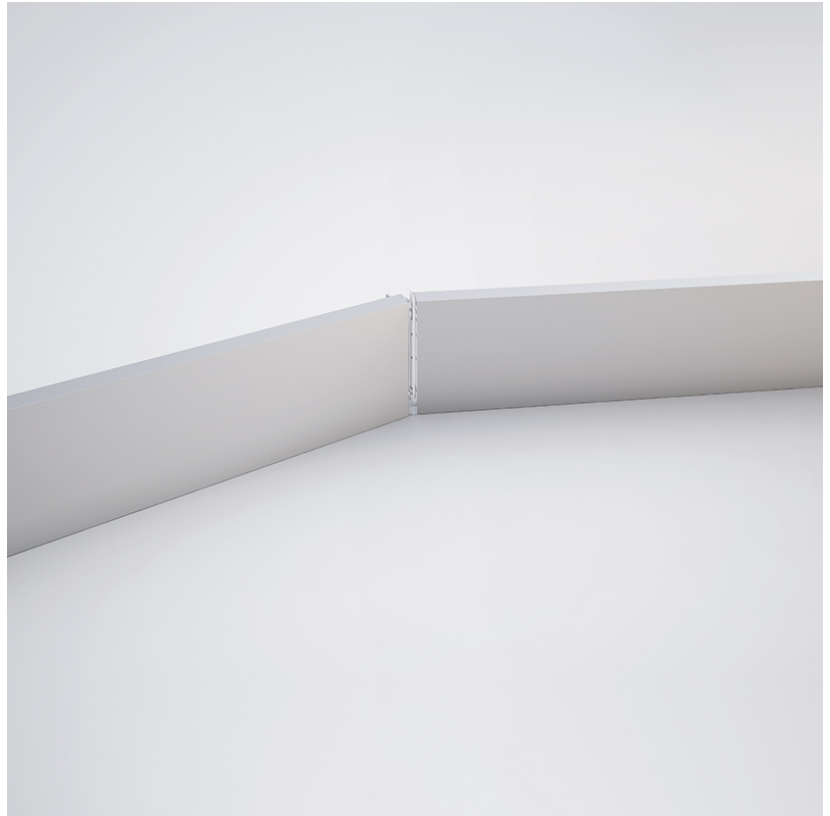

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900030-

DESCRIPTION

Nodo Desk - Plug Wiring - Right - Wiring covered in Anthracite Gray Fabric.

GENERAL


Series: Nodo _____
Brand: Letroh _____
Division: Architectural _____

PHYSICAL

Length (mm): 2000 _____
Length (in): 78 ³/₄ _____
Fixture Finish: WHI / BLK _____
Cable Details: 2000mm / 78 3/4" - 3 x 15mm2 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
IP rating: IP20 _____

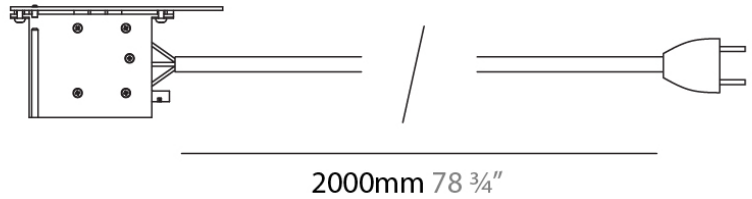

A7NODO-MOD-SYS COMPONENTS


A7900031-

DESCRIPTION
 Nodo Desk - Plug Wiring - Left - Wiring covered in Anthracite Gray Fabric.

GENERAL
 Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____
 Subcategory: Profile _____

PHYSICAL
 Shape: Rectangle _____
 Length (mm): 2000 _____
 Length (in): 78 ¾ _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____
 Cable Details: 2000mm / 78 ¾" - 3 x 15mm² _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

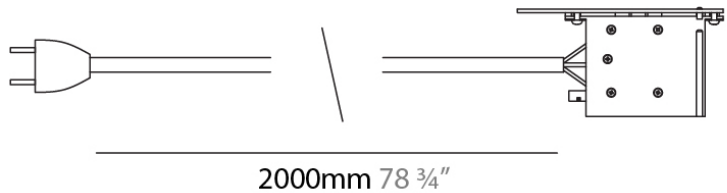

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS

A7900040

DESCRIPTION
 MICROLED-LED Insert - 100cm, 11W, 1100lm, 24V, 3000K - Satin Silver


GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL
 Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8"
 Width (mm): 4
 Width (in): 3/16"
 Height (mm): 8
 Height (in): 5/16"
 Fixture Material: Aluminum

ELECTRICAL
 Lamp Type: LED
 Total Output Wattage (W): 11
 Dimming: Non-Dimmable
 Driver Included: No
 Input Voltage (V): 120
 Output Voltage (V): 24

LED
 Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 1100
 CRI: >90 CRI

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

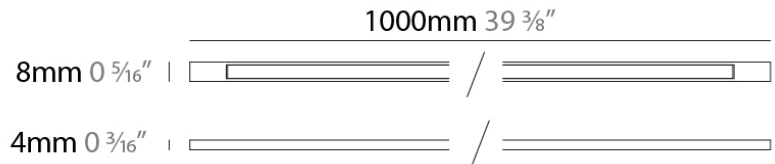

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS

A7900041

DESCRIPTION

MICROLED-LED Insert - 200cm, 22W, 2200lm, 24V, 3000K - Satin Silver

GENERAL

Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL

Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 4
 Width (in): 3/16
 Height (mm): 8
 Height (in): 5/16
 Fixture Material: Aluminum

ELECTRICAL


Lamp Type: LED
 Total Output Wattage (W): 22
 Dimming: Non-Dimmable
 Driver Included: No
 Input Voltage (V): 120
 Constant Voltage (V): 24

LED

Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 2200
 CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

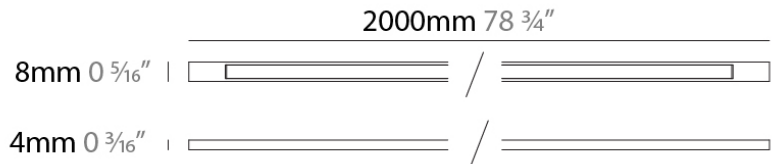

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS

A7900042

DESCRIPTION

MICROLED-LED Insert - 300cm, 33W, 3300lm, 24V, 3000K - Satin Silver

GENERAL

Series: Nodo _____
Brand: Letroh _____
Division: Architectural _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 3000 _____
Length (in): 118 ¹/₈ _____
Width (mm): 4 _____
Width (in): 3/16 _____
Height (mm): 8 _____
Height (in): 5/16 _____
Fixture Material: Aluminum _____

ELECTRICAL

Lamp Type: LED _____
Total Output Wattage (W): 33 _____
Dimming: Non-Dimmable _____
Driver Included: No _____
Input Voltage (V): 120 _____
Constant Voltage (V): 24 _____

LED

Color Temperature (°K): 3000 _____
Max. Delivered Lumen (lm): 3300 _____
CRI: >90 CRI _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
IP rating: IP20 _____



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

A7NODO-MOD-SYS COMPONENTS

A7900046-

DESCRIPTION

NODO BOX-Slim Box - 1 x 3 Prong Receptacle (Double Sided) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL



Shape: Rectangle _____
 Length (mm): 102 _____
 Length (in): 4 _____
 Width (mm): 52 _____
 Width (in): 2 ¹/₁₆ _____
 Height (mm): 86 _____
 Height (in): 3 ³/₈ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Max. Wattage Per Lamp (W): 2000 _____
 Input Voltage (V): 127 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

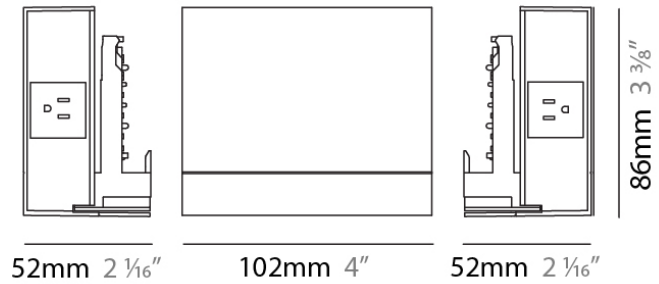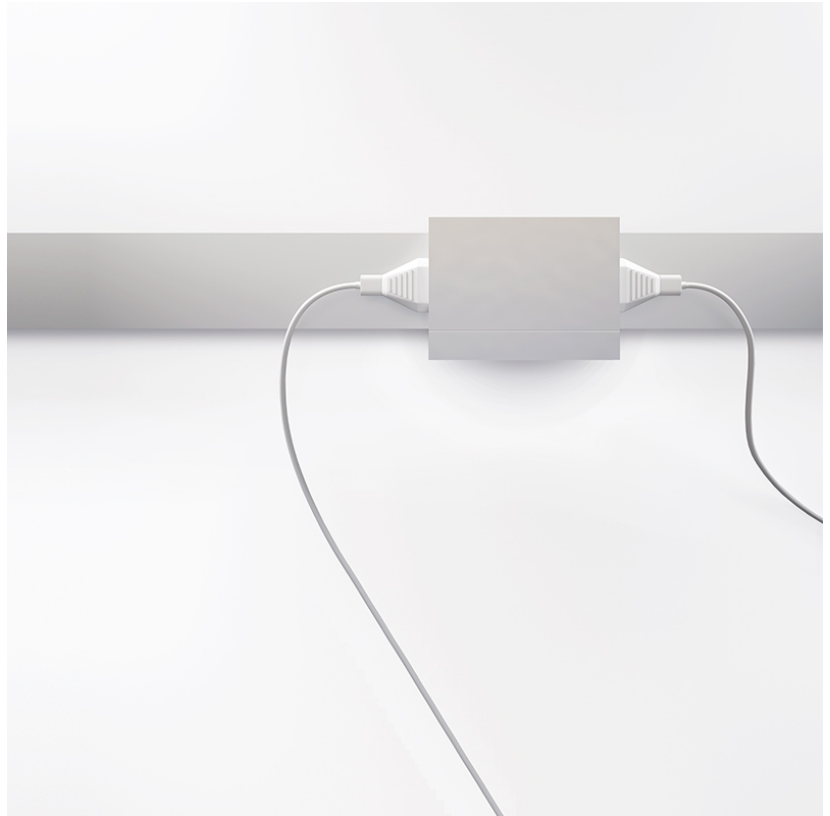

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900047-

DESCRIPTION

NODO BOX-Slim Box - 1 x USB Port (Single Side) + 1 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 102
 Length (in): 4
 Width (mm): 52
 Width (in): 2 1/16
 Height (mm): 86
 Height (in): 3 3/8
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
 Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

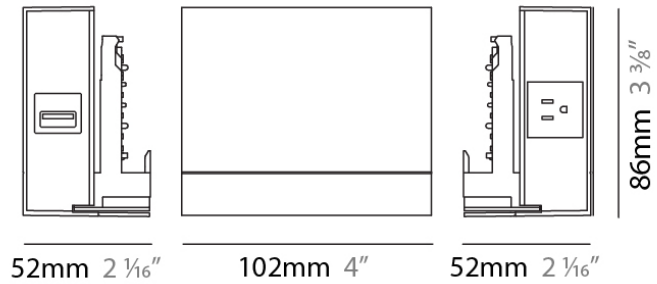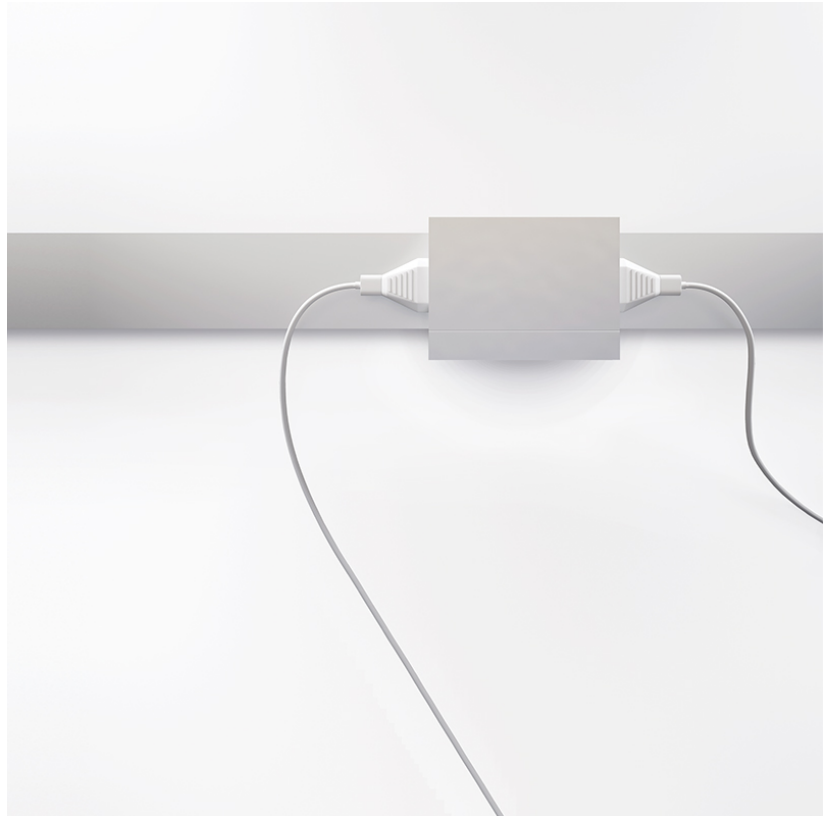

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7NODO-MOD-SYS COMPONENTS

A7900049-

DESCRIPTION

NODO BOX-Large Box - 2 x USB Port (Single Side) + 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
 Brand: Letroh
 Division: Architectural

PHYSICAL



Shape: Rectangle
 Length (mm): 102
 Length (in): 4
 Width (mm): 74
 Width (in): 2 ¹⁵/₁₆
 Height (mm): 86
 Height (in): 3 ³/₈
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL

Max. Wattage Per Lamp (W): 2000
 Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

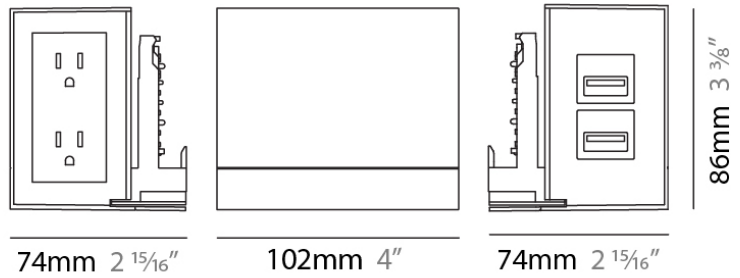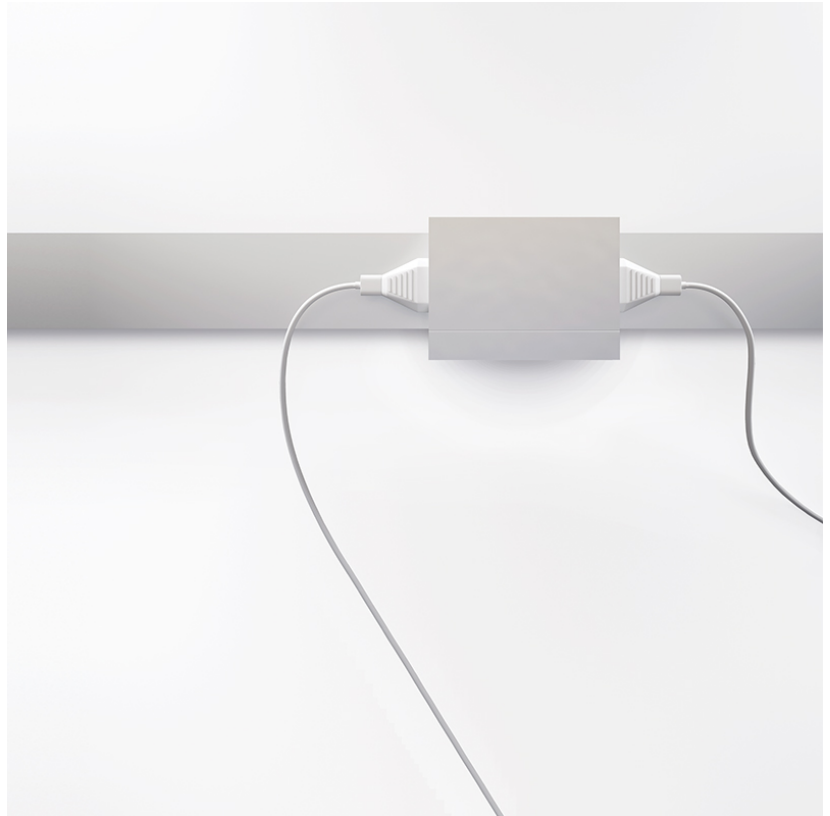

A7NODO-MOD-SYS COMPONENTS

A7900050-

DESCRIPTION

NODO BOX-Large Box - 2 x GFCI Receptacles - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL



Shape: Rectangle _____
 Length (mm): 102 _____
 Length (in): 4 _____
 Width (mm): 74 _____
 Width (in): $2 \frac{15}{16}$ _____
 Height (mm): 86 _____
 Height (in): $3 \frac{3}{8}$ _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Max. Wattage Per Lamp (W): 2000 _____
 Input Voltage (V): 127 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

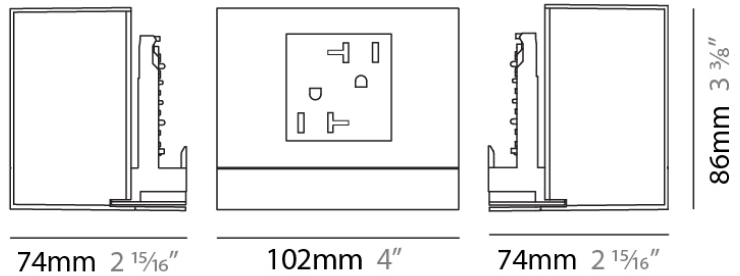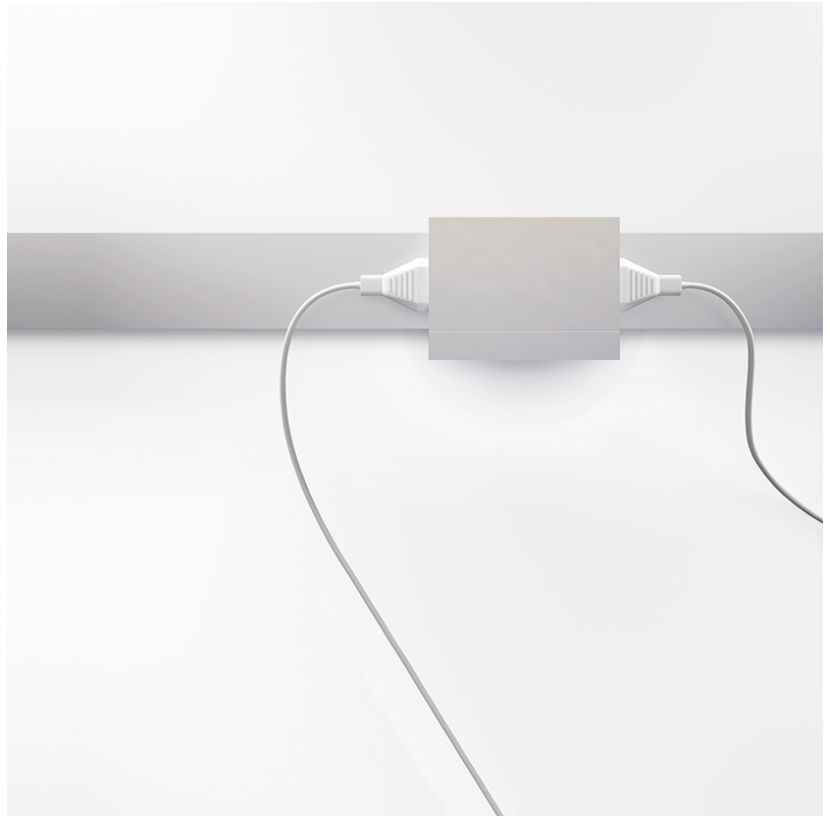

A7NODO-MOD-SYS COMPONENTS

A7T00007-

DESCRIPTION

NODO LIGHTS-Nuo - Right - Spotlight - 4.5W LED - 3000K - 400lm
 - 350mA - CRI90

GENERAL

Series: Nodo _____
 Subseries: Nuo _____
 Brand: Letroh _____
 Division: Architectural _____

PHYSICAL

Diameter (mm): 15 _____
 Diameter (in): 9/16 _____
 Length (mm): 100 _____
 Length (in): 3 15/16 _____
 Extension (mm): 520 _____
 Extension (in): 20 1/2 _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.50 _____
 Weight (lbs): 1.1 _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL



Input Wattage Range: 1 - 9 W _____
 Lamp Type: LED _____
 Input Wattage (W): 4.5 _____
 Dimming: Non-Dimmable _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - 120Vac _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Constant Current (mA): 350 _____

LED

Delivered Lumen Range: 100 - 499 lm _____
 Color Temperature (°K): 3000 _____
 Max. Delivered Lumen (lm): 400 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

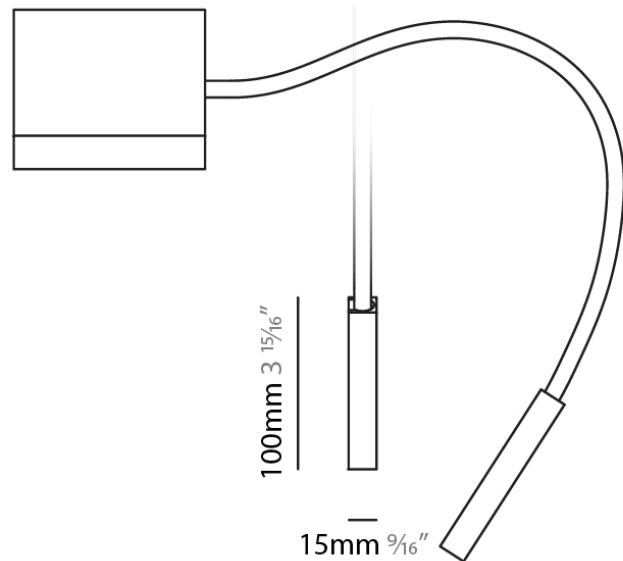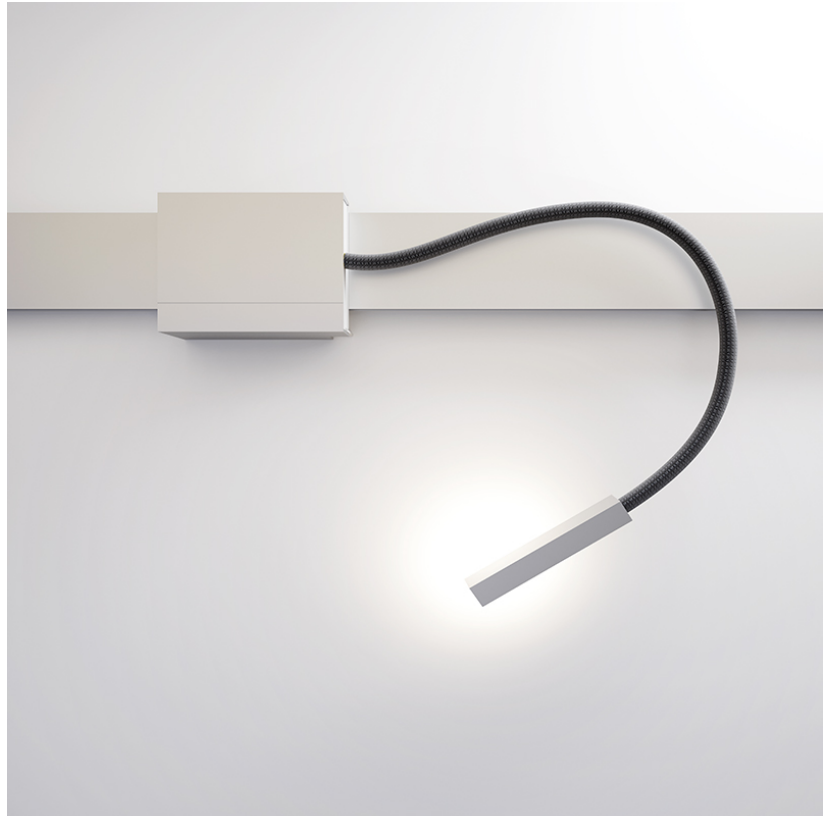

Hose: Ø9mm 3/8"
 Maximum extension 520mm 20 1/2"



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7T00008-

DESCRIPTION

NODO LIGHTS - Nuo - Left - Spotlight - 4.5W LED - 3000K - 350mA - CRI90 -

GENERAL

Series: Nodo
 Subseries: Nuo
 Brand: Letroh
 Division: Architectural

PHYSICAL

Diameter (mm): 15
 Diameter (in): 9/16
 Length (mm): 100
 Length (in): 3 15/16
 Extension (mm): 520
 Extension (in): 20 1/2
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

ELECTRICAL



Input Wattage Range: 1 - 9 W
 Lamp Type: LED
 Input Wattage (W): 4.5
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current - 120Vac
 Driver Class: Class 2
 Input Voltage (V): 120
 Constant Current (MA): 350

LED

Color Temperature (°K): 3000
 Max. Delivered Lumen (lm): 400
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

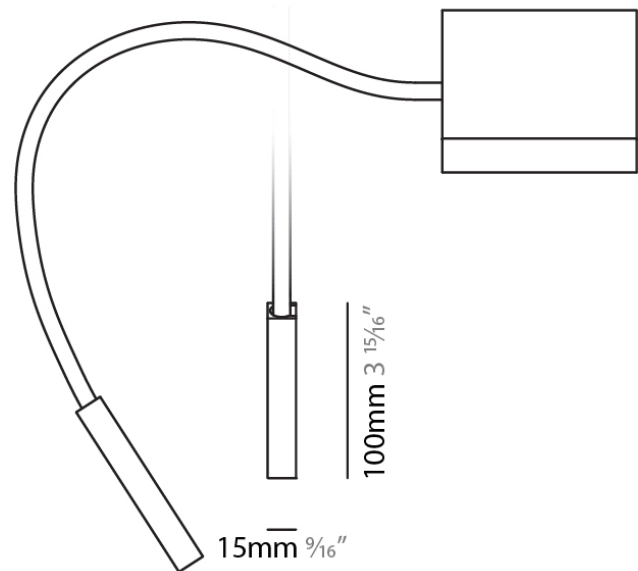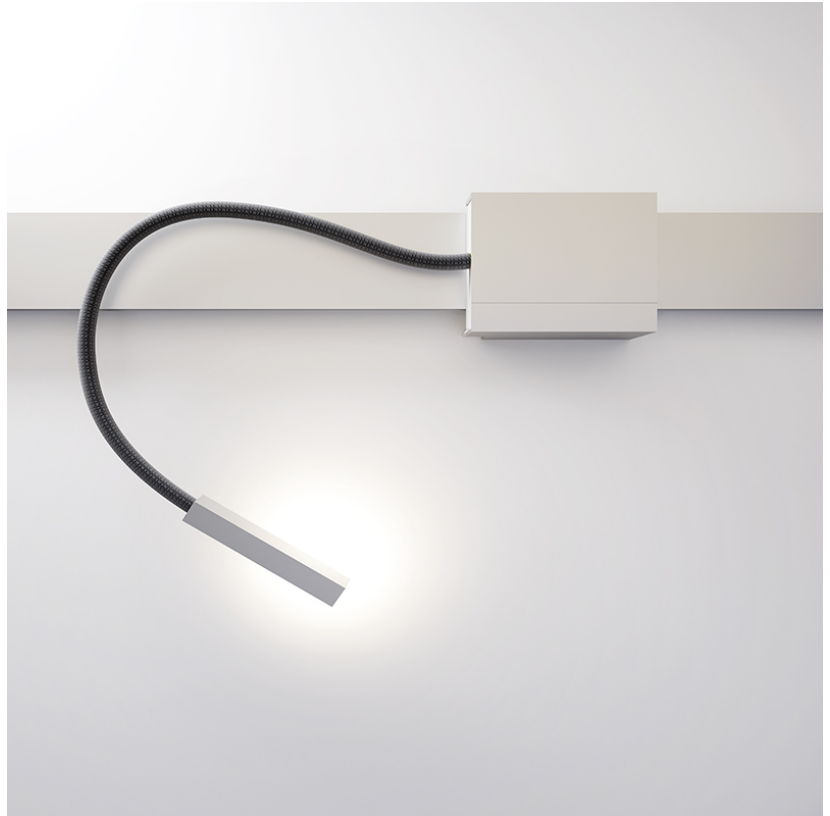

Hose: Ø9mm 3/8"
 Maximum extension 520mm 20 1/2"



A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00011-

DESCRIPTION
 1-Phase Track - 1000mm

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Profile

PHYSICAL
 Shape: Rectangle
 Length (mm): 1000
 Length (in): 39 3/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Weight (kg): 1
 Weight (lbs): 2.205
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

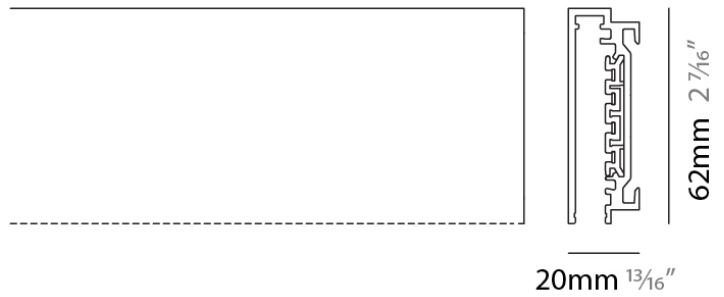

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00012-

DESCRIPTION
1-Phase Track - 2000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 1/16
Weight (kg): 2
Weight (lbs): 4.41
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

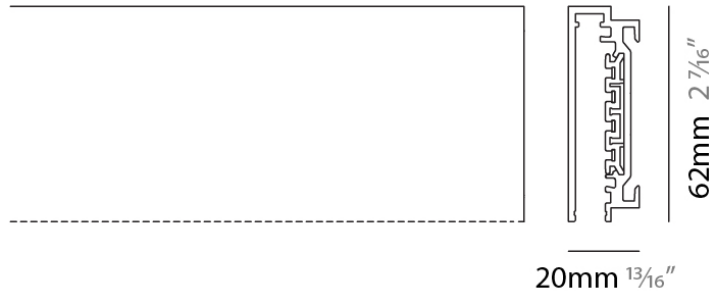

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00013-

DESCRIPTION
1-Phase Track - 3000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

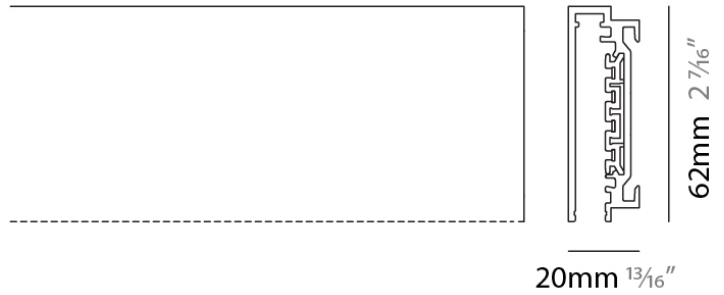

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00014-

DESCRIPTION
2-Phase Track - 1000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2.205
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

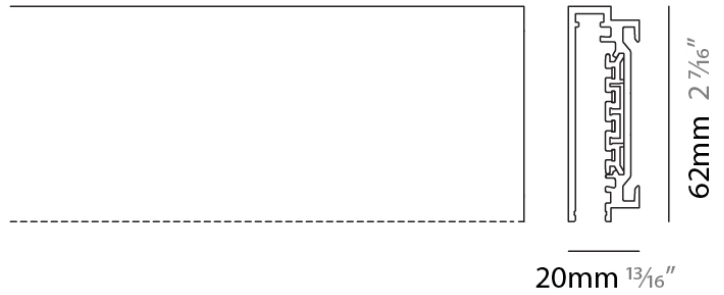

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00015-

DESCRIPTION
 2-Phase Track - 2000mm

GENERAL
 Series: Nodo
 Brand: Letroh
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Profile

PHYSICAL
 Shape: Rectangle
 Length (mm): 2000
 Length (in): 78 3/4
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Weight (kg): 2
 Weight (lbs): 4 7/16
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

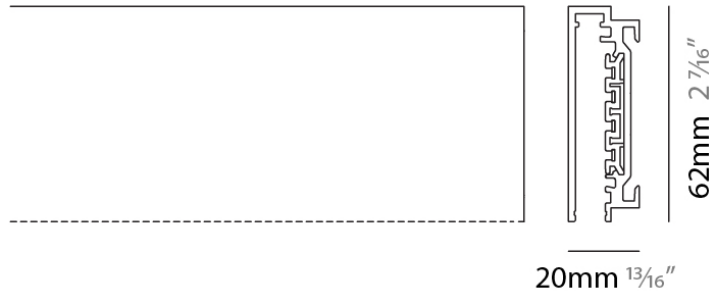

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00016-

DESCRIPTION
2-Phase Track - 3000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

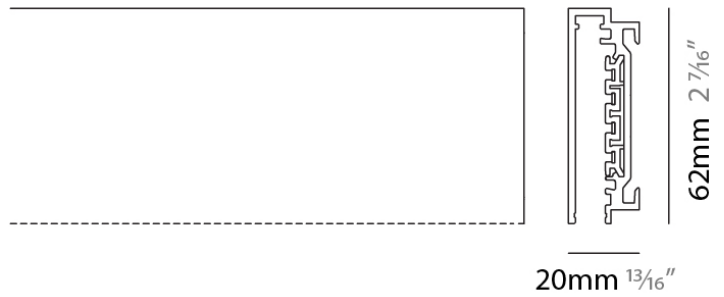

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00017-

DESCRIPTION
3-Phase Track - 1000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

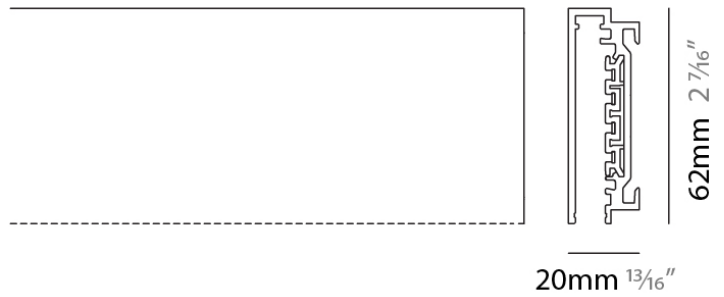

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00018-

DESCRIPTION
3-Phase Track - 2000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

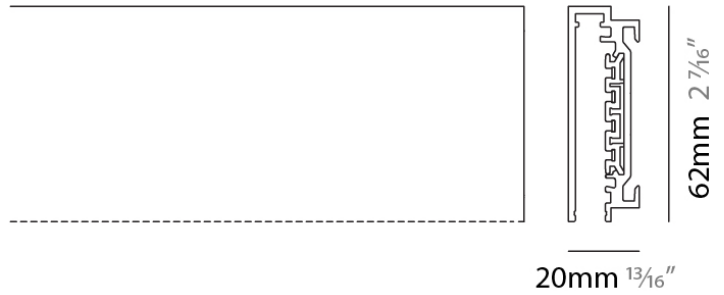

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

A7T00019-

DESCRIPTION

3-Phase Track - 3000mm

GENERAL


Series: Nodo
 Brand: Letroh
 Division: Architectural
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Profile

PHYSICAL

Shape: Rectangle
 Length (mm): 3000
 Length (in): 118 1/8
 Width (mm): 20
 Width (in): 13/16
 Height (mm): 62
 Height (in): 2 7/16
 Weight (kg): 3
 Weight (lbs): 6 5/8
 Fixture Finish: SSR / WHI / BLK
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

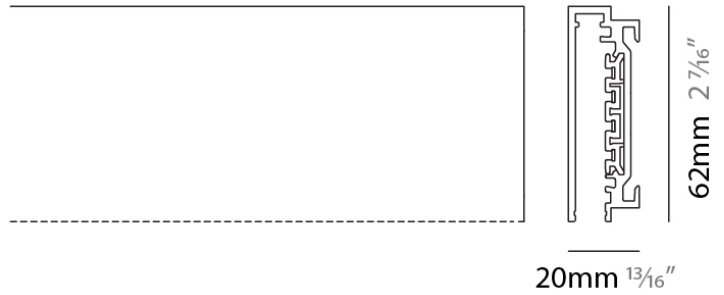

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00020-

DESCRIPTION
Wired Track - 1000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 1
Weight (lbs): 2 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

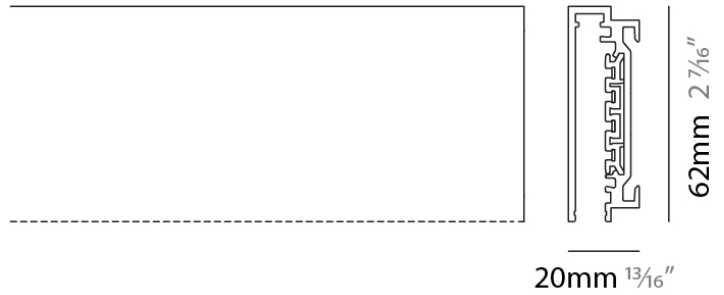

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00021-

DESCRIPTION
Wired Track - 2000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Square
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

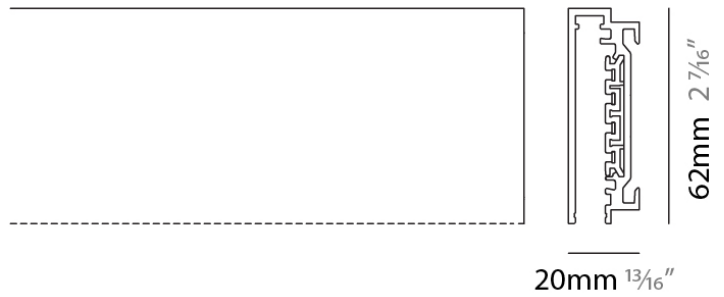

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7NODO-MOD-SYS COMPONENTS SURFACE


A7T00022-

DESCRIPTION
Wired Track - 3000mm

GENERAL
Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL
Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

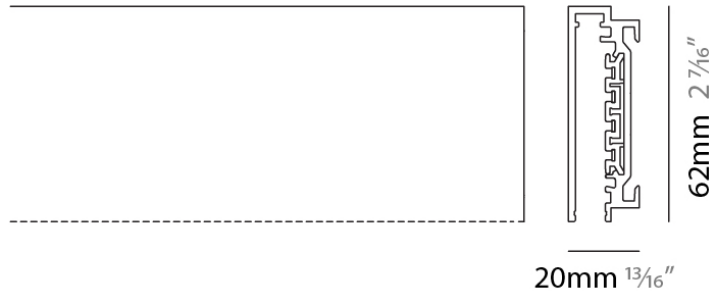

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS TRACK

A7T00025-

DESCRIPTION

Nodo - Bob - Track Spotlight - 13W LED - 2700K / 3000K - Optics
 25° / 40° / 60° / OV / RL / WW

GENERAL

Series: Bob _____
 Brand: Letroh _____
 Division: Architectural _____
 Mounting Type: Track _____
 Mounting Location: Wall _____
 Subcategory: Profile _____

PHYSICAL

Shape: Cylinder _____
 Diameter (mm): 60 _____
 Diameter (in): 2 3/8 _____
 Length (mm): 101 _____
 Length (in): 4 _____
 Height (mm): 109 _____
 Height (in): 4 5/16 _____
 Light Distribution: Adjustable / Direct _____
 Weight (kg): 0.65 _____
 Weight (lbs): 1.43 _____
 Fixture Finish: WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Input Wattage Range: 10 - 19 W _____
 Lamp Type: LED _____
 Input Wattage (W): 13 _____
 Total Output Wattage (W): 12 _____
 Dimming: Non-Dimmable _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Type: Constant Current - 120Vac _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Constant Current (MA): 350 _____

LED


Delivered Lumen Range: 1000 - 2999 lm _____
 Color Temperature (°K): 2700 / 3000 _____
 Max. Delivered Lumen (lm): 1100 / 1500 _____
 CRI: >90 CRI _____
 Lamp Life (hrs): 50000 _____

OPTICAL

Optic°: 25 / 40 60 / OV / RT / WW _____
 Adjustability: Rotational 360°; Tilt 90° _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

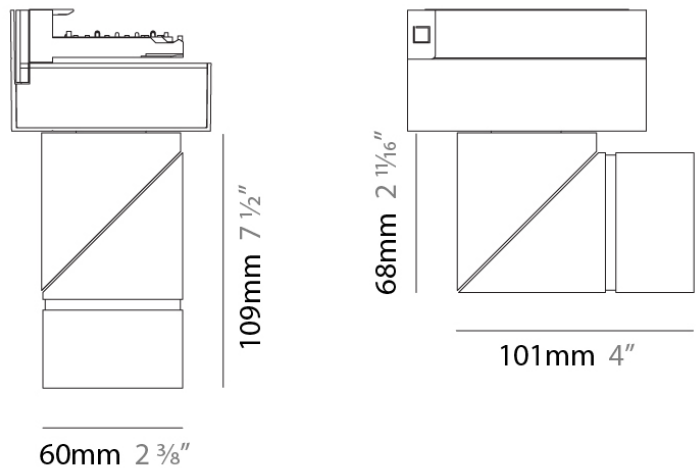

LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)