

## A7NODO-MOD-SYS COMPONENTS

### A7900001

#### DESCRIPTION

NODO SYSTEM-Direct - Surface Support for Wall or Ceiling Every 81cm Allows For Load of 10Kg/m

#### GENERAL


Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL


Length (mm): 57 \_\_\_\_\_  
 Length (in): 2 ¼ \_\_\_\_\_  
 Width (mm): 7 \_\_\_\_\_  
 Width (in): 1/4 \_\_\_\_\_  
 Height (mm): 48 \_\_\_\_\_  
 Height (in): 1 7/8 \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_



57mm 2 ¼"



48mm 1 7/8"

7mm ¼"



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS

### A7900002

#### DESCRIPTION

NODO SYSTEM-Ceiling Support Kit with 200cm Suspension Cable Every 81cm Allows For Load of 10Kg/m

#### GENERAL


Series: Nodo  
 Partner: Letroh  
 Division: Architectural

#### PHYSICAL

Length (mm): 50  
 Length (in): 1 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 2000  
 Height (in): 78 <sup>3</sup>/<sub>4</sub>  
 Fixture Finish: SSR  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

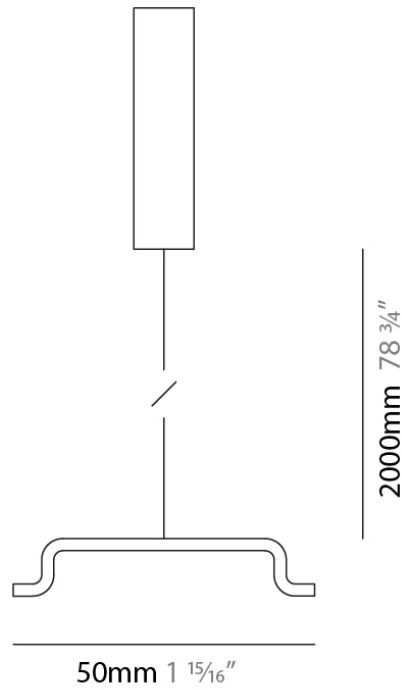

## A7NODO-MOD-SYS COMPONENTS



### A7900003-

**DESCRIPTION**  
 End Cap - Right Side

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Width (mm): 32  
 Width (in): 1 ¼  
 Height (mm): 62  
 Depth (mm): 4  
 Height (in): 2 ⅞  
 Depth (in): 3/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Insulating Plastic / Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

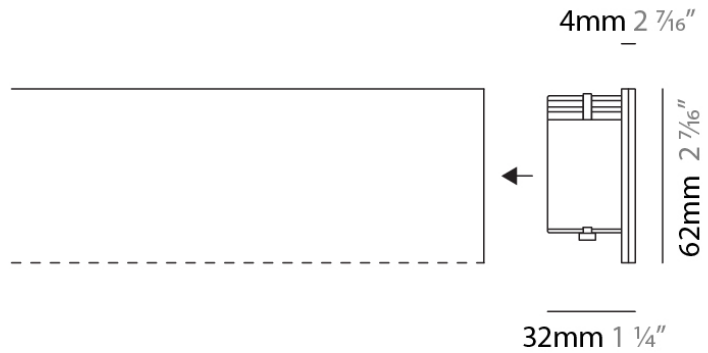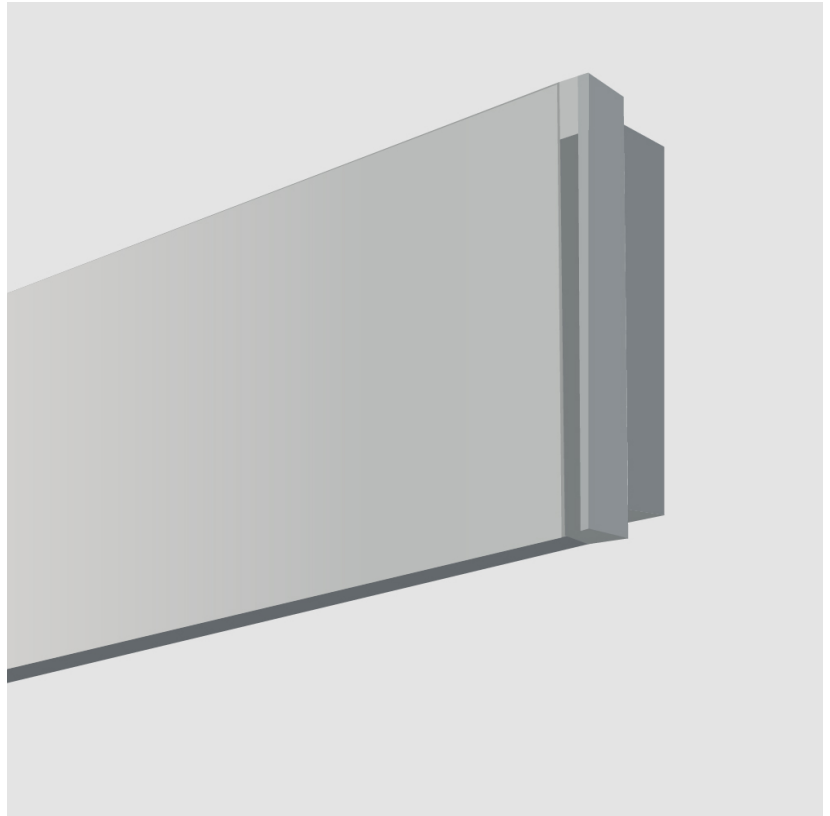

---- INDICATES OPEN SIDE



## A7NODO-MOD-SYS COMPONENTS


### A7900004-

**DESCRIPTION**  
 End Cap - Left Side


**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Width (mm): 32  
 Width (in): 1 ¼  
 Height (mm): 62  
 Depth (mm): 4  
 Height (in): 2 ⅞  
 Depth (in): 3/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Insulating Plastic / Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

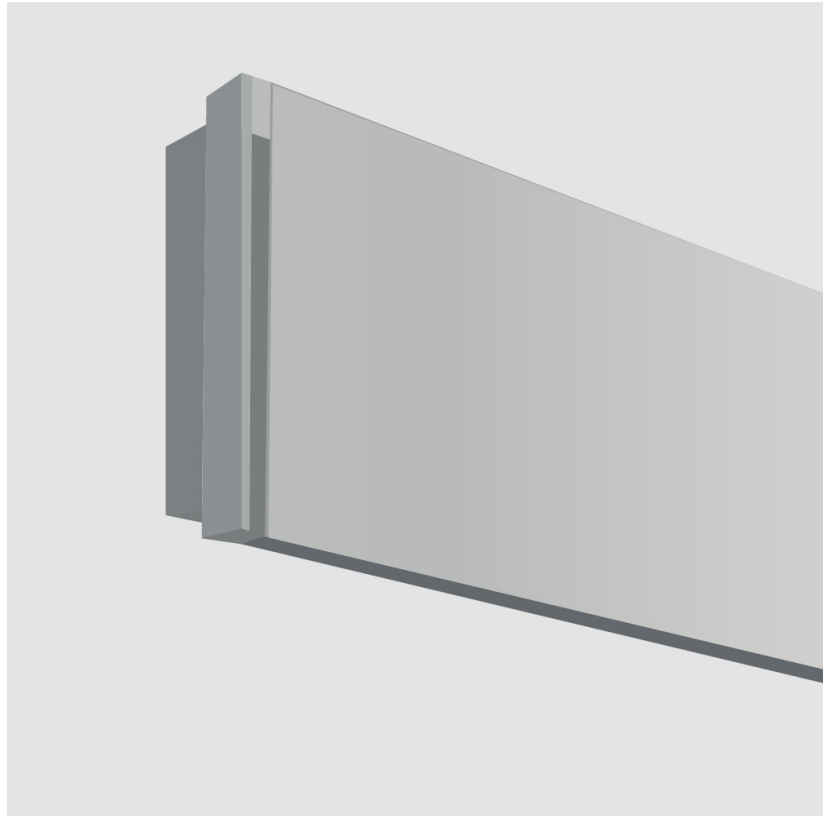

4mm 2 ⅞"

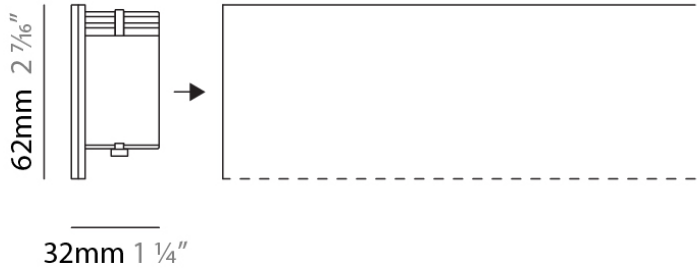

---- INDICATES OPEN SIDE



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A7NODO-MOD-SYS COMPONENTS

### A7900005-

#### DESCRIPTION

NODO SYSTEM-Right End Power Feed - to be used with min 5 x 1.5mm<sup>2</sup> Cable - Mount 3 16A fuses ( Not Included)

#### GENERAL


Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 192 \_\_\_\_\_  
 Length (in): 7 <sup>9</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 20 \_\_\_\_\_  
 Width (in): 13/16 \_\_\_\_\_  
 Height (mm): 62 \_\_\_\_\_  
 Height (in): 2 <sup>7</sup>/<sub>16</sub> \_\_\_\_\_  
 Fixture Finish: SSR / WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

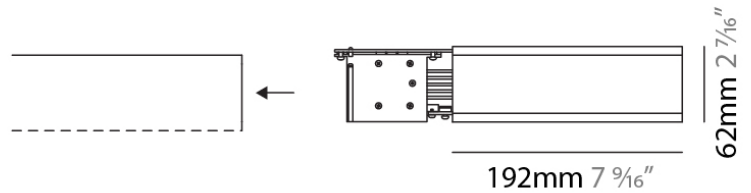

--- INDICATES OPEN SIDE



## A7NODO-MOD-SYS COMPONENTS

### A7900006-

#### DESCRIPTION

NODO SYSTEM-Left End Power Feed - to be used with min 5 x 1.5mm<sup>2</sup> Cable - Mount 3 16A fuses ( Not Included)

#### GENERAL


Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 192 \_\_\_\_\_  
 Length (in): 7 <sup>9</sup>/<sub>16</sub> \_\_\_\_\_  
 Width (mm): 20 \_\_\_\_\_  
 Width (in): 13/16 \_\_\_\_\_  
 Height (mm): 62 \_\_\_\_\_  
 Height (in): 2 <sup>7</sup>/<sub>16</sub> \_\_\_\_\_  
 Fixture Finish: SSR / WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

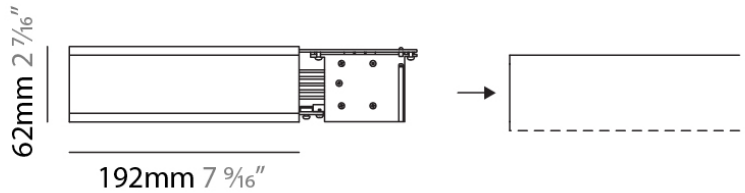

--- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS

### A7900007-

#### DESCRIPTION

NODO SYSTEM - Central Power Feed To be used with min 5 x 1.5mm<sup>2</sup> Cable - Mount 3 16A fuses (not included)

#### GENERAL


Series: Nodo  
 Partner: Letroh  
 Division: Architectural

#### PHYSICAL

Shape: Rectangle  
 Length (mm): 192  
 Length (in): 7 <sup>9</sup>/<sub>16</sub>  
 Width (mm): 25  
 Width (in): 1  
 Height (mm): 62  
 Height (in): 2 <sup>7</sup>/<sub>16</sub>  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

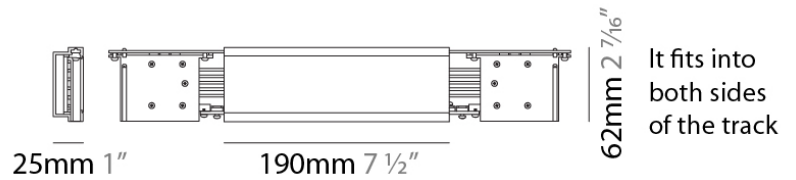

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7900008

**DESCRIPTION**  
Cable Clamp Kit

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Ceiling

**PHYSICAL**  
Shape: Rectangle  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

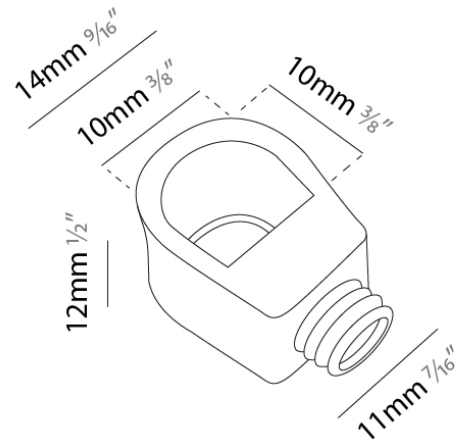

## A7NODO-MOD-SYS COMPONENTS


### A7900010-

**DESCRIPTION**  
 Nodo System - Linear Insulating Coupling

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 200  
 Length (in): 7 7/8  
 Width (mm): 20  
 Width (in): 13/16  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

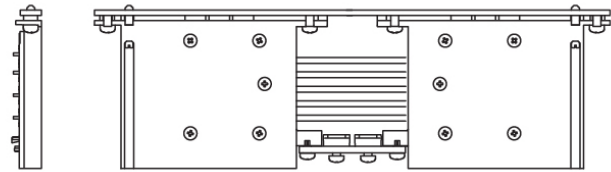

200mm 7 7/8"

It fits between two tracks



## A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


### A7900013-

**DESCRIPTION**  
 NODO SYSTEM - 90° Joint - Internal -

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 190 + 190  
 Length (in): 7 1/2  
 Width (mm): 20  
 Width (in): 13/16  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

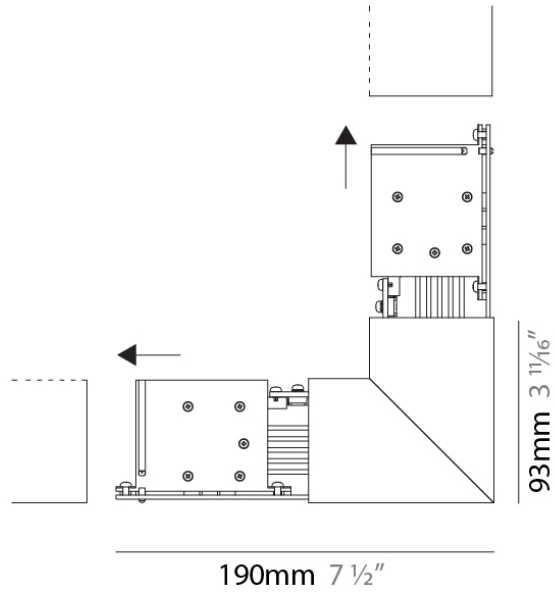

--- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS


### A7900014-

**DESCRIPTION**  
 NODO SYSTEM-90° Joint - External

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Length (mm): 93 + 93  
 Length (in): 3 11/16  
 Width (mm): 25  
 Width (in): 1  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

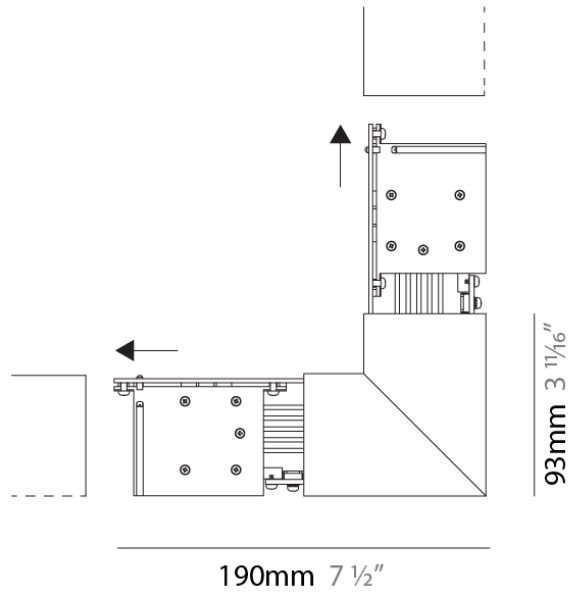

--- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS


### A7900015-

**DESCRIPTION**  
 NODO SYSTEM-Angular Joint - Internal

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 150 + 150  
 Length (in): 5 7/8  
 Width (mm): 20  
 Width (in): 13/16  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

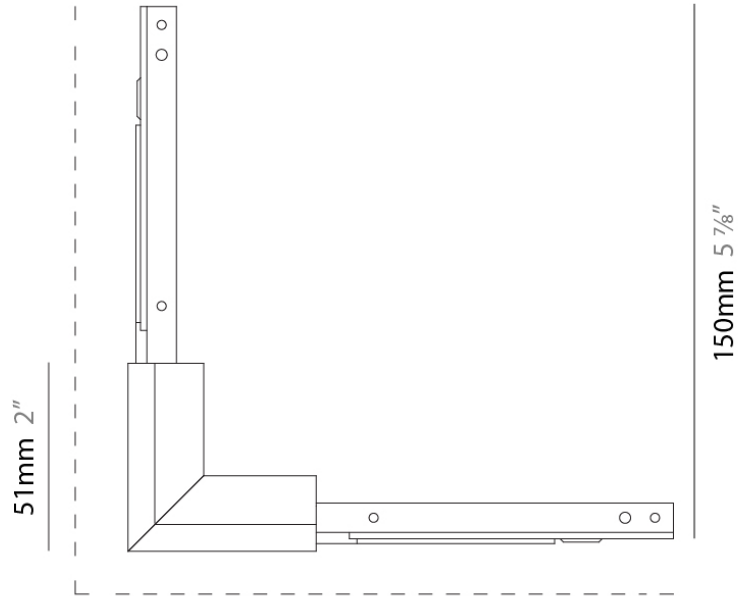

--- INDICATES WALL



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS


### A7900016-

**DESCRIPTION**  
 NODO SYSTEM-Angular Joint - External -

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Length (mm): 51 + 51  
 Length (in): 2 + 2  
 Width (mm): 20  
 Width (in): 13/16  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

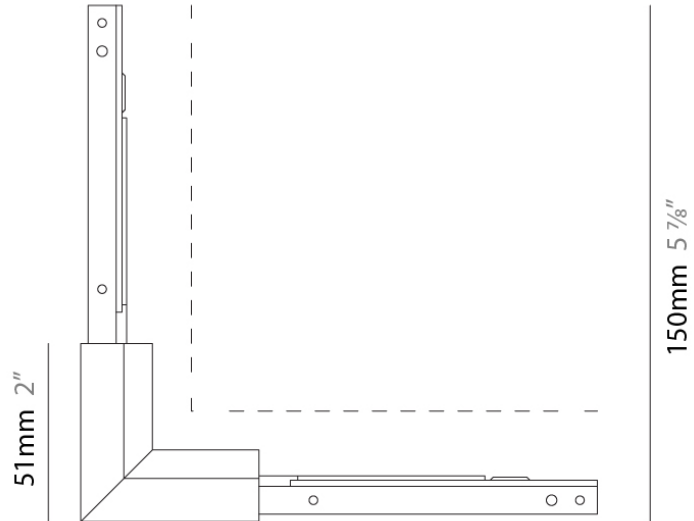

----- INDICATES WALL



## A7NODO-MOD-SYS COMPONENTS

### A7900022-

#### DESCRIPTION

NODO BOX-Large Box - 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 2000W.

#### GENERAL

Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL



Shape: Rectangle \_\_\_\_\_  
 Length (mm): 102 \_\_\_\_\_  
 Length (in): 4 \_\_\_\_\_  
 Width (mm): 74 \_\_\_\_\_  
 Width (in):  $2 \frac{15}{16}$  \_\_\_\_\_  
 Height (mm): 86 \_\_\_\_\_  
 Height (in):  $3 \frac{3}{8}$  \_\_\_\_\_  
 Fixture Finish: SSR / WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL

Max. Wattage Per Lamp (W): 2000 \_\_\_\_\_  
 Input Voltage (V): 127 \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

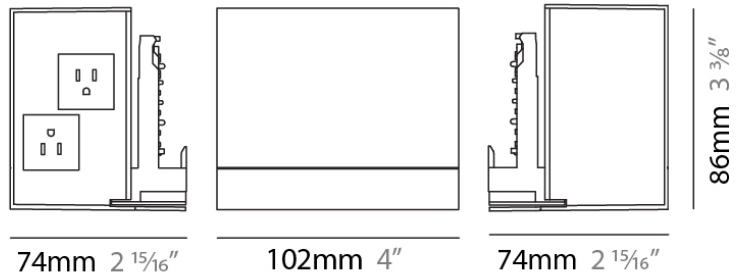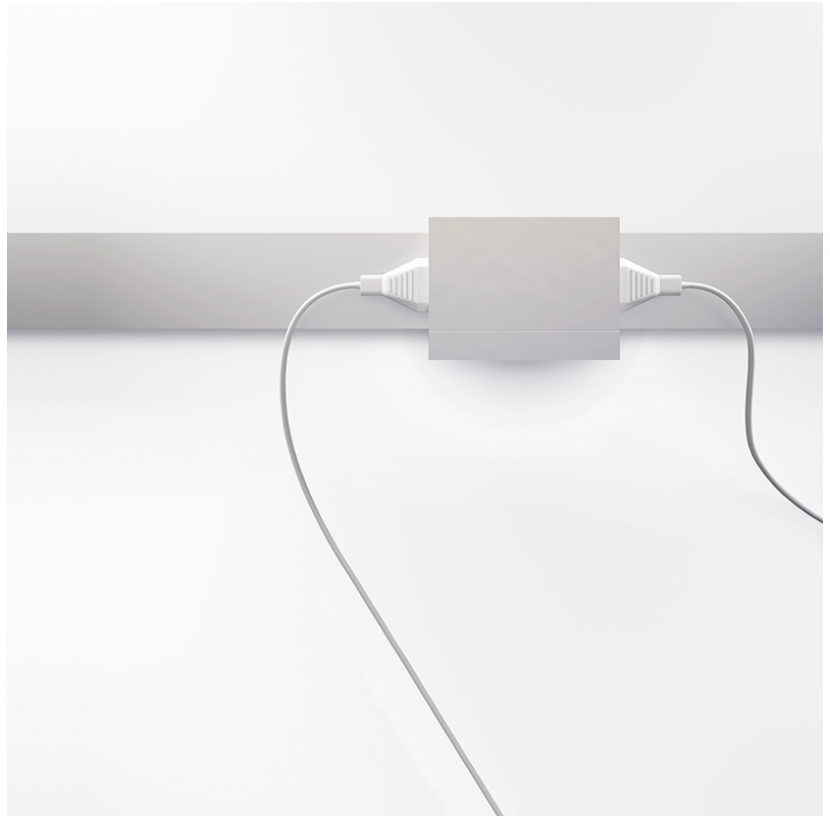

PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS



### A7900029-

**DESCRIPTION**  
 NODO-Adjustable Joint -

**GENERAL**  
 Series: Nodo  
 Partner: Letroh  
 Division: Architectural

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 160 + 160  
 Length (in): 6 5/16  
 Width (mm): 20  
 Width (in): 13/16  
 Height (mm): 62  
 Height (in): 2 7/16  
 Fixture Finish: WHI / BLK  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

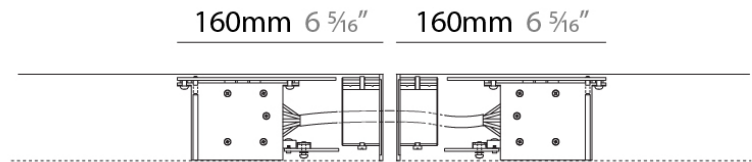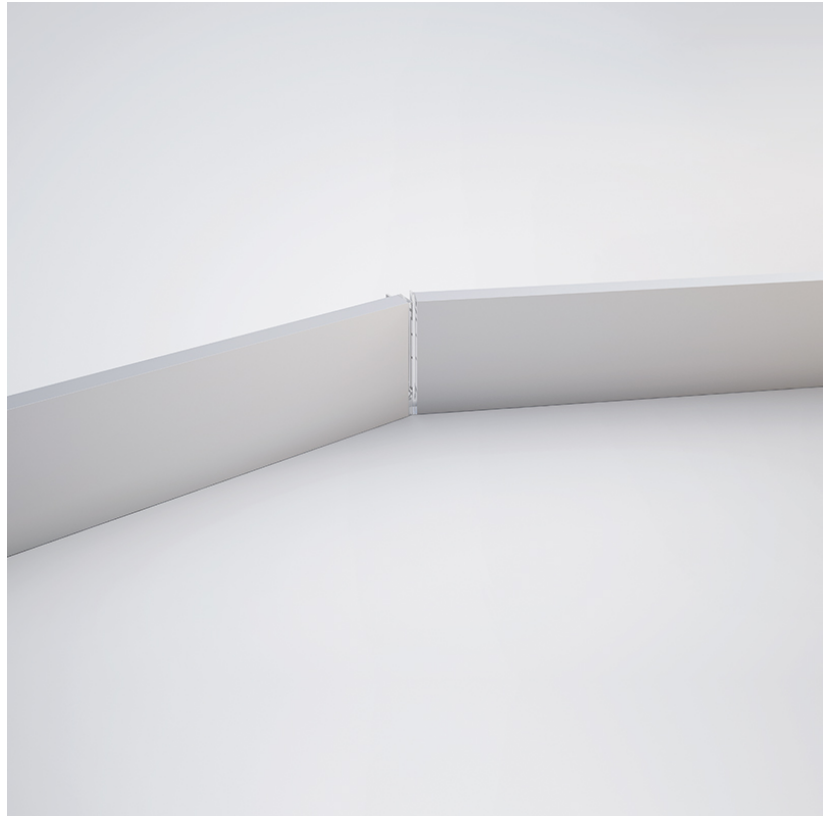

----- INDICATES OPEN SIDE



## A7NODO-MOD-SYS COMPONENTS

### A7900030-

#### DESCRIPTION

Nodo Desk - Plug Wiring - Right - Wiring covered in Anthracite Gray Fabric.

#### GENERAL


Series: Nodo \_\_\_\_\_  
Partner: Letroh \_\_\_\_\_  
Division: Architectural \_\_\_\_\_

#### PHYSICAL

Length (mm): 2000 \_\_\_\_\_  
Length (in): 78 <sup>3</sup>/<sub>4</sub> \_\_\_\_\_  
Fixture Finish: WHI / BLK \_\_\_\_\_  
Cable Details: 2000mm / 78 3/4" - 3 x 15mm<sup>2</sup> \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
IP rating: IP20 \_\_\_\_\_

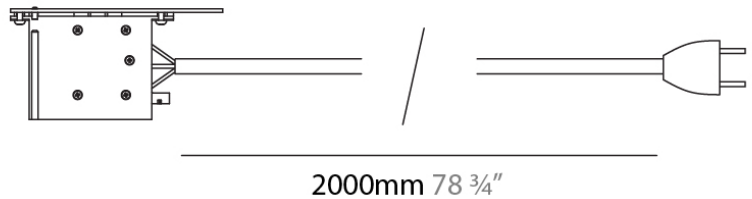

## A7NODO-MOD-SYS COMPONENTS

### A7900031-

#### DESCRIPTION

Nodo Desk - Plug Wiring - Left - Wiring covered in Anthracite Gray Fabric.

#### GENERAL


Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Product Type: Linear Profiles \_\_\_\_\_

#### PHYSICAL

Shape: Rectangle \_\_\_\_\_  
 Length (mm): 2000 \_\_\_\_\_  
 Length (in): 78 ¾ \_\_\_\_\_  
 Fixture Finish: WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_  
 Cable Details: 2000mm / 78 ¾" - 3 x 15mm<sup>2</sup> \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

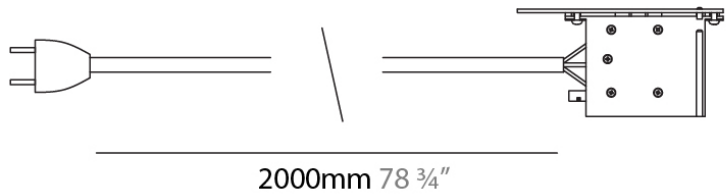

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS

### A7900046-

#### DESCRIPTION

NODO BOX-Slim Box - 1 x 3 Prong Receptacle (Double Sided) - Maximum load per socket (127V) 20amp (2000W)

#### GENERAL

Series: Nodo  
 Partner: Letroh  
 Division: Architectural

#### PHYSICAL



Shape: Rectangle  
 Length (mm): 102  
 Length (in): 4  
 Width (mm): 52  
 Width (in): 2 <sup>1</sup>/<sub>16</sub>  
 Height (mm): 86  
 Height (in): 3 <sup>3</sup>/<sub>8</sub>  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Max. Wattage Per Lamp (W): 2000  
 Input Voltage (V): 127

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

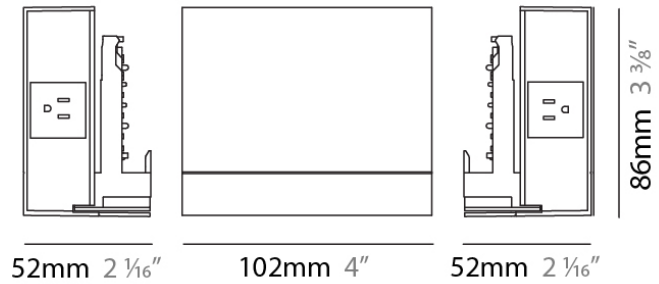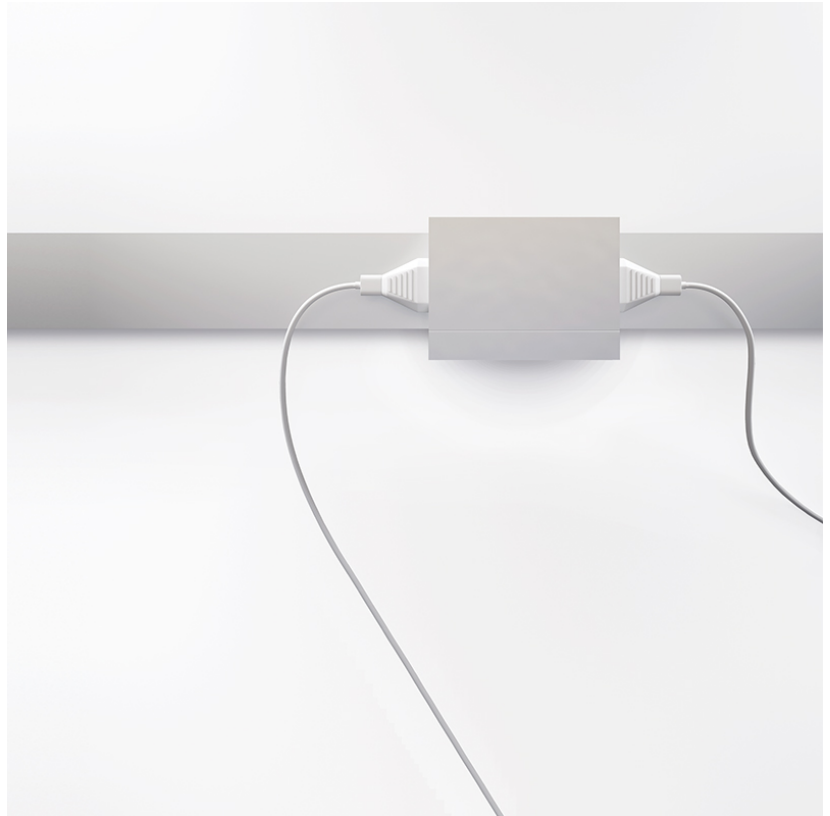

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A7NODO-MOD-SYS COMPONENTS

### A7900047-

#### DESCRIPTION

NODO BOX-Slim Box - 1 x USB Port (Single Side) + 1 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

#### GENERAL

Series: Nodo  
 Partner: Letroh  
 Division: Architectural

#### PHYSICAL



Shape: Rectangle  
 Length (mm): 102  
 Length (in): 4  
 Width (mm): 52  
 Width (in): 2 1/16  
 Height (mm): 86  
 Height (in): 3 3/8  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Max. Wattage Per Lamp (W): 2000  
 Input Voltage (V): 127

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

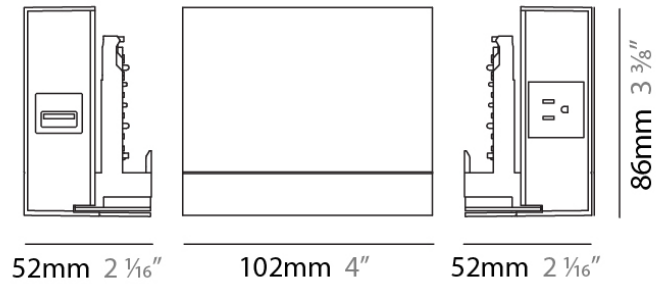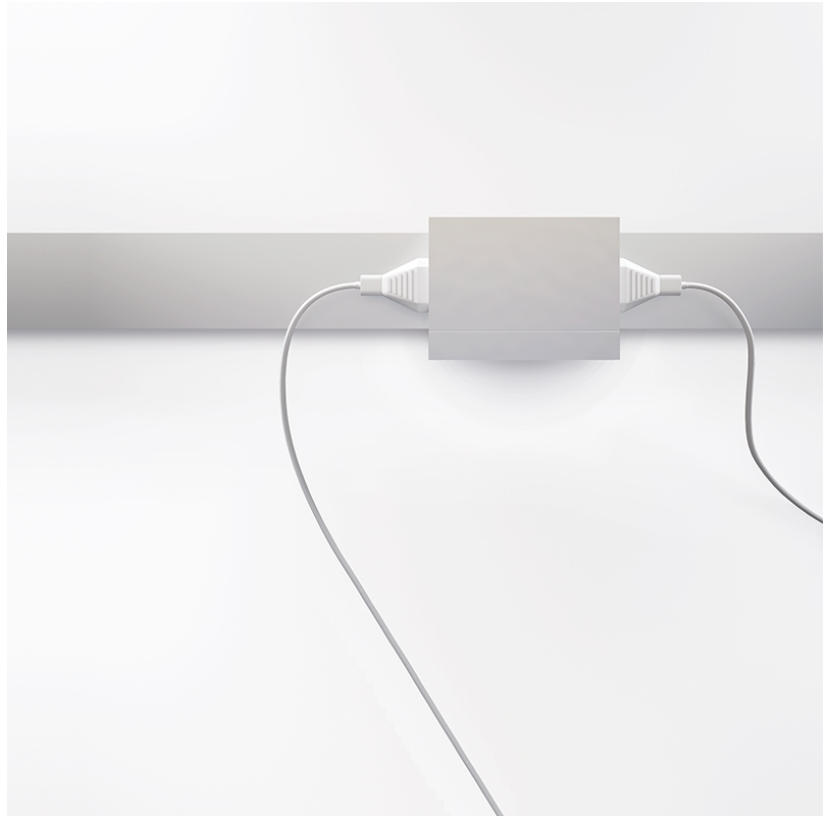

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS

### A7900049-

#### DESCRIPTION

NODO BOX-Large Box - 2 x USB Port (Single Side) + 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 20amp (2000W)

#### GENERAL

Series: Nodo  
 Partner: Letroh  
 Division: Architectural

#### PHYSICAL



Shape: Rectangle  
 Length (mm): 102  
 Length (in): 4  
 Width (mm): 74  
 Width (in): 2 <sup>15</sup>/<sub>16</sub>  
 Height (mm): 86  
 Height (in): 3 <sup>3</sup>/<sub>8</sub>  
 Fixture Finish: SSR / WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Max. Wattage Per Lamp (W): 2000  
 Input Voltage (V): 127

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
 IP rating: IP20

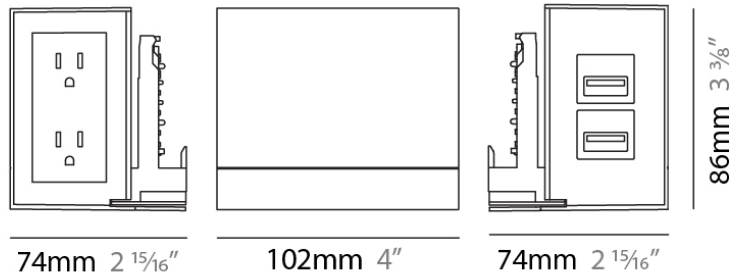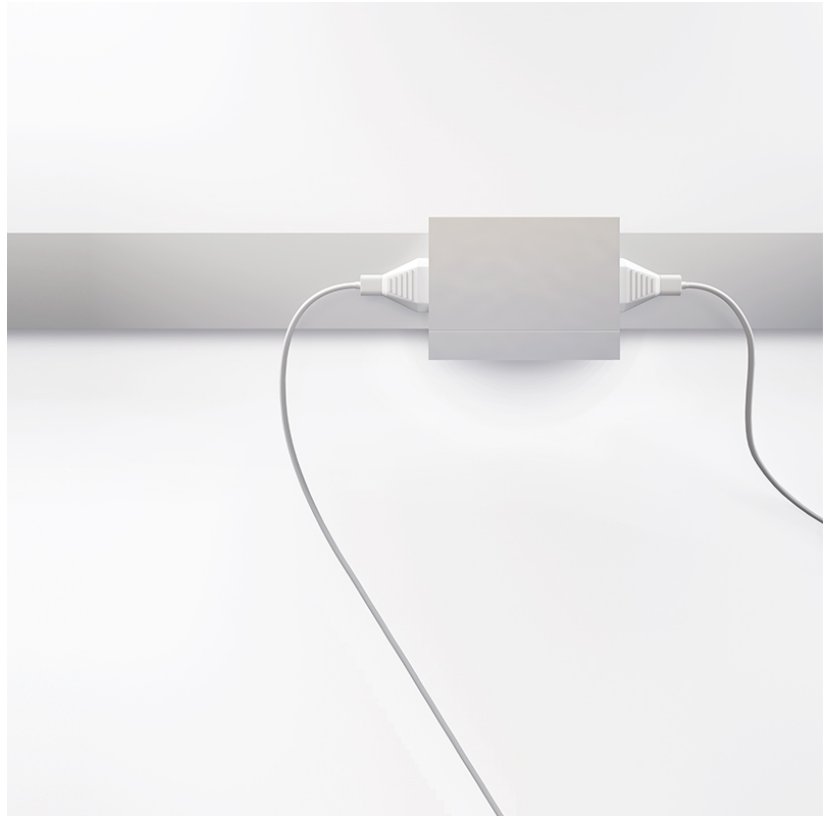

## A7NODO-MOD-SYS COMPONENTS

### A7900050-



**DESCRIPTION**  
 NODO BOX-Large Box - 2 x GFCI Receptacles - Maximum load per socket (127V) 20amp (2000W)

**GENERAL**  
 Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

**PHYSICAL**  
 Shape: Rectangle \_\_\_\_\_  
 Length (mm): 102 \_\_\_\_\_  
 Length (in): 4 \_\_\_\_\_  
 Width (mm): 74 \_\_\_\_\_  
 Width (in): 2 <sup>15</sup>/<sub>16</sub> \_\_\_\_\_  
 Height (mm): 86 \_\_\_\_\_  
 Height (in): 3 <sup>3</sup>/<sub>8</sub> \_\_\_\_\_  
 Fixture Finish: SSR / WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**  
 Max. Wattage Per Lamp (W): 2000 \_\_\_\_\_  
 Input Voltage (V): 127 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

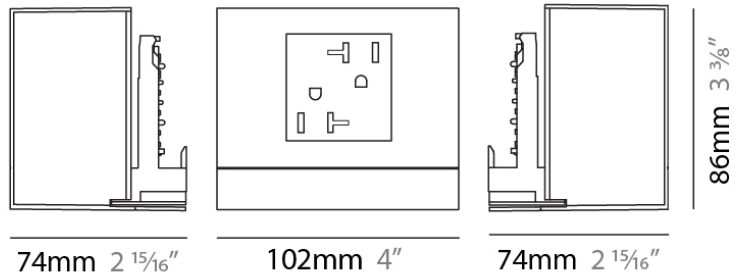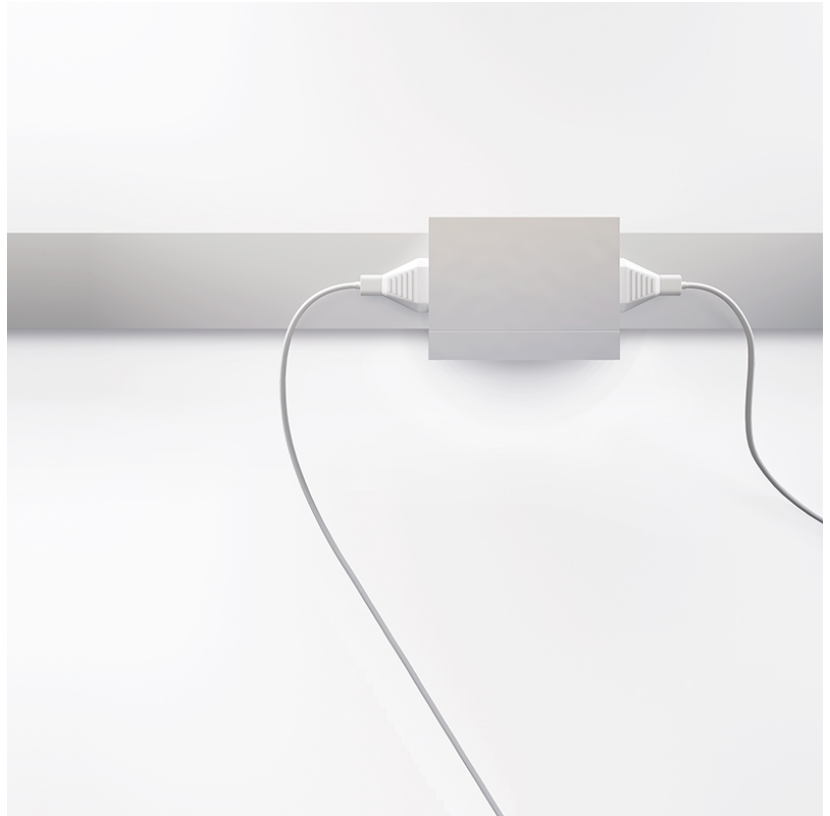

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS

### A7T00007-

#### DESCRIPTION

NODO LIGHTS-Nuo - Right - Spotlight - 4.5W LED - 3000K - 400lm  
- 350mA - CRI90

#### GENERAL

Series: Nodo  
Subseries: Nuo  
Partner: Letroh  
Division: Architectural  
Light Distribution: Adjustable / Direct

#### PHYSICAL

Diameter (mm): 15  
Diameter (in): 9/16  
Length (mm): 100  
Length (in): 3 15/16  
Extension (mm): 520  
Extension (in): 20 1/2  
Weight (kg): 0.50  
Weight (lbs): 1.1  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

#### ELECTRICAL



Input Wattage Range: 1 - 9 W  
Lamp Type: LED  
Input Wattage (W): 4.5  
Dimming: Non-Dimmable  
Driver Included: Yes  
Driver Location: Integrated  
Driver Type: Constant Current - 120Vac  
Driver Class: Class 2  
Input Voltage (V): 120  
Constant Current (mA): 350

#### LED

Delivered Lumen Range: 100 - 499 lm  
Color Temperature (°K): 3000  
Max. Delivered Lumen (lm): 400  
CRI: >90 CRI  
Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

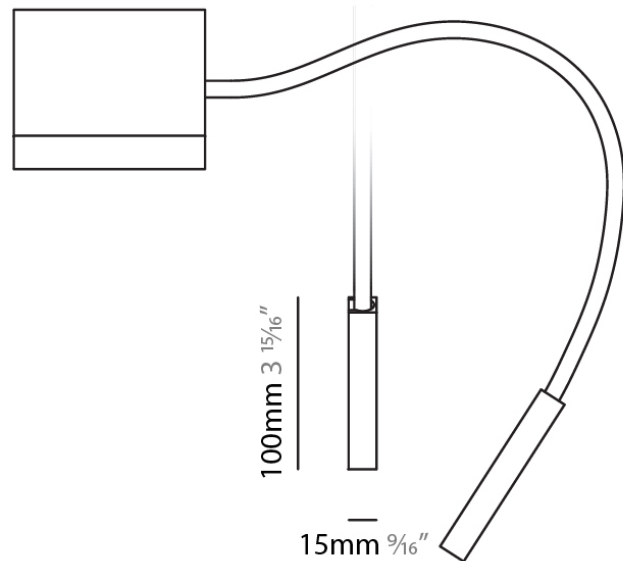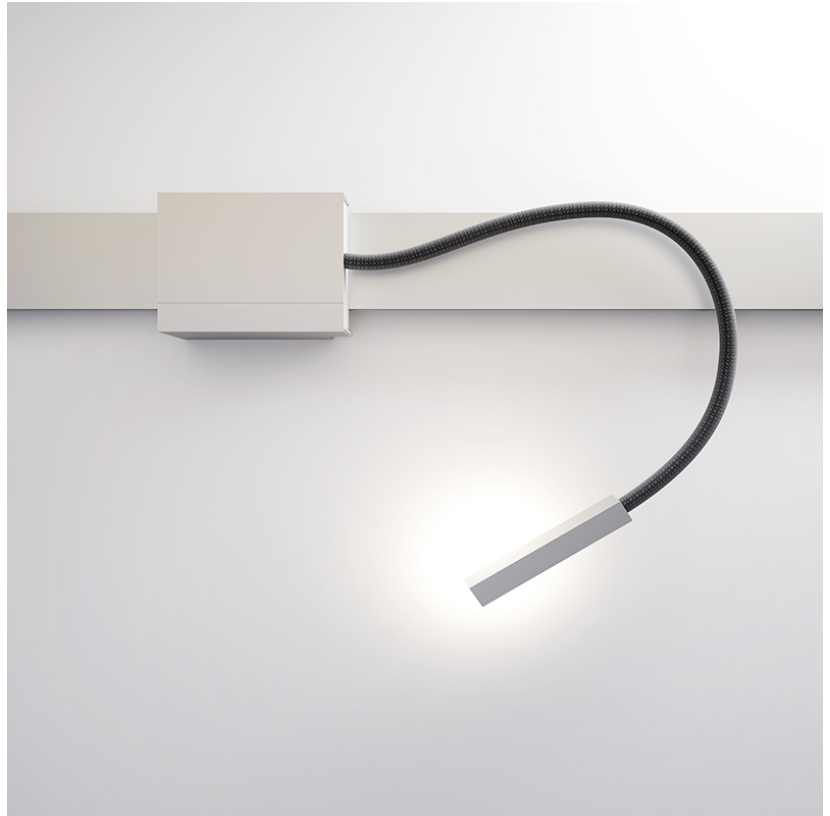

Hose: Ø9mm 3/8"  
Maximum extension 520mm 20 1/2"



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

## A7NODO-MOD-SYS COMPONENTS

### A7T00008-

#### DESCRIPTION

NODO LIGHTS - Nuo - Left - Spotlight - 4.5W LED - 3000K - 350mA - CRI90 -

#### GENERAL

Series: Nodo \_\_\_\_\_  
 Subseries: Nuo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_

#### PHYSICAL

Diameter (mm): 15 \_\_\_\_\_  
 Diameter (in): 9/16 \_\_\_\_\_  
 Length (mm): 100 \_\_\_\_\_  
 Length (in): 3 15/16 \_\_\_\_\_  
 Extension (mm): 520 \_\_\_\_\_  
 Extension (in): 20 1/2 \_\_\_\_\_  
 Fixture Finish: SSR / WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL



Input Wattage Range: 1 - 9 W \_\_\_\_\_  
 Lamp Type: LED \_\_\_\_\_  
 Input Wattage (W): 4.5 \_\_\_\_\_  
 Dimming: Non-Dimmable \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_  
 Constant Current (mA): 350 \_\_\_\_\_

#### LED

Color Temperature (°K): 3000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 400 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

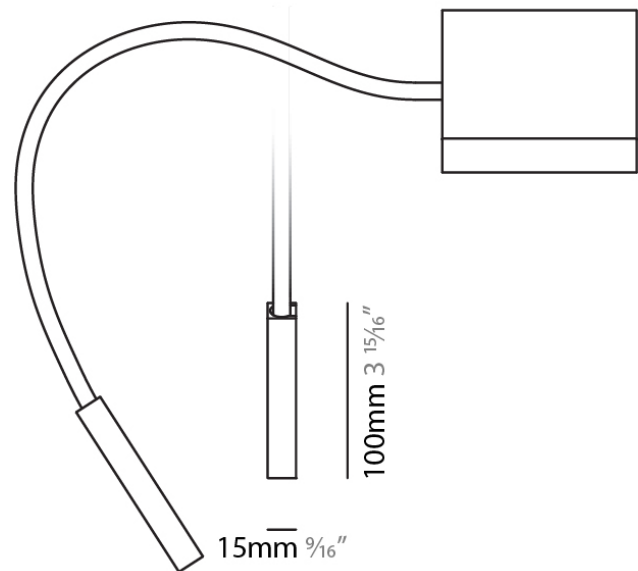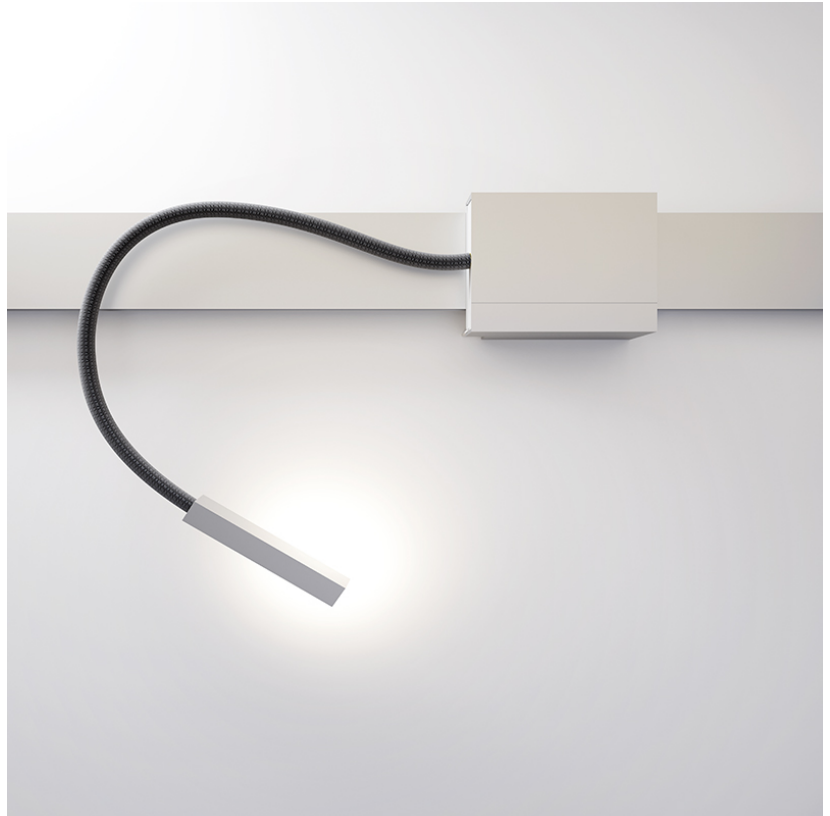

Hose: Ø9mm 3/8"  
 Maximum extension 520mm 20 1/2"



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00011-

**DESCRIPTION**  
1-Phase Track - 1000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 1000  
Length (in): 39 3/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 1  
Weight (lbs): 2.205  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

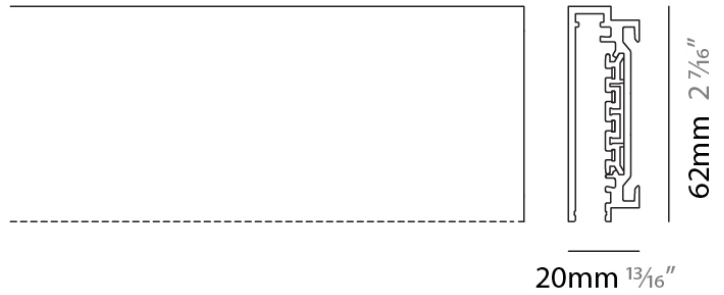

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00012-

**DESCRIPTION**  
1-Phase Track - 2000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 2  
Weight (lbs): 4.41  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

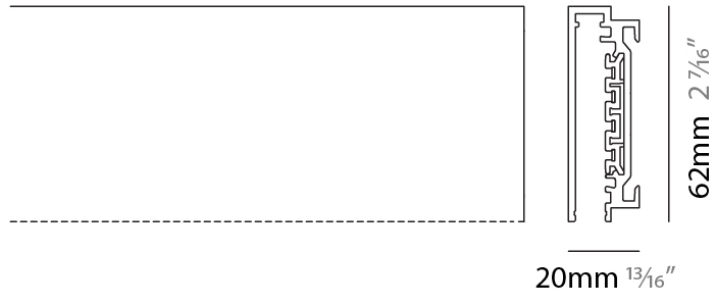

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00013-

**DESCRIPTION**  
1-Phase Track - 3000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 3  
Weight (lbs): 6 5/8  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

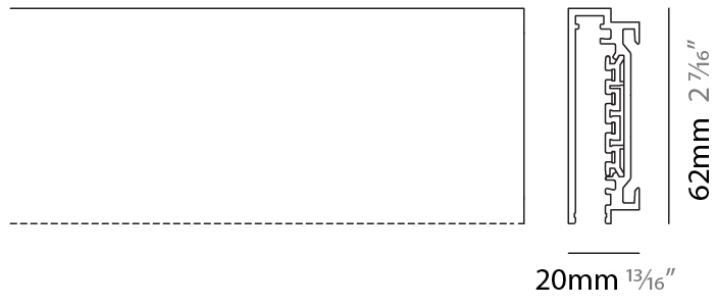

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00014-

**DESCRIPTION**  
2-Phase Track - 1000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 1000  
Length (in): 39 3/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 1  
Weight (lbs): 2.205  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

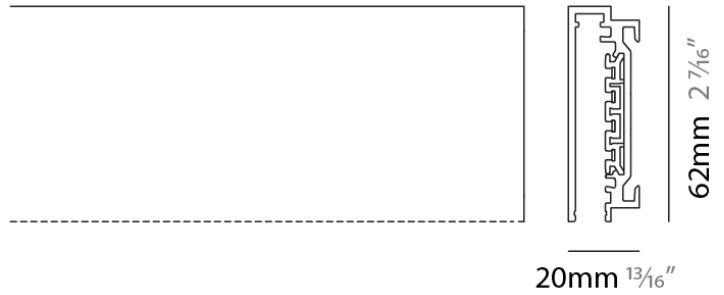

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00015-

**DESCRIPTION**  
2-Phase Track - 2000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 2  
Weight (lbs): 4 7/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

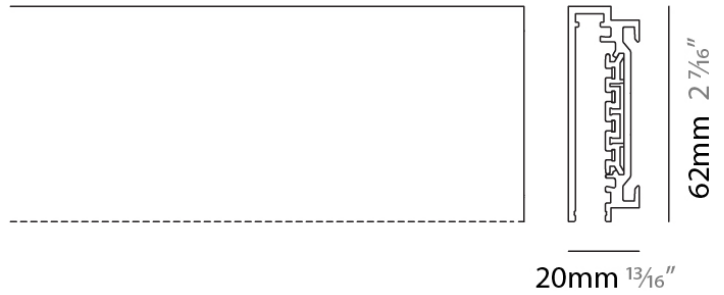

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00016-

**DESCRIPTION**  
2-Phase Track - 3000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

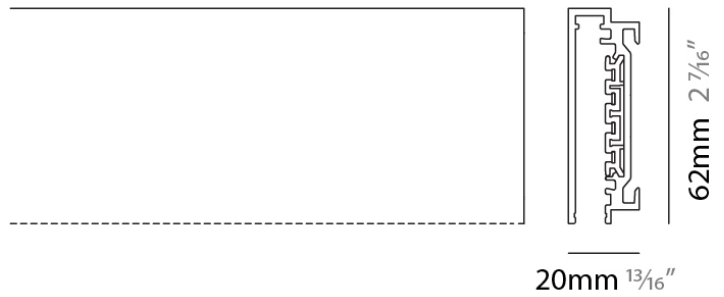

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00017-

**DESCRIPTION**  
3-Phase Track - 1000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 1000  
Length (in): 39 3/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 1  
Weight (lbs): 2 3/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

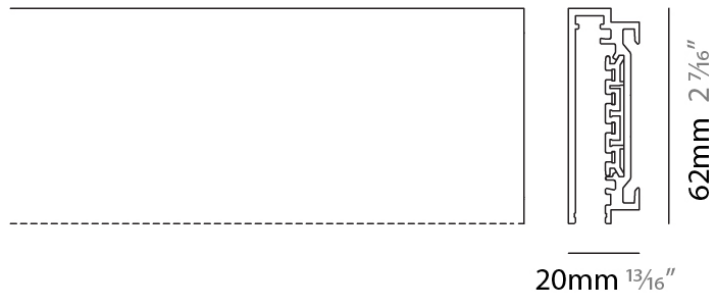

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00018-

**DESCRIPTION**  
3-Phase Track - 2000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 2  
Weight (lbs): 4 7/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

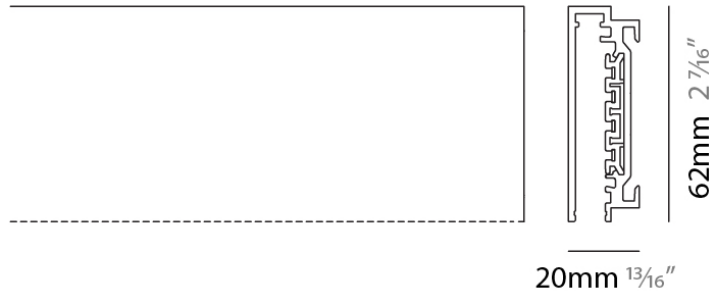

----- INDICATES OPEN SIDE



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00019-

**DESCRIPTION**  
3-Phase Track - 3000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 3  
Weight (lbs): 6 5/8  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

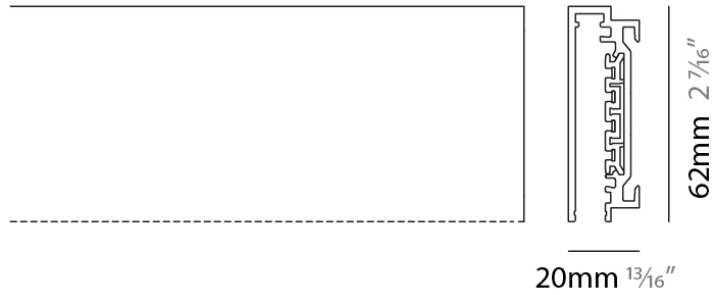

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00020-

**DESCRIPTION**  
Wired Track - 1000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 1000  
Length (in): 39 3/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 1  
Weight (lbs): 2 3/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

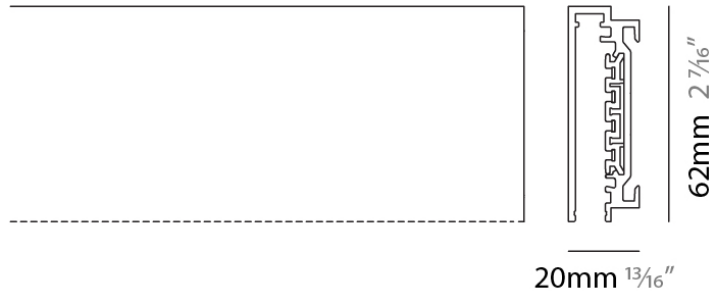

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00021-

**DESCRIPTION**  
Wired Track - 2000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Square  
Length (mm): 2000  
Length (in): 78 3/4  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 2  
Weight (lbs): 4 7/16  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

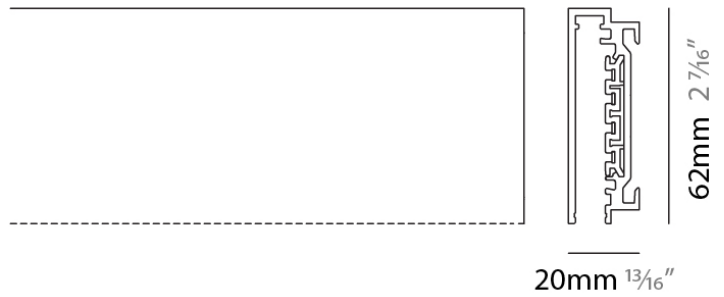

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

## A7NODO-MOD-SYS COMPONENTS SURFACE


### A7T00022-

**DESCRIPTION**  
Wired Track - 3000mm

**GENERAL**  
Series: Nodo  
Partner: Letroh  
Division: Architectural  
Installation: Surface  
Product Type: Linear Profiles  
Mounting Location: Wall

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 3000  
Length (in): 118 1/8  
Width (mm): 20  
Width (in): 13/16  
Height (mm): 62  
Height (in): 2 7/16  
Weight (kg): 3  
Weight (lbs): 6 5/8  
Fixture Finish: SSR / WHI / BLK  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

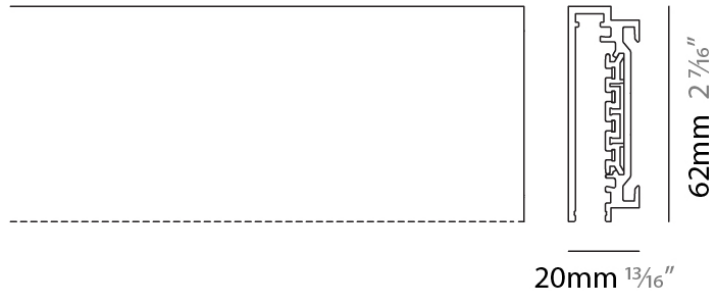

----- INDICATES OPEN SIDE



## A7NODO-MOD-SYS COMPONENTS TRACK

### A7T00025-

#### DESCRIPTION

Nodo - Bob - Track Spotlight - 13W LED - 2700K / 3000K - Optics 30° / 40° / 60° / OV / RL / WW

#### GENERAL

Series: Nodo \_\_\_\_\_  
 Partner: Letroh \_\_\_\_\_  
 Division: Architectural \_\_\_\_\_  
 Installation: Track \_\_\_\_\_  
 Product Type: Linear Profiles \_\_\_\_\_  
 Mounting Location: Wall \_\_\_\_\_  
 Light Distribution: Adjustable / Direct \_\_\_\_\_

#### PHYSICAL

Shape: Cylinder \_\_\_\_\_  
 Diameter (mm): 60 \_\_\_\_\_  
 Diameter (in): 2 <sup>3</sup>/<sub>8</sub> \_\_\_\_\_  
 Length (mm): 101 \_\_\_\_\_  
 Length (in): 4 \_\_\_\_\_  
 Height (mm): 109 \_\_\_\_\_  
 Height (in): 4 <sup>5</sup>/<sub>16</sub> \_\_\_\_\_  
 Weight (kg): 0.65 \_\_\_\_\_  
 Weight (lbs): 1.43 \_\_\_\_\_  
 Fixture Finish: WHI / BLK \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

#### ELECTRICAL

Input Wattage Range: 10 - 19 W \_\_\_\_\_  
 Lamp Type: LED \_\_\_\_\_  
 Input Wattage (W): 13 \_\_\_\_\_  
 Total Output Wattage (W): 12 \_\_\_\_\_  
 Dimming: Non-Dimmable \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Type: Constant Current - 120Vac \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_  
 Constant Current (MA): 350 \_\_\_\_\_

#### LED


Delivered Lumen Range: 1000 - 2999 lm \_\_\_\_\_  
 Color Temperature (°K): 2700 / 3000 \_\_\_\_\_  
 Max. Delivered Lumen (lm): 1100 / 1500 \_\_\_\_\_  
 CRI: >90 CRI \_\_\_\_\_  
 Lamp Life (hrs): 50000 \_\_\_\_\_

#### OPTICAL

Optic°: 30 / 40 / 60 / OV / RL / WW \_\_\_\_\_  
 Adjustability: Rotational 360°; Tilt 90° \_\_\_\_\_

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

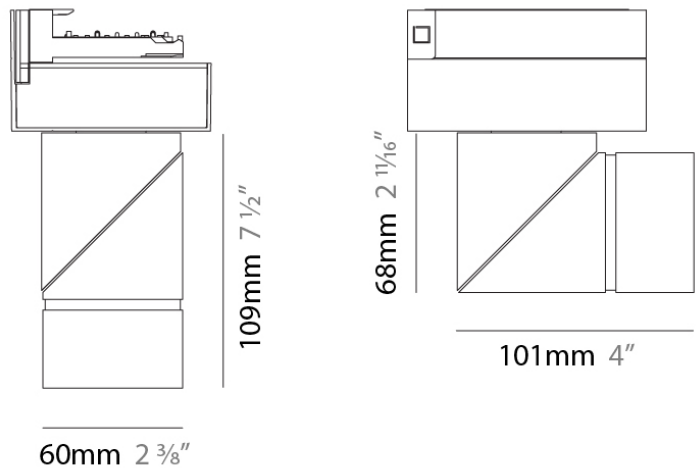

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

## A7NODO-MOD-SYS COMPONENTS TRACK

### A7T00045-

#### DESCRIPTION

NODO LIGHTS - Zoom Adjustable Spot - 1 x 13W LED, 2700K/3000K, 878lm, CRI97, Optic Range: 12° - 46°

#### GENERAL

Series: Nodo  
 Partner: Letroh  
 Division: Architectural  
 Installation: Track  
 Product Type: Spots  
 Mounting Location: Ceiling  
 Light Distribution: Adjustable / Direct

#### PHYSICAL

Aperture Sizes - Downlights: 1"  
 Shape: Cylinder  
 Length (mm): 85  
 Length (in): 3 3/8  
 Height (mm): 114  
 Height (in): 4 1/2  
 Fixture Finish: WHI / BLK  
 Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W  
 Lamp Type: LED  
 Input Wattage (W): 13  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Type: Constant Current - Universal  
 Driver Class: Class 2  
 Input Voltage (V): 120

#### LED


Delivered Lumen Range: 500 - 999 lm  
 Color Temperature (°K): 2700 / 3000  
 Max. Delivered Lumen (lm): 831 / 878  
 Nominal Lumen (lm): 1010 / 1068  
 CRI: >97 CRI  
 Lamp Life (hrs): 50000

#### OPTICAL







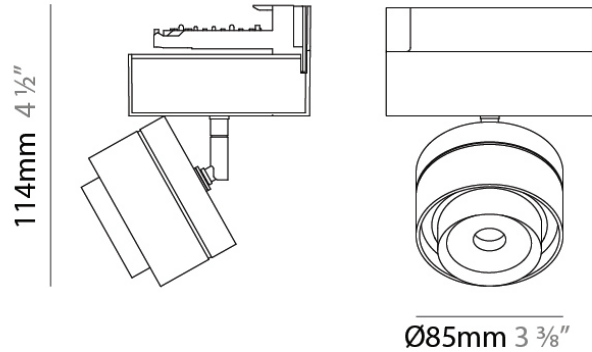






























































Optic°: 12 - 46  
 Adjustability: Rotational 350°; Tilt 90°

#### RATINGS AND CERTIFICATIONS











Certified By: Certified for North American Standards  
 IP rating: IP20













### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)