

A7NODO-MOD-SYS COMPONENTS

A7900001

DESCRIPTION

NODO SYSTEM-Direct - Surface Support for Wall or Ceiling Every 81cm Allows For Load of 10Kg/m

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Length (mm): 57
Length (in): 2 ¼
Width (mm): 7
Width (in): 1/4
Height (mm): 48
Height (in): 1 7/8
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

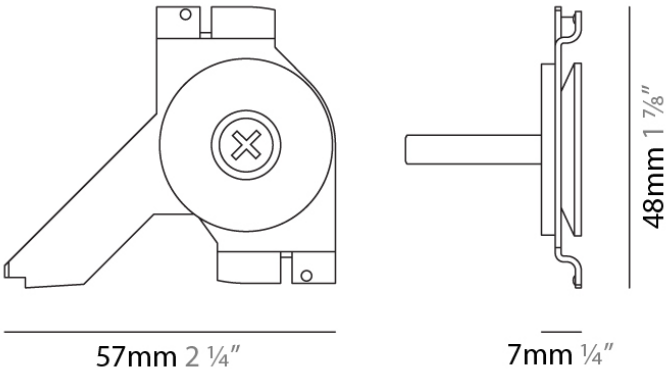

A7NODO-MOD-SYS COMPONENTS

A7900002

DESCRIPTION

NODO SYSTEM-Ceiling Support Kit with 200cm Suspension Cable Every 81cm Allows For Load of 10Kg/m

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Length (mm): 50
Length (in): 1 15/16
Height (mm): 2000
Height (in): 78 3/4
Fixture Finish: SSR
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

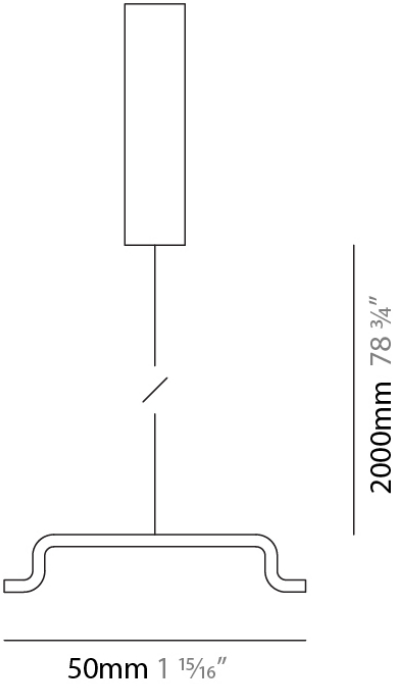

A7NODO-MOD-SYS COMPONENTS

A7900003-

DESCRIPTION

End Cap - Right Side

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural



PHYSICAL

Shape: Rectangle
Width (mm): 32
Width (in): 1 ¼
Height (mm): 62
Depth (mm): 4
Height (in): 2 7/16
Depth (in): 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Insulating Plastic / Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

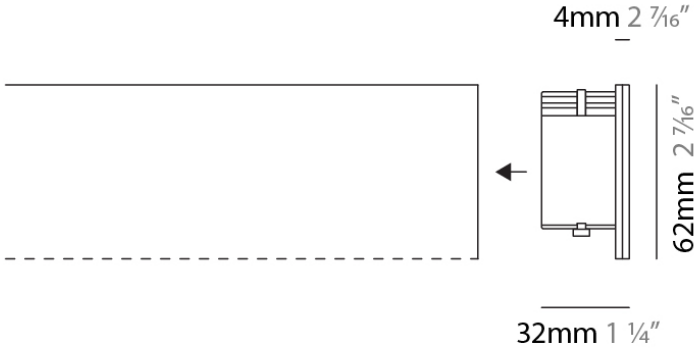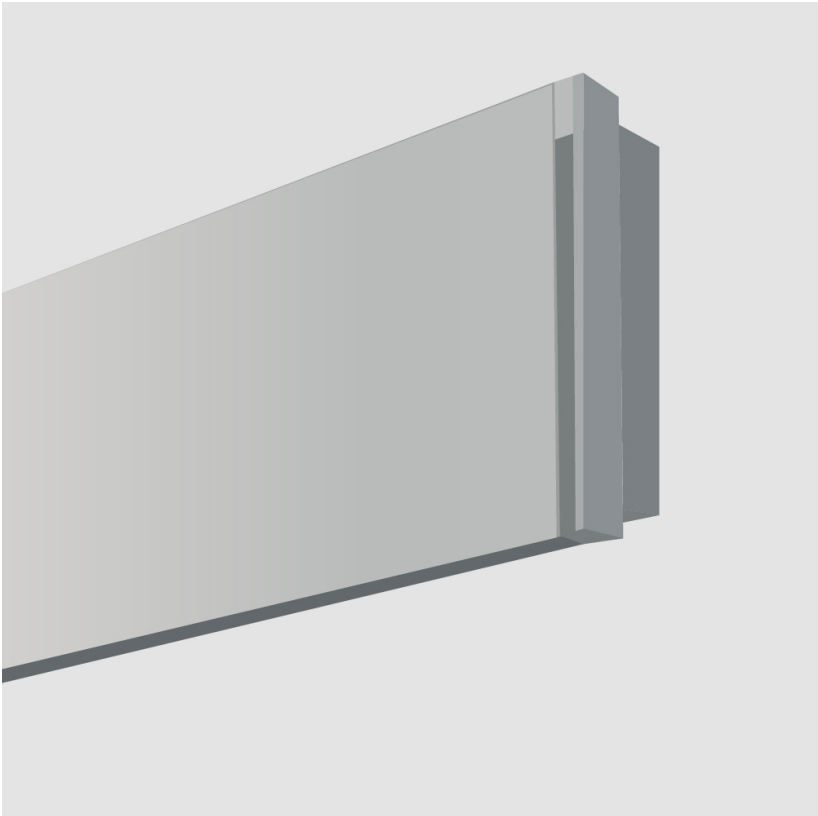

---- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900004-

DESCRIPTION

End Cap - Left Side

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Width (mm): 32
Width (in): 1 ¼
Height (mm): 62
Depth (mm): 4
Height (in): 2 7/16
Depth (in): 3/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Insulating Plastic / Aluminum


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

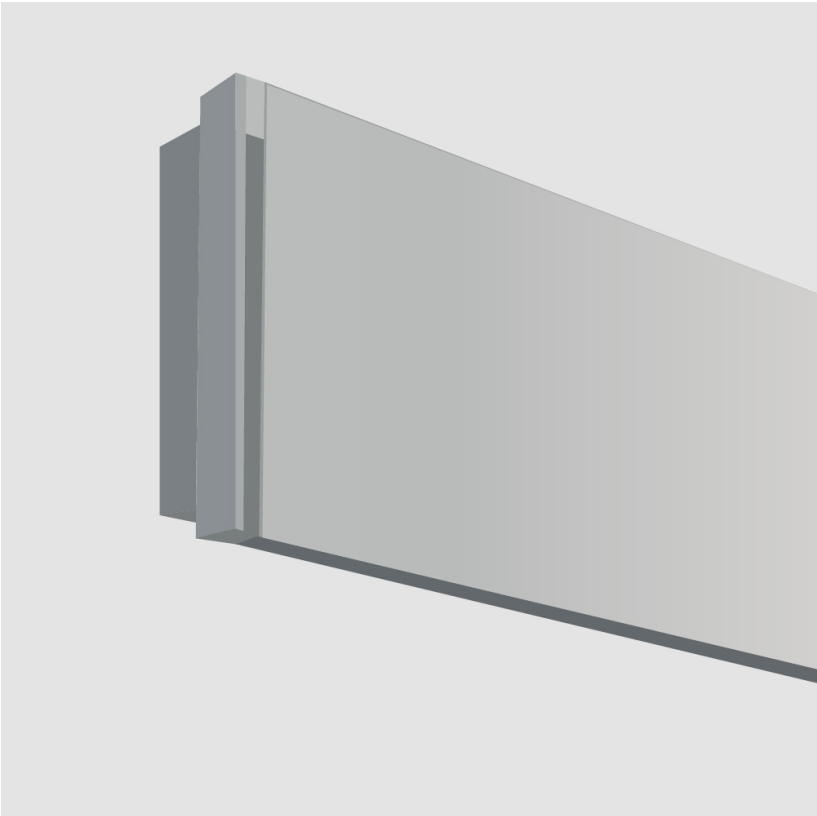

4mm 2 7/16"

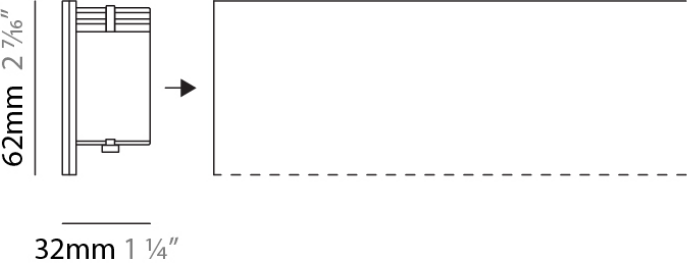

---- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900005-

DESCRIPTION

NODO SYSTEM-Right End Power Feed - to be used with min 5 x 1.5mm2 Cable - Mount 3 16A fuses (Not Included)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 192
Length (in): 7 9/16
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

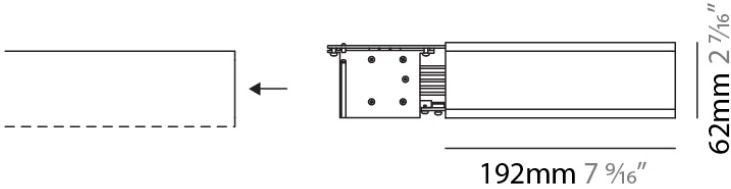

A7NODO-MOD-SYS COMPONENTS

A7900006-

DESCRIPTION

NODO SYSTEM-Left End Power Feed - to be used with min 5 x 1.5mm2 Cable - Mount 3 16A fuses (Not Included)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 192
Length (in): 7 9/16
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

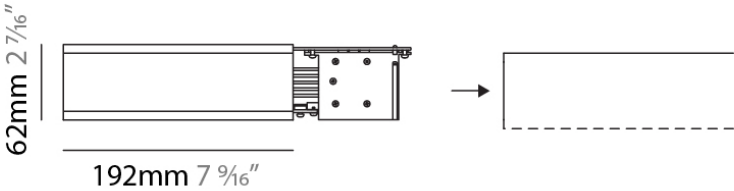

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900007-

DESCRIPTION

NODO SYSTEM - Central Power Feed To be used with min 5 x 1.5mm 2 Cable - Mount 3 16A fuses (not included)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 192
Length (in): 7 9/16
Width (mm): 25
Width (in): 1
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

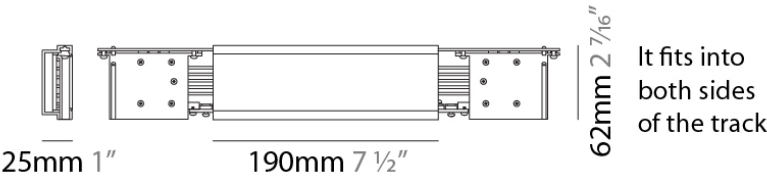

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7900008

DESCRIPTION

Cable Clamp Kit

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

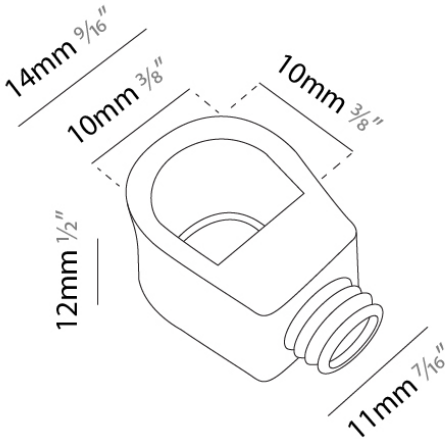

A7NODO-MOD-SYS COMPONENTS

A7900010-

DESCRIPTION

Nodo System - Linear Insulating Coupling

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 200
Length (in): 7 7/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

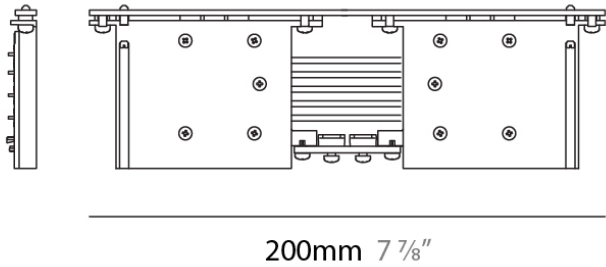

It fits between two tracks



A7NODO-MOD-SYS COMPONENTS

A7900013-

DESCRIPTION

NODO SYSTEM - 90° Joint - Internal -

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Shape: Rectangle
Length (mm): 190 + 190
Length (in): 7 1/2
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

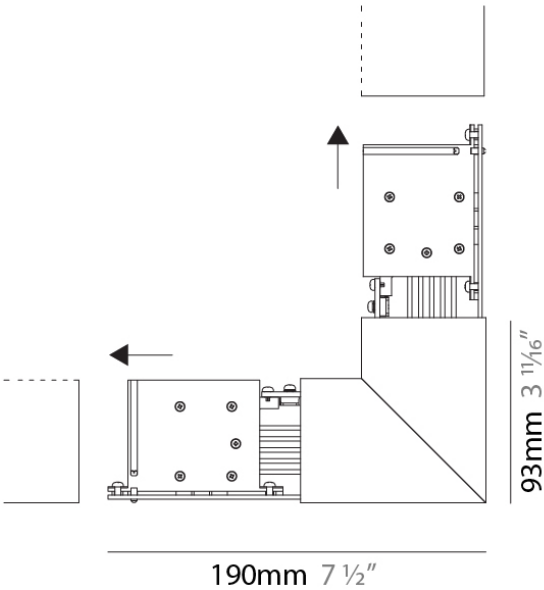

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A7900014-

DESCRIPTION

NODO SYSTEM-90° Joint - External

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Length (mm): 93 + 93
Length (in): 3 11/16
Width (mm): 25
Width (in): 1
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

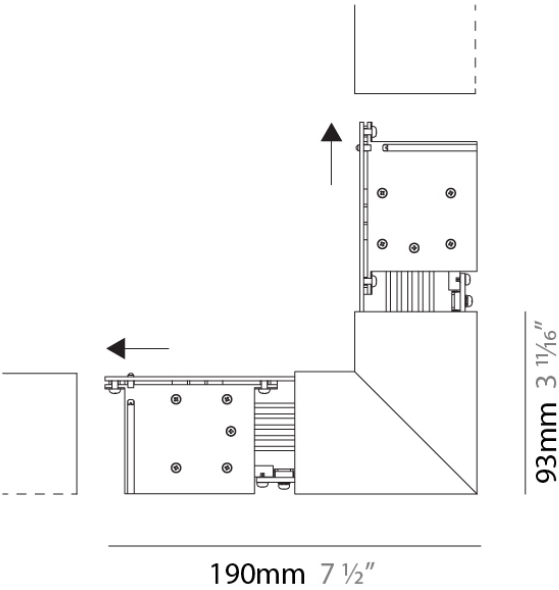

--- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7900015-

DESCRIPTION

NODO SYSTEM-Angular Joint - Internal

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 150 + 150
Length (in): 5 7/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

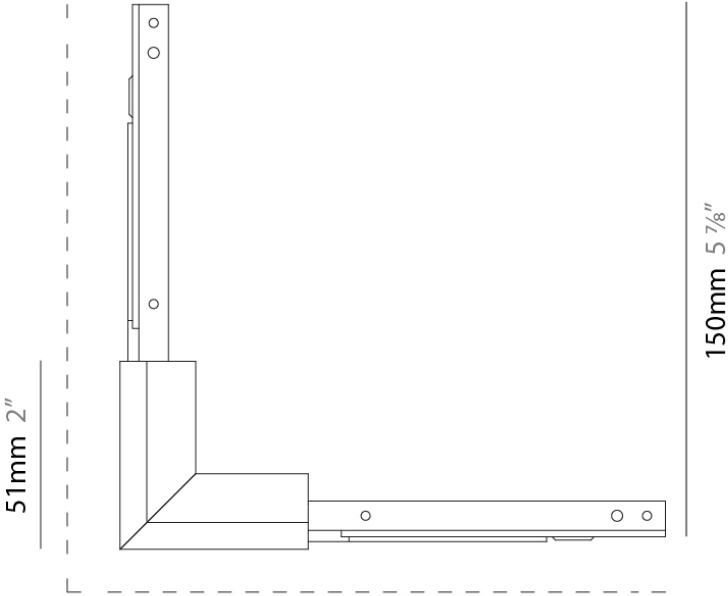

--- INDICATES WALL



A7NODO-MOD-SYS COMPONENTS

A7900016-

DESCRIPTION

NODO SYSTEM-Angular Joint - External -

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Length (mm): 51 + 51
Length (in): 2 + 2
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

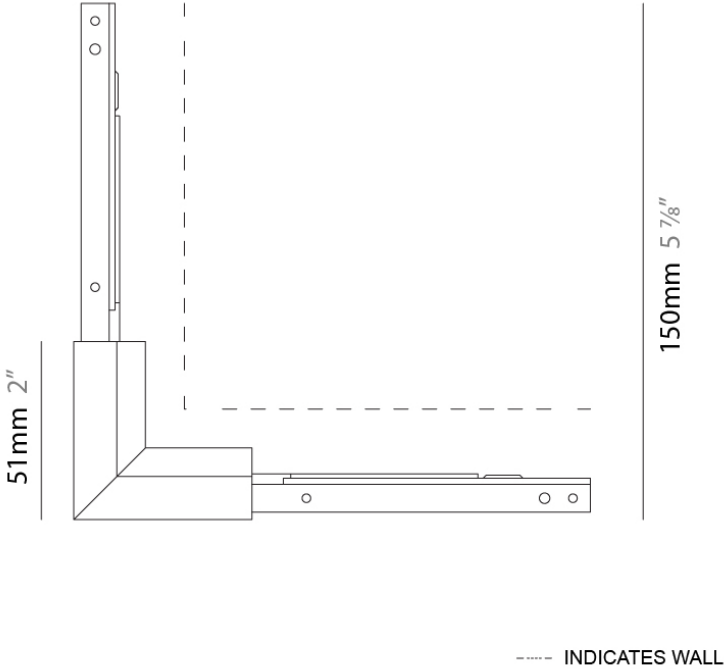

A7NODO-MOD-SYS COMPONENTS

A7900022-

DESCRIPTION

NODO BOX-Large Box - 2 x 3 Prong Receptacle (Single Side) - Maximum load per socket (127V) 2000W.

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 74
Width (in): 2 15/16
Height (mm): 86
Height (in): 3 3/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum



ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

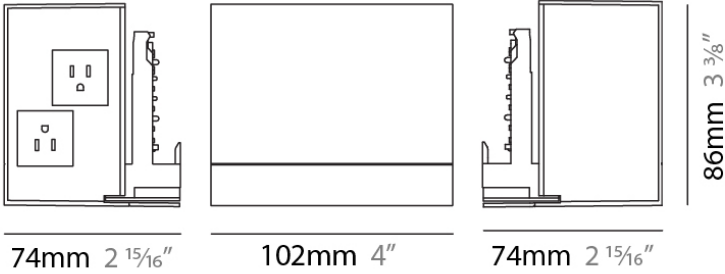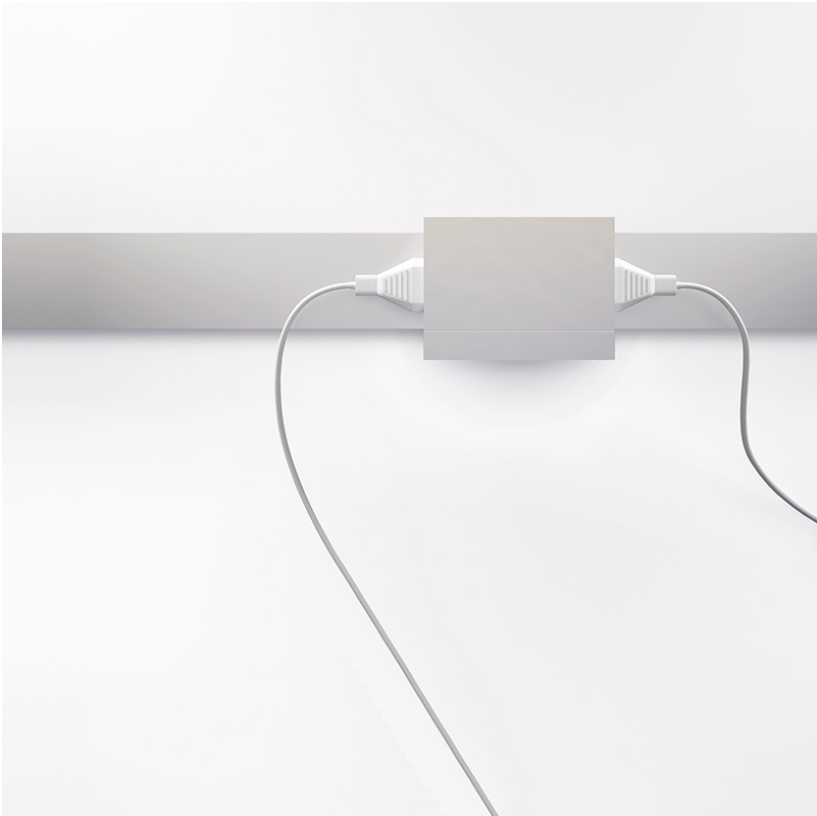

A7NODO-MOD-SYS COMPONENTS

A7900029-

DESCRIPTION

NODO-Adjustable Joint -

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural



PHYSICAL

Shape: Rectangle
Length (mm): 160 + 160
Length (in): 6 5/16
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

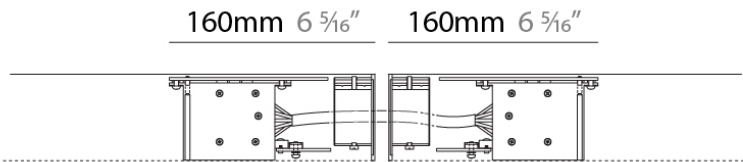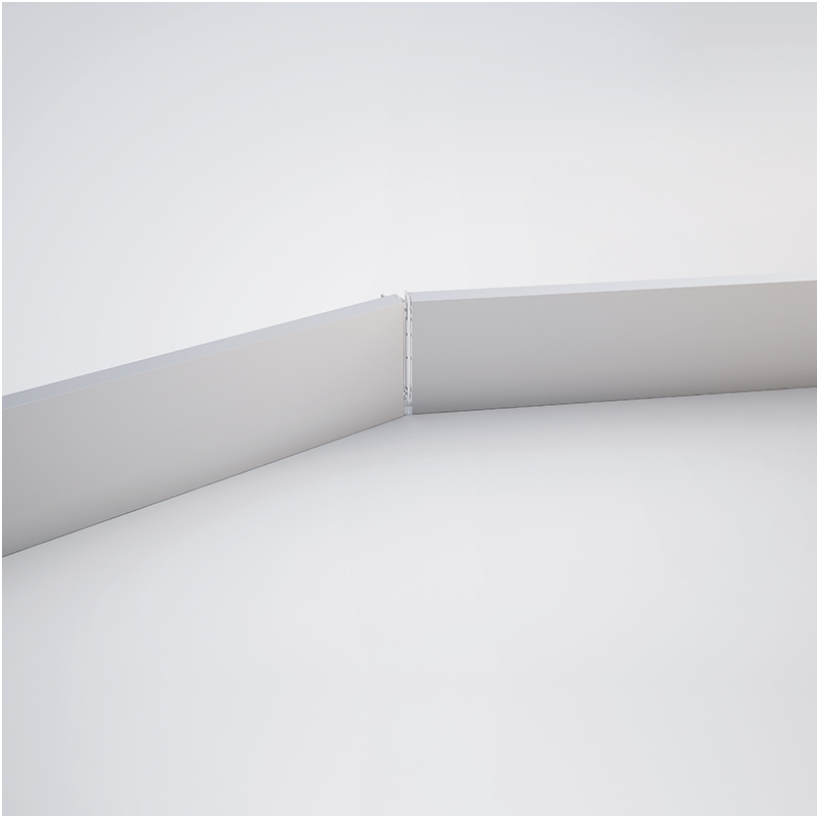

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS

A7900030-

DESCRIPTION

Nodo Desk - Plug Wiring - Right - Wiring covered in Anthracite Gray Fabric.

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural


PHYSICAL

Length (mm): 2000
Length (in): 78 3/4
Fixture Finish: WHI / BLK
Cable Details: 2000mm / 78 3/4" - 3 x 15mm2

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

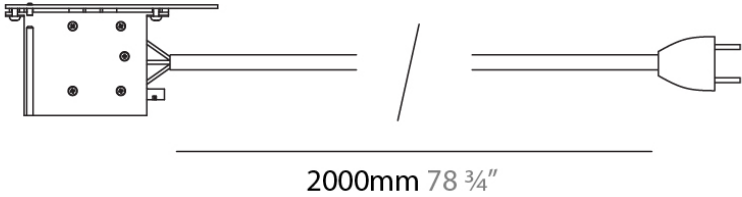

A7NODO-MOD-SYS COMPONENTS

A7900031-

DESCRIPTION

Nodo Desk - Plug Wiring - Left - Wiring covered in Anthracite Gray Fabric.

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural
Subcategory: Profile


PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Fixture Finish: WHI / BLK
Fixture Material: Aluminum
Cable Details: 2000mm / 78 ¾" - 3 x 15mm2

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

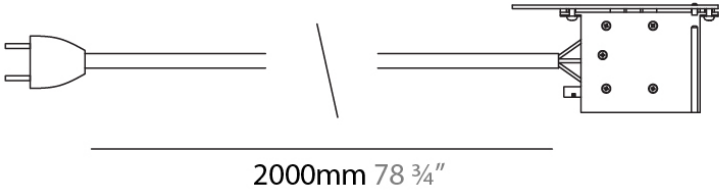

A7NODO-MOD-SYS COMPONENTS

A7900040

DESCRIPTION

MICROLED-LED Insert - 100cm, 11W, 1100lm, 24V, 3000K - Satin Silver

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 4
Width (in): 3/16
Height (mm): 8
Height (in): 5/16
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Total Output Wattage (W): 11
Dimming: Non-Dimmable
Driver Included: No
Input Voltage (V): 120
Output Voltage (V): 24


LED

Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 1100
CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

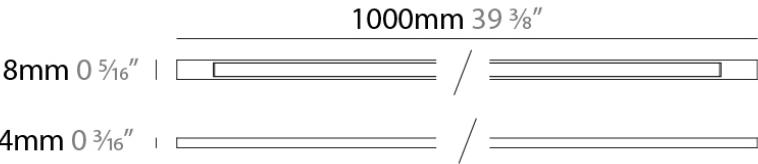

A7NODO-MOD-SYS COMPONENTS

A7900041

DESCRIPTION

MICROLED-LED Insert - 200cm, 22W, 2200lm, 24V, 3000K - Satin Silver

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 3/4
Width (mm): 4
Width (in): 3/16
Height (mm): 8
Height (in): 5/16
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Total Output Wattage (W): 22
Dimming: Non-Dimmable
Driver Included: No
Input Voltage (V): 120
Constant Voltage (V): 24


LED

Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 2200
CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

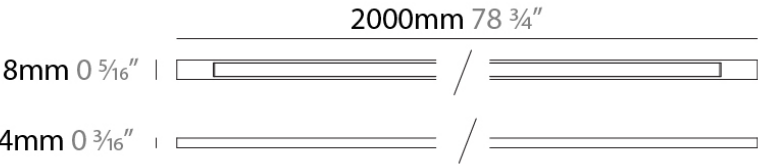

A7NODO-MOD-SYS COMPONENTS

A7900042

DESCRIPTION

MICROLED-LED Insert - 300cm, 33W, 3300lm, 24V, 3000K - Satin Silver

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 4
Width (in): 3/16
Height (mm): 8
Height (in): 5/16
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED
Total Output Wattage (W): 33
Dimming: Non-Dimmable
Driver Included: No
Input Voltage (V): 120
Constant Voltage (V): 24

LED

Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 3300
CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



A7NODO-MOD-SYS COMPONENTS

A7900046-

DESCRIPTION

NODO BOX-Slim Box - 1 x 3 Prong Receptacle (Double Sided) - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 52
Width (in): 2 1/16
Height (mm): 86
Height (in): 3 3/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum



ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

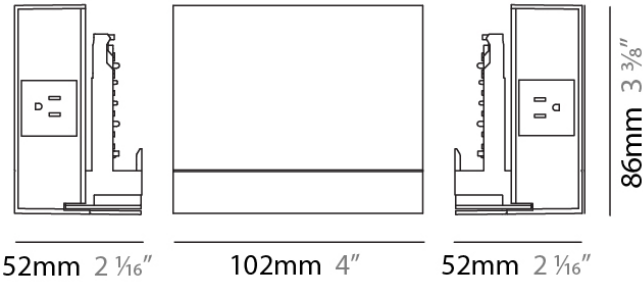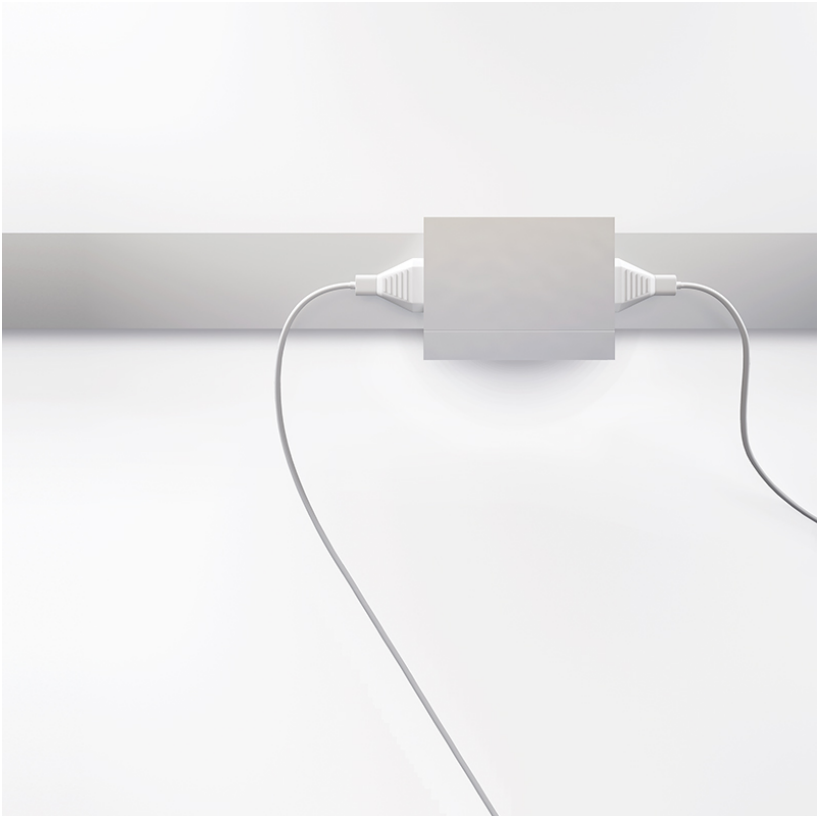

A7NODO-MOD-SYS COMPONENTS

A7900047-

DESCRIPTION

NODO BOX-Slim Box - 1 x USB Port (Single Side) + 1 x 3 Prong
Receptacle (Single Side) - Maximum load per socket (127V)
20amp (2000W)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 52
Width (in): 2 1/16
Height (mm): 86
Height (in): 3 3/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum



ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

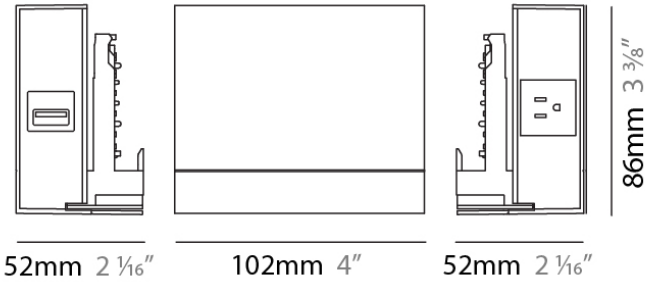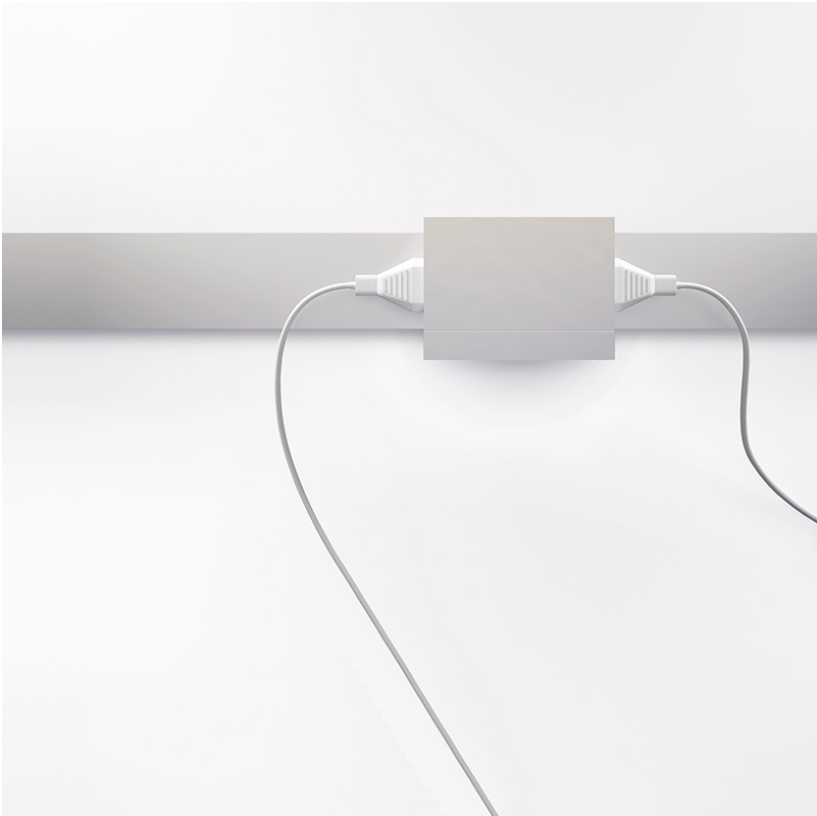

A7NODO-MOD-SYS COMPONENTS

A7900049-

DESCRIPTION

NODO BOX-Large Box - 2 x USB Port (Single Side) + 2 x 3 Prong
Receptacle (Single Side) - Maximum load per socket (127V)
20amp (2000W)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 74
Width (in): 2 15/16
Height (mm): 86
Height (in): 3 3/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum



ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

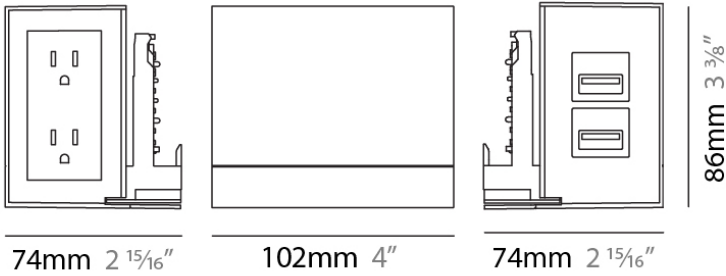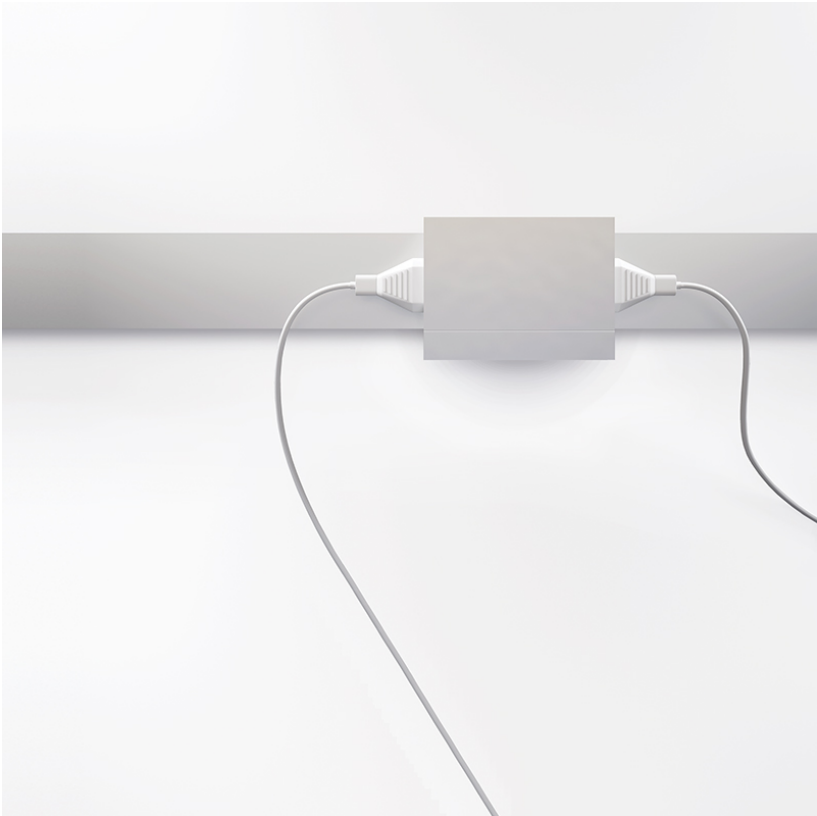

A7NODO-MOD-SYS COMPONENTS

A7900050-

DESCRIPTION

NODO BOX-Large Box - 2 x GFCI Receptacles - Maximum load per socket (127V) 20amp (2000W)

GENERAL

Series: Nodo
Brand: Letroh
Division: Architectural

PHYSICAL

Shape: Rectangle
Length (mm): 102
Length (in): 4
Width (mm): 74
Width (in): 2 15/16
Height (mm): 86
Height (in): 3 3/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum



ELECTRICAL

Max. Wattage Per Lamp (W): 2000
Input Voltage (V): 127

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

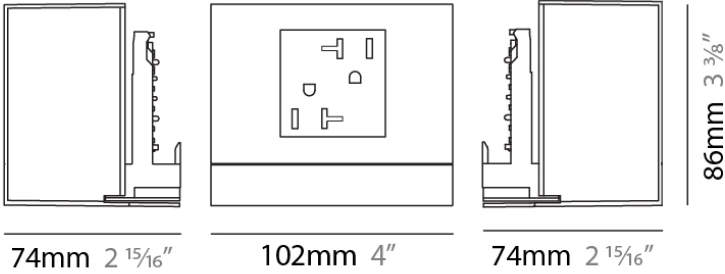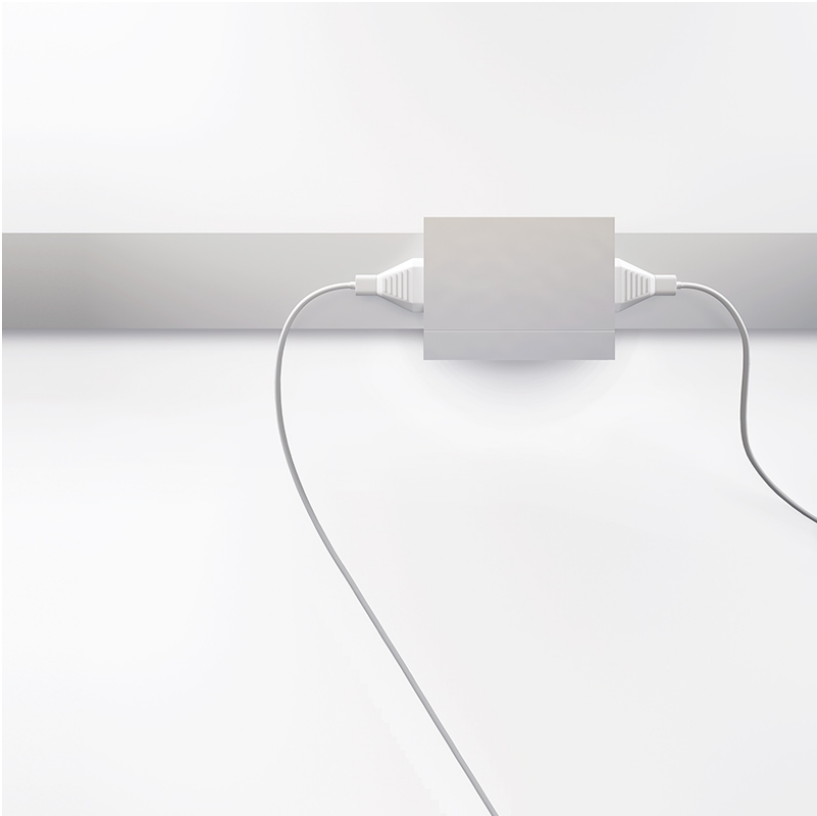

A7NODO-MOD-SYS COMPONENTS

A7T00007-

DESCRIPTION

NODO LIGHTS-Nuo - Right - Spotlight - 4.5W LED - 3000K - 400lm
- 350mA - CRI90

GENERAL

Series: Nodo
Subseries: Nuo
Brand: Letroh
Division: Architectural

PHYSICAL

Diameter (mm): 15
Diameter (in): 9/16
Length (mm): 100
Length (in): 3 15/16
Extension (mm): 520
Extension (in): 20 1/2
Light Distribution: Adjustable / Direct
Weight (kg): 0.50
Weight (lbs): 1.1
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4.5
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120Vac
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (mA): 350



LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

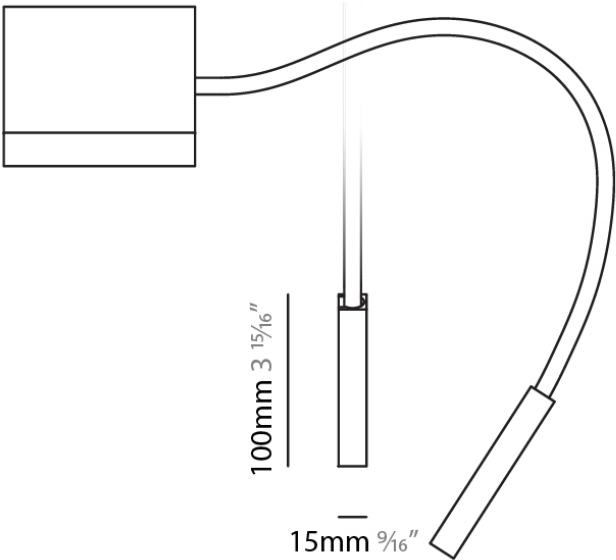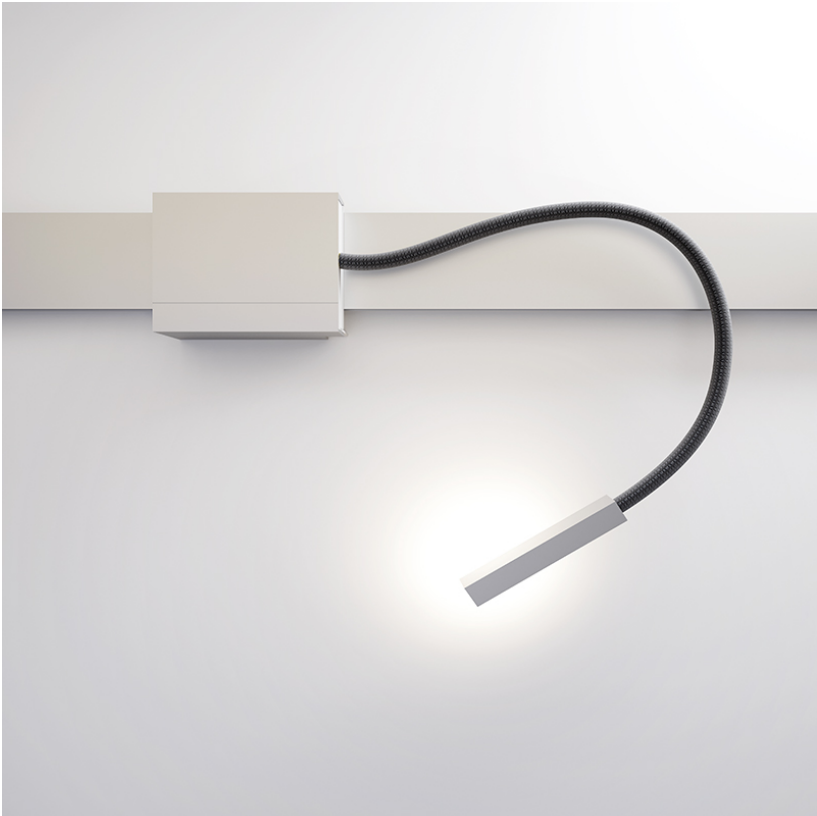

Hose: Ø9mm 3/8"
Maximum extension 520mm 20 1/2"

A7NODO-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00008-

DESCRIPTION

NODO LIGHTS - Nuo - Left - Spotlight - 4.5W LED - 3000K - 350mA
- CRI90 -

GENERAL

Series: Nodo
Subseries: Nuo
Brand: Letroh
Division: Architectural

PHYSICAL

Diameter (mm): 15
Diameter (in): 9/16
Length (mm): 100
Length (in): 3 15/16
Extension (mm): 520
Extension (in): 20 1/2
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

ELECTRICAL



Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 4.5
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120Vac
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 350

LED

Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 400
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

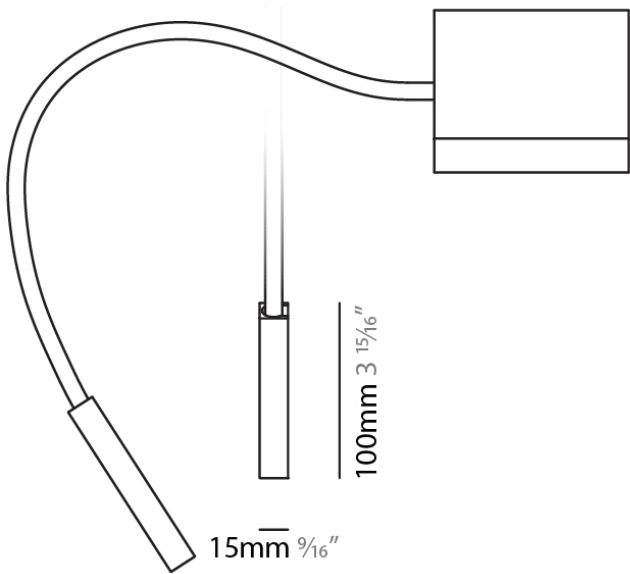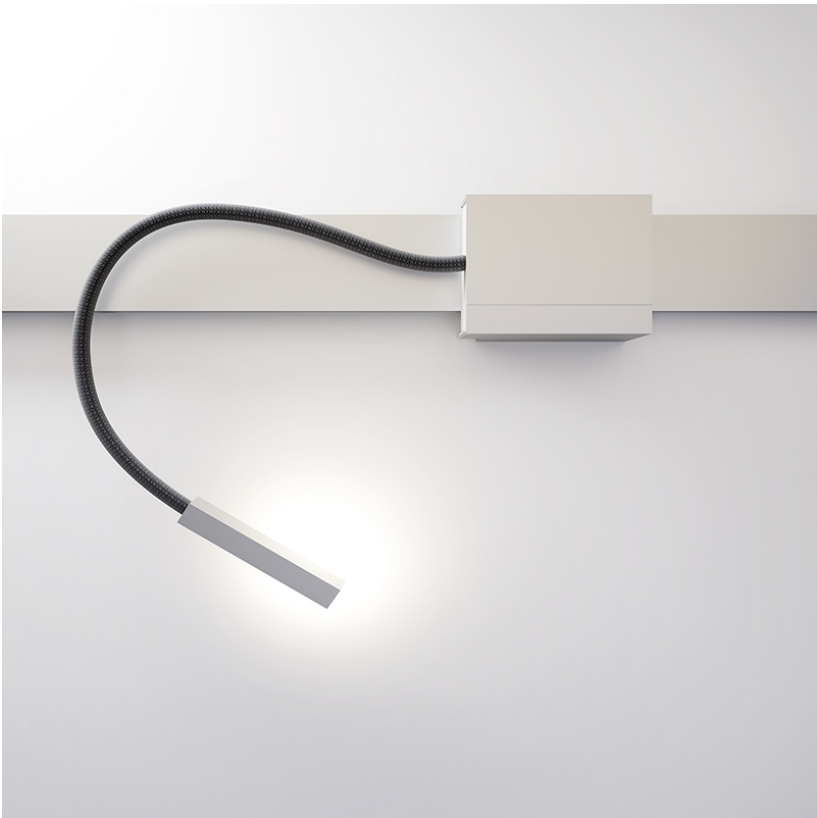

Hose: Ø9mm 3/8"
Maximum extension 520mm 20 1/2"



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00011-

DESCRIPTION

1-Phase Track - 1000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3⁄8
Width (mm): 20
Width (in): 13⁄16
Height (mm): 62
Height (in): 2 7⁄16
Weight (kg): 1
Weight (lbs): 2.205
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

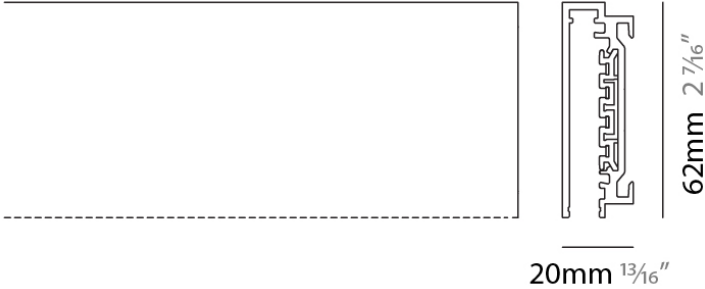

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00012-

DESCRIPTION

1-Phase Track - 2000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4.41
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

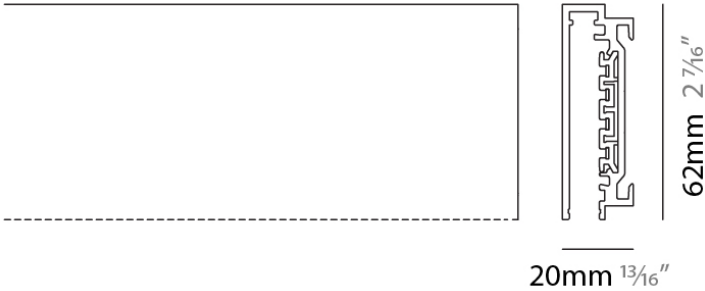

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00013-

DESCRIPTION

1-Phase Track - 3000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

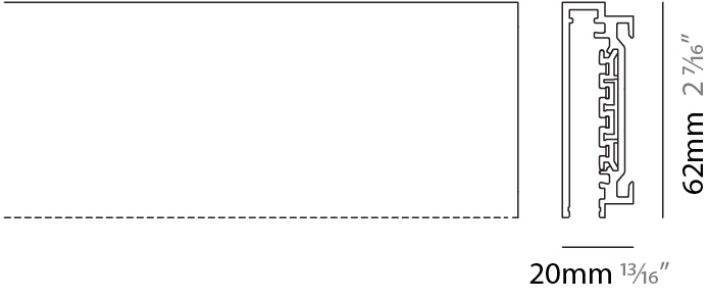

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00014-

DESCRIPTION

2-Phase Track - 1000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3⁄8
Width (mm): 20
Width (in): 13⁄16
Height (mm): 62
Height (in): 2 7⁄16
Weight (kg): 1
Weight (lbs): 2.205
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

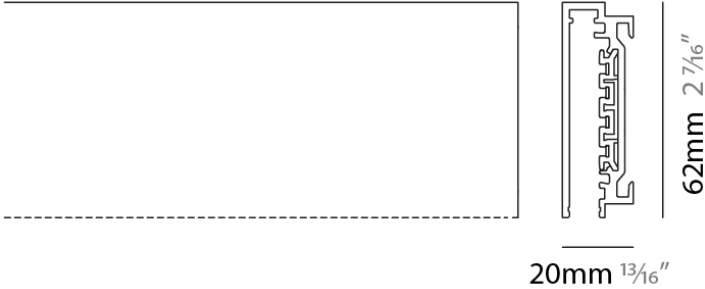

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00015-

DESCRIPTION

2-Phase Track - 2000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

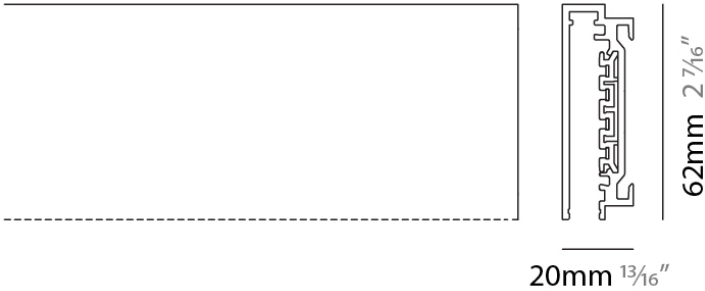

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00016-

DESCRIPTION

2-Phase Track - 3000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

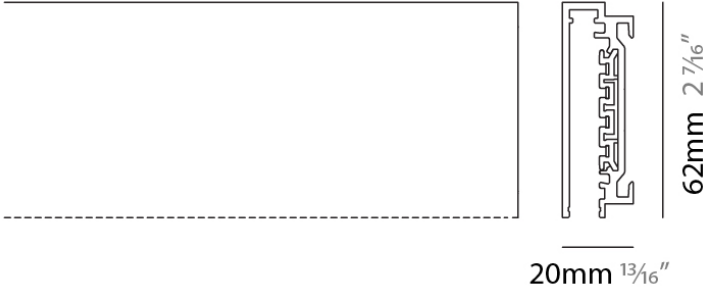

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00017-

DESCRIPTION

3-Phase Track - 1000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3⁄8
Width (mm): 20
Width (in): 13⁄16
Height (mm): 62
Height (in): 2 7⁄16
Weight (kg): 1
Weight (lbs): 2 3⁄16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

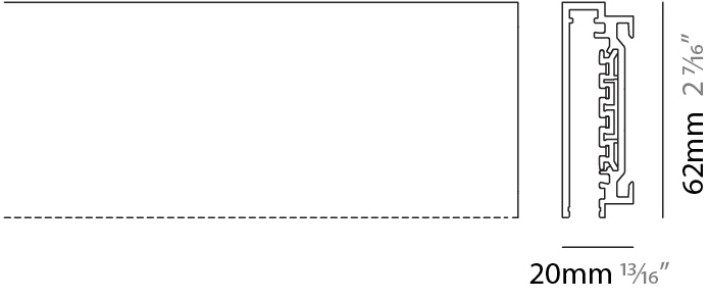

----- INDICATES OPEN SIDE



PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00018-

DESCRIPTION

3-Phase Track - 2000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

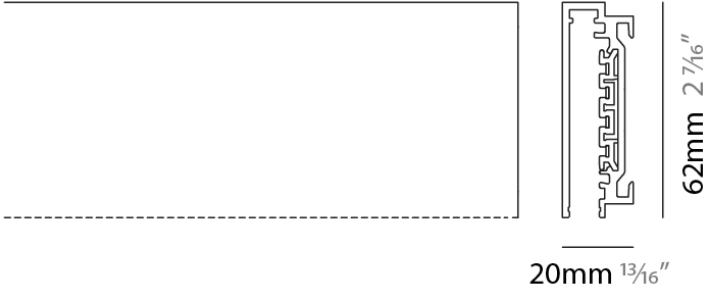

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00019-

DESCRIPTION

3-Phase Track - 3000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

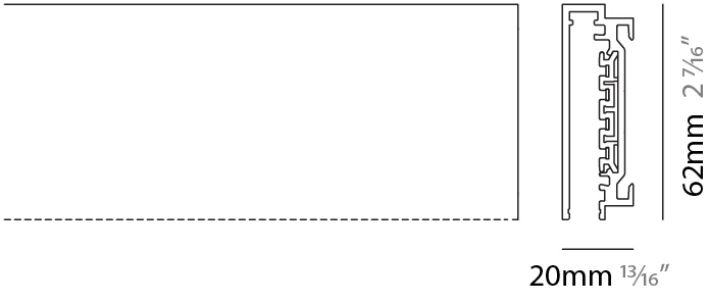

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00020-

DESCRIPTION

Wired Track - 1000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3⁄8
Width (mm): 20
Width (in): 13⁄16
Height (mm): 62
Height (in): 2 7⁄16
Weight (kg): 1
Weight (lbs): 2 3⁄16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

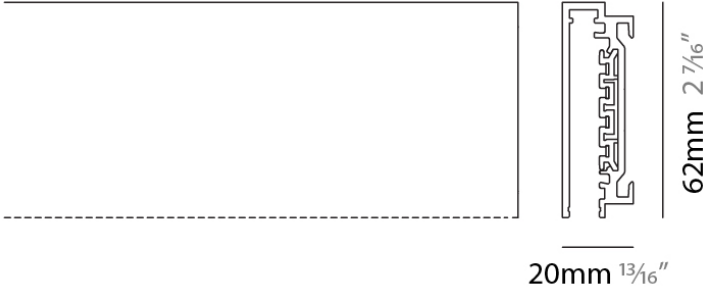

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00021-

DESCRIPTION

Wired Track - 2000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Square
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 2
Weight (lbs): 4 7/16
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

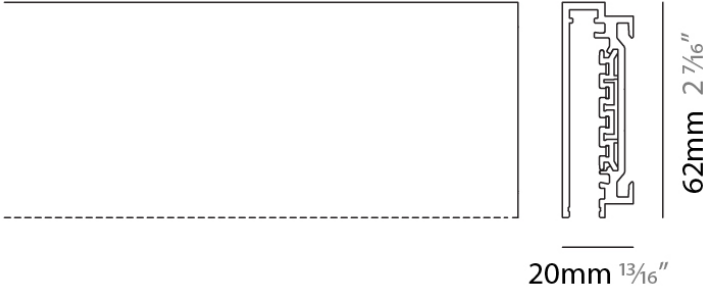

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS SURFACE

PROJECT
TYPE
NOTES
QUANTITY
DATE

A7T00022-

DESCRIPTION

Wired Track - 3000mm

GENERAL


Series: Nodo
Brand: Letroh
Division: Architectural
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 20
Width (in): 13/16
Height (mm): 62
Height (in): 2 7/16
Weight (kg): 3
Weight (lbs): 6 5/8
Fixture Finish: SSR / WHI / BLK
Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

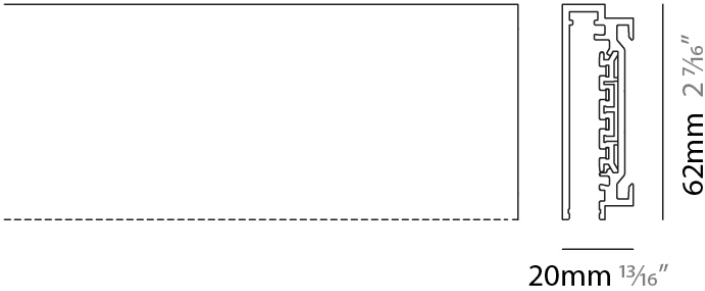

----- INDICATES OPEN SIDE



A7NODO-MOD-SYS COMPONENTS TRACK

A7T00025-

DESCRIPTION

Nodo - Bob - Track Spotlight - 20W LED - 2700K / 3000K - Optics 25° / 40° / 60° / OV / RL / WW

GENERAL

Series: Bob
Brand: Letroh
Division: Architectural
Mounting Type: Track
Mounting Location: Wall
Subcategory: Profile

PHYSICAL

Shape: Cylinder
Diameter (mm): 60
Diameter (in): 2 3/8
Length (mm): 101
Length (in): 4
Height (mm): 109
Height (in): 4 5/16
Light Distribution: Adjustable / Direct
Weight (kg): 0.65
Weight (lbs): 1.43
Fixture Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED
Input Wattage (W): 20
Total Output Wattage (W): 17
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current - 120Vac
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 500

LED

Delivered Lumen Range: 1000 - 2999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 1800 / 1900
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic°: 25 / 40 60 / OV / RT / WW
Adjustability: Rotational 360°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

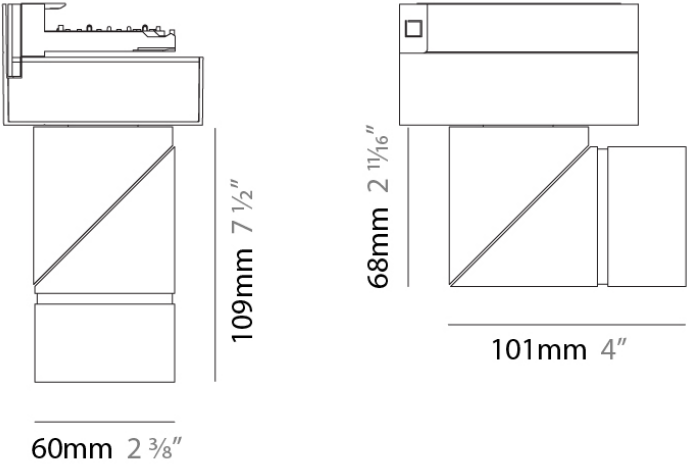

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)