

A8KIPS-REC-SYS COMPONENTS RECESSED

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



A86553

**DESCRIPTION**  
Kips - Recessed - Round 45° - Aluminum Profile - White

**GENERAL**  
Series: Kips  
Brand: Panzeri  
Division: Architectural  
Mounting Type: Recessed  
Mounting Location: Ceiling  
Subcategory: Profile

**PHYSICAL**  
Shape: Curves  
Length (mm): 1033  
Length (in): 40 11/16  
Width (mm): 14.5  
Width (in): 9/16  
Height (mm): 23.2  
Height (in): 15/16  
Light Distribution: Direct  
Fixture Finish: WHI  
Fixture Material: Aluminum  
Cut-out Measurements: Exterior - 1028mm / 40 1/2" Interior - 1009mm / 39 3/4"

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20

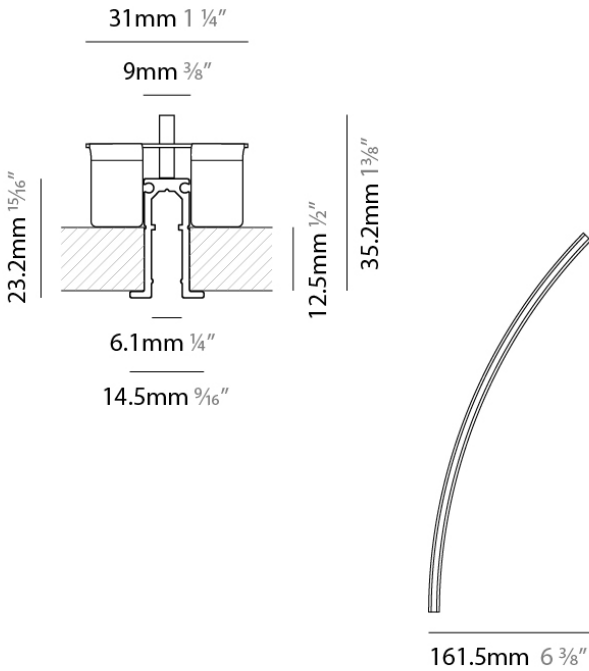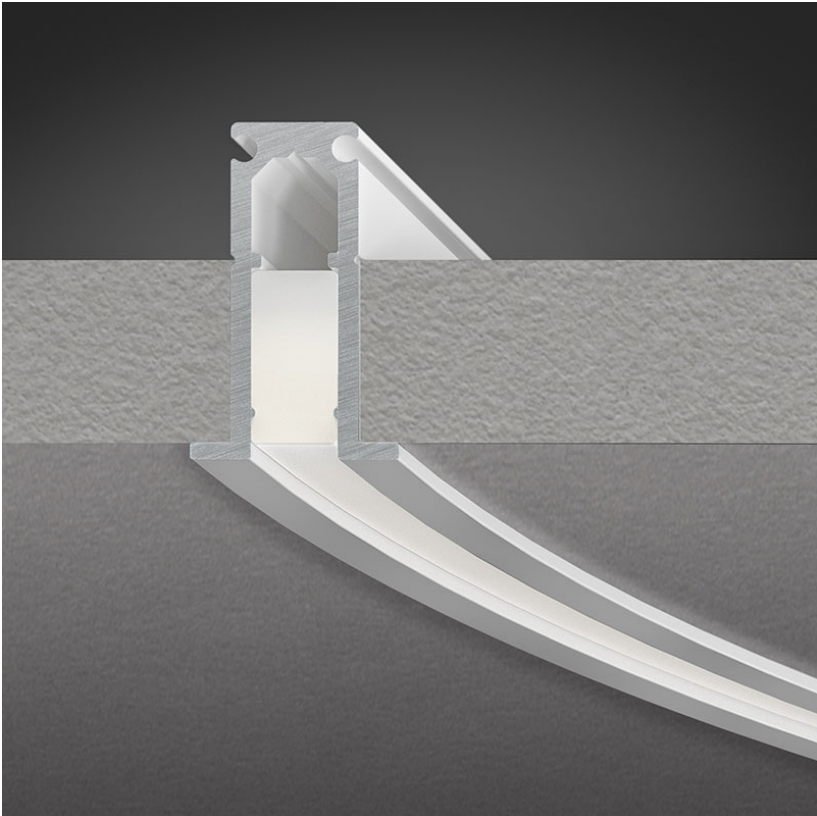

A8KIPS-REC-SYS COMPONENTS RECESSED

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



A86554

DESCRIPTION  
Kips - Recessed - Round 90° - Aluminum Profile - White

GENERAL  
Series: Kips  
Brand: Panzeri  
Division: Architectural  
Mounting Type: Recessed  
Mounting Location: Ceiling  
Subcategory: Profile

PHYSICAL  
Shape: Curves  
Length (mm): 1033  
Length (in): 40 11/16  
Width (mm): 14.5  
Width (in): 9/16  
Height (mm): 23.2  
Height (in): 15/16  
Light Distribution: Direct  
Fixture Finish: WHI  
Fixture Material: Aluminum  
Cut-out Measurements: Exterior - 1028mm / 40 1/2" Interior - 1009mm / 39 3/4"

RATINGS AND CERTIFICATIONS  
Certified By: Certified for North American Standards  
IP rating: IP20

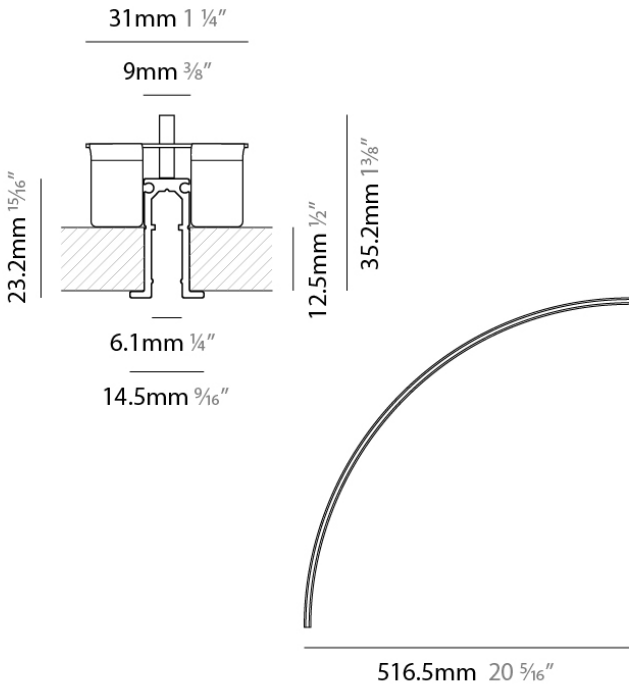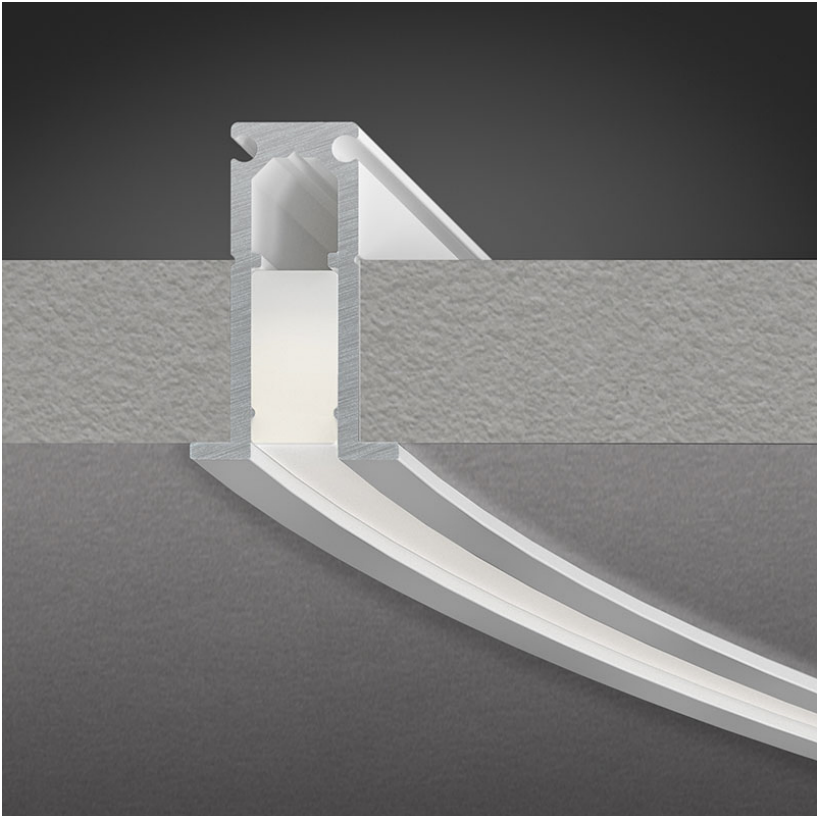

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86555

DESCRIPTION

Kips - Recessed - Round 180° - Aluminum Profile - White

GENERAL



Series: Kips
Brand: Panzeri
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Curves
Length (mm): 1033
Length (in): 40 11⁄16
Width (mm): 14.5
Width (in): 9⁄16
Height (mm): 23.2
Height (in): 15⁄16
Light Distribution: Direct
Fixture Finish: WHI
Fixture Material: Aluminum
Cut-out Measurements: Exterior - 1028mm / 40 1⁄2" Interior - 1009mm / 39 3⁄4"

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

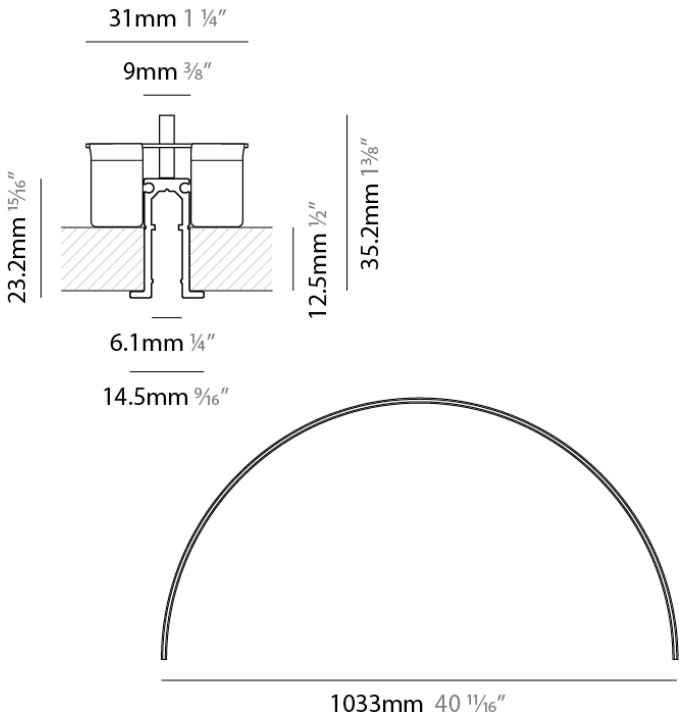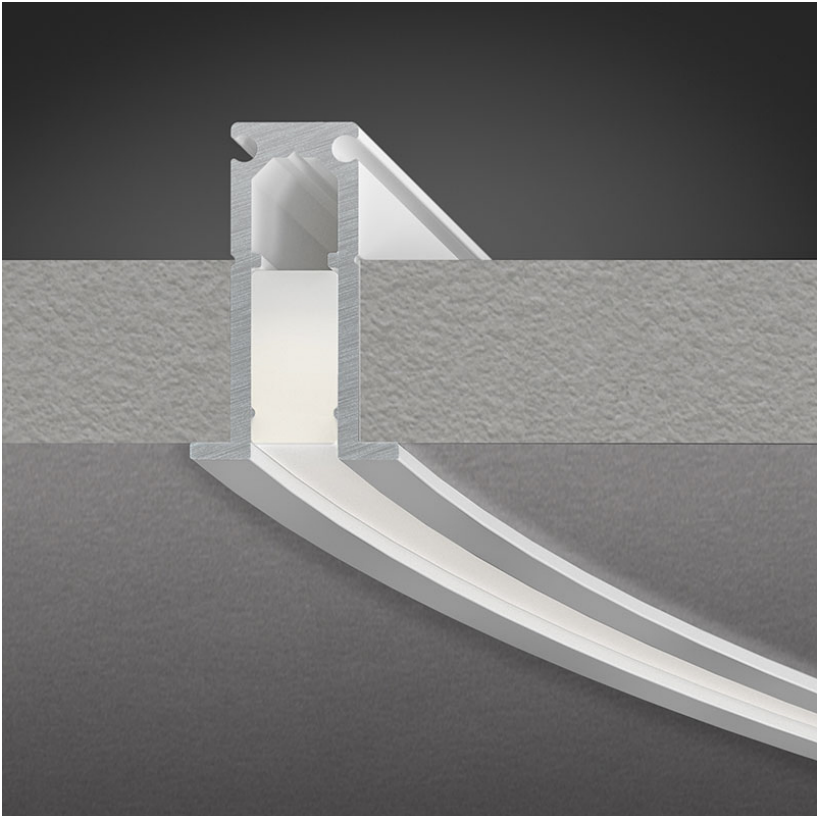

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86556

DESCRIPTION

LED Strip - 1000mm / 39 7/16" - 12.25W/m - 24Vdc - 3000K - CRI >80 - 401lm - Can be cut every 50mm / 2" - Silicone Opal diffuser

GENERAL

Series: Kips  
Brand: Panzeri  
Division: Architectural  
Mounting Type: Recessed  
Mounting Location: Ceiling

PHYSICAL

Length (mm): 1000  
Length (in): 39 3/8  
Height (mm): 12  
Height (in): 1/2  
Diffuser: Silicone - Opal

ELECTRICAL



Lamp Type: LED  
Input Wattage (W): 12.25/m  
Total Output Wattage (W): 10.6/m  
Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24

LED

Delivered Lumen Range: 1000 - 1999 lm  
Color Temperature (°K): 3000  
Max. Delivered Lumen (lm): 1075  
CRI: >80 CRI  
Lamp Life (hrs): 80000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

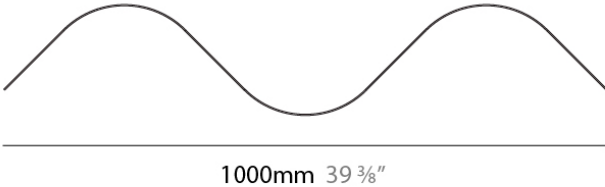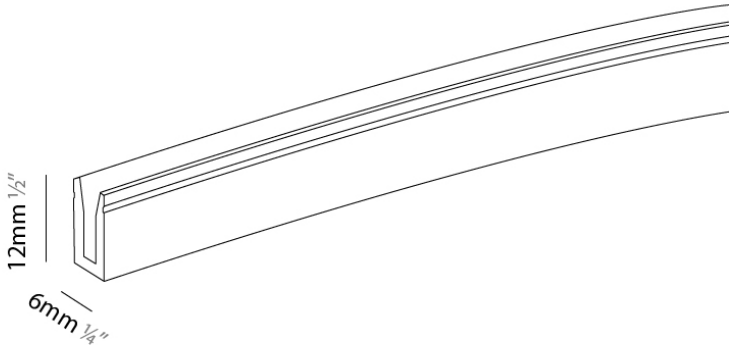

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86557

DESCRIPTION

LED Strip - 5000mm /196 15/16" - 12.25W/m 24Vdc - 3000K - CRI >80 - 401lm - Can be cut every 50mm / 2" - Silicone Opal diffuser

GENERAL

Series: Kips  
Brand: Panzeri  
Division: Architectural  
Mounting Type: Recessed  
Mounting Location: Ceiling

PHYSICAL

Length (mm): 5000  
Length (in): 196 7/8  
Height (mm): 12  
Height (in): 1/2  
Diffuser: Silicone - Opal

ELECTRICAL




Lamp Type: LED  
Input Wattage (W): 12.25/m  
Total Output Wattage (W): 10.5/m  
Dimming: Non-Dimmable / 0-10V Dimming  
Driver Included: No  
Driver Location: Remote  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24

LED

Delivered Lumen Range: 1000 - 1999 lm  
Color Temperature (°K): 3000  
Max. Delivered Lumen (lm): 1075  
CRI: >80 CRI  
Lamp Life (hrs): 80000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards  
IP rating: IP20

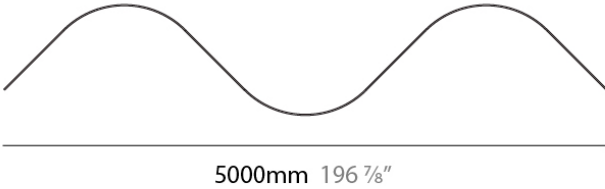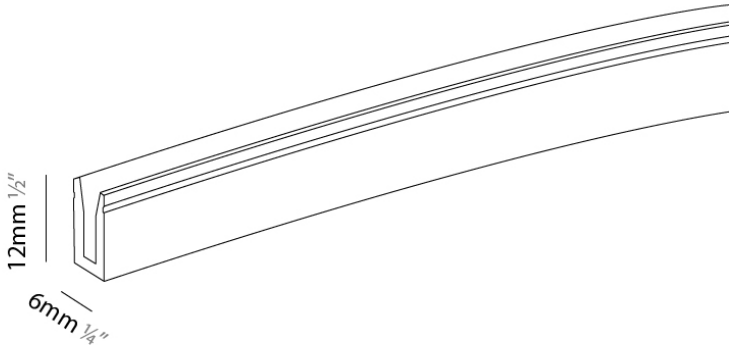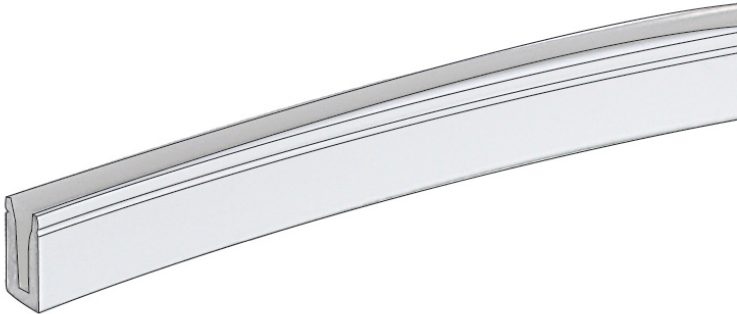

A8KIPS-REC-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86558

DESCRIPTION

Kips - Drywall fixing bracket

GENERAL

Series: Kips

Brand: Panzeri

Division: Architectural


PHYSICAL

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

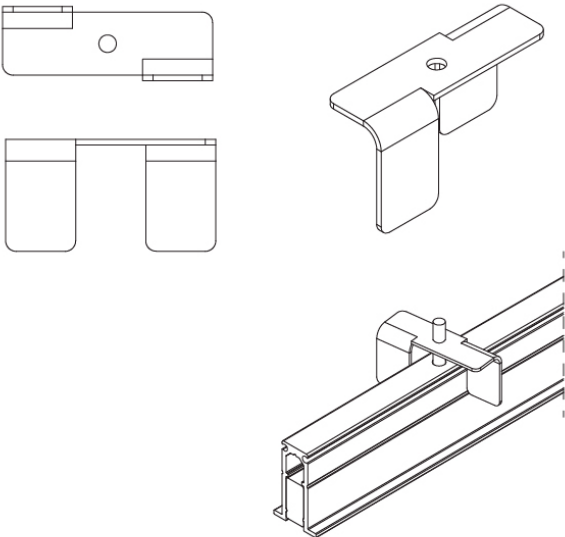

A8KIPS-REC-SYS COMPONENTS

A86559

DESCRIPTION

Kips - Pair of end caps with screws

GENERAL

Series: Kips

Brand: Panzeri

Division: Architectural

PHYSICAL



Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

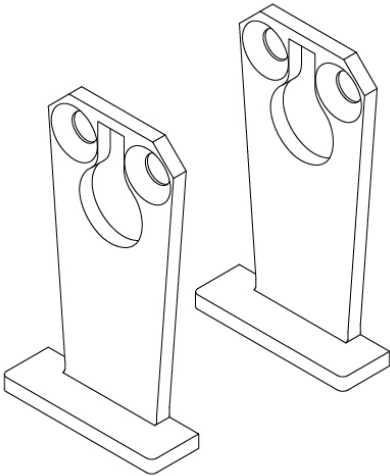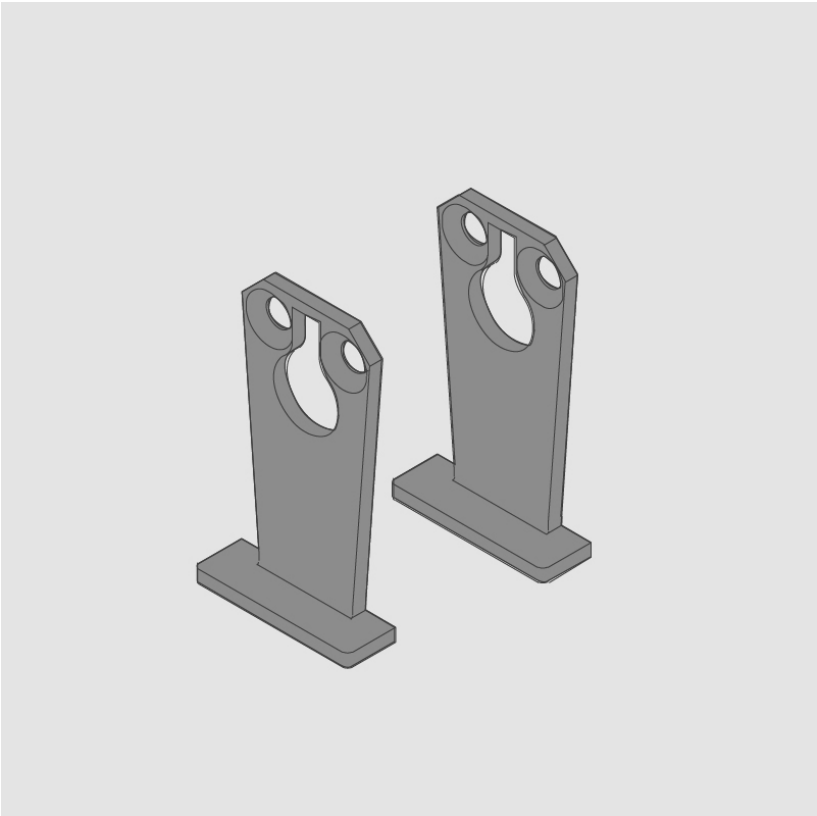

A8KIPS-REC-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

A86560

DESCRIPTION

Kips - Linear junction kit

GENERAL

Series: Kips

Brand: Panzeri

Division: Architectural



PHYSICAL

Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

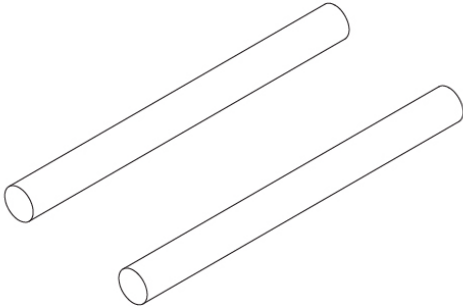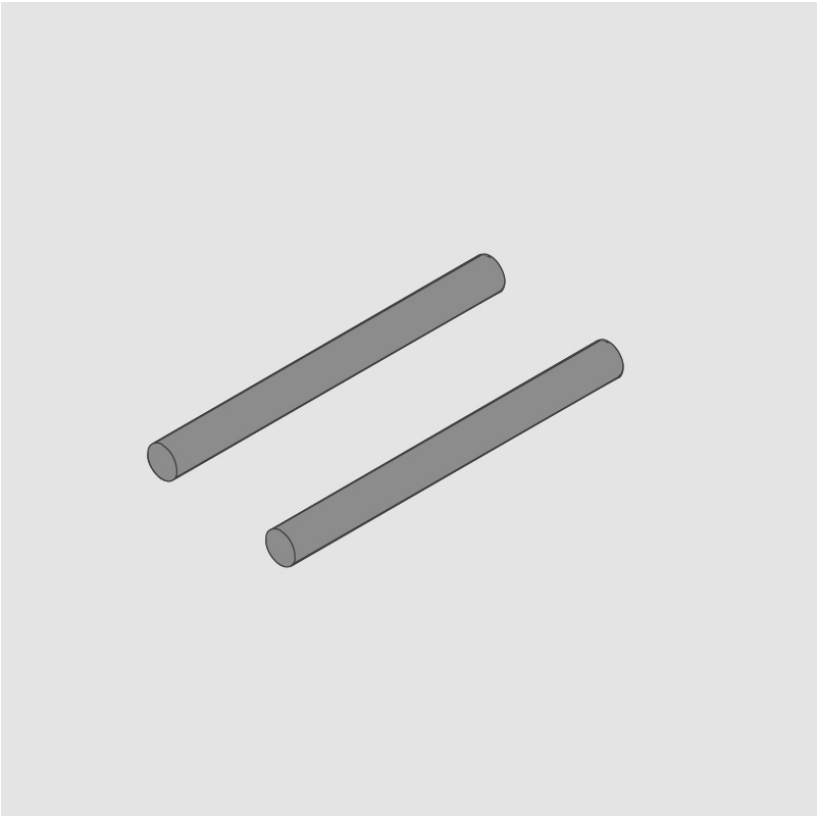



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86562

DESCRIPTION

Kips - Recessed - 500mm - Aluminum Profile - White

GENERAL



Series: Kips
Brand: Panzeri
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 500
Length (in): 19 11⁄16
Width (mm): 14.5
Width (in): 9⁄16
Height (mm): 23.2
Height (in): 15⁄16
Light Distribution: Direct
Fixture Finish: WHI
Fixture Material: Aluminum
Cut-out Measurements: 505mm / 19 7⁄8" x 11mm / 7⁄16"

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

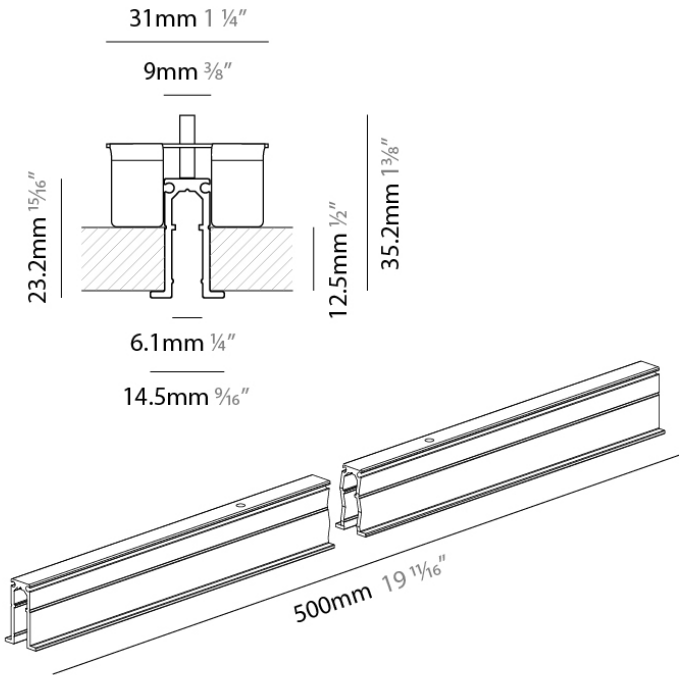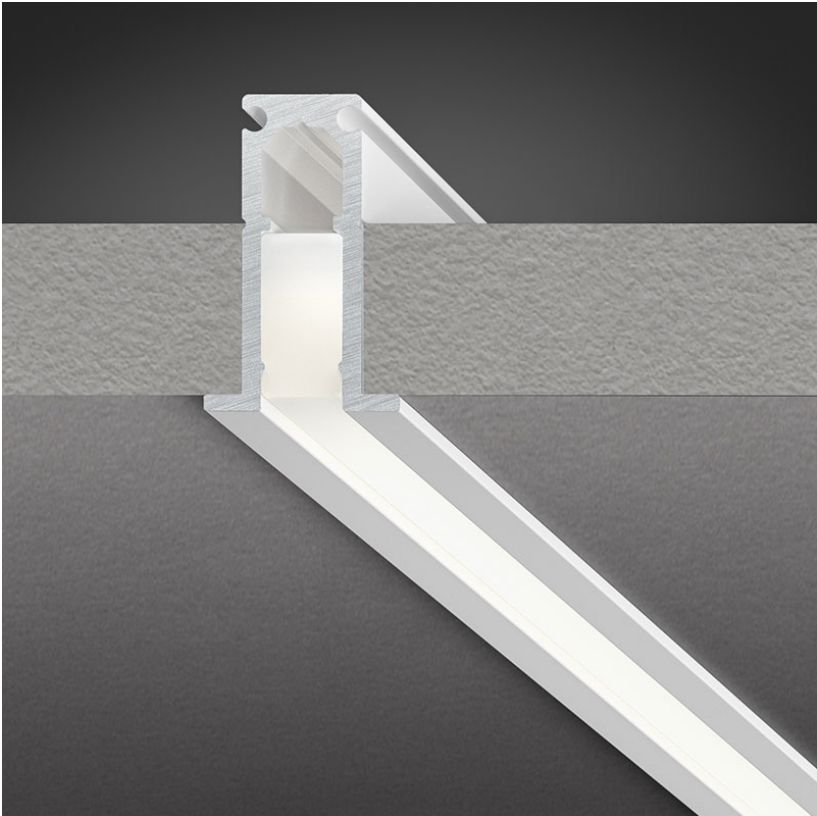

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86563

DESCRIPTION

Kips - Recessed - 1000mm - Aluminum Profile - White

GENERAL



Series: Kips
Brand: Panzeri
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 14.5
Width (in): 9/16
Height (mm): 23.2
Height (in): 15/16
Light Distribution: Direct
Fixture Finish: WHI
Fixture Material: Aluminum
Cut-out Measurements: 1005mm / 39 9/16" x 11mm / 7/16"

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

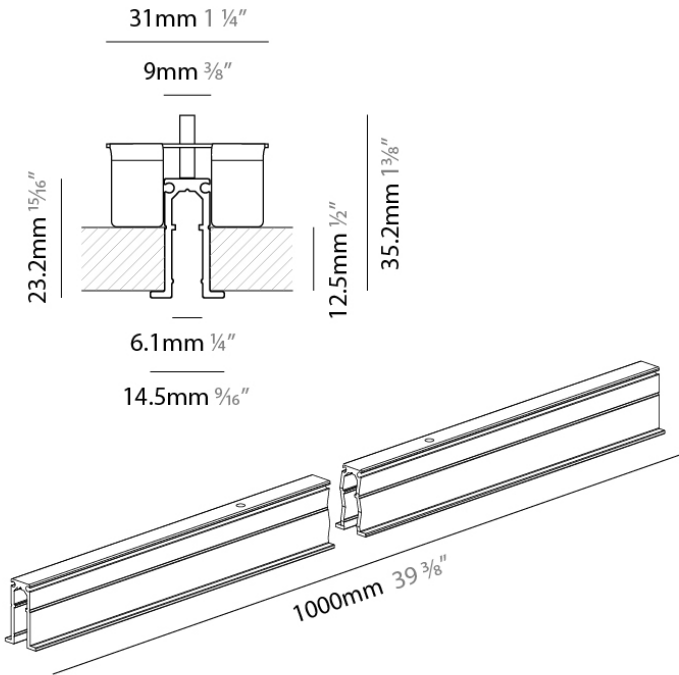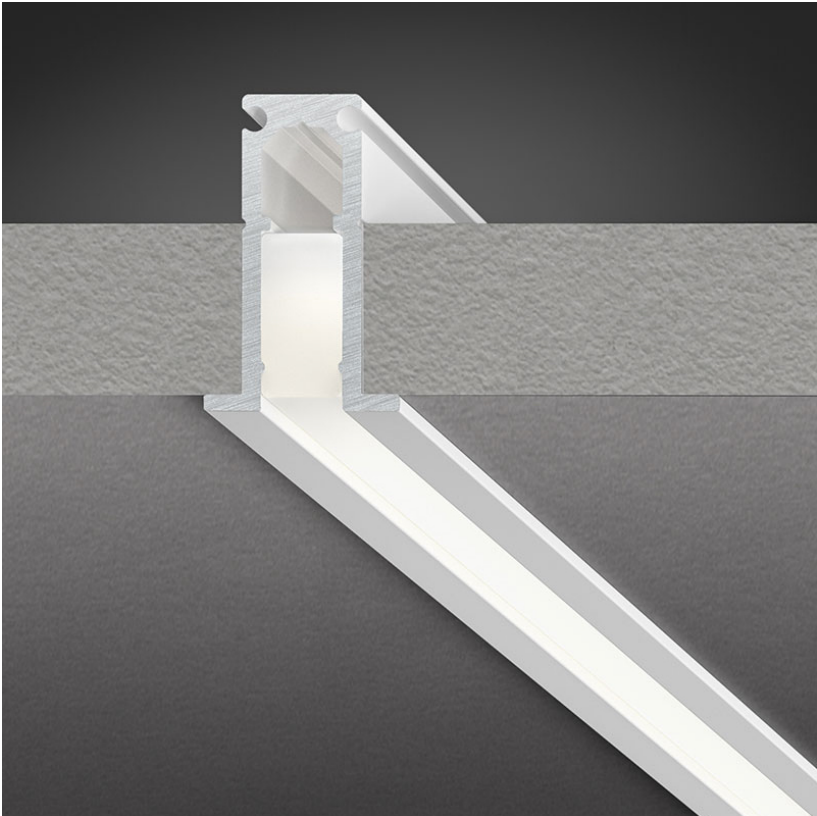

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86564

DESCRIPTION

Kips - Recessed - 2000mm - Aluminum Profile - White

GENERAL



Series: Kips
Brand: Panzeri
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 2000
Length (in): 78 ¾
Width (mm): 14.5
Width (in): 9/16
Height (mm): 23.2
Height (in): 15/16
Light Distribution: Direct
Fixture Finish: WHI
Fixture Material: Aluminum
Cut-out Measurements: 2005mm / 78 15/16" x 11mm / 7/16"

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

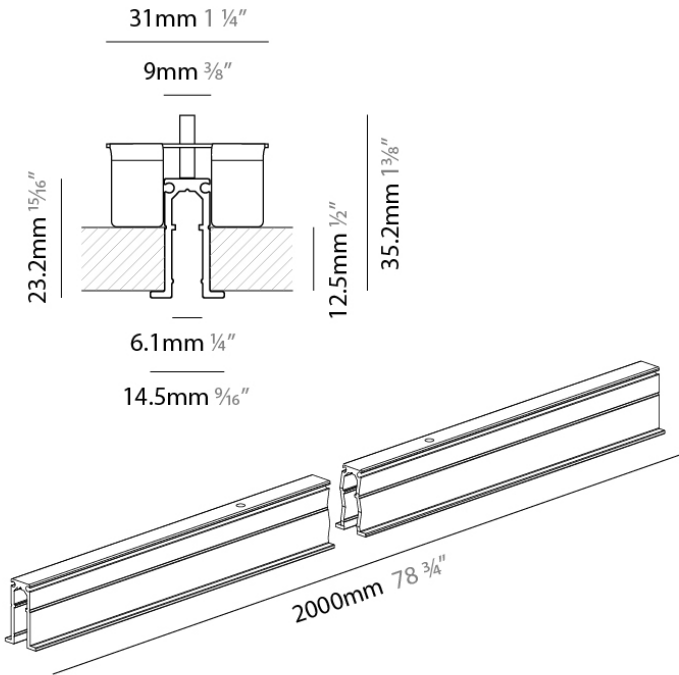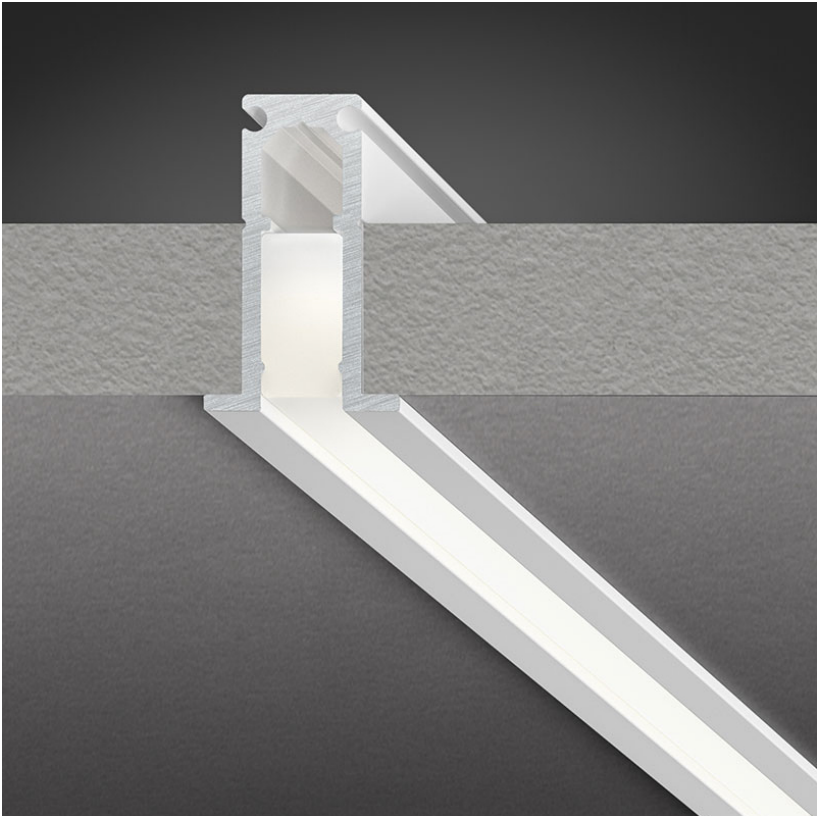

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A86565

DESCRIPTION

Kips - Recessed - 3000mm - Aluminum Profile - White

GENERAL



Series: Kips
Brand: Panzeri
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Profile

PHYSICAL

Shape: Rectangle
Length (mm): 3000
Length (in): 118 1/8
Width (mm): 14.5
Width (in): 9/16
Height (mm): 23.2
Height (in): 15/16
Light Distribution: Direct
Fixture Finish: WHI
Fixture Material: Aluminum
Cut-out Measurements: 3005mm / 118 5/16" x 11mm / 7/16"

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

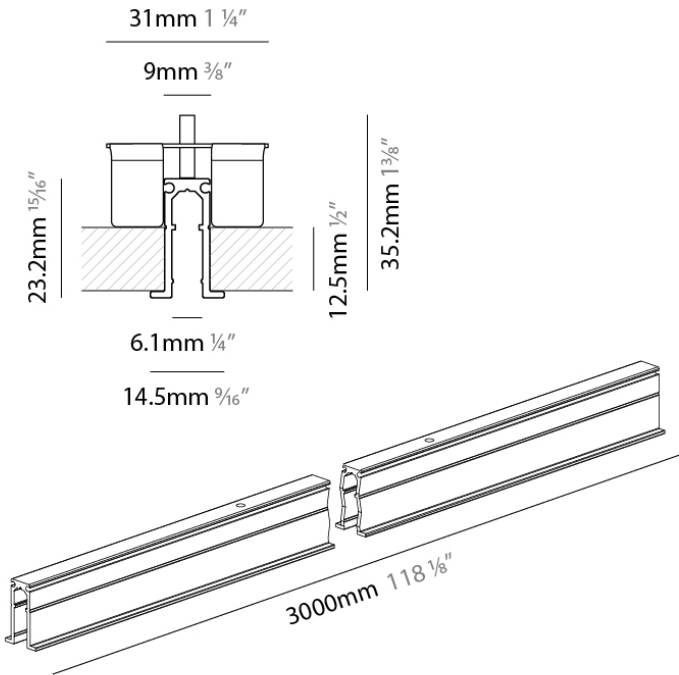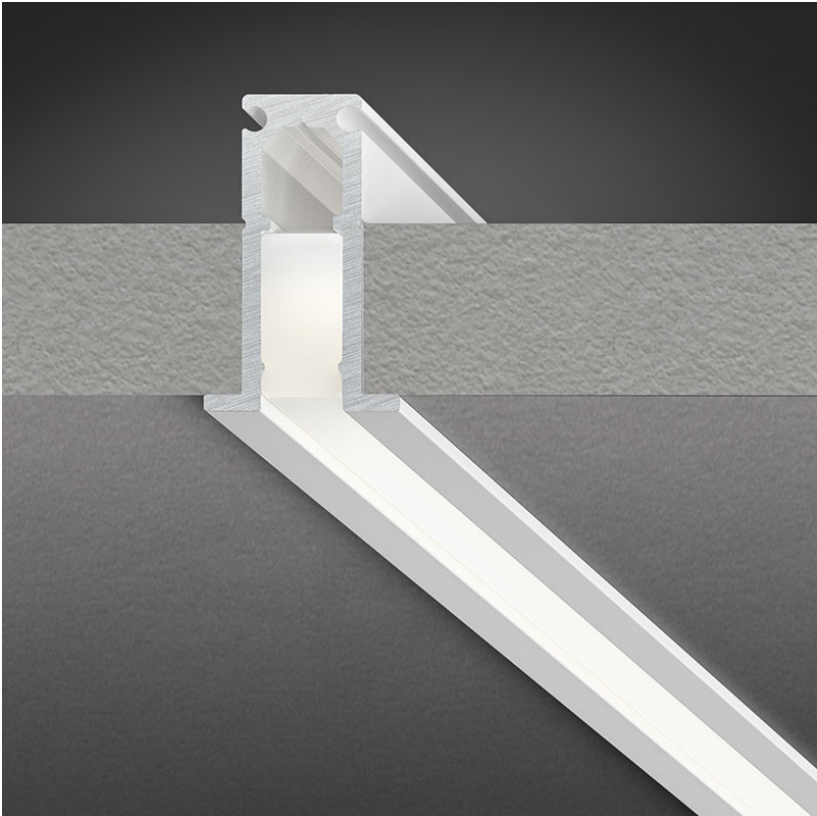

A8KIPS-REC-SYS COMPONENTS

DND0400024EV

DESCRIPTION

ERP - VLM40W-24 - Non-dimming - 40W - 24Vdc - 120 / 277Vac - LED power supply -Used with ENCP12 -Available with IP68- Outdoor Rated -ENCP20, ENCP22

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 144

Length (in): 5 43/64

Width (mm): 21

Width (in): 53/64

Height (mm): 19.8

Height (in): 13/16

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 1.2-40

Dimming: Non-Dimmable

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Efficiency (%): <92%


RATINGS AND CERTIFICATIONS

Certified By: UL Listed

Code Compliance: Title 24 commercial Installation

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

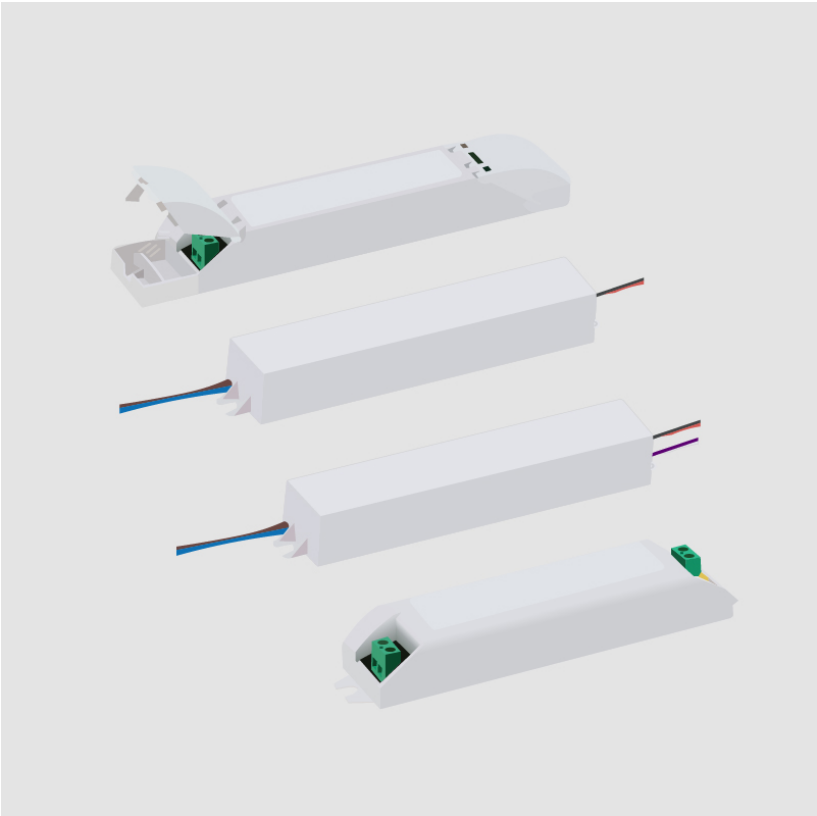

A8KIPS-REC-SYS COMPONENTS

DND0600024EV

DESCRIPTION

ERP - VLM60W-24 - Non-dimming - 60W - 24Vdc - 120 / 277Vac - LED power supply -Used with ENCP12 -Available with IP68- Outdoor Rated -ENCP20, ENCP22

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 144

Length (in): 5 43/64

Width (mm): 21

Width (in): 53/64

Height (mm): 19.8

Height (in): 13/16

Weight (kg): 0.122

Weight (lbs): 0.268

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 1.2-60

Dimming: Non-Dimmable

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Efficiency (%): <92%


RATINGS AND CERTIFICATIONS

Certified By: UL Listed

Code Compliance: Title 24 commercial Installation

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

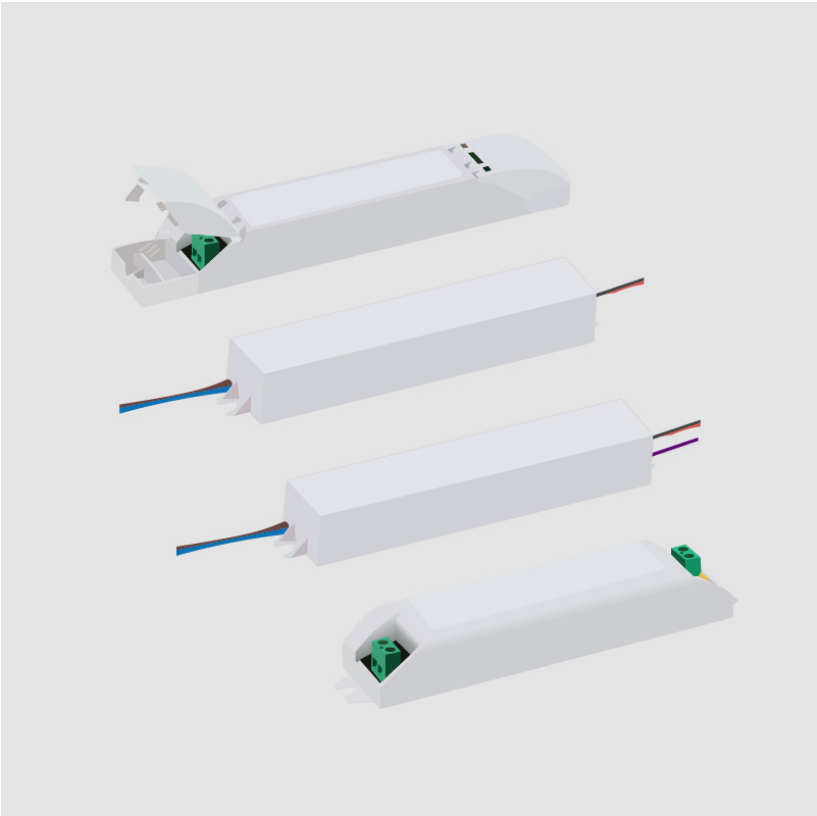

A8KIPS-REC-SYS COMPONENTS

DND1000024EV

DESCRIPTION

ERP VLM100W-24 - 100W - 24Vdc - 120-277Vac - Non-dimming - LED power supply -Used with ENCP12 -Available with IP68- Outdoor Rated -ENCP20, ENCP22

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 151

Length (in): 5 15/16

Width (mm): 27.3

Width (in): 1 5/64

Height (mm): 19.8

Height (in): 25/32

Weight (kg): 0.159

Weight (lbs): 0.35

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 103

Total Output Wattage (W): 4.8-96

Dimming: Non-Dimmable

Driver Class: Class 2


Input Voltage (V): 120 - 277

Output Voltage (V): 24

LED

Efficiency (%): <92

PROJECT
TYPE
NOTES
QUANTITY
DATE

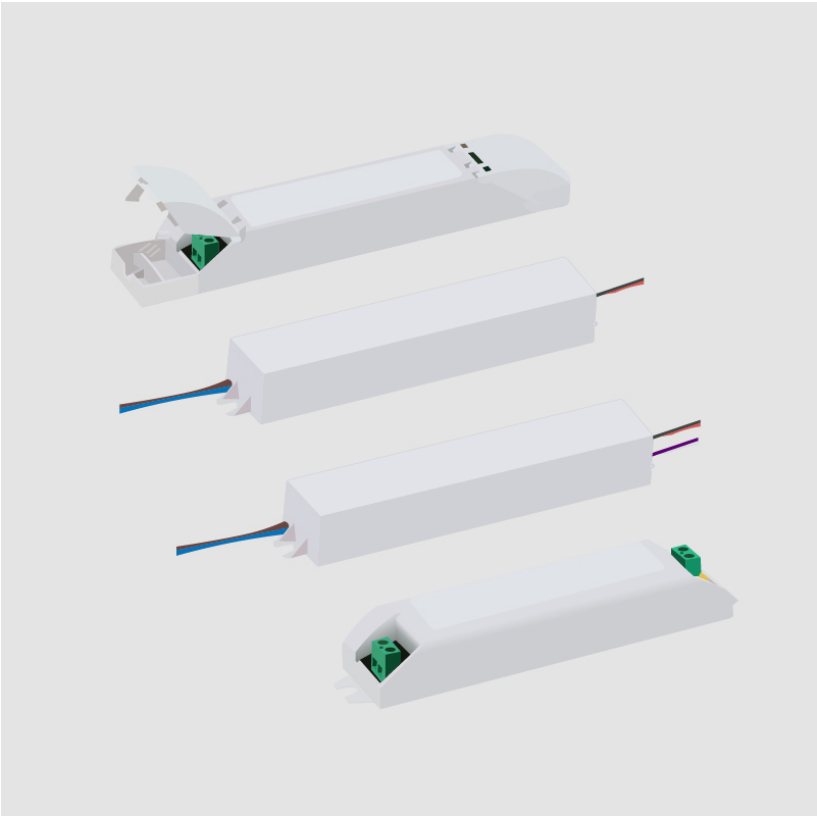



A8KIPS-REC-SYS COMPONENTS

DVO0400024MP

DESCRIPTION

MeanWell - PWM-40-24 - 0-10Vdc / Resistance / 10V PWM  
Dimming - Dim-to-Off - 14.4-40W - 24Vdc - 120-277Vac - LED  
power supply -Used with ENCP8 -Available with IP68 – Outdoor  
Rated – Enclosure TBD

PHYSICAL

Length (mm): 150  
Length (in): 5 29/32  
Width (mm): 53  
Width (in): 2 3/32  
Height (mm): 35  
Height (in): 1 3/8  
Weight (kg): 0.49  
Weight (lbs): 1.08  
Fixture Material: Plastic


ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 45  
Total Output Wattage (W): 14.4-40  
Dimming: 0-10V Dimming to 0%  
Driver Type: Constant Voltage - Universal  
Driver Class: Class 2  
Input Voltage (V): 120 - 277  
Output Voltage (V): 24  
Constant Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: UR Listed  
IP rating: IP67

PROJECT
TYPE
NOTES
QUANTITY
DATE

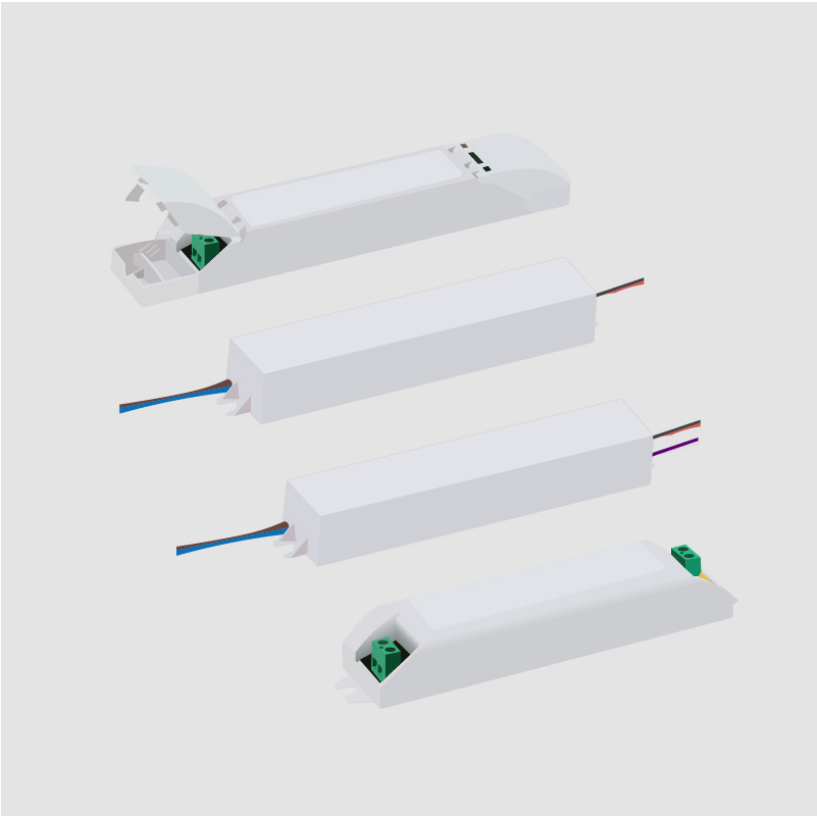



A8KIPS-REC-SYS COMPONENTS

DVO0600024MP

DESCRIPTION

MeanWell - PWM-60-24 - 0-10Vdc / Resistance / 10V PWM signal dimming - Dim-to-Off - 19.2-60W - 24Vdc - 120-277Vac - LED power supply -Used with ENCP8 -Available with IP68 – Outdoor Rated – Enclosure TBD

PHYSICAL

Shape: Rectangle  
Length (mm): 150  
Length (in): 5 7/8  
Width (mm): 53  
Width (in): 2 1/16  
Height (mm): 35  
Height (in): 1 3/8  
Weight (kg): 0.49  
Fixture Material: Plastic


ELECTRICAL

Lamp Type: LED  
Input Wattage (W): 67.4  
Total Output Wattage (W): 60  
Dimming: 0-10V Dimming to 0%  
Driver Type: Constant Voltage - 120-277Vac / Type HL  
Driver Class: Class 2  
Input Voltage (V): Universal  
Constant Voltage (V): 24 dc

RATINGS AND CERTIFICATIONS

Certified By: UR Listed  
IP rating: IP67

PROJECT
TYPE
NOTES
QUANTITY
DATE

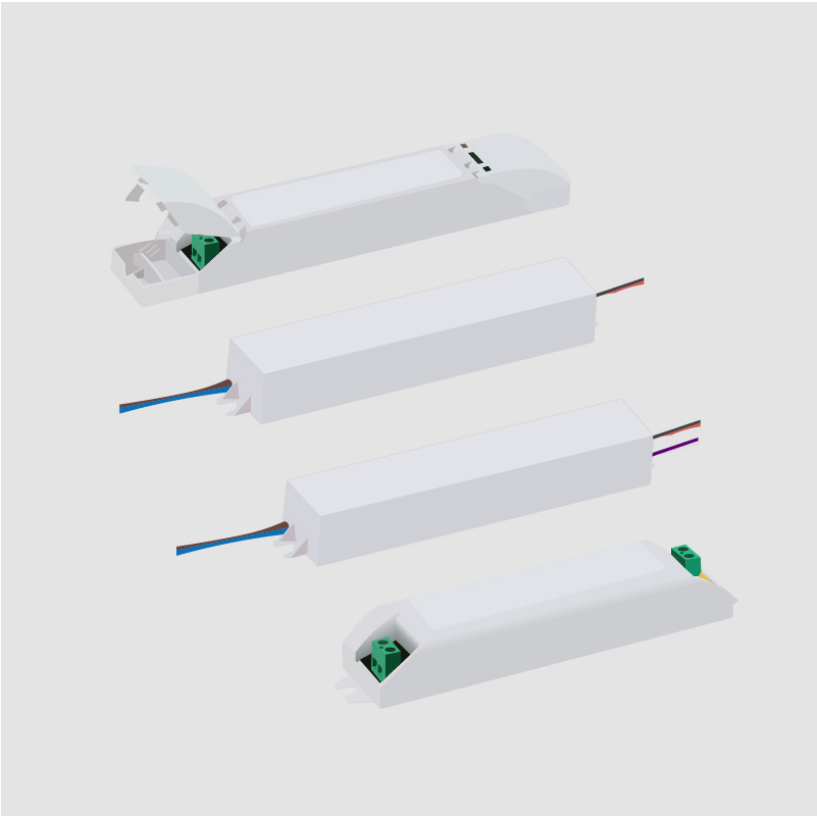

A8KIPS-REC-SYS COMPONENTS

DVO0900024MP

DESCRIPTION

MeanWell - PWM-90-24 - 0-10Vdc / Resistance / 10V PWM  
Dimming - Dim-to-Off - 90W - 24Vdc - 120-277Vac - LED power  
supply

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 171

Length (in): 6 47/64

Width (mm): 63

Width (in): 2 31/64

Height (mm): 37

Height (in): 1 29/64

Weight (kg): 0.77

Weight (lbs): 1.69

Fixture Material: Plastic

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 99

Total Output Wattage (W): 22.8-90

Dimming: 0-10V Dimming to 0%

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Output Voltage (V): 24


Constant Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: UR Listed

IP rating: IP67

PROJECT
TYPE
NOTES
QUANTITY
DATE

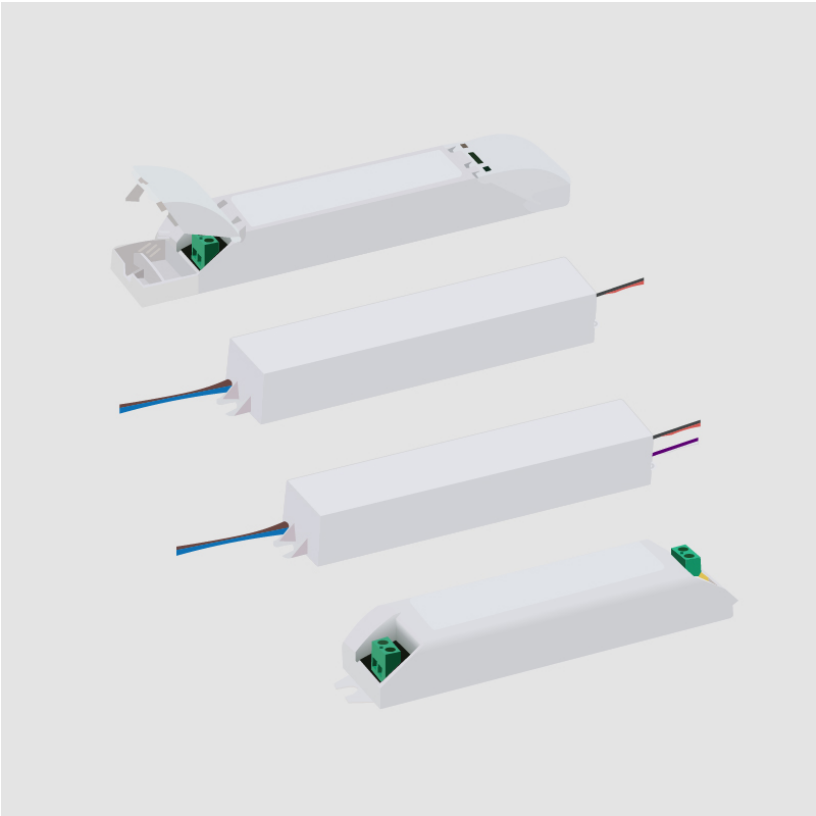

A8KIPS-REC-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

ENCP8

DESCRIPTION

Empty Metal Enclosure for Driver - IP20 - Indoor Rated

GENERAL

Division: Architectural : Components

PHYSICAL

Shape: Rectangle

Length (mm): 305

Length (in): 12

Width (mm): 92

Width (in): 3 5/8


Height (mm): 54

Height (in): 2 1/8

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

IP rating: IP20

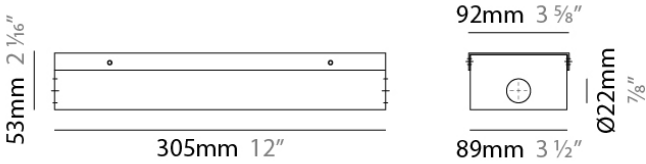

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)