

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D10MONLT-MOD-SYS COMPONENTS SUSPENSION

D1010003-

DESCRIPTION

Moonlight Ø400mm / 15 3/4" x H.2000mm / 78 3/4" - Suspension
- 7.2W LED - 2700K, CRI>90

GENERAL

Series: Moonlight
Partner: Quasar
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling

PHYSICAL

Shape: Abstract
Diameter (mm): 400
Diameter (in): 15 3/4"
Width (mm): 43
Width (in): 1 11/16"
Height (mm): 400
Height (in): 15 3/4"
Max. Overall Height (mm): 2400
Max. Overall Height (in): 94 1/2"
Fixture Finish: ALU / BRA / BRZ / FOS / LOT
Fixture Material: Aluminum
Cable Details: 2000mm Cable

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 7.2
Dimming: Non-Dimming / Phase Dimming (120vac Only)
Driver Included: Yes
Driver Location: Integrated
Driver Class: Class 2
Input Voltage (V): 120
Output Voltage (V): 24
Upon Request: 0-10V Dimming

LED

Color Temperature (°K): 2700
Nominal Lumen (lm): 504
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

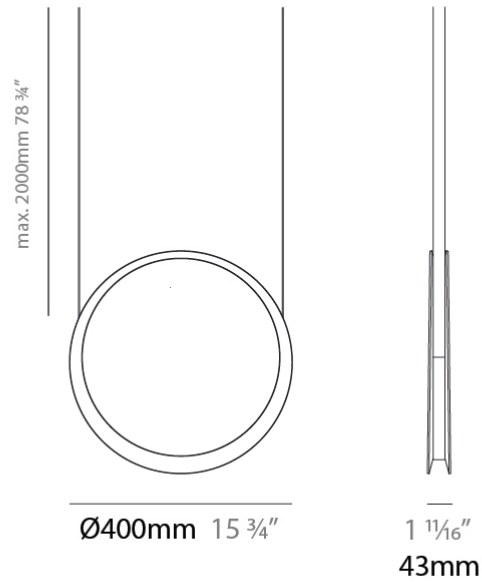

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D10MONLT-MOD-SYS COMPONENTS SUSPENSION

D1010005-

DESCRIPTION
Moonlight ØSuspension - 500mm/19 11/16" x 2000mm/78 3/4" - 1 x 9.8W LED Strip, 2700K, CRI>90


GENERAL
Series: Moonlight
Partner: Quasar
Division: Design
Installation: Suspension
Product Type: Pendant
Mounting Location: Ceiling

PHYSICAL
Shape: Abstract
Diameter (mm): 500
Diameter (in): 19 11/16"
Height (mm): 500
Height (in): 19 11/16"
Max. Overall Height (mm): 2500
Max. Overall Height (in): 98 7/16"
Fixture Finish: ALU / BRA / BRZ / FOS / LOT
Fixture Material: Aluminum
Cable Details: 2000mm Cable

ELECTRICAL
Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 9.8
Dimming: Non-Dimming / Phase Dimming (120vac Only)
Driver Included: Yes
Driver Location: Integrated
Driver Class: Class 2
Input Voltage (V): 120
Output Voltage (V): 24
Upon Request: 0-10V Dimming

LED
Color Temperature (°K): 2700
Nominal Lumen (lm): 637
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

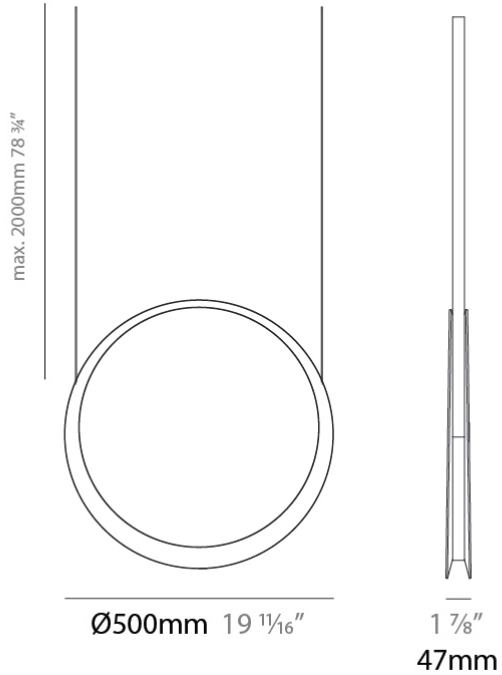

D10MONLT-MOD-SYS COMPONENTS

D109141-


DESCRIPTION
 Moonlight Wall Canopy

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling


PHYSICAL
 Shape: Abstract
 Diameter (mm): 130
 Diameter (in): 5 1/8
 Height (mm): 130
 Depth (mm): 60
 Height (in): 5 1/8
 Depth (in): 2 3/8
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: No
 Driver Location: Remote
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20



Ø130mm 5 1/8"



60mm 2 3/8"



D10MONLT-MOD-SYS COMPONENTS


D109142-

DESCRIPTION
 Moonlight Wall Fixation

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Diameter (mm): 30
 Diameter (in): 1 3/16
 Height (mm): 30
 Depth (mm): 50
 Height (in): 1 13/16
 Depth (in): 1 15/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20



Ø30mm 1 3/16"



50mm 1 15/16"



D10MONLT-MOD-SYS COMPONENTS


D109143-

DESCRIPTION
 Moonlight Recessed Mounting Set

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Diameter (mm): 60
 Diameter (in): 2 3/8
 Height (mm): 60
 Depth (mm): 20
 Height (in): 2 3/8
 Depth (in): 13/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

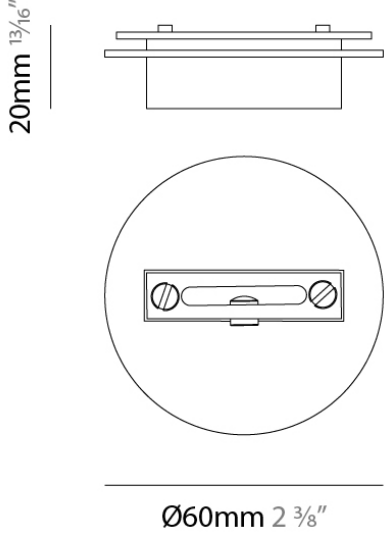

D10MONLT-MOD-SYS COMPONENTS

D109144-


DESCRIPTION
 Moonlight Canopy Single for 400mm Suspension

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Length (mm): 400
 Length (in): 15 3/4
 Width (mm): 100
 Width (in): 3 15/16
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

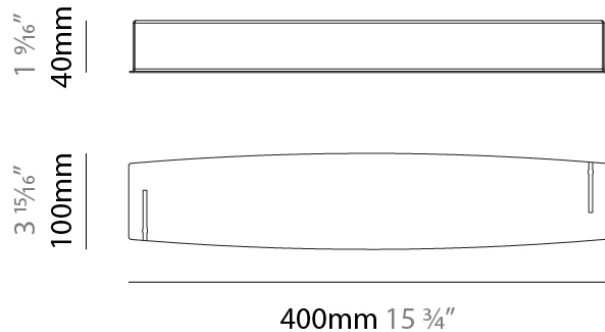

D10MONLT-MOD-SYS COMPONENTS

D109145-


DESCRIPTION
 Moonlight Canopy Single for 500mm Suspension

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Length (mm): 500
 Length (in): 19 15/16
 Width (mm): 100
 Width (in): 3 15/16
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

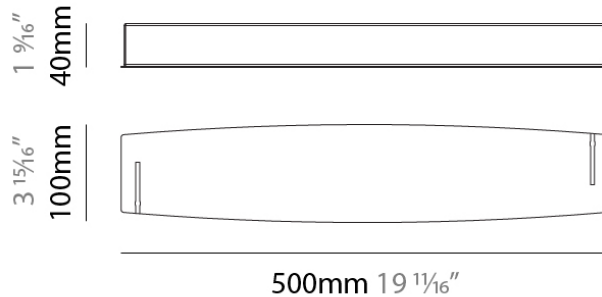

D10MONLT-MOD-SYS COMPONENTS

D109146-

DESCRIPTION
 Moonlight Canopy Double for 400mm+400mm Suspension

GENERAL

Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL

Shape: Abstract
 Length (mm): 790
 Length (in): 31 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 14.4
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24
 Upon Request: 0-10V Dimming

LED

Color Temperature (°K): 2700
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

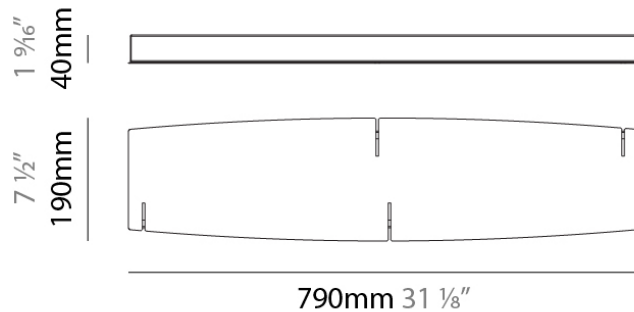

D10MONLT-MOD-SYS COMPONENTS

D109147-

DESCRIPTION
 Moonlight Canopy Double for 400mm+500mm Suspension

GENERAL

Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL

Shape: Abstract
 Length (mm): 790
 Length (in): 31 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 17
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24
 Upon Request: 0-10V Dimming

LED

Color Temperature (°K): 2700
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

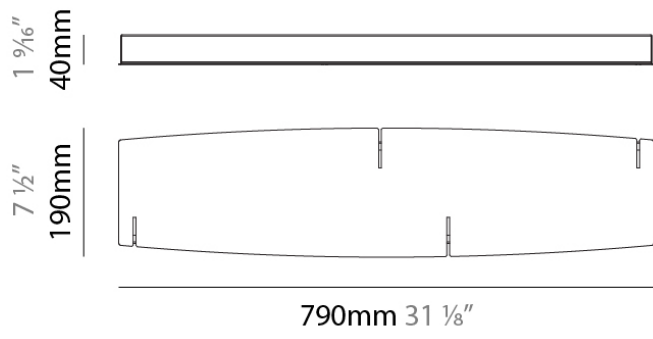

D10MONLT-MOD-SYS COMPONENTS

D109148-

DESCRIPTION
 Moonlight Canopy Double for 500mm+500mm Suspension

GENERAL

Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL

Shape: Abstract
 Length (mm): 790
 Length (in): 31 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL


Input Wattage Range: 10 - 19 W
 Lamp Type: LED
 Input Wattage (W): 19.6
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24
 Upon Request: 0-10V Dimming

LED

Color Temperature (°K): 2700
 CRI: >90 CRI
 Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

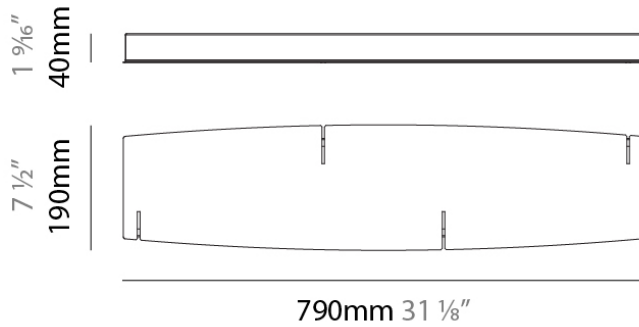

D10MONLT-MOD-SYS COMPONENTS

D109149-

DESCRIPTION

Moonlight Canopy Triple for 3 x 400mm Suspension

GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Product Type: Clusters

Mounting Location: Ceiling

PHYSICAL

Shape: Abstract

Length (mm): 1070

Length (in): 42 1/8"

Width (mm): 190

Width (in): 7 1/2"

Height (mm): 40

Height (in): 1 9/16"

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

ELECTRICAL

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24


LED

Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

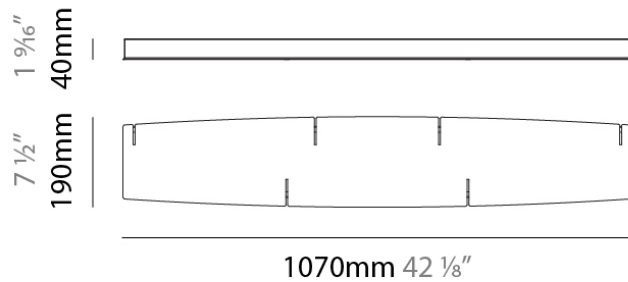

D10MONLT-MOD-SYS COMPONENTS

D109150-


DESCRIPTION
 Moonlight Canopy Triple for 400mm+400mm+500mm
 Suspension

GENERAL
 Series: Moonlight _____
 Partner: Quasar _____
 Division: Design _____
 Product Type: Clusters _____
 Mounting Location: Ceiling _____

PHYSICAL
 Shape: Abstract _____
 Length (mm): 1070 _____
 Length (in): 42 1/8 _____
 Width (mm): 190 _____
 Width (in): 7 1/2 _____
 Height (mm): 40 _____
 Height (in): 1 9/16 _____
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only) _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Output Voltage (V): 24 _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

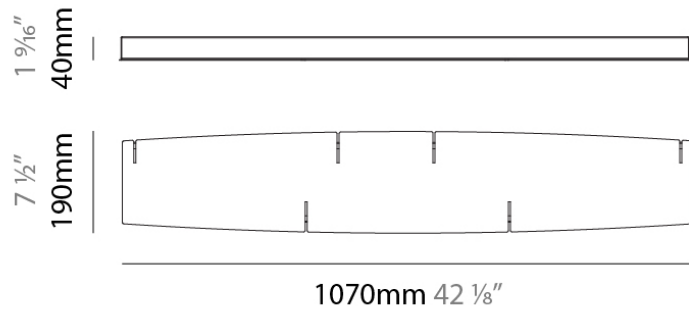

D10MONLT-MOD-SYS COMPONENTS

D109151-


DESCRIPTION
 Moonlight Canopy Triple for 400mm+500mm+400mm
 Suspension

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Length (mm): 1070
 Length (in): 42 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

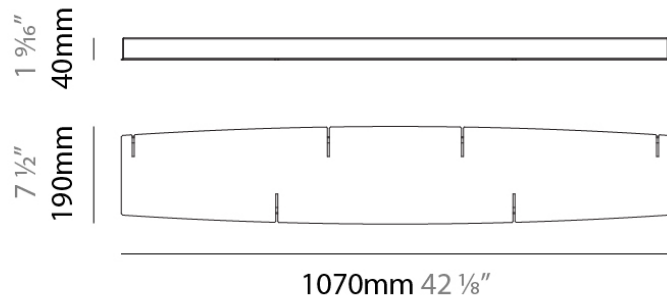

D10MONLT-MOD-SYS COMPONENTS

D109152-


DESCRIPTION
 Moonlight Canopy Triple for 500mm+400mm+500mm
 Suspension

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Abstract
 Length (mm): 1070
 Length (in): 42 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

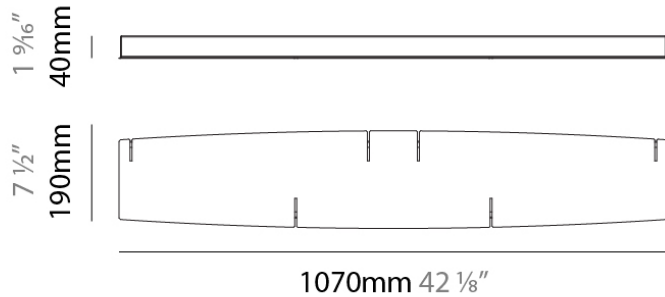

D10MONLT-MOD-SYS COMPONENTS

D109153


DESCRIPTION
 Moonlight Canopy Triple for 500mm+500mm+400mm
 Suspension

GENERAL
 Series: Moonlight _____
 Partner: Quasar _____
 Division: Design _____
 Product Type: Clusters _____
 Mounting Location: Ceiling _____

PHYSICAL
 Shape: Abstract _____
 Length (mm): 1070 _____
 Length (in): 42 1/8 _____
 Width (mm): 190 _____
 Width (in): 7 1/2 _____
 Height (mm): 40 _____
 Height (in): 1 9/16 _____
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT _____
 Fixture Material: Aluminum _____

ELECTRICAL
 Dimming: Non-Dimming / Phase Dimming (120vac Only) _____
 Driver Included: Yes _____
 Driver Location: Integrated _____
 Driver Class: Class 2 _____
 Input Voltage (V): 120 _____
 Output Voltage (V): 24 _____

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

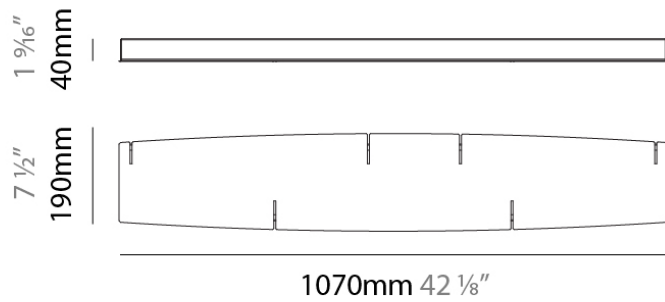

D10MONLT-MOD-SYS COMPONENTS

D109154-

DESCRIPTION

Moonlight Canopy Triple for 3 x 500mm Suspension

GENERAL

Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL


Shape: Abstract
 Length (mm): 1070
 Length (in): 42 1/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 40
 Height (in): 1 9/16
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT
 Fixture Material: Aluminum

ELECTRICAL

Dimming: Non-Dimming / Phase Dimming (120vac Only)
 Driver Included: Yes
 Driver Location: Integrated
 Driver Class: Class 2
 Input Voltage (V): 120
 Output Voltage (V): 24

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

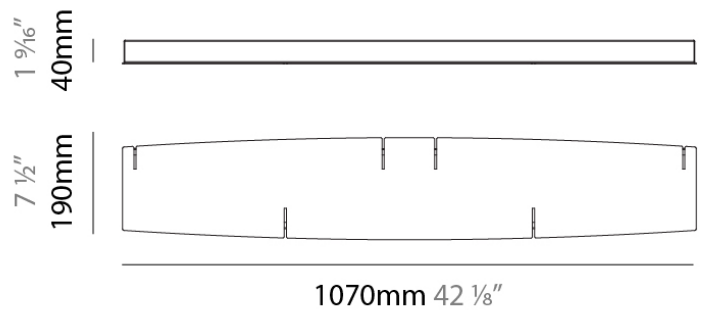

D10MONLT-MOD-SYS COMPONENTS

D109163-


DESCRIPTION
 Moonlight 5 canopy 40-50-40-50-40 for 9 rings. length +/- 289cm

GENERAL
 Series: Moonlight
 Partner: Quasar
 Division: Design
 Product Type: Clusters
 Mounting Location: Ceiling

PHYSICAL
 Shape: Oblong
 Length (mm): 1800
 Length (in): 70 7/8
 Width (mm): 190
 Width (in): 7 1/2
 Height (mm): 50
 Height (in): 1 15/16
 Fixture Material: Metal

ELECTRICAL
 Dimming: Phase Dimming (120Vac Only)
 Driver Included: Yes

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

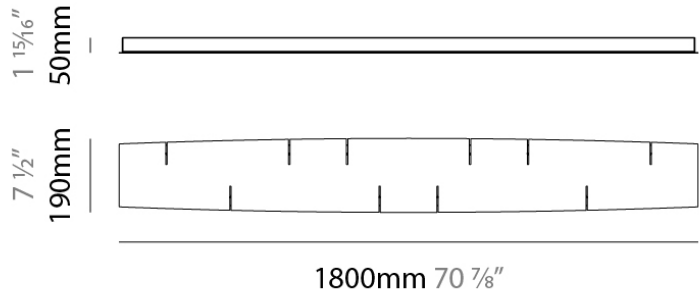











D10MONLT-MOD-SYS COMPONENTS











LEGEND

 floor-mounted	 pivotable	 special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
 wall and ceiling: recessed and surface mounted	 rotating	 warm dim / natural dimming LED
 ceiling-mounted and wall-mounted	 illuminate tilted	 rechargeable battery powered
 wall-mounted	 color of suspension cable	 fixture with natural vivid LED (upon request)
 omni-directional light distribution	 length of suspension cable	 color rendering index
 direct light distribution	 reflector degree selection	 color temperature
 direct/indirect light distribution	 super spot	 lumen (luminous flux)
 indirect light distribution	 lens	 efficacy (lumens per watt)
 asymmetric light distribution	 lens pack	 Unified Glare Rating (UGR) range from 5-40
 aura light distribution	 shine ring	 marine grade (AISI 316 stainless steel)
 round wall or ceiling cut-out	 integrated shine ring with diffuser	 walk on
 square wall or ceiling cut-out	 free individual colors 01-29	 drive on
 the supplied jig specifies the cutout dimensions	 individual colors: 00 (free of charge), 01-25 (extra charge)	 Dark Sky Compliance
 minimum distance (meters) lamp - object	 luminaire part to be colored (F1)	 Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
 recessed depth	 luminaire part to be colored (F2)	 lamp protected against explosion
 ceiling thickness in mm	 luminaire part to be colored (F3)	 blown glass using traditional methods by master glass blower
 ceiling thickness selection	 luminaire part to be colored (F4)	 acoustic material
 dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	 luminaire part to be colored (F5)	 protection class I, protection insulation
 included or excluded LED driver/transformer/control gear	 color of 3-circuit adaptor	 protection class II, protection insulation
 separately switchable	 indirect diffuser	 ETL Certified to UL and CSA Standards
 sensor	 direct diffuser	 UL Certified to UL and CSA Standards
 remote control	 ball-proof (upon request)	 CSA Certified to UL and CSA Standards
 available upon request	 accessory	 Certified for North American Standards

IP RATING

 IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
 IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
 IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
 IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
 IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
 IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
 IP65	protected against ingress of dust protected against jets of water
 IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
 IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
 IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

 IK01	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
 IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
 IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
 IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
 IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
 IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
 IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
 IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
 IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
 IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)