

## D10MONLT-MOD-SYS COMPONENTS SUSPENSION

### D1010003-

#### DESCRIPTION

Moonlight Ø400mm / 15 3/4" x H.2000mm / 78 3/4" - Suspension  
- 7.2W LED - 2700K, CRI>90

#### GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

#### PHYSICAL

Shape: Abstract

Diameter (mm): 400

Diameter (in): 15 3/4"

Width (mm): 43

Width (in): 1 11/16"

Height (mm): 400

Height (in): 15 3/4"

Max. Overall Height (mm): 2400

Max. Overall Height (in): 94 1/2"

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

Cable Details: 2000mm Cable

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED

Input Wattage (W): 7.2

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

#### LED

Color Temperature (°K): 2700

Nominal Lumen (lm): 504


CRI: >90 CRI

Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

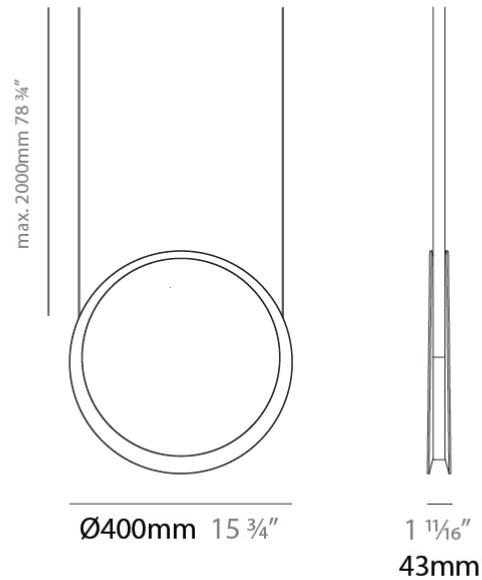

## D10MONLT-MOD-SYS COMPONENTS SUSPENSION

### D1010005-

#### DESCRIPTION

Moonlight ØSuspension - 500mm/19 11/16" x 2000mm/78 3/4" - 1 x 9.8W LED Strip, 2700K, CRI>90

#### GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Installation: Suspension

Product Type: Pendant

Mounting Location: Ceiling

#### PHYSICAL

Shape: Abstract

Diameter (mm): 500

Diameter (in): 19 11/16"

Height (mm): 500

Height (in): 19 11/16"

Max. Overall Height (mm): 2500

Max. Overall Height (in): 98 7/16"

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

Cable Details: 2000mm Cable

#### ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED

Input Wattage (W): 9.8

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

#### LED

Color Temperature (°K): 2700

Nominal Lumen (lm): 637


CRI: >90 CRI

Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

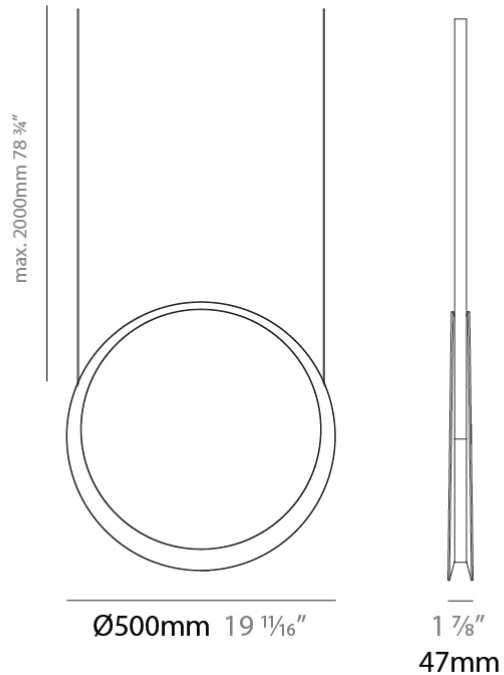

## D10MONLT-MOD-SYS COMPONENTS

PROJECT
TYPE
NOTES
QUANTITY
DATE

### D109141-


**DESCRIPTION**  
Moonlight Wall Canopy

**GENERAL**  
Series: Moonlight  
Partner: Quasar  
Division: Design  
Product Type: Clusters  
Mounting Location: Ceiling


**PHYSICAL**  
Shape: Abstract  
Diameter (mm): 130  
Diameter (in): 5 1/8  
Height (mm): 130  
Depth (mm): 60  
Height (in): 5 1/8  
Depth (in): 2 3/8  
Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
Fixture Material: Aluminum

**ELECTRICAL**  
Dimming: Non-Dimming / Phase Dimming (120vac Only)  
Driver Included: No  
Driver Location: Remote  
Driver Class: Class 2  
Input Voltage (V): 120  
Output Voltage (V): 24

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP20



Ø130mm 5 1/8"



60mm 2 3/8"



## D10MONLT-MOD-SYS COMPONENTS


### D109142-

**DESCRIPTION**  
 Moonlight Wall Fixation

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Diameter (mm): 30  
 Diameter (in): 1 3/16  
 Height (mm): 30  
 Depth (mm): 50  
 Height (in): 1 13/16  
 Depth (in): 1 15/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20



Ø30mm 1 3/16"



50mm 1 15/16"



## D10MONLT-MOD-SYS COMPONENTS


### D109143-

**DESCRIPTION**  
 Moonlight Recessed Mounting Set

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Diameter (mm): 60  
 Diameter (in): 2 3/8  
 Height (mm): 60  
 Depth (mm): 20  
 Height (in): 2 3/8  
 Depth (in): 13/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

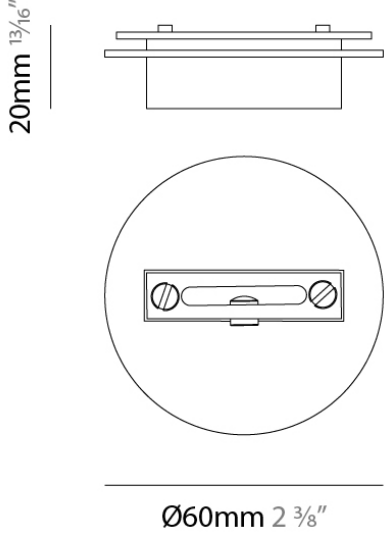

## D10MONLT-MOD-SYS COMPONENTS

### D109144-


**DESCRIPTION**  
 Moonlight Canopy Single for 400mm Suspension

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Length (mm): 400  
 Length (in): 15 3/4  
 Width (mm): 100  
 Width (in): 3 15/16  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

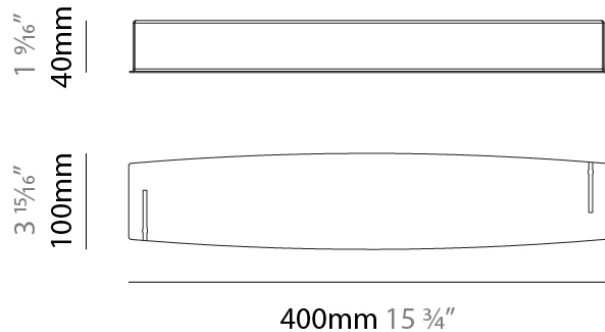

## D10MONLT-MOD-SYS COMPONENTS

### D109145-

#### DESCRIPTION

Moonlight Canopy Single for 500mm Suspension

#### GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Product Type: Clusters

Mounting Location: Ceiling

#### PHYSICAL

Shape: Abstract

Length (mm): 500

Length (in): 19 15/16

Width (mm): 100

Width (in): 3 15/16

Height (mm): 40

Height (in): 1 9/16

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2


Input Voltage (V): 120

Output Voltage (V): 24

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

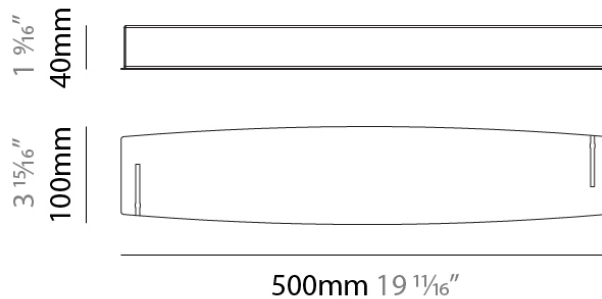

## D10MONLT-MOD-SYS COMPONENTS

### D109146-

#### DESCRIPTION

Moonlight Canopy Double for 400mm+400mm Suspension

#### GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Product Type: Clusters

Mounting Location: Ceiling

#### PHYSICAL

Shape: Abstract

Length (mm): 790

Length (in): 31 1/8"

Width (mm): 190

Width (in): 7 1/2"

Height (mm): 40

Height (in): 1 9/16"

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

#### ELECTRICAL

Input Wattage Range: 10 - 19 W

Lamp Type: LED

Input Wattage (W): 14.4

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24

Upon Request: 0-10V Dimming

#### LED

Color Temperature (°K): 2700


CRI: >90 CRI

Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

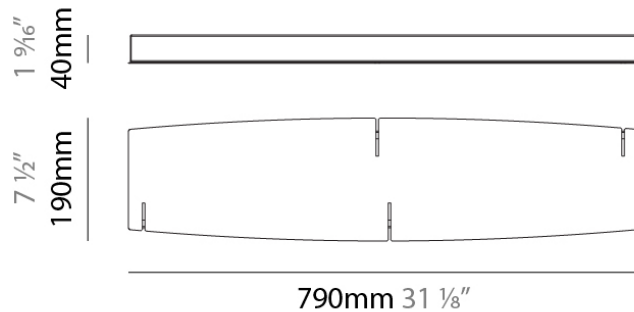

## D10MONLT-MOD-SYS COMPONENTS

### D109147-

**DESCRIPTION**  
 Moonlight Canopy Double for 400mm+500mm Suspension

**GENERAL**

Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**

Shape: Abstract  
 Length (mm): 790  
 Length (in): 31 1/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**


Input Wattage Range: 10 - 19 W  
 Lamp Type: LED  
 Input Wattage (W): 17  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24  
 Upon Request: 0-10V Dimming

**LED**

Color Temperature (°K): 2700  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards  
 IP rating: IP20

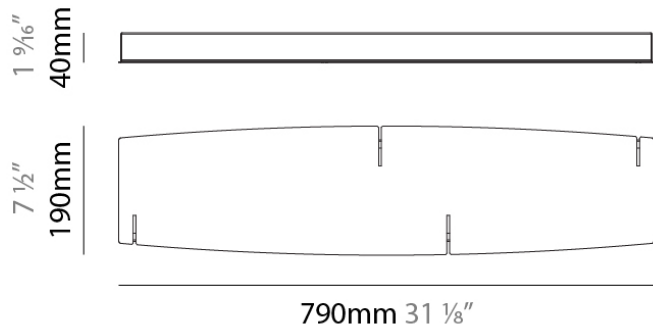

## D10MONLT-MOD-SYS COMPONENTS

### D109148-

**DESCRIPTION**  
 Moonlight Canopy Double for 500mm+500mm Suspension

**GENERAL**

Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**

Shape: Abstract  
 Length (mm): 790  
 Length (in): 31 1/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**


Input Wattage Range: 10 - 19 W  
 Lamp Type: LED  
 Input Wattage (W): 19.6  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24  
 Upon Request: 0-10V Dimming

**LED**

Color Temperature (°K): 2700  
 CRI: >90 CRI  
 Lamp Life (hrs): 50000

**RATINGS AND CERTIFICATIONS**

Certified By: Certified for North American Standards  
 IP rating: IP20

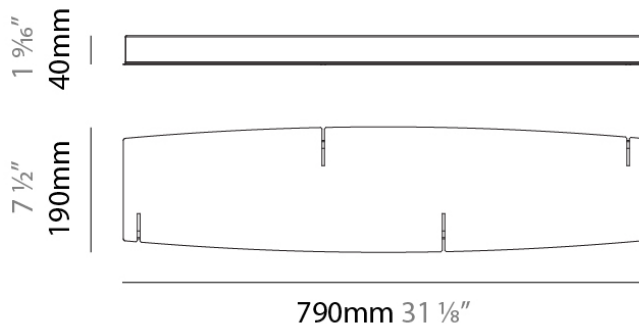

## D10MONLT-MOD-SYS COMPONENTS

### D109149-

#### DESCRIPTION

Moonlight Canopy Triple for 3 x 400mm Suspension

#### GENERAL

Series: Moonlight

Partner: Quasar

Division: Design

Product Type: Clusters

Mounting Location: Ceiling

#### PHYSICAL

Shape: Abstract

Length (mm): 1070

Length (in): 42 1/8"

Width (mm): 190

Width (in): 7 1/2"

Height (mm): 40

Height (in): 1 9/16"

Fixture Finish: ALU / BRA / BRZ / FOS / LOT

Fixture Material: Aluminum

#### ELECTRICAL

Dimming: Non-Dimming / Phase Dimming (120vac Only)

Driver Included: Yes

Driver Location: Integrated

Driver Class: Class 2

Input Voltage (V): 120

Output Voltage (V): 24


#### LED

Lamp Life (hrs): 50000

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

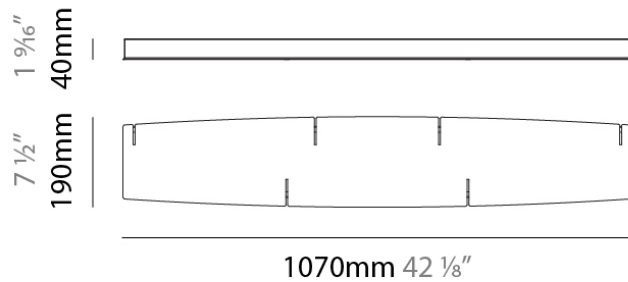

## D10MONLT-MOD-SYS COMPONENTS

### D109150-


**DESCRIPTION**  
 Moonlight Canopy Triple for 400mm+400mm+500mm  
 Suspension

**GENERAL**  
 Series: Moonlight \_\_\_\_\_  
 Partner: Quasar \_\_\_\_\_  
 Division: Design \_\_\_\_\_  
 Product Type: Clusters \_\_\_\_\_  
 Mounting Location: Ceiling \_\_\_\_\_

**PHYSICAL**  
 Shape: Abstract \_\_\_\_\_  
 Length (mm): 1070 \_\_\_\_\_  
 Length (in): 42 1/8 \_\_\_\_\_  
 Width (mm): 190 \_\_\_\_\_  
 Width (in): 7 1/2 \_\_\_\_\_  
 Height (mm): 40 \_\_\_\_\_  
 Height (in): 1 9/16 \_\_\_\_\_  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_  
 Output Voltage (V): 24 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

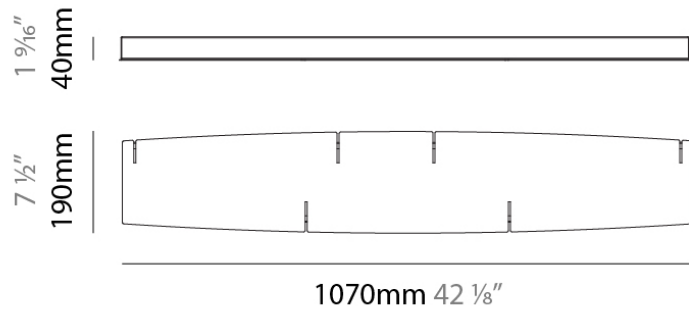

## D10MONLT-MOD-SYS COMPONENTS

### D109151-


**DESCRIPTION**  
 Moonlight Canopy Triple for 400mm+500mm+400mm  
 Suspension

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Length (mm): 1070  
 Length (in): 42 1/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

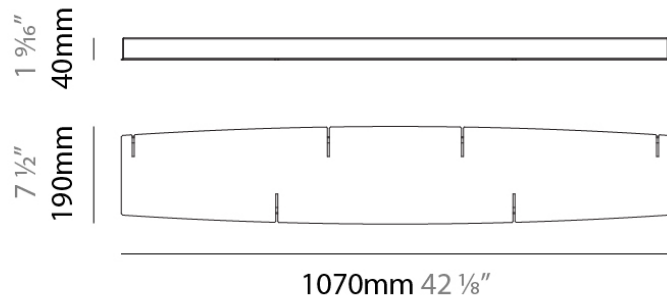

## D10MONLT-MOD-SYS COMPONENTS

### D109152-


**DESCRIPTION**  
 Moonlight Canopy Triple for 500mm+400mm+500mm  
 Suspension

**GENERAL**  
 Series: Moonlight \_\_\_\_\_  
 Partner: Quasar \_\_\_\_\_  
 Division: Design \_\_\_\_\_  
 Product Type: Clusters \_\_\_\_\_  
 Mounting Location: Ceiling \_\_\_\_\_

**PHYSICAL**  
 Shape: Abstract \_\_\_\_\_  
 Length (mm): 1070 \_\_\_\_\_  
 Length (in): 42 1/8 \_\_\_\_\_  
 Width (mm): 190 \_\_\_\_\_  
 Width (in): 7 1/2 \_\_\_\_\_  
 Height (mm): 40 \_\_\_\_\_  
 Height (in): 1 9/16 \_\_\_\_\_  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT \_\_\_\_\_  
 Fixture Material: Aluminum \_\_\_\_\_

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only) \_\_\_\_\_  
 Driver Included: Yes \_\_\_\_\_  
 Driver Location: Integrated \_\_\_\_\_  
 Driver Class: Class 2 \_\_\_\_\_  
 Input Voltage (V): 120 \_\_\_\_\_  
 Output Voltage (V): 24 \_\_\_\_\_

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards \_\_\_\_\_  
 IP rating: IP20 \_\_\_\_\_

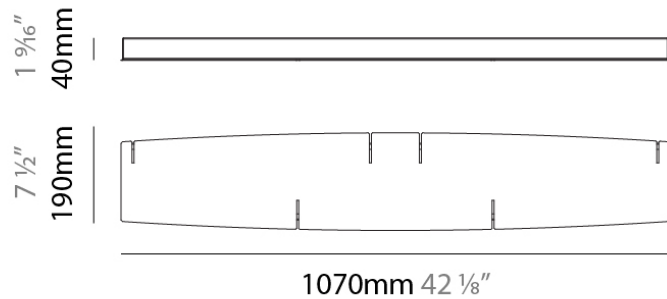

## D10MONLT-MOD-SYS COMPONENTS

### D109153


**DESCRIPTION**  
 Moonlight Canopy Triple for 500mm+500mm+400mm  
 Suspension

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Length (mm): 1070  
 Length (in): 42 1/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

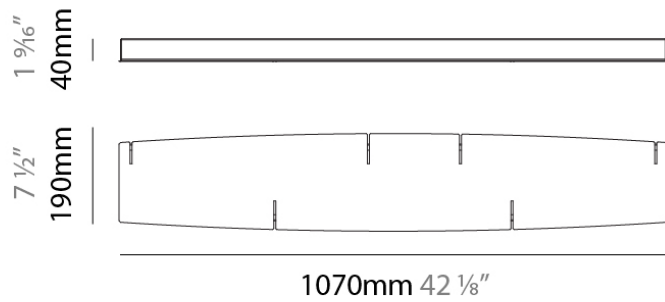

## D10MONLT-MOD-SYS COMPONENTS

### D109154-


**DESCRIPTION**  
 Moonlight Canopy Triple for 3 x 500mm Suspension

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Abstract  
 Length (mm): 1070  
 Length (in): 42 1/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 40  
 Height (in): 1 9/16  
 Fixture Finish: ALU / BRA / BRZ / FOS / LOT  
 Fixture Material: Aluminum

**ELECTRICAL**  
 Dimming: Non-Dimming / Phase Dimming (120vac Only)  
 Driver Included: Yes  
 Driver Location: Integrated  
 Driver Class: Class 2  
 Input Voltage (V): 120  
 Output Voltage (V): 24

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

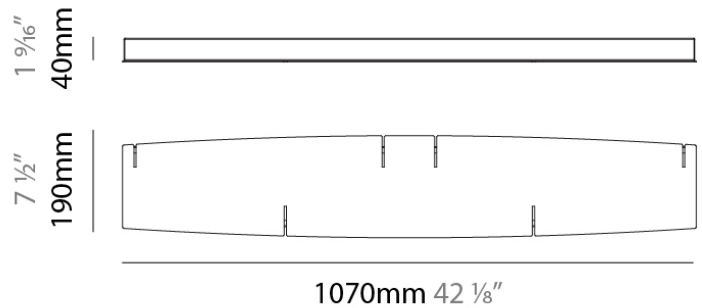

## D10MONLT-MOD-SYS COMPONENTS

### D109163-


**DESCRIPTION**  
 Moonlight 5 canopy 40-50-40-50-40 for 9 rings. length +/- 289cm

**GENERAL**  
 Series: Moonlight  
 Partner: Quasar  
 Division: Design  
 Product Type: Clusters  
 Mounting Location: Ceiling

**PHYSICAL**  
 Shape: Oblong  
 Length (mm): 1800  
 Length (in): 70 7/8  
 Width (mm): 190  
 Width (in): 7 1/2  
 Height (mm): 50  
 Height (in): 1 15/16  
 Fixture Material: Metal

**ELECTRICAL**  
 Dimming: Phase Dimming (120Vac Only)  
 Driver Included: Yes

**RATINGS AND CERTIFICATIONS**  
 Certified By: Certified for North American Standards  
 IP rating: IP20

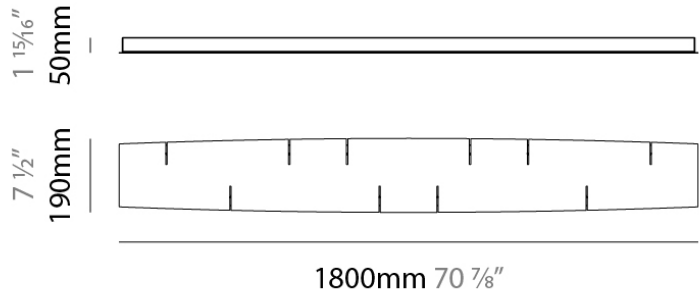











## D10MONLT-MOD-SYS COMPONENTS











### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)