

D11KITPOP-SUR-SYS COMPONENTS SURFACE

D113034-

DESCRIPTION

Kit Pop-Up - Surface - Wall Holder with fixed 200mm / 7 7/8" arm
(Shade sold separately)

GENERAL

Series: Kit Pop-Up _____
 Partner: Ole _____
 Division: Design _____
 Installation: Surface _____
 Mounting Location: Wall _____
 Light Distribution: Direct _____

PHYSICAL

Shape: Abstract _____
 Diameter (mm): 120 _____
 Diameter (in): 4 3/4 _____
 Length (mm): 200 _____
 Length (in): 7 7/8 _____
 Max. Overall Height (mm): 1200 _____
 Max. Overall Height (in): 47 1/4 _____
 Fixture Finish: WHI / MBK _____
 Fixture Material: Metal _____

ELECTRICAL



Number of Lamps: 1 _____
 Lamp Type: LED Retrofit _____
 Lamp Shape: A19 _____
 Bulb Included: Bulb Not Included _____
 Max. Wattage Per Lamp (W): 15 _____
 Lamp Base: E26 _____
 Input Voltage (V): 120 _____
 Upon Request: 277Vac / GU24 _____

OPTICAL

Adjustability: Rotational 120° _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

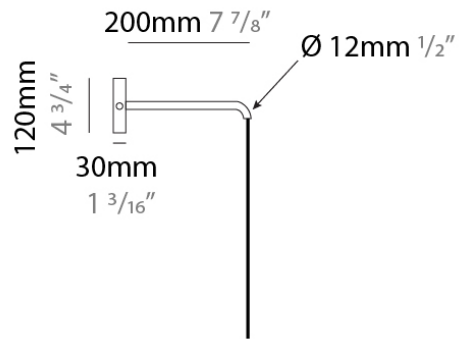

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

D11KITPOP-SUR-SYS COMPONENTS SURFACE

D113035-

DESCRIPTION
 Kit Pop-Up - Surface - Wall Holder with fixed 500mm / 19 11/16" arm (Shade sold separately)



GENERAL
 Series: Kit Pop-Up
 Partner: Ole
 Division: Design
 Installation: Surface
 Mounting Location: Wall
 Light Distribution: Direct

PHYSICAL
 Shape: Abstract
 Diameter (mm): 140
 Diameter (in): 5 1/2
 Length (mm): 500
 Length (in): 19 11/16
 Max. Overall Height (mm): 1200
 Max. Overall Height (in): 47 1/4
 Fixture Finish: WHI / MBK
 Fixture Material: Metal

ELECTRICAL
 Number of Lamps: 1
 Lamp Type: LED Retrofit
 Lamp Shape: A19
 Bulb Included: Bulb Not Included
 Max. Wattage Per Lamp (W): 15
 Lamp Base: E26
 Input Voltage (V): 120
 Upon Request: 277Vac / GU24

OPTICAL
 Adjustability: Rotational 120°

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

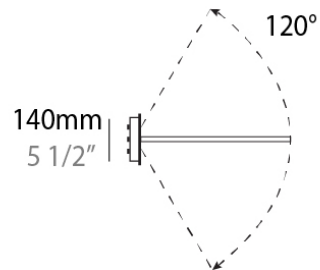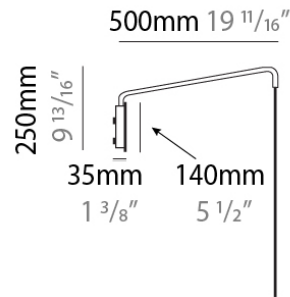

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

D11KITPOP-SUR-SYS COMPONENTS SURFACE

D113036-

DESCRIPTION
 Kit Pop-Up - Surface - Wall Holder with fixed 800mm / 31 1/2" arm (Shade sold separately)

GENERAL

Series: Kit Pop-Up
 Partner: Ole
 Division: Design
 Installation: Surface
 Mounting Location: Wall
 Light Distribution: Direct

PHYSICAL

Shape: Abstract
 Diameter (mm): 140
 Diameter (in): 5 1/2
 Length (mm): 800
 Length (in): 31 1/2
 Max. Overall Height (mm): 1200
 Max. Overall Height (in): 47 1/4
 Fixture Finish: WHI / MBK
 Fixture Material: Metal

ELECTRICAL



Number of Lamps: 1
 Lamp Type: LED Retrofit
 Lamp Shape: A19
 Bulb Included: Bulb Not Included
 Max. Wattage Per Lamp (W): 15
 Lamp Base: E26
 Input Voltage (V): 120
 Upon Request: 277Vac / GU24

OPTICAL

Adjustability: Rotational 120°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

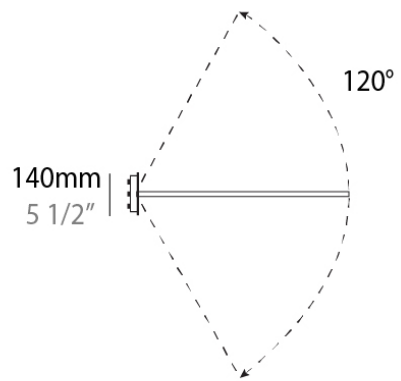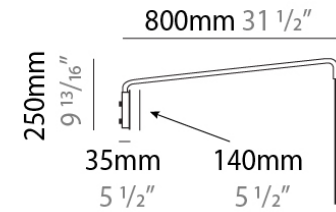

PROJECT
TYPE
NOTES
QUANTITY
DATE

D11KITPOP-SUR-SYS COMPONENTS



D119000-

DESCRIPTION
 Banyo Shade - 300mm - 80mm Cord

GENERAL
 Series: Kit Pop-Up
 Partner: Ole
 Division: Design

PHYSICAL
 Shape: Abstract
 Diameter (mm): 300
 Diameter (in): 11 ¹³/₁₆
 Height (mm): 200
 Height (in): 7 ⁷/₈
 Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
 Fixture Material: Fabric Cord / Metal
 Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

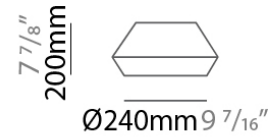

D11KITPOP-SUR-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


D119001-

DESCRIPTION
 Drum Shade - 180mm - 80mm Cord

GENERAL
 Series: Kit Pop-Up
 Partner: Ole
 Division: Design

PHYSICAL
 Shape: Abstract
 Diameter (mm): 180
 Diameter (in): 7 1/16
 Height (mm): 250
 Height (in): 9 13/16
 Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
 Fixture Material: Fabric Cord / Metal
 Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20



D11KITPOP-SUR-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D119002-

DESCRIPTION
 Drum Shade - 300mm - 50mm Cord

GENERAL
 Series: Kit Pop-Up
 Partner: Ole
 Division: Design

PHYSICAL
 Shape: Abstract
 Diameter (mm): 300
 Diameter (in): 11 ¹³/₁₆
 Height (mm): 200
 Height (in): 7 ⁷/₈
 Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
 Fixture Material: Fabric Cord / Metal
 Primary Material: Fabric - Recycled


RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20



Ø270mm 10 5/8"



200mm 7 7/8"



Ø300mm 11 13/16"



D11KITPOP-SUR-SYS COMPONENTS

D119003-

DESCRIPTION

Ukelele Shade - 260mm - 75mm Cord

GENERAL

Series: Kit Pop-Up

Partner: Ole

Division: Design

PHYSICAL

Shape: Abstract

Diameter (mm): 260

Diameter (in): 10 1/4"

Height (mm): 380

Height (in): 14 15/16"

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Fixture Material: Fabric Cord / Metal

Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20




Ø120mm

4 3/4"



380mm 10 1/16"



Ø260mm

10 1/4"



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D11KITPOP-SUR-SYS COMPONENTS



D119004-

DESCRIPTION
 Ukelele Shade - 350mm - 60mm Cord

GENERAL
 Series: Kit Pop-Up
 Partner: Ole
 Division: Design

PHYSICAL
 Shape: Abstract
 Diameter (mm): 350
 Diameter (in): 13 3/4
 Height (mm): 200
 Height (in): 7 7/8
 Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
 Fixture Material: Fabric Cord / Metal
 Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

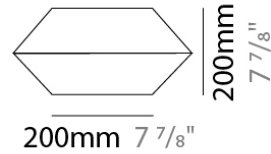

D11KITPOP-SUR-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

D119005-

DESCRIPTION

Kora Shade - 240mm - 55mm Cord

GENERAL

Series: Kit Pop-Up

Partner: Ole

Division: Design

PHYSICAL

Shape: Abstract

Diameter (mm): 240

Diameter (in): $9 \frac{7}{16}$

Height (mm): 380

Height (in): $14 \frac{15}{16}$

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI


Fixture Material: Fabric Cord / Metal

Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

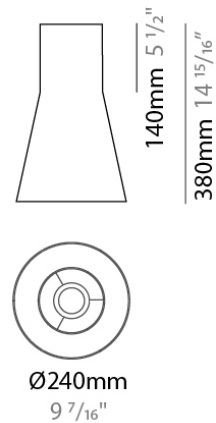

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D11KITPOP-SUR-SYS COMPONENTS



D119006-

DESCRIPTION
Kora Shade - 350mm - 60mm Cord

GENERAL
Series: Kit Pop-Up
Partner: Ole
Division: Design

PHYSICAL
Shape: Abstract
Diameter (mm): 350
Diameter (in): 13 3/4
Height (mm): 220
Height (in): 8 11/16
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Fixture Material: Fabric Cord / Metal
Primary Material: Fabric - Recycled

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

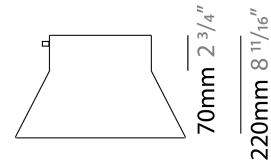

Ø350mm 13 3/4"



D11KITPOP-SUR-SYS COMPONENTS

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)