

D14OSCURAMAX-MOD-SYS COMPONENTS SUSPENSION

D141221-

DESCRIPTION

Oscura Max - Suspension - 240mm / 9 7/16" - 1 x 6W LED -2700K / 3000K - Without Canopy

GENERAL

Series: Oscura Max

Subseries: Oscura Max - Modular System

Brand: Cangini & Tucci

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 220

Diameter (in): 8 11/16

Height (mm): 240

Height (in): 9 7/16

Max. Overall Height (mm): 2240

Max. Overall Height (in): 88 3/16

Light Distribution: Omnidirectional

Weight (kg): 0.650

Weight (lbs): 1.43

Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA

Holder Finish: CHR / WHI / BLK / BCR

Fixture Material: Glass / Metal

Cable Details: 2,000mm Transparent cable

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 7.8

Total Output Wattage (W): 6

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Input Voltage (V): 120 - 277

Constant Current (MA): 500mA

Upon Request: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming

LED

Delivered Lumen Range: 500 - 999 lm

Color Temperature (°K): 2700 / 3000


Max. Delivered Lumen (lm): 866

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

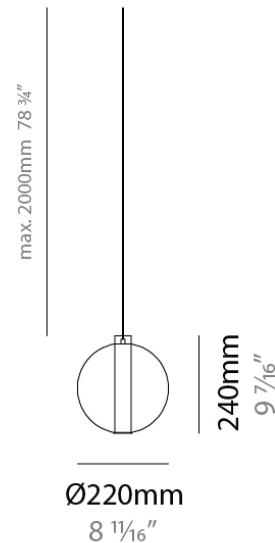

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS SUSPENSION

D141222-

DESCRIPTION

Oscura Max - Suspension - 240mm / 9 7/16" - 1 x 6W LED -2700K / 3000K - Without Canopy

GENERAL

Series: Oscura Max
 Subseries: Oscura Max - Modular System
 Brand: Cangini & Tucci
 Division: Design
 Mounting Type: Suspension
 Mounting Location: Ceiling
 Subcategory: Pendant

PHYSICAL

Shape: Round
 Diameter (mm): 240
 Diameter (in): 9 7/16
 Height (mm): 260
 Height (in): 10 1/4
 Max. Overall Height (mm): 2260
 Max. Overall Height (in): 89
 Light Distribution: Omnidirectional
 Weight (kg): 0.715
 Weight (lbs): 1.58
 Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA
 Holder Finish: CHR / WHI / BLK / BCR
 Fixture Material: Glass / Metal
 Cable Details: 2,000mm Transparent cable

ELECTRICAL


Input Wattage Range: 1 - 9 W
 Lamp Type: LED (Zhaga Standard)
 Input Wattage (W): 7.8
 Total Output Wattage (W): 6
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Input Voltage (V): 120 - 277
 Constant Current (MA): 500mA
 Upon Request: Non-Dimming / Phase Dimming (120Vac only) / 0-10V Dimming

LED

Delivered Lumen Range: 500 - 999 lm
 Color Temperature (°K): 2700 / 3000
 Max. Delivered Lumen (lm): 866
 CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

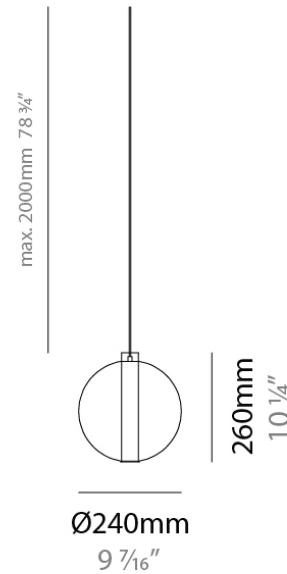

D14OSCURAMAX-MOD-SYS COMPONENTS SUSPENSION

D141223-

DESCRIPTION

Oscura Max - Suspension - 260mm / 10 1/4" - 1 x 6W LED -2700K / 3000K - Without Canopy

GENERAL

Series: Oscura Max

Subseries: Oscura Max - Modular System

Brand: Cangini & Tucci

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

Subcategory: Pendant

PHYSICAL

Shape: Round

Diameter (mm): 260

Diameter (in): 10 1/4

Height (mm): 280

Height (in): 11

Max. Overall Height (mm): 2280

Max. Overall Height (in): 89 3/4

Light Distribution: Omnidirectional

Weight (kg): 0.800

Weight (lbs): 1.76

Fixture Finish: AMB / BLK / BRZ / GLD / GRN / PNK / RGD / RUB / SKB / SMK / STE / TOB / TRA

Holder Finish: CHR / WHI / BLK / BCR

Fixture Material: Glass / Metal

Cable Details: 2,000mm Transparent cable

ELECTRICAL

Input Wattage Range: 1 - 9 W

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 7.8

Total Output Wattage (W): 6

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Input Voltage (V): 120 - 277

Constant Current (MA): 500mA

LED

Delivered Lumen Range: 500 - 999 lm

Color Temperature (°K): 2700 / 3000


Max. Delivered Lumen (lm): 866

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

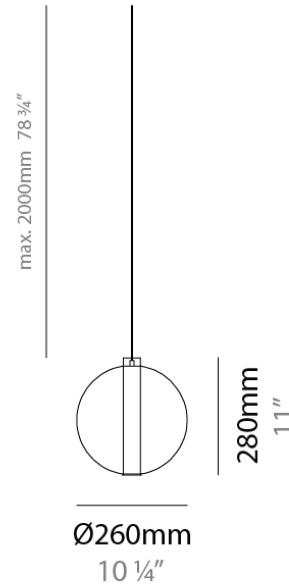

D14OSCURAMAX-MOD-SYS COMPONENTS

D149001-

DESCRIPTION

Component - Single 120mm - Round Canopy

GENERAL

Brand: Cangini & Tucci

Division: Design

PHYSICAL

Shape: Round

Diameter (mm): 120

Diameter (in): 4 3/4

Height (mm): 30

Height (in): 1 3/16


Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF

Fixture Material: Metal

RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20



Ø120mm 4 3/4"

1 3/16"
30mm



D140SCURAMAX-MOD-SYS COMPONENTS


D149006-

DESCRIPTION
 Component - Round Canopy - 95mm - 3 Holes

GENERAL
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Shape: Round
 Diameter (mm): 120
 Diameter (in): 4 ¾
 Height (mm): 25
 Height (in): 1
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

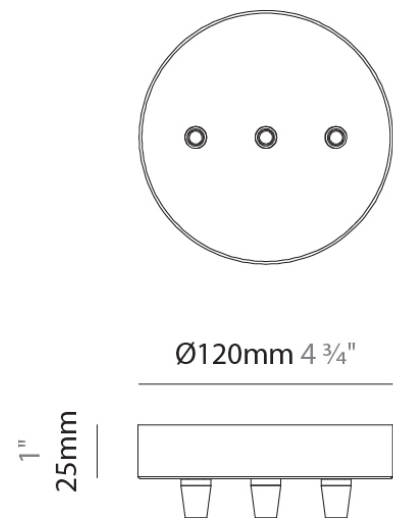

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149007-

DESCRIPTION
 Component - Round Canopy - 120mm - 5 Holes

GENERAL
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Shape: Round
 Diameter (mm): 120
 Diameter (in): 4 ¾
 Height (mm): 25
 Height (in): 1
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

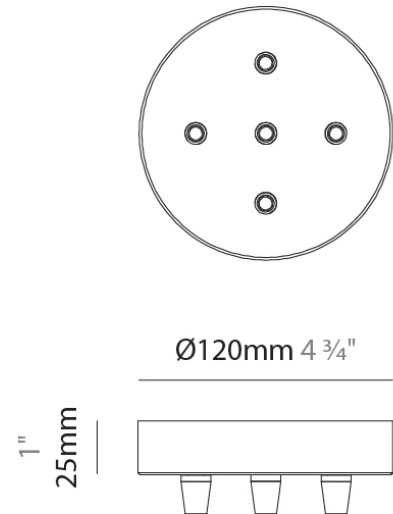

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS



D149008-

DESCRIPTION
 Component - Single 120mm - Round Cone Canopy - 2 External Holes + 1 Central Hole


GENERAL
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Shape: Round
 Diameter (mm): 120
 Diameter (in): 4 3/4
 Height (mm): 70
 Height (in): 2 3/4
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

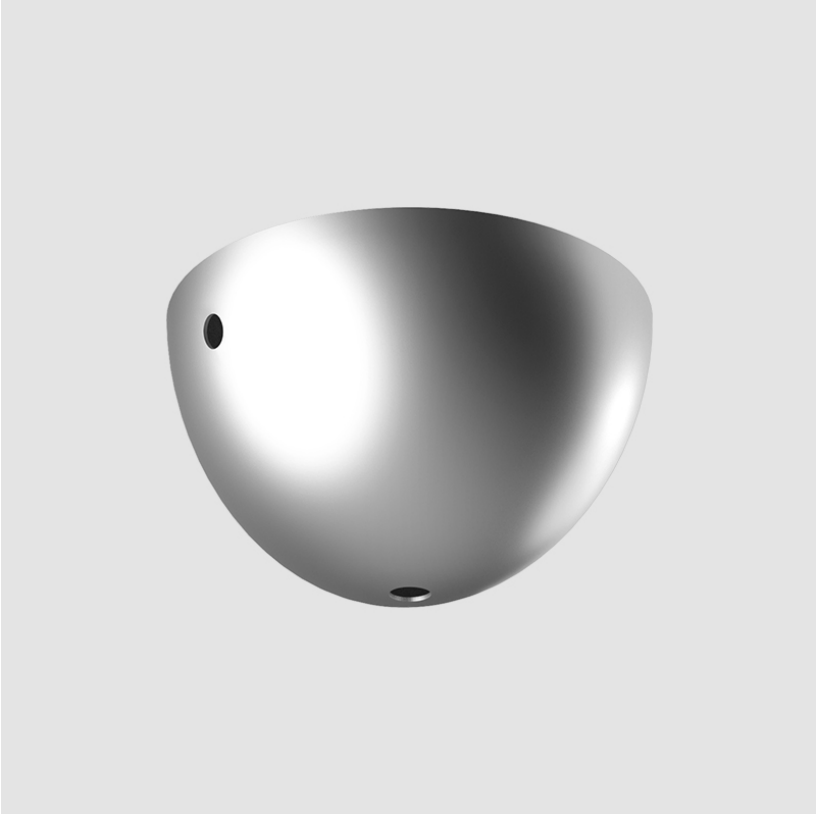

Ø120mm 4 3/4"

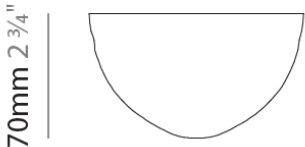

D140SCURAMAX-MOD-SYS COMPONENTS

D149009-

DESCRIPTION

Component - Single 120mm - Round Cone Canopy - 4 External Holes + 1 Central Hole

GENERAL



Brand: Cangini & Tucci _____
 Division: Design _____

PHYSICAL


Shape: Round _____
 Diameter (mm): 120 _____
 Diameter (in): 4 ³/₄ _____
 Height (mm): 90 _____
 Height (in): 3 ⁹/₁₆ _____
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF _____
 Fixture Material: Metal _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

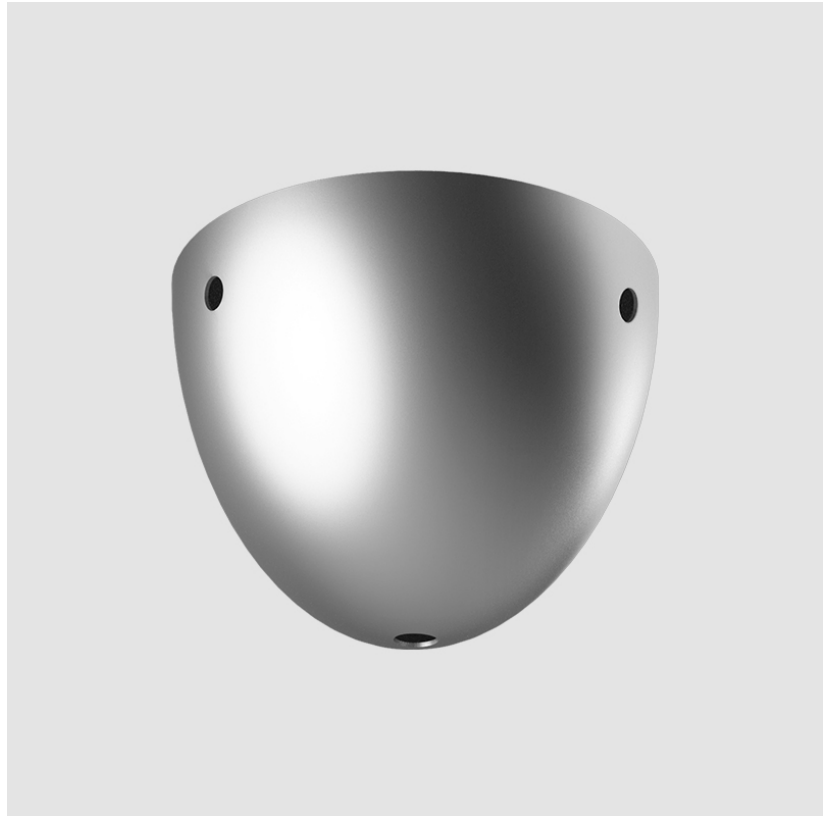

Ø120mm 4 ³/₄"



D140SCURAMAX-MOD-SYS COMPONENTS



D149012-

DESCRIPTION
 Accessory - Wall Stud Cable Spacer

GENERAL
 Series: Flute
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal


RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

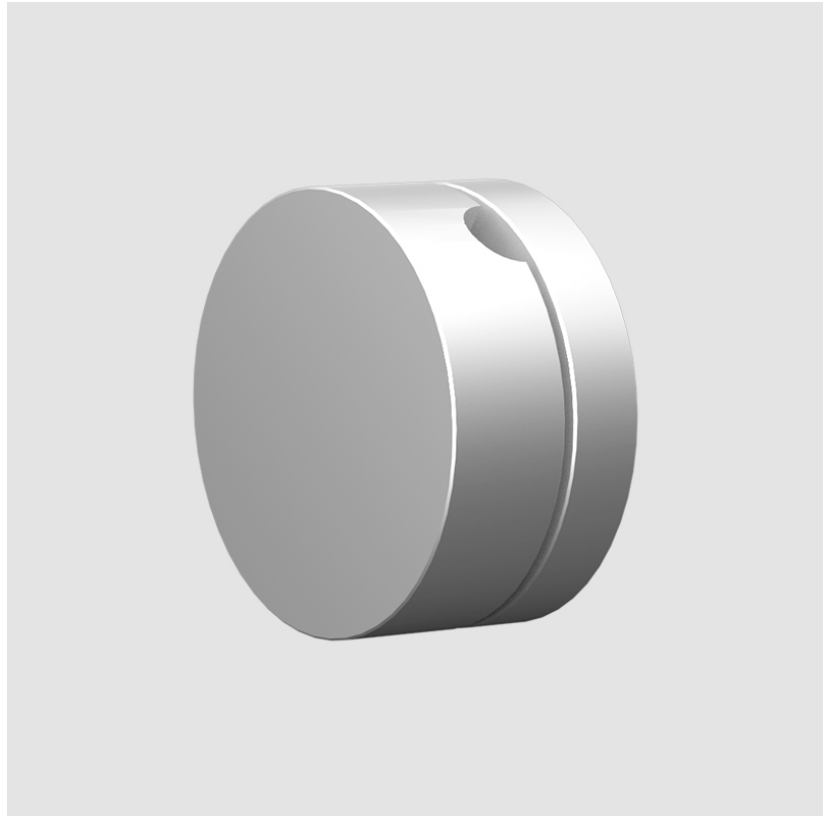

20mm $\frac{13}{16}$ "



10mm $\frac{3}{8}$ "



20mm $\frac{13}{16}$ "



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149013-

DESCRIPTION
Accessory - Ceiling Cable Spacer

GENERAL
Series: Flute
Brand: Cangini & Tucci
Division: Design

PHYSICAL
Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
Fixture Material: Metal

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

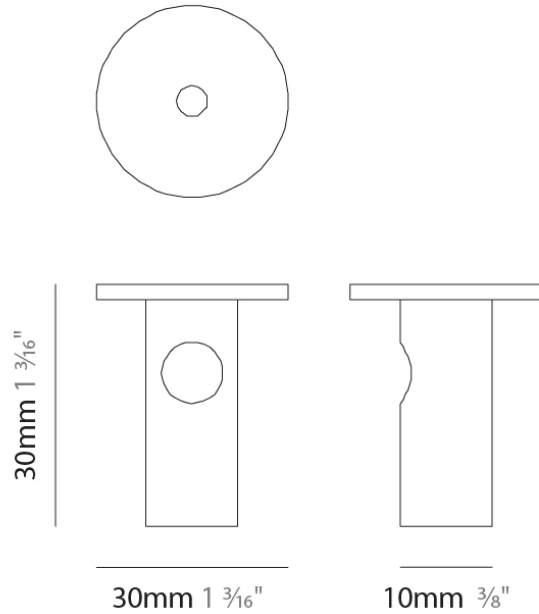

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149014-

DESCRIPTION
 Component - Round Canopy - 270mm - for 3 - 5 - 6 lights

GENERAL
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Shape: Round
 Diameter (mm): 270
 Diameter (in): 10 ⁵/₈
 Height (mm): 30
 Height (in): 1 ³/₁₆
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

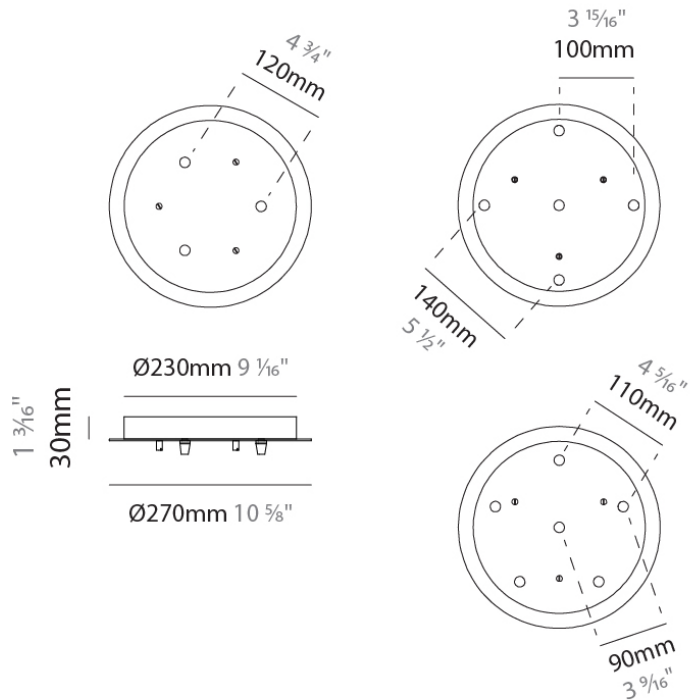

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS

D149015-

DESCRIPTION

Component - Round Canopy - 430mm - for 3 - 5 - 6 - 7 - 8 - 9 - 10 - 11 lights

GENERAL


Brand: Cangini & Tucci
 Division: Design

PHYSICAL

Shape: Round
 Diameter (mm): 430
 Diameter (in): 16 ¹⁵/₁₆
 Height (mm): 40
 Height (in): 1 ⁹/₁₆
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP20

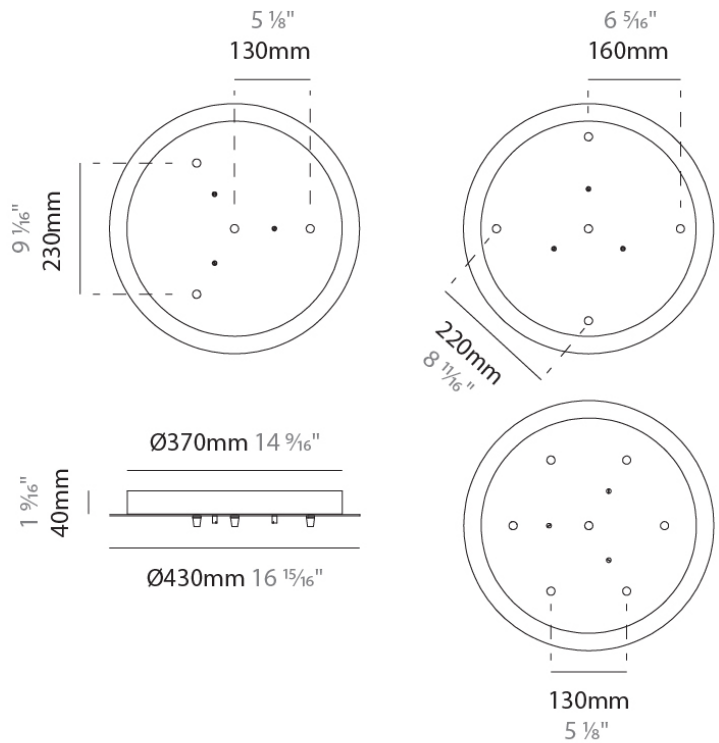

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149016-

DESCRIPTION
 Component - Round Canopy - 500mm - for 3 - 4 - 5 lights

GENERAL
 Brand: Cangini & Tucci
 Division: Design

PHYSICAL
 Shape: Round
 Diameter (mm): 500
 Diameter (in): 19 11/16"
 Height (mm): 40
 Height (in): 1 9/16"
 Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
 Fixture Material: Metal

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP20

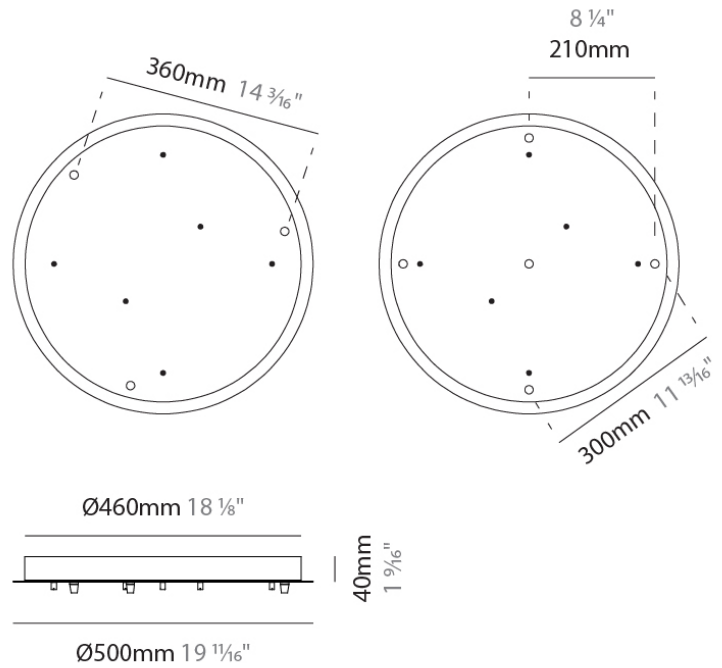

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS

D149017-

DESCRIPTION

Component - Square Canopy - 300mm - for 5 lights

GENERAL

Brand: Cangini & Tucci

Division: Design

PHYSICAL

Shape: Square

Length (mm): 300

Length (in): 11 ¹³/₁₆"

Width (mm): 300

Width (in): 11 ¹³/₁₆"

Height (mm): 30

Height (in): 1 ³/₁₆"


Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

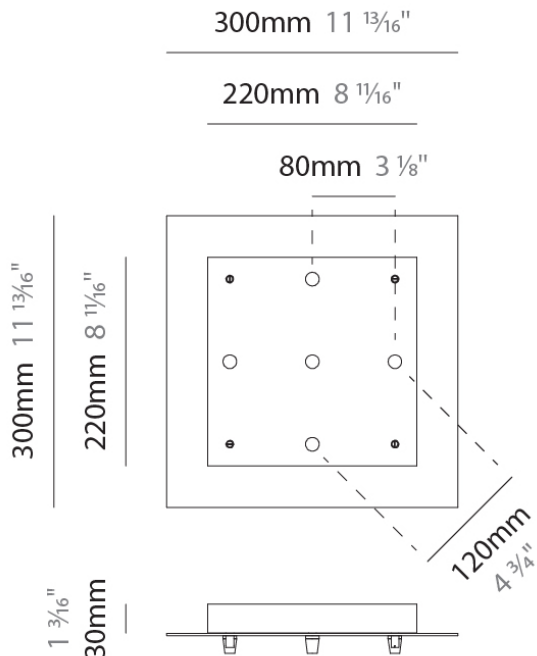

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS

D149018-

DESCRIPTION

Component - Square Canopy - 400mm - for 5 lights

GENERAL

Brand: Cangini & Tucci

Division: Design

PHYSICAL

Shape: Square

Length (mm): 400

Length (in): 15 3/4

Width (mm): 400

Width (in): 15 3/4

Height (mm): 30

Height (in): 1 3/16


Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF

Fixture Material: Metal

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

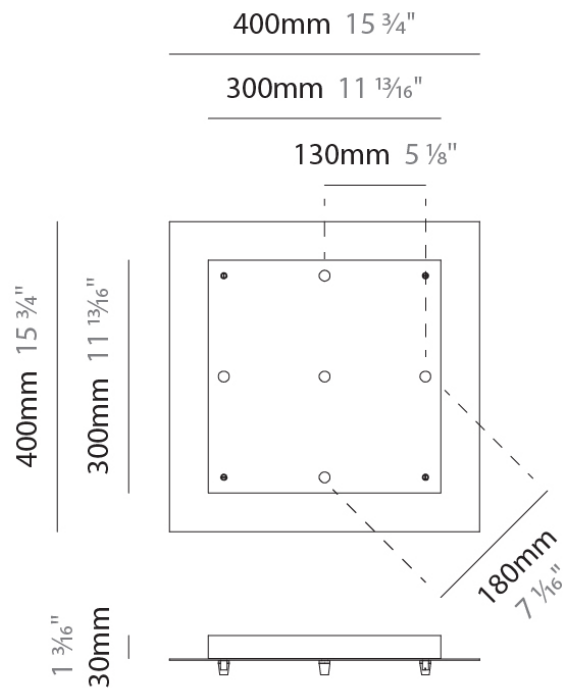

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149019-

DESCRIPTION
Component - Slim Linear Canopy - 300mm - 2 lights

GENERAL
Brand: Cangini & Tucci
Division: Design

PHYSICAL
Shape: Rectangle
Length (mm): 300
Length (in): 11 ¹³/₁₆"
Width (mm): 30
Width (in): 1 ³/₁₆"
Height (mm): 30
Height (in): 1 ³/₁₆"
Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
Fixture Material: Metal

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

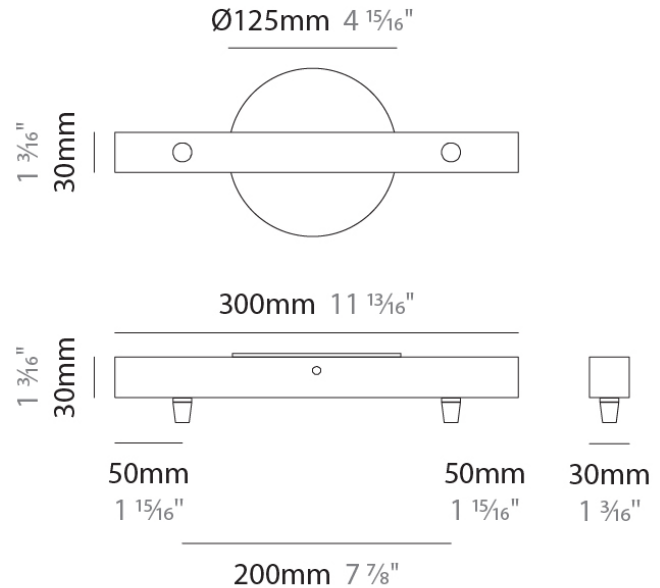

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149020-

DESCRIPTION
Component - Slim Linear Canopy - 500mm - 3 lights

GENERAL
Brand: Cangini & Tucci
Division: Design

PHYSICAL
Shape: Rectangle
Length (mm): 500
Length (in): 19 11/16
Width (mm): 30
Width (in): 1 3/16
Height (mm): 30
Height (in): 1 3/16
Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
Fixture Material: Metal

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

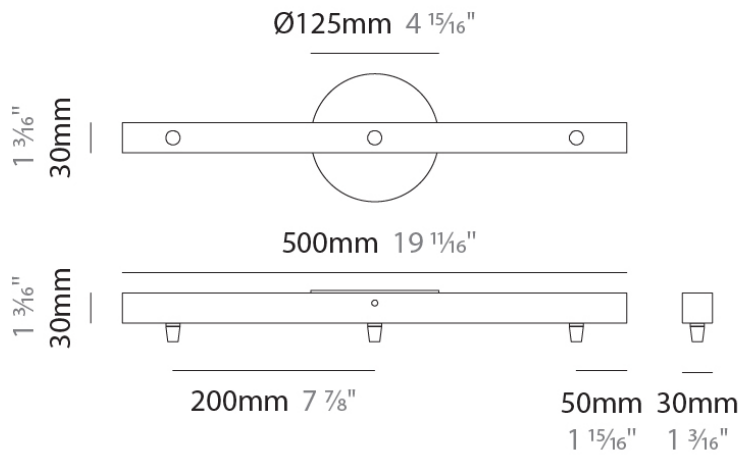

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D140SCURAMAX-MOD-SYS COMPONENTS


D149021-

DESCRIPTION
Component - Slim Linear Canopy - 1000mm - 3-5 lights

GENERAL
Brand: Cangini & Tucci
Division: Design

PHYSICAL
Shape: Rectangle
Length (mm): 1000
Length (in): 39 3/8
Width (mm): 30
Width (in): 1 3/16
Height (mm): 30
Height (in): 1 3/16
Fixture Finish: CHR / WHI / BLK / BST / SLF / GLF
Fixture Material: Metal

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

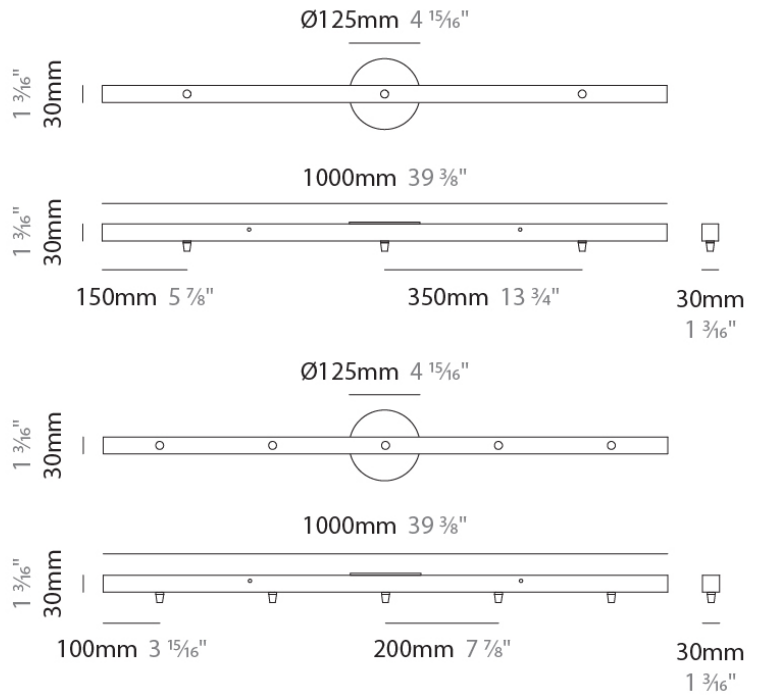

D140SCURAMAX-MOD-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)