

D4GHI-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D41088-

DESCRIPTION

Ghianda, Modular Suspension, 135mm, Direct, 7.5W LED, 850lm, 24V - Without Canopy

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Round
Diameter (mm): 135
Diameter (in): 5 5/16
Height (mm): 135
Height (in): 5 5/16
Max. Overall Height (mm): 1935
Max. Overall Height (in): 73 3/16
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum
Cable Details: 1800mm / 76 3/6" Cable

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 7.5
Total Output Wattage (W): 6.4
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Color Temperature (°K): 3000
Nominal Lumen (lm): 850
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

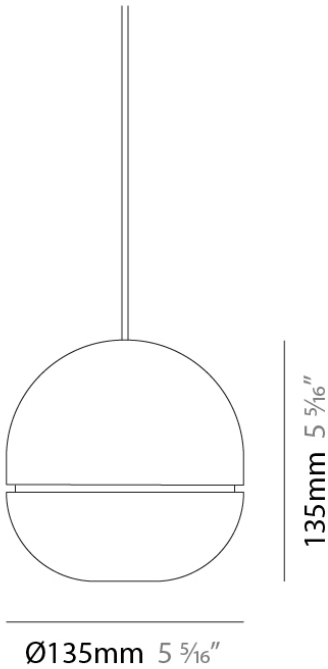

D4GHI-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D41089-

DESCRIPTION

Ghianda, Modular Suspension, 135mm, Indirect, 7.5W LED, 850lm, 24V - Without Canopy

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling
Light Distribution: Indirect

PHYSICAL

Shape: Round
Diameter (mm): 135
Diameter (in): 5 5/16
Height (mm): 135
Height (in): 5 5/16
Max. Overall Height (mm): 1935
Max. Overall Height (in): 73 3/16
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum
Cable Details: 1800mm / 76 3/6" Cable

ELECTRICAL


Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 7.5
Total Output Wattage (W): 6.4
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

Color Temperature (°K): 3000
Nominal Lumen (lm): 850
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

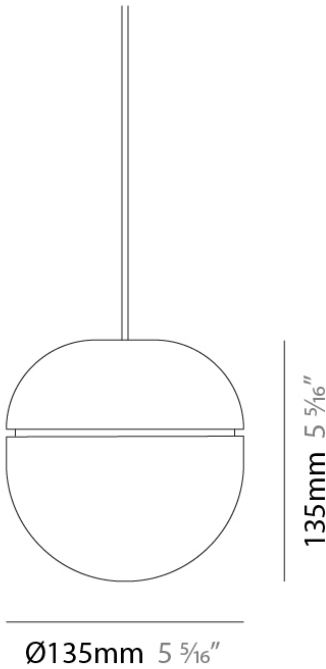

D4GHI-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D49043-

DESCRIPTION

Ghianda Modular Canopy, 600mm/23 5/8", 6 Light - Remote Driver

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling

PHYSICAL

Shape: Round
Diameter (mm): 600
Diameter (in): 23 5/8
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum

ELECTRICAL

Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED


CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



Ø600mm 23 5/8"

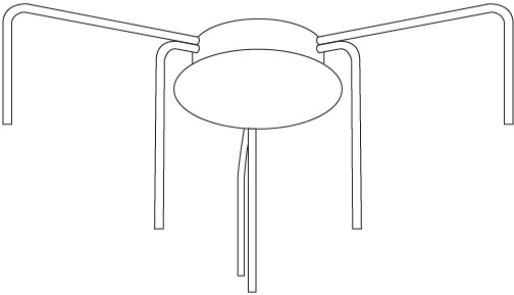

D4GHI-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D49044-

DESCRIPTION

Ghianada Modular Canopy, 800mm/31 1/2", 10 Light - Remote Driver

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling

PHYSICAL

Shape: Round
Diameter (mm): 800
Diameter (in): 31 1/2
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum

ELECTRICAL

Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED


CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



Ø800mm 31 1/2"

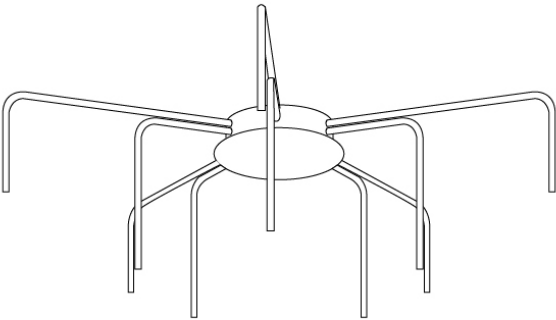

D4GHI-MOD-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

D49045-

DESCRIPTION

Ghianada Modular Canopy, 1000mm/39 3/8", 14 Light - Remote Driver

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling

PHYSICAL

Shape: Round
Diameter (mm): 1000
Diameter (in): 39 3/8
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum

ELECTRICAL


Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

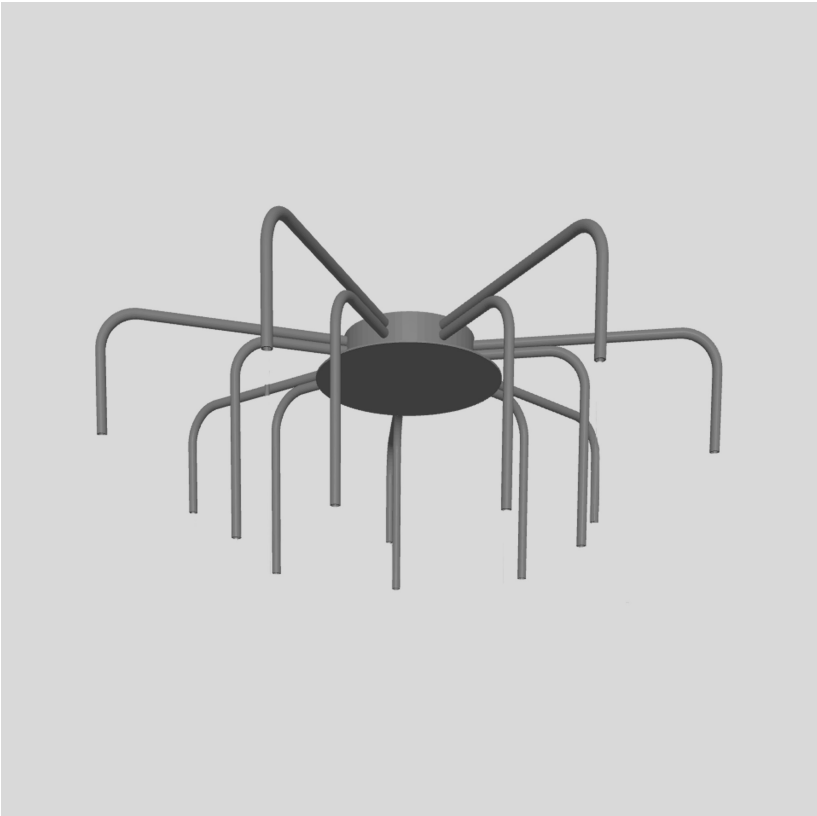

PROJECT
TYPE
NOTES
QUANTITY
DATE

D49046-

DESCRIPTION

Ghianda Modular Canopy, 1000mm/39 3/8", 16 Light - Remote Driver

GENERAL

Series: Ghianda
Subseries: Ghianda Modular System
Partner: Icone
Division: Design
Installation: Suspension
Product Type: Clusters
Mounting Location: Ceiling

PHYSICAL

Shape: Round
Diameter (mm): 1000
Diameter (in): 39 3/8
Fixture Finish: WHI / SMS
Fixture Material: Turned Aluminum

ELECTRICAL


Input Voltage (V): 120 - 277
Output Voltage (V): 24

LED

CRI: >90 CRI

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

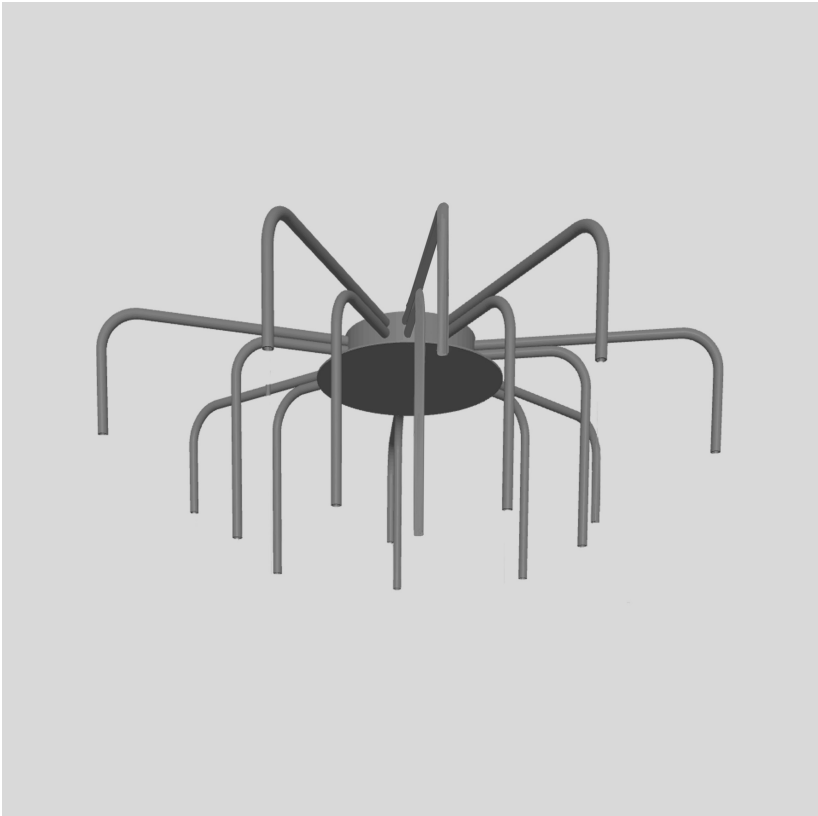

D4GHI-MOD-SYS COMPONENTS

DPH0300024ST

DESCRIPTION

SCPpower / KVF-24030-TDW - Phase dimmable @120Vac - 3-30W - 24Vdc - 120/277Vac - LED power supply

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 155

Length (in): 6 1/16

Width (mm): 54

Width (in): 2 1/8

Height (mm): 20

Height (in): 3/4

Weight (kg): 0.21

Weight (lbs): 0.46

Fixture Material: Plastic

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 3-30

Dimming: Phase Dimming (120Vac Only)

Driver Type: Constant Voltage- Universal

Driver Class: Class 2

Housing: ENCP6

Input Voltage (V): 120 - 277

Output Voltage (V): 24


Constant Voltage (V): 21.5-25.5

RATINGS AND CERTIFICATIONS

Certified By: UL Listed

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

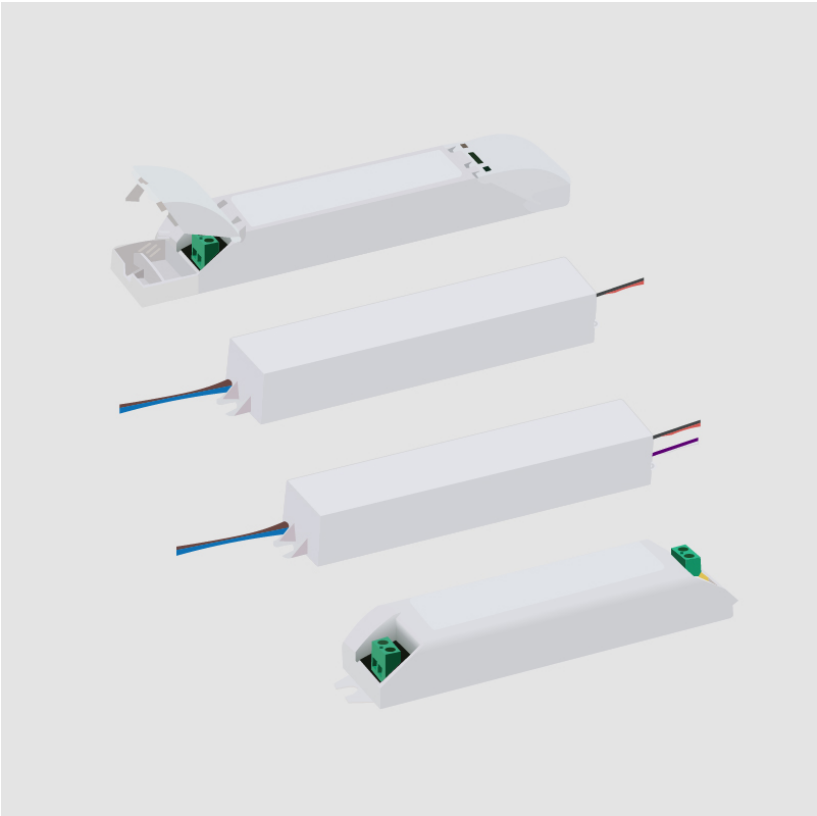

D4GHI-MOD-SYS COMPONENTS

DVO0600024EZ

DESCRIPTION

ERP - VZM60W-24 - Programmable - 0-10Vdc Dimming - 60W - 24Vdc - 120 / 277Vac - LED power supply

GENERAL

Division: Architectural : Components : LED Drivers

PHYSICAL

Length (mm): 176

Length (in): 6 ⁵⁹/₆₄

Width (mm): 30.4

Width (in): 1 ¹³/₆₄

Height (mm): 22.4

Height (in): 7/8

Fixture Material: Metal

ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 16.8-60

Dimming: 0-10V Dimming

Driver Type: Constant Voltage - Universal

Driver Class: Class 2

Housing: ENCP5

Input Voltage (V): 120 - 277

Output Voltage (V): 24

Constant Voltage (V): 16.4-24


RATINGS AND CERTIFICATIONS

Certified By: UL Listed

Code Compliance: Title 24 commercial Installation

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

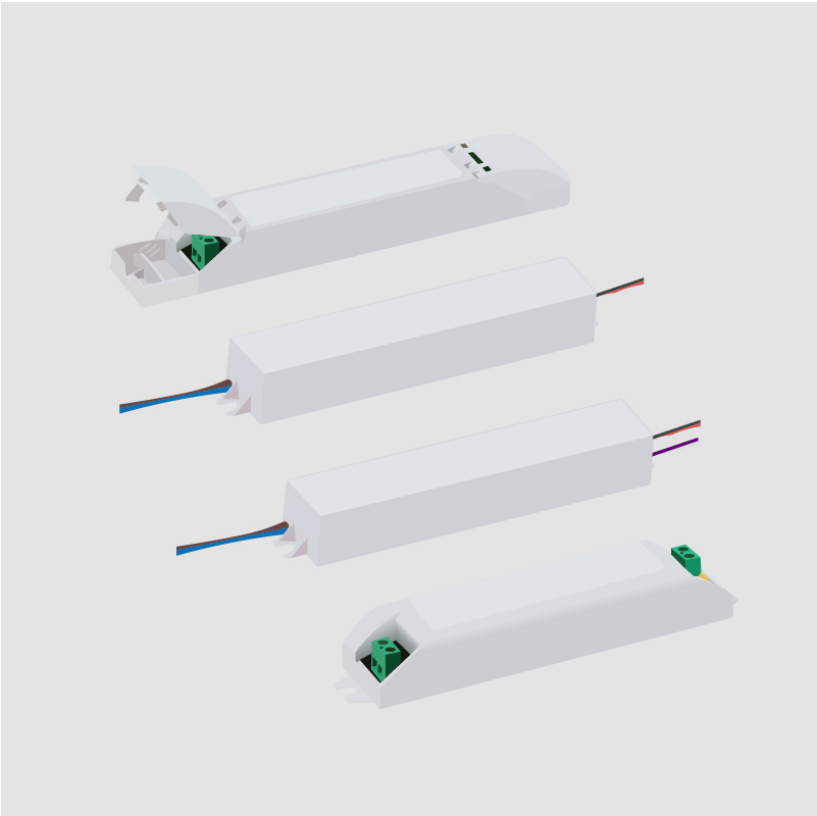

D4GHI-MOD-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)