

## E10C0114- COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### DVO050PROGMA

#### DESCRIPTION

Magnitude - AFLEX-50W - 0-10Vdc Dimming (0.1% or Dim-to-Off)  
- 0.3-50W - 100-1400mA - 120-277Vac - Programmable LED  
power supply -Used with ENCP6 -Available with IP68-Outdoor  
Rated -ENCP20, ENCP22

#### GENERAL

Division: Architectural : Components : LED Drivers

#### PHYSICAL

Length (mm): 125.7

Length (in): 4 <sup>61</sup>/<sub>64</sub>

Width (mm): 65.8

Width (in): 2 <sup>19</sup>/<sub>32</sub>

Height (mm): 25.4

Height (in): 1

Weight (kg): 0.166

Weight (lbs): 0.365

Fixture Material: Aluminum

#### ELECTRICAL

Lamp Type: LED

Total Output Wattage (W): 0.3-50

Dimming: 0-10V Dimming

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 100-1400


Constant Voltage (V): 10-57

#### RATINGS AND CERTIFICATIONS

Certified By: UL Listed

Code Compliance: Title 24 commercial Installation

IP rating: IP40

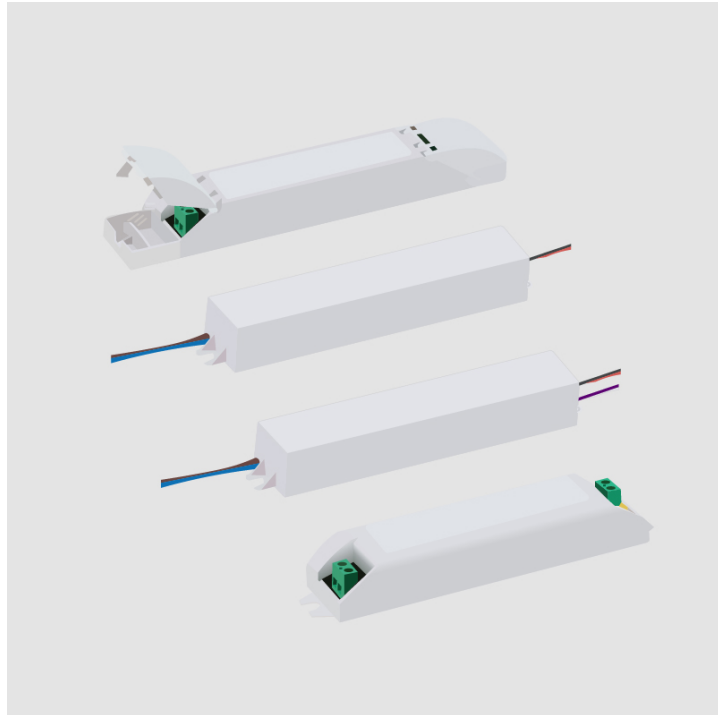

## E10C0114- COMPONENTS

### E10A0033


**DESCRIPTION**  
Fin - h 46mm - 2 piece Fixing bracket kit

**GENERAL**  
Series: Fin  
Partner: Side  
Division: Exterior

**PHYSICAL**  
Width (mm): 24  
Width (in): 15/16  
Height (mm): 46  
Height (in): 1 13/16  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP65

PROJECT
TYPE
NOTES
QUANTITY
DATE

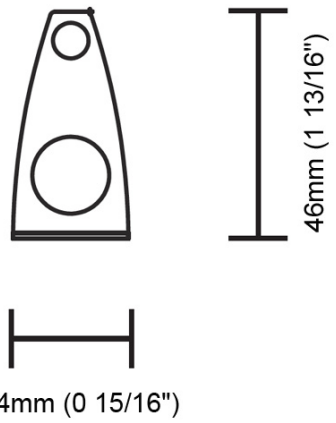

## E10C0114- COMPONENTS

### E10A0034


**DESCRIPTION**  
Fin - h 90mm - 2 piece Fixing bracket kit

**GENERAL**  
Series: Fin  
Partner: Side  
Division: Exterior

**PHYSICAL**  
Width (mm): 34  
Width (in): 1 3/16  
Height (mm): 90  
Height (in): 3 5/16  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP65

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_



24mm (0 15/16")

## E10C0114- COMPONENTS

### E10A0035


**DESCRIPTION**  
Fin - h 156mm - Fixing bracket kit

**GENERAL**  
Series: Fin  
Partner: Side  
Division: Exterior

**PHYSICAL**  
Width (mm): 40  
Width (in): 1 <sup>9</sup>/<sub>16</sub>  
Height (mm): 156  
Height (in): 6 <sup>1</sup>/<sub>8</sub>  
Fixture Material: Aluminum

**RATINGS AND CERTIFICATIONS**  
Certified By: Certified for North American Standards  
IP rating: IP65

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

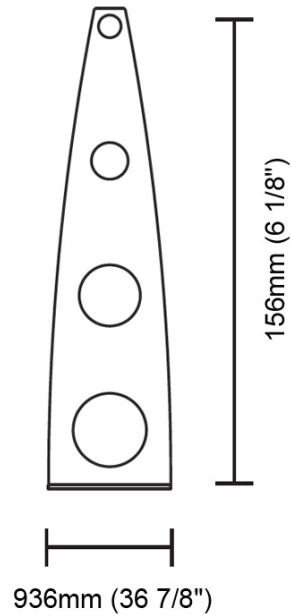

## E10C0114- COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


### ENCP50

**DESCRIPTION**  
 Empty Metal Enclosure for Driver - IP20 - Indoor Rated

**GENERAL**  
 Division: Architectural : Components

**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 670  
 Length (in): 26 3/8  
 Width (mm): 44  
 Width (in): 1 3/4  
 Height (mm): 38  
 Height (in): 1 1/2  
 Gasket: 1554JGASKET  
 Fixture Material: Metal

**RATINGS AND CERTIFICATIONS**  
 IP rating: IP20

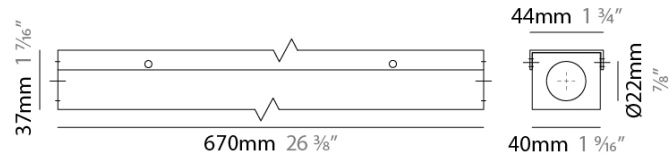

## E10C0114- COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


### ENCP6

**DESCRIPTION**  
 Empty Metal Enclosure for Driver - IP20 - Indoor Rated

**GENERAL**  
 Division: Architectural : Components







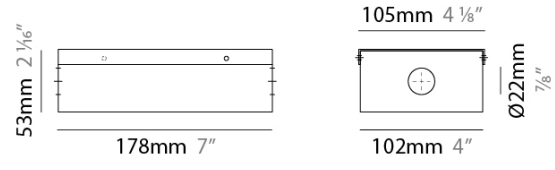






























































**PHYSICAL**  
 Shape: Rectangle  
 Length (mm): 178  
 Length (in): 7  
 Width (mm): 105  
 Width (in): 4 1/8  
 Height (mm): 54  
 Height (in): 2 1/8  
 Screws: A4 stainless steel  
 Fixture Material: Metal

**RATINGS AND CERTIFICATIONS**  
 IP rating: IP20













PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____











### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)