

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15A004

DESCRIPTION

Glowline, On/Off leader cable and cap - 2,000mm/78 3/4", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): 0.28

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

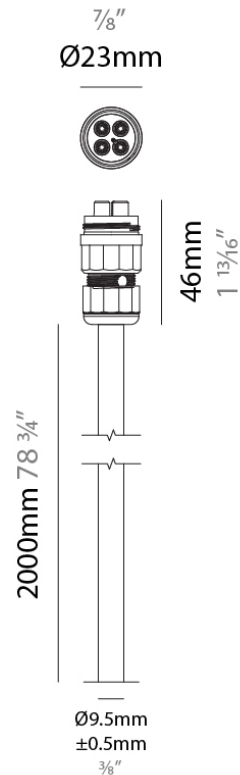

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15G0012- COMPONENTS

E15A005

DESCRIPTION

Glowline, On/Off leader cable and cap - 5,000mm/196 7/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): 0.66

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

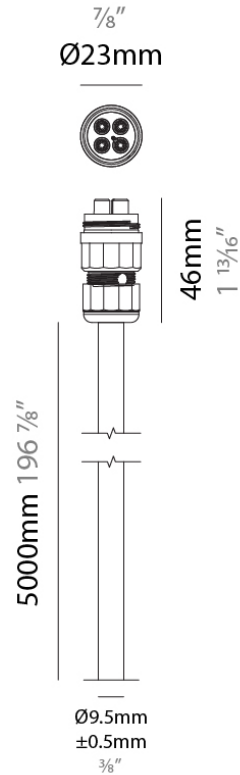

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15G0012- COMPONENTS

E15A006

DESCRIPTION

Glowline, On/Off leader cable and cap - 10,000mm/393 11/16", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 10000
 Length (in): 393 11/16
 Weight (kg): 1.3

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

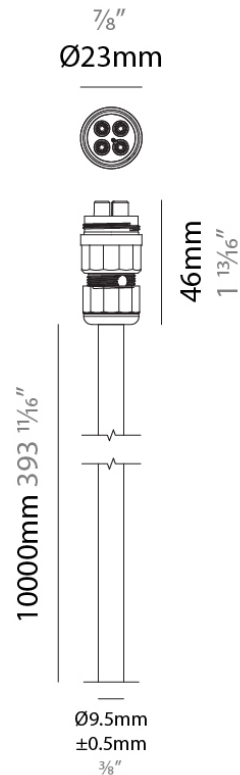

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15G0012- COMPONENTS


E15A007

DESCRIPTION
 Glowline, On/Off leader cable and cap - 20,000mm/787 3/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 20000
 Length (in): 787 3/8
 Weight (kg): 2.59

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66

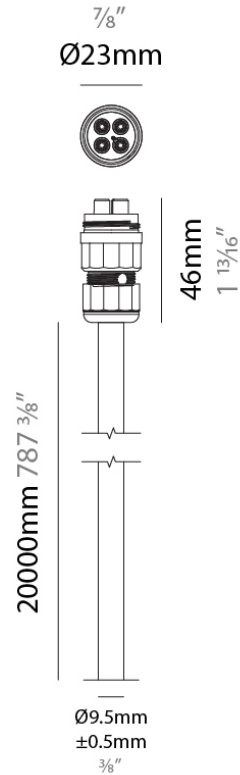

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15G0012- COMPONENTS

E15A008

DESCRIPTION

Glowline, On/Off Jumper cable - 500mm/19 11/16", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 500
 Length (in): 19 11/16
 Weight (kg): 0.1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

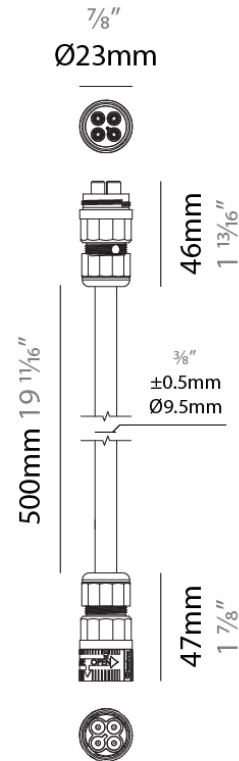

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |


E15A009

DESCRIPTION
 Glowline, On/Off Jumper cable - 1,000mm/39 3/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 1000
 Length (in): 39 3/8
 Weight (kg): 0.17

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66

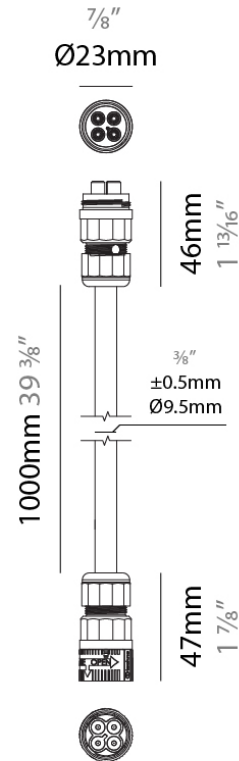

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15A010

DESCRIPTION

Glowline, On/Off Jumper cable - 2,000mm/78 3/4", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): .3

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

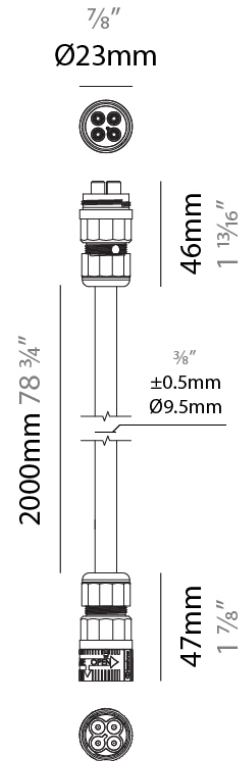

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |


E15A011

DESCRIPTION
 Glowline, On/Off Jumper cable - 5,000mm/196 7/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): .68

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66

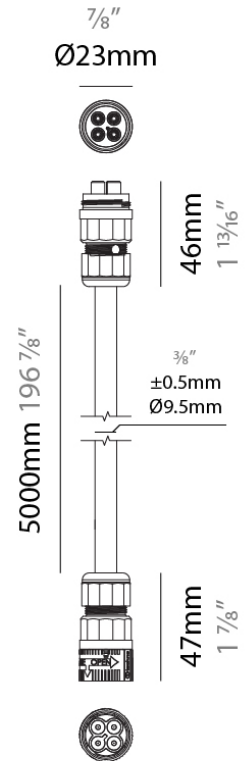

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |


E15A012

DESCRIPTION
 Glowline, Dali leader cable and cap - 2,000mm/78 3/4", 5 Pole,
 Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): 0.41

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

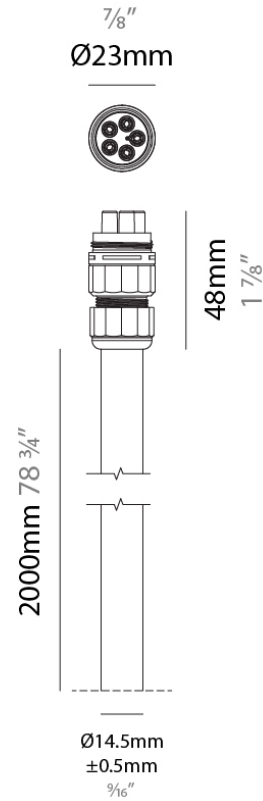

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |


E15A013

DESCRIPTION
 Glowline, Dali leader cable and cap - 5,000mm/196 7/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): 1

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66

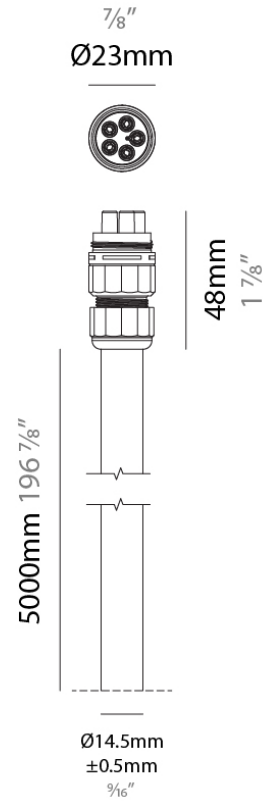

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15A014

DESCRIPTION

Glowline, Dali leader cable and cap - 10,000mm/393 11/16", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 10000
 Length (in): 393 11/16
 Weight (kg): 2

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

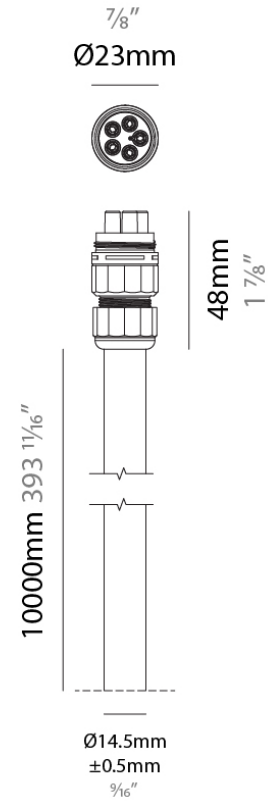

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15A015

DESCRIPTION

Glowline, Dali leader cable and cap - 20,000mm/787 3/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 20000
 Length (in): 787 3/8
 Weight (kg): 4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

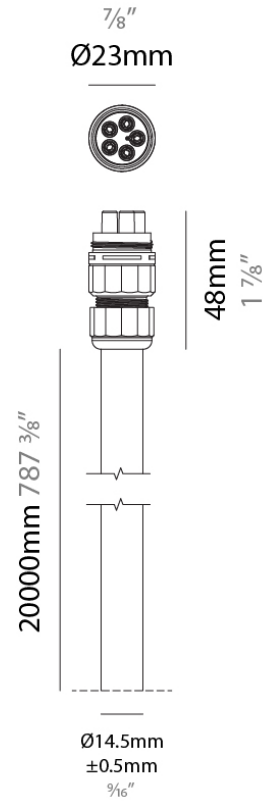

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |


E15A016

DESCRIPTION
 Glowline, Dali Jumper cable - 500mm/19 11/16", 5 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 500
 Length (in): 19 11/16
 Weight (kg): 0.13

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

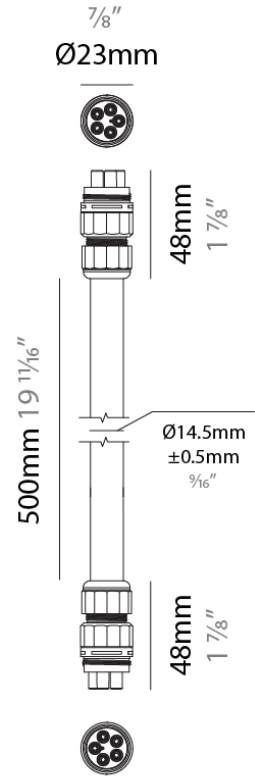

E15G0012- COMPONENTS

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15A017

DESCRIPTION

Glowline, Dali Jumper cable - 1,000mm/39 3/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 1000
 Length (in): 39 3/8
 Weight (kg): 0.23

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

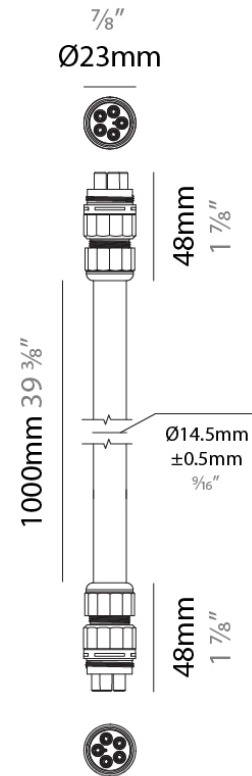

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

E15G0012- COMPONENTS

E15A018

DESCRIPTION

Glowline, Dali Jumper cable - 2,000mm/78 3/4", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): .43

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

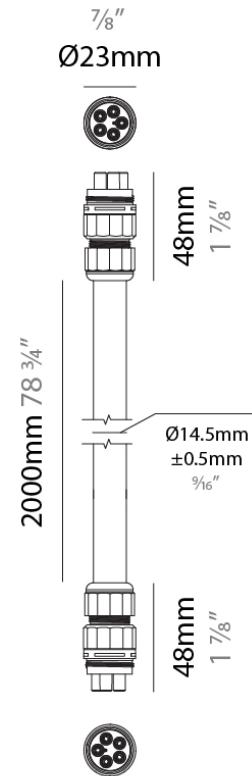

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

E15G0012- COMPONENTS

E15A019

DESCRIPTION

Glowline, Dali Jumper cable - 5,000mm/196 7/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): .1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

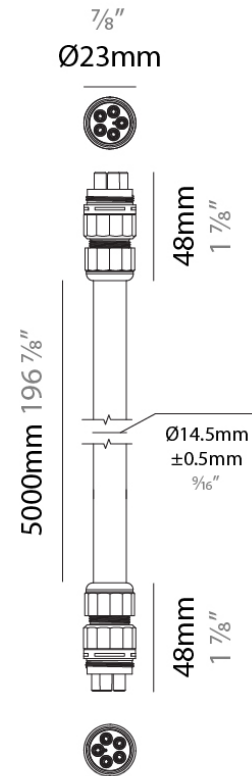

LEGEND

| | | | | | |
|--|---|--|--|--|--|
| | floor-mounted | | pivotable | | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
| | wall and ceiling: recessed and surface mounted | | rotating | | warm dim / natural dimming LED |
| | ceiling-mounted and wall-mounted | | illuminate tilted | | rechargeable battery powered |
| | wall-mounted | | color of suspension cable | | fixture with natural vivid LED (upon request) |
| | omni-directional light distribution | | length of suspension cable | | color rendering index |
| | direct light distribution | | reflector degree selection | | color temperature |
| | direct/indirect light distribution | | super spot | | lumen (luminous flux) |
| | indirect light distribution | | lens | | efficacy (lumens per watt) |
| | asymmetric light distribution | | lens pack | | Unified Glare Rating (UGR) range from 5-40 |
| | aura light distribution | | shine ring | | marine grade (AISI 316 stainless steel) |
| | round wall or ceiling cut-out | | integrated shine ring with diffuser | | walk on |
| | square wall or ceiling cut-out | | free individual colors 01-29 | | drive on |
| | the supplied jig specifies the cutout dimensions | | individual colors: 00 (free of charge), 01-25 (extra charge) | | Dark Sky Compliance |
| | minimum distance (meters) lamp - object | | luminaire part to be colored (F1) | | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
| | recessed depth | | luminaire part to be colored (F2) | | lamp protected against explosion |
| | ceiling thickness in mm | | luminaire part to be colored (F3) | | blown glass using traditional methods by master glass blower |
| | ceiling thickness selection | | luminaire part to be colored (F4) | | acoustic material |
| | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) | | luminaire part to be colored (F5) | | protection class I, protection insulation |
| | included or excluded LED driver/transformer/control gear | | color of 3-circuit adaptor | | protection class II, protection insulation |
| | separately switchable | | indirect diffuser | | ETL Certified to UL and CSA Standards |
| | sensor | | direct diffuser | | UL Certified to UL and CSA Standards |
| | remote control | | ball-proof (upon request) | | CSA Certified to UL and CSA Standards |
| | available upon request | | accessory | | Certified for North American Standards |

IP RATING

| | |
|--|--|
| | protected against ingress of solid bodies greater than 12.5mm (finger) |
| | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
| | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
| | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
| | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
| | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
| | protected against ingress of dust protected against jets of water |
| | protected against ingress of dust protected against powerful jets of water or heavy seas |
| | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
| | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|--|---|
| | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
| | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
| | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
| | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
| | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
| | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
| | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
| | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
| | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
| | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |