

E15G0015- COMPONENTS

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

E15A004

DESCRIPTION

Glowline, On/Off leader cable and cap - 2,000mm/78 3/4", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline _____
 Partner: Diamante _____
 Division: Exterior _____

PHYSICAL

Diameter (mm): 23 _____
 Diameter (in): 7/8 _____
 Length (mm): 2000 _____
 Length (in): 78 3/4 _____
 Weight (kg): 0.28 _____

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP66 _____
 IK Rating: IK08 _____

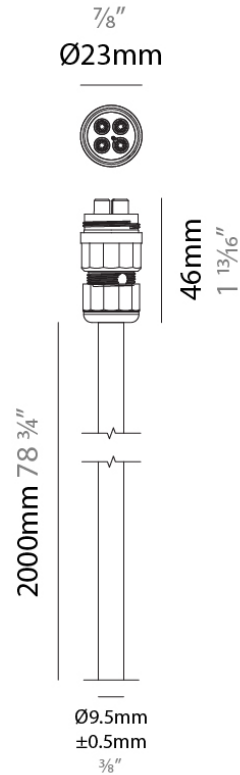

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A005

DESCRIPTION

Glowline, On/Off leader cable and cap - 5,000mm/196 7/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): 0.66

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

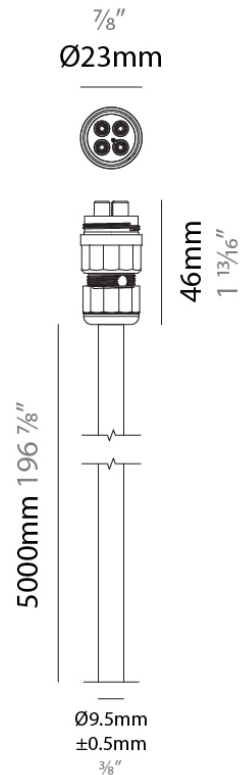

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15G0015- COMPONENTS

E15A006

DESCRIPTION

Glowline, On/Off leader cable and cap - 10,000mm/393 11/16", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 10000
 Length (in): 393 11/16
 Weight (kg): 1.3

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

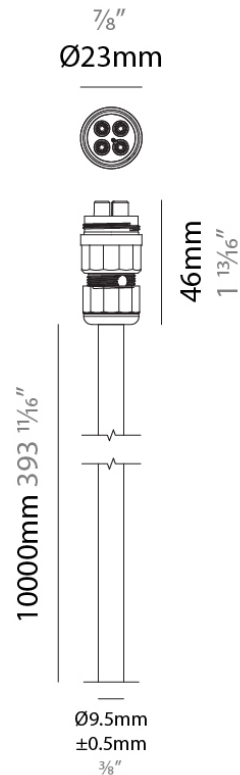

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15G0015- COMPONENTS

E15A007

DESCRIPTION

Glowline, On/Off leader cable and cap - 20,000mm/787 3/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 20000
 Length (in): 787 3/8
 Weight (kg): 2.59

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

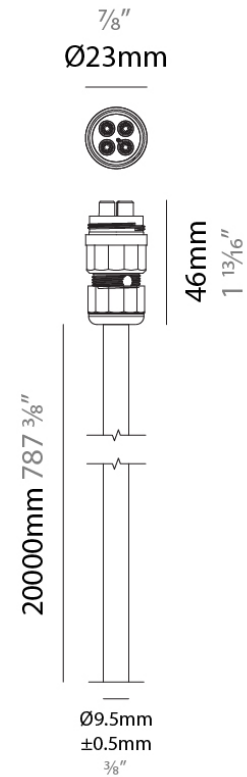

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A008

DESCRIPTION

Glowline, On/Off Jumper cable - 500mm/19 11/16", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 500
 Length (in): 19 11/16
 Weight (kg): 0.1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

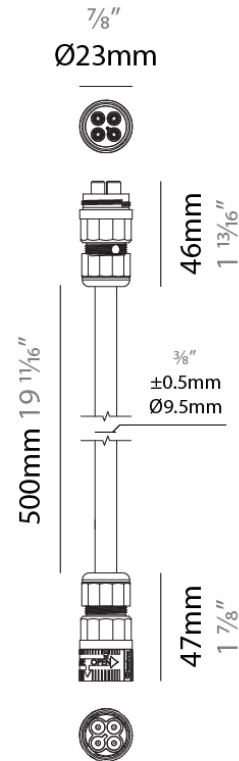

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A009

DESCRIPTION

Glowline, On/Off Jumper cable - 1,000mm/39 3/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 1000
 Length (in): 39 3/8
 Weight (kg): 0.17

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

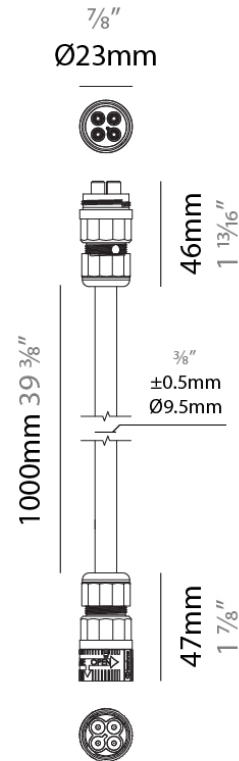

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	


E15A010

DESCRIPTION
 Glowline, On/Off Jumper cable - 2,000mm/78 3/4", 4 Pole, Max Power 1500W, 1200Vac

GENERAL
 Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL
 Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): .3

RATINGS AND CERTIFICATIONS
 Certified By: Certified for North American Standards
 IP rating: IP66

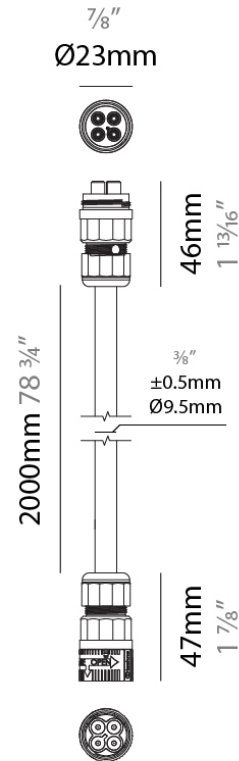

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A011

DESCRIPTION

Glowline, On/Off Jumper cable - 5,000mm/196 7/8", 4 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): .68

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

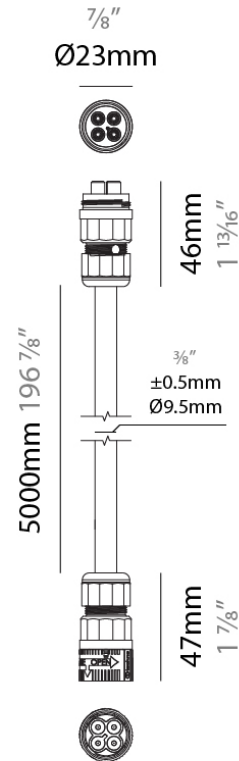

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A012

DESCRIPTION

Glowline, Dali leader cable and cap - 2,000mm/78 3/4", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): 0.41

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

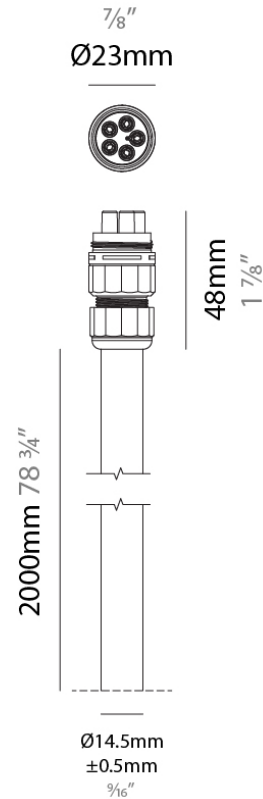

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A013

DESCRIPTION

Glowline, Dali leader cable and cap - 5,000mm/196 7/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): 1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

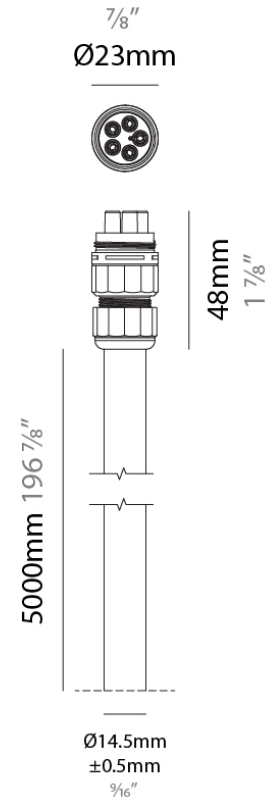

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A014

DESCRIPTION

Glowline, Dali leader cable and cap - 10,000mm/393 11/16", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 10000
 Length (in): 393 11/16
 Weight (kg): 2

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

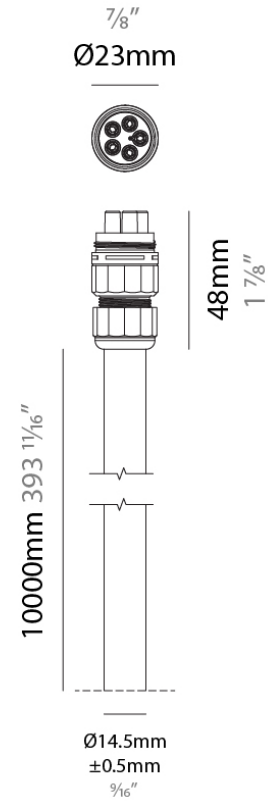

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15G0015- COMPONENTS

E15A015

DESCRIPTION

Glowline, Dali leader cable and cap - 20,000mm/787 3/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 20000
 Length (in): 787 3/8
 Weight (kg): 4

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

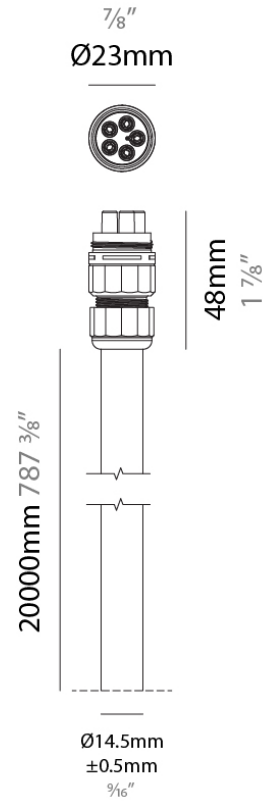

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A016

DESCRIPTION

Glowline, Dali Jumper cable - 500mm/19 11/16", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 500
 Length (in): 19 11/16
 Weight (kg): 0.13

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66
 IK Rating: IK08

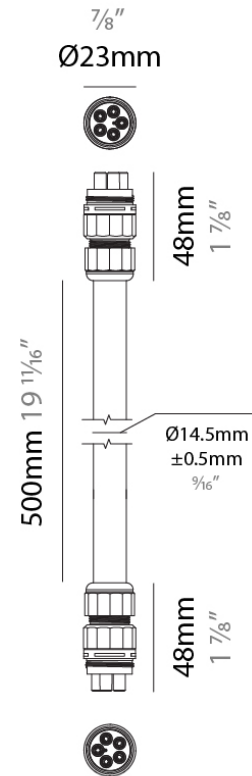

E15G0015- COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15A017

DESCRIPTION

Glowline, Dali Jumper cable - 1,000mm/39 3/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 1000
 Length (in): 39 3/8
 Weight (kg): 0.23

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

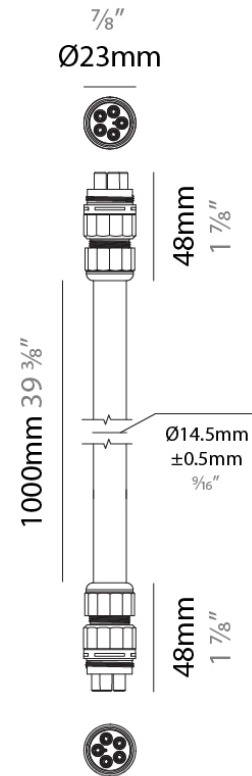

PROJECT
TYPE
NOTES
QUANTITY
DATE

E15G0015- COMPONENTS

E15A018

DESCRIPTION

Glowline, Dali Jumper cable - 2,000mm/78 3/4", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 2000
 Length (in): 78 3/4
 Weight (kg): .43

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

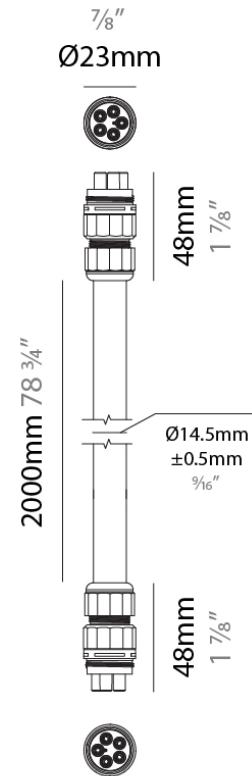

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

E15G0015- COMPONENTS

E15A019

DESCRIPTION

Glowline, Dali Jumper cable - 5,000mm/196 7/8", 5 Pole, Max Power 1500W, 1200Vac

GENERAL


Series: Glowline
 Partner: Diamante
 Division: Exterior

PHYSICAL

Diameter (mm): 23
 Diameter (in): 7/8
 Length (mm): 5000
 Length (in): 196 7/8
 Weight (kg): .1

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
 IP rating: IP66

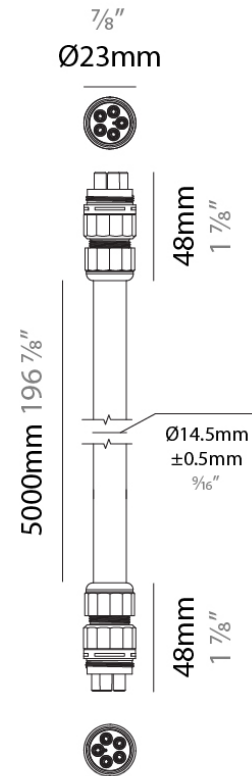

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)