

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380656-

DESCRIPTION

Bilo Insert for Minimal Track System Suspension - Ø120mm - 6.4W LED , 48V, CRI:90, Beam 180

GENERAL

Series: Bilo
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling

PHYSICAL

Shape: Sphere
Diameter (mm): 120
Diameter (in): 4 ¾
Height (mm): 120
Height (in): 4 ¾
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Glass / Metal
Cable Details: 2000mm/78 ¾" or 4000mm/157 ½" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL



Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 356 / 377 / 398 / 408
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

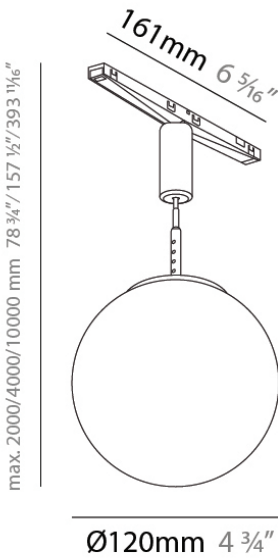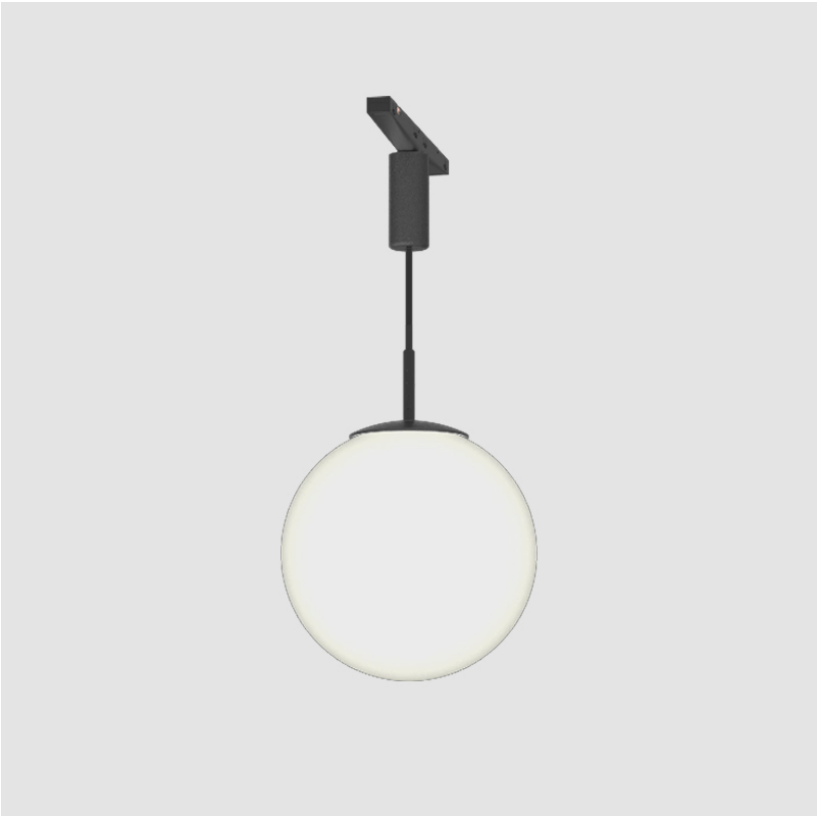

STMSH48V-SUS-SYS COMPONENTS TRACK

A380659-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 150mm / 5 7/8" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dimming - Beam Angle: 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 150
Height (in): 5 7/8
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

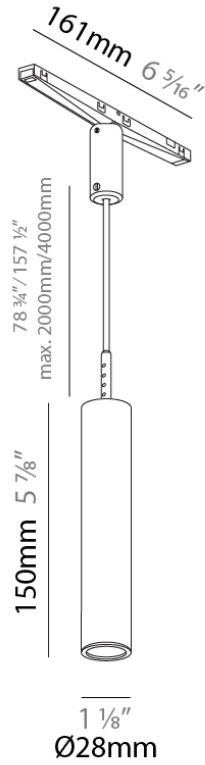

STMSH48V-SUS-SYS COMPONENTS TRACK

A380660-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 300mm / 11 13/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 300
Height (in): 11 13/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

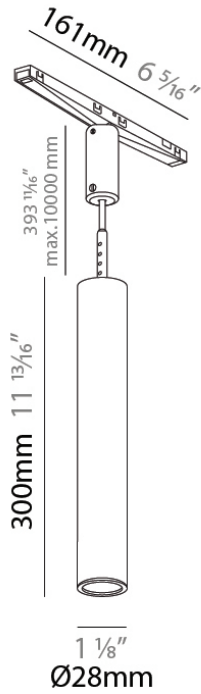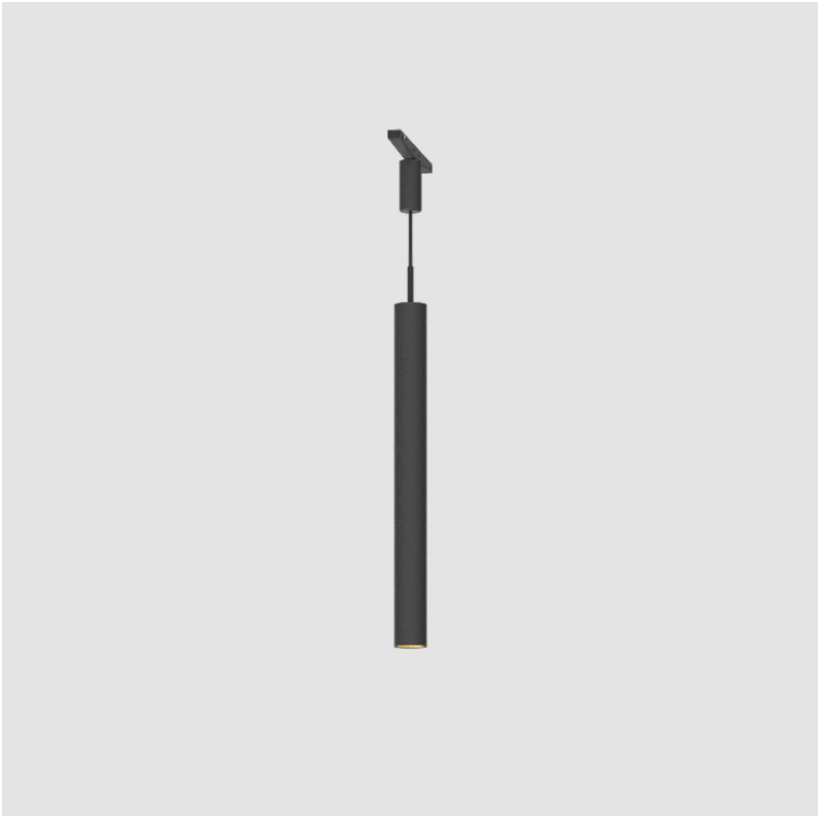

STMSH48V-SUS-SYS COMPONENTS TRACK

A380661-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø28mm / 1 1/8" x 450mm / 17 11/16" - 6.4W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 22°/26°/ 56° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8"
Height (mm): 450
Height (in): 17 11/16"
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 100 - 499 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 381 / 404 / 426 / 438
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 20 / 26 / 56

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

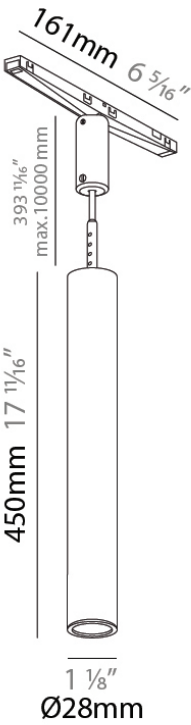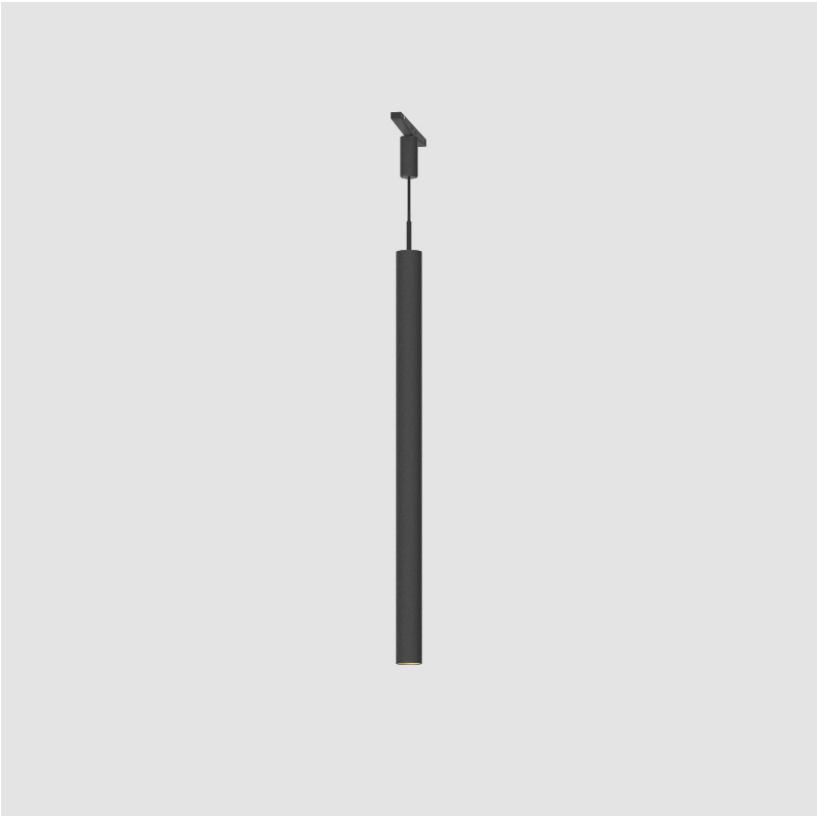

STMSH48V-SUS-SYS COMPONENTS TRACK

A380662-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 150mm / 5 7/8" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 150
Height (in): 5 7/8
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic°: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

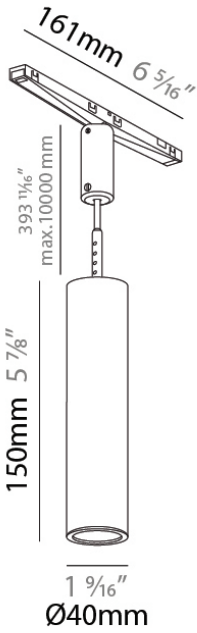

STMSH48V-SUS-SYS COMPONENTS TRACK

A380663-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 300
Height (in): 11 13/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

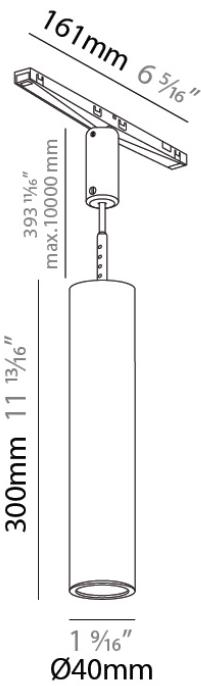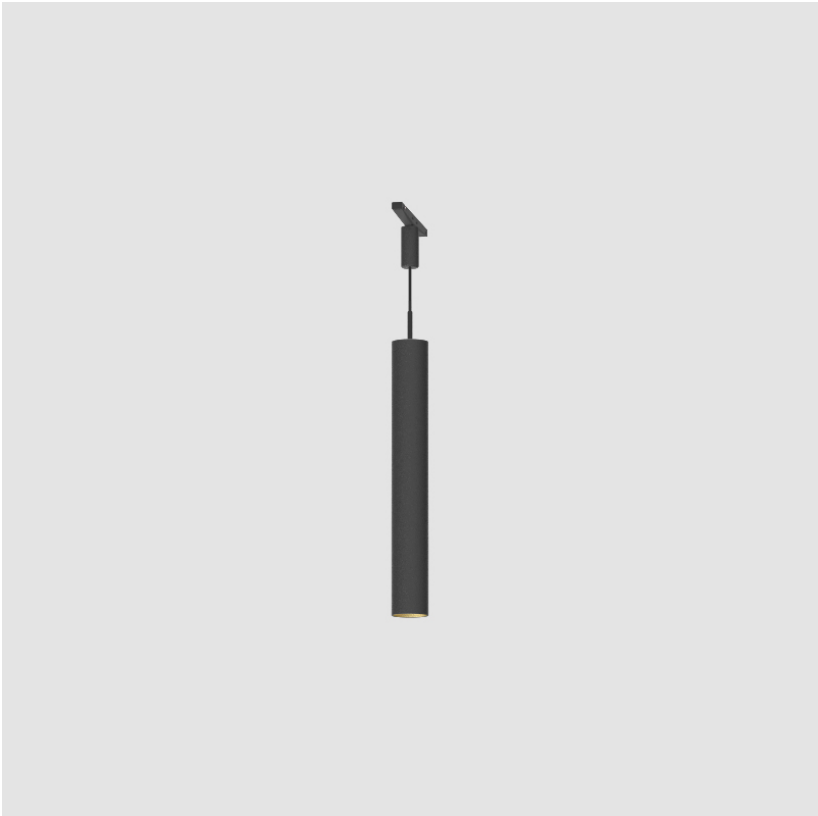

STMSH48V-SUS-SYS COMPONENTS TRACK

A380664-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø40mm / 1 9/16" x 300mm / 11 13/16" - 9.8W LED (Zhaga Standard) - 48V - 2700K / 3000K / 3500K / 4000K - Lens 40° / 52° - Shine Ring - CRI: 90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Spots
Mounting Location: Ceiling
Light Distribution: Downlight

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 40
Diameter (in): 1 9/16
Height (mm): 450
Height (in): 17 11/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
Number of LEDs: 1
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 684 / 716 / 742 / 759
Nominal Lumen (lm): 969 / 1014 / 1052 / 1075
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 40 / 52

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

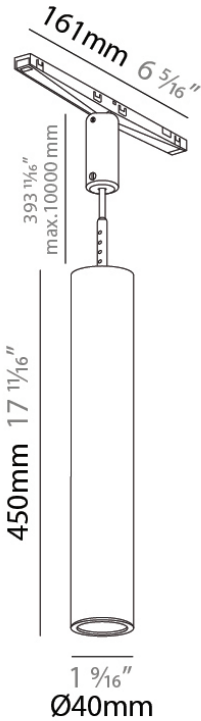

STMSH48V-SUS-SYS COMPONENTS TRACK

A380665-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - 10W LED - 2700K / 3000K / 3500K / 4000K - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 2"
Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Weight (kg): 0.481
Weight (lbs): 1.06
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 10
Total Output Wattage (W): 9.1
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 500 - 1999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 851 / 890 / 923 / 944
Nominal Lumen (lm): 969 / 1014 / 1054 / 1075
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic°: 18 / 36 / 56
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

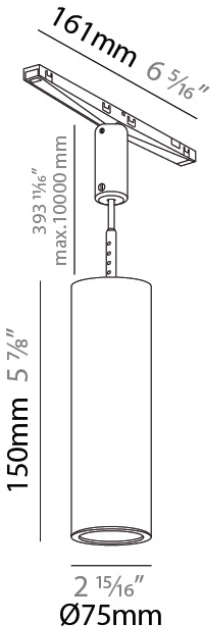

STMSH48V-SUS-SYS COMPONENTS TRACK

A380666-

DESCRIPTION

Hangover Plug Insert for Minimal Track Suspension - Ø75mm/2 15/16" - 150mm/5 7/8" - Direct - 20W LED - Max. 1826lm, 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Shine Ring - Optics: 18° / 36° / 56°

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct / Indirect

PHYSICAL

Aperture Sizes - Downlights: 2"
Shape: Cylinder
Diameter (mm): 75
Diameter (in): 2 15/16
Height (mm): 150
Height (in): 5 7/8
Weight (kg): 0.481
Weight (lbs): 1.06
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 20
Total Output Wattage (W): 18.2
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 1000 - 2999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): Max. 1826
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Optic°: 18 / 36 / 56
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

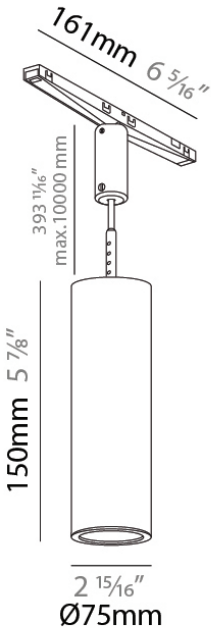

STMSH48V-SUS-SYS COMPONENTS TRACK

A380667-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Suspension - Ø28/1 1/8" - 150mm/5 7/8" - Direct/Indirect - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8"
Height (mm): 150
Height (in): 5 7/8"
Weight (kg): 0.124
Weight (lbs): 0.273
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000


OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

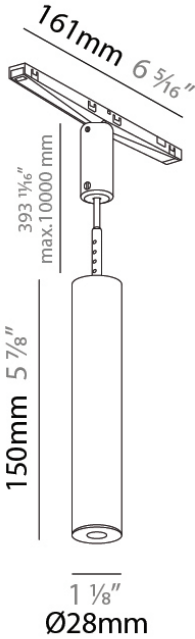

STMSH48V-SUS-SYS COMPONENTS TRACK

A380668-

DESCRIPTION

Hangover Plug Micro for Minimal Track Suspension - Ø28/1 1/8" - 300mm/11 13/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8
Height (mm): 300
Height (in): 11 13/16
Weight (kg): 0.24
Weight (lbs): 0.529
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

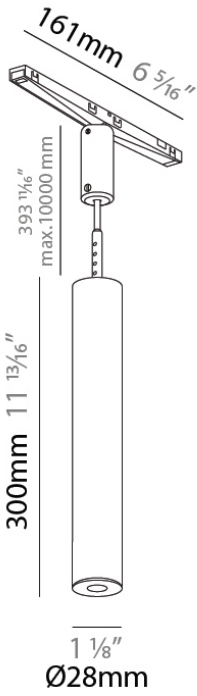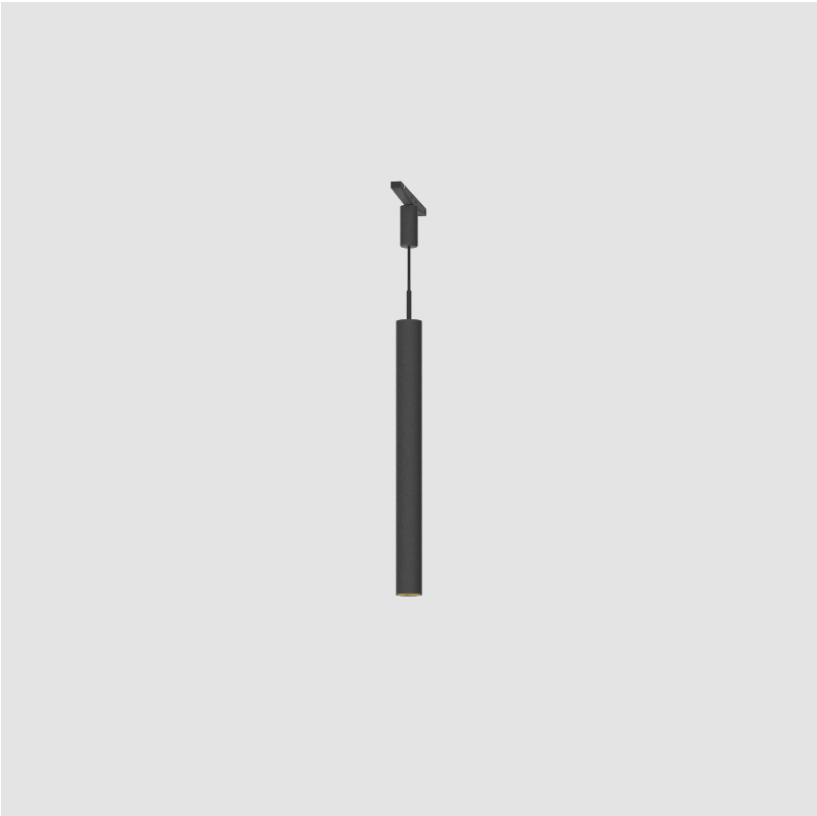

STMSH48V-SUS-SYS COMPONENTS TRACK

A380669-

DESCRIPTION

Hangover Plug Micro Insert for Minimal Track Suspension - Ø28/1 1/8" - 450mm/17 11/16" - 6.4W LED (Zhaga Standard), 2700K / 3000K / 3500K / 4000K - Non-Dimming / Dali Dim - 48Vdc, CRI90 - Optics: 32° / 58°

GENERAL

Series: Hangover Plug
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 28
Diameter (in): 1 1/8"
Height (mm): 450
Height (in): 17 11/16"
Weight (kg): 0.355
Weight (lbs): 0.783
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

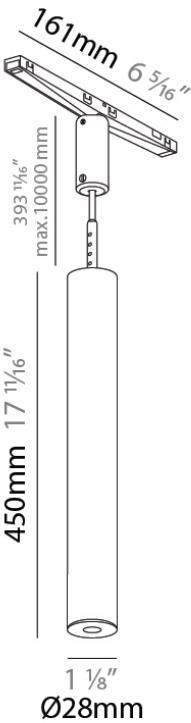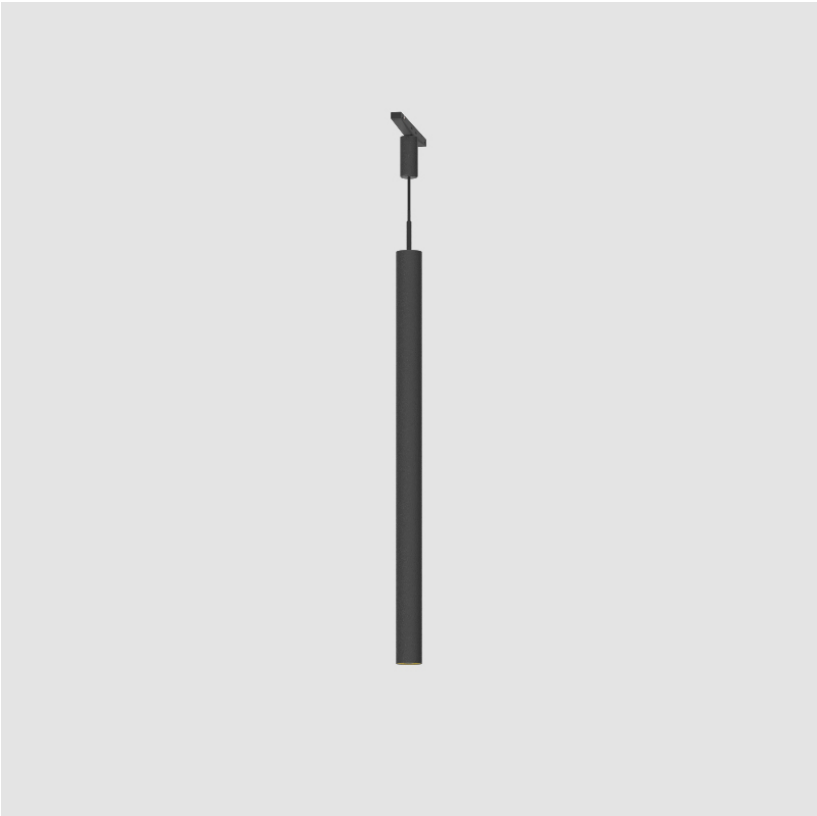

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380670-

DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension - 23mm / 7/8" x 66mm / 2 5/8" - 4.4W LED, 2700K / 3000K / 3500K / 4000K - 48 - Non-Dimming / Dali Dim - Adjustable - CRI:90 - Beam: 26° / 28° / 38° / 46° / 64°

GENERAL

Series: Imagine Micro
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 23
Diameter (in): 7/8
Height (mm): 66
Height (in): 2 5/8
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 4
Total Output Wattage (W): 3.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 252 / 271 / 315 / 290
Nominal Lumen (lm): 295 / 317 / 368 / 339
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 26, 28, 38, 46, 64
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

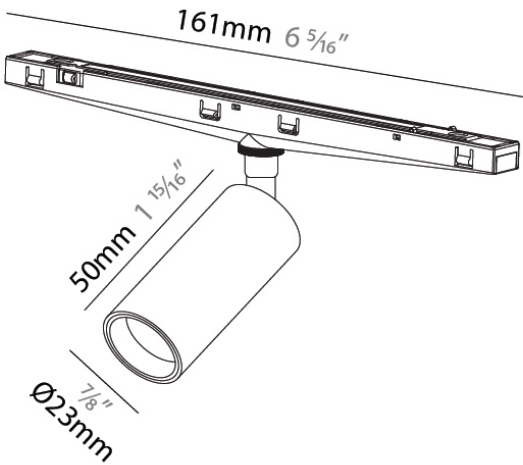

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380671-

DESCRIPTION

Imagine Micro Insert for Minimal Track Suspension - 35mm/1 3/8" x 90mm/2 5/8" - 9.8W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimmg / Dali Dim, CRI:90 - Beam: 22° / 36° / 62°

GENERAL

Series: Imagine Micro
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 90
Height (in): 3 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 9
Total Output Wattage (W): 8.2
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 554 / 590 / 620 / 636
Nominal Lumen (lm): 750 / 800 / 840 / 861
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 22, 36, 62
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

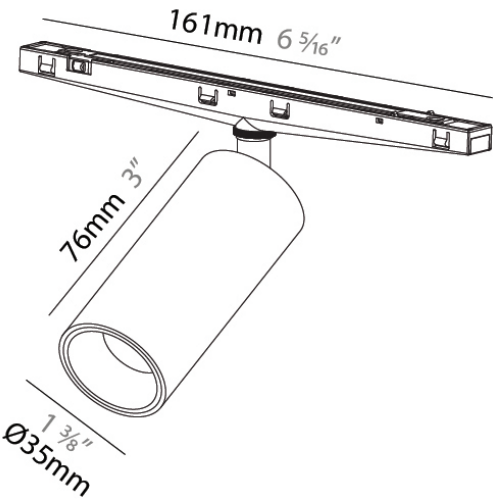

STMSH48V-SUS-SYS COMPONENTS TRACK

A380672-

DESCRIPTION

Imagine Micro Flex Insert for Minimal Track Suspension -
Ø37mm/1 7/16" x 100mm/3 15/16" - 7.1W LED, 48V, Adjustable -
CRI:90 - Beam: 14° / 20° / 52°

GENERAL

Series: Imagine Micro Flex
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 37
Diameter (in): 1 7/16
Height (mm): 100
Height (in): 3 15/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG /
MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH /
CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 328 / 342 / 362
Nominal Lumen (lm): 607 / 634 / 671
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 14, 20, 52
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

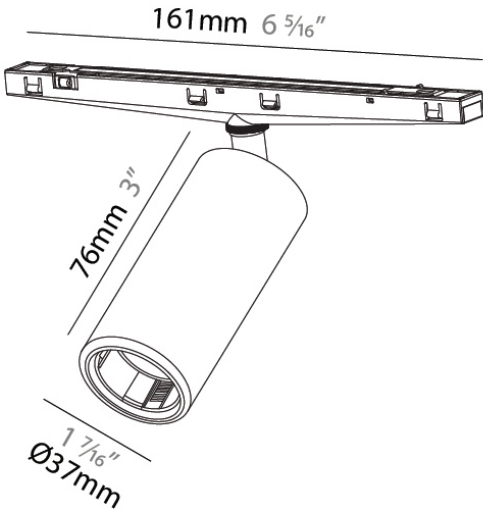

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380673-

DESCRIPTION

Imagine Micro Dot Insert for Minimal Track Suspension - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K. 48V, Adjustable, Non-Dimming / Dali Dim, CRI:90 - Beam: 34° / 52°

GENERAL

Series: Imagine Micro Dot
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 90
Height (in): 3 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 235 / 252 / 270
Nominal Lumen (lm): 372 / 399 / 427
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 34, 52
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

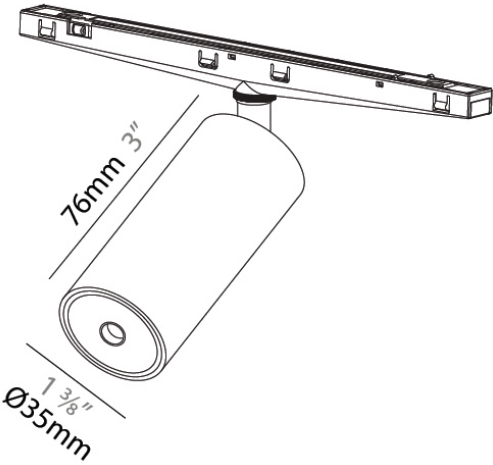

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380674-

DESCRIPTION

Magiq Micro Insert for Minimal Track Suspension - 4.9W LED (Zhaga Standard) - 2700K / 3000K / 4000K Max. 365lm, Beam Angle 54

GENERAL

Series: Magiq Micro
Partner: Prolicht
Division: Architectural
Installation: Track
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 300
Length (in): 11 13/16
Width (mm): 11
Width (in): 7/16
Height (mm): 7
Height (in): 1/4
Fixture Finish: BLK / WHI
Fixture Material: Aluminum Die Cast

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED
Input Wattage (W): 5
Total Output Wattage (W): 4.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 370 / 384 / 417
Nominal Lumen (lm): 370 / 384 / 417
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 54

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

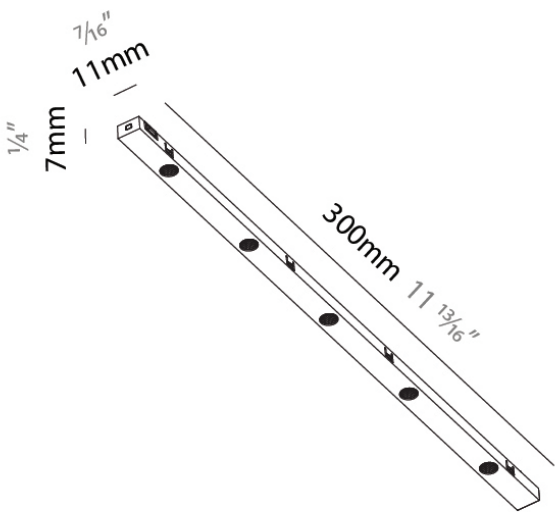

PROJECT
TYPE
NOTES
QUANTITY
DATE

A380676-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=672mm, LED 8W, max. 429lm, CRI90

GENERAL

Series: Microline
Partner: Prolicht
Division: Architectural
Installation: Surface
Product Type: Modular Systems
Mounting Location: Wall / Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 674
Length (in): 26 7/16
Width (mm): 11
Width (in): 7/16
Height (mm): 7
Height (in): 1/4
Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 8
Total Output Wattage (W): 7.3
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 386 / 429
Nominal Lumen (lm): 386 / 429
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

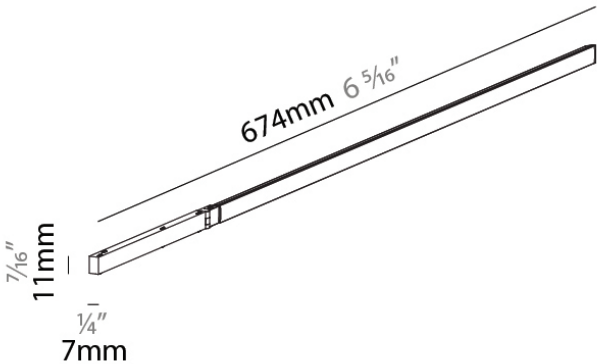

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380677-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=1170mm / 46 1/16", LED 15.8W, max. 772lm, CRI90

GENERAL

Series: Microline
Partner: Prolicht
Division: Architectural
Installation: Surface
Product Type: Modular Systems
Mounting Location: Wall / Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1174
Length (in): 46 1/4
Width (mm): 11
Width (in): 7/16
Height (mm): 7
Height (in): 1/4
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 10 - 19 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 16
Total Output Wattage (W): 14.6
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED



Delivered Lumen Range: 500 - 999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 772 / 858
Nominal Lumen (lm): 772 / 858
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

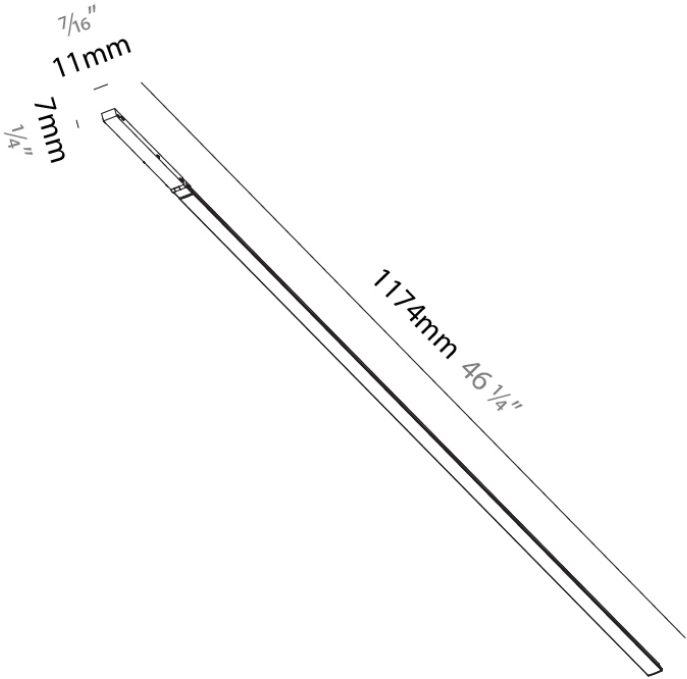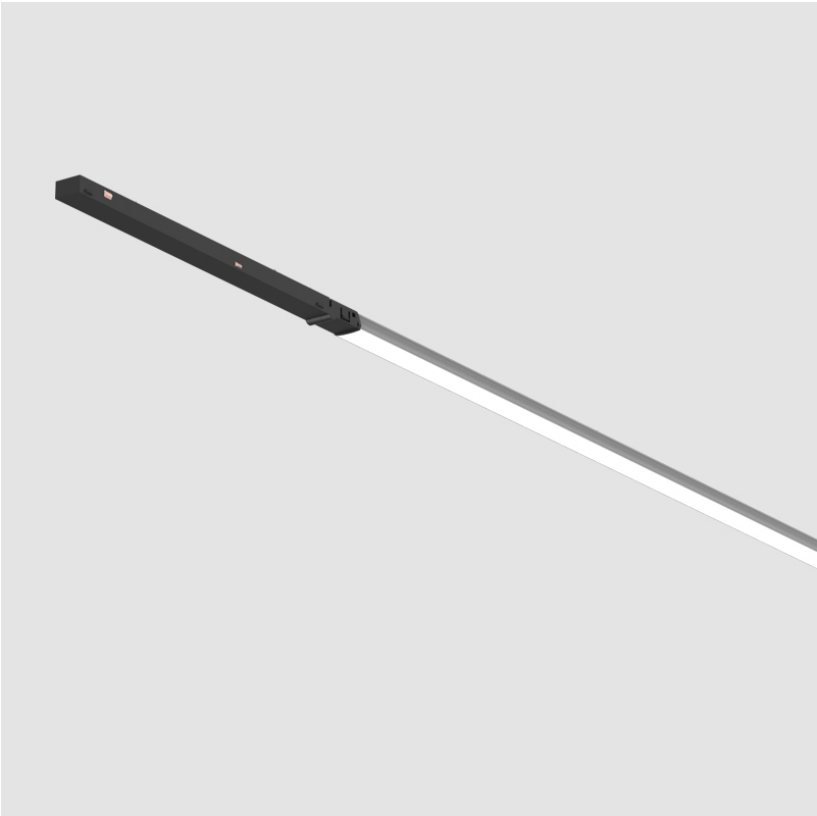

STMSH48V-SUS-SYS COMPONENTS SUSPENSION

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380678-

DESCRIPTION

Microline Insert for Minimal Track Suspension - L=1670mm / 65 3/4", L24W LED,2700K / 3000K - max. 1287lm, CRI90

GENERAL

Series: Microline
Partner: Prolicht
Division: Architectural
Installation: Suspension
Product Type: Linear Profiles
Mounting Location: Wall / Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Rectangle
Length (mm): 1674
Length (in): 65 7/8
Width (mm): 11
Width (in): 7/16
Height (mm): 7
Height (in): 1/4
Fixture Material: Aluminum

ELECTRICAL

Input Wattage Range: 20 - 29 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 24
Total Output Wattage (W): 21.8
Dimming: Non-Dimmable
Driver Included: No
Driver Location: Remote
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 1000 - 1999 lm
Color Temperature (°K): 2700 / 3000
Max. Delivered Lumen (lm): 1158 / 1287
Nominal Lumen (lm): 1158 / 1287
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 116

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

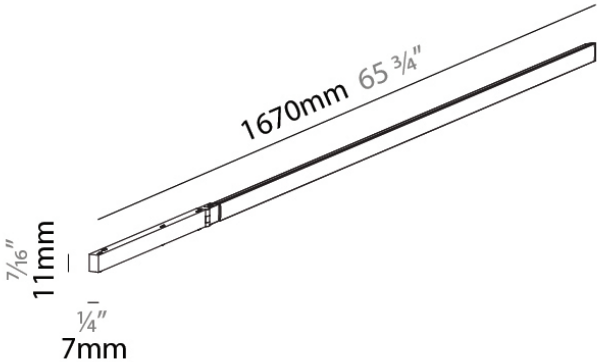

STMSH48V-SUS-SYS COMPONENTS TRACK

A380680-

DESCRIPTION

Snooker Insert for Minimal Track Suspension - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non-Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Shine Ring

GENERAL

Series: Snooker
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Round
Diameter (mm): 72
Diameter (in): 2 13/16
Height (mm): 71
Height (in): 2 13/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Accent Finish: NOR / OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (mA): 500
Upon Request: 0-10V Dimming with Tridonic Bridge

LED

Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000



OPTICAL

Beam Angle: 32 / 58
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

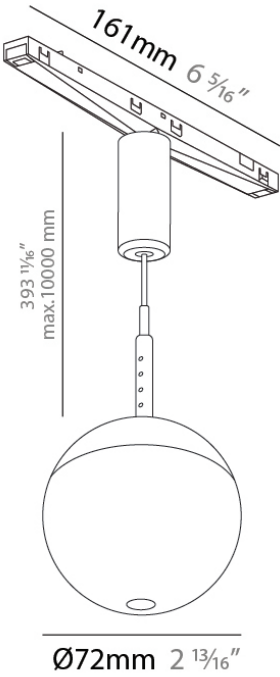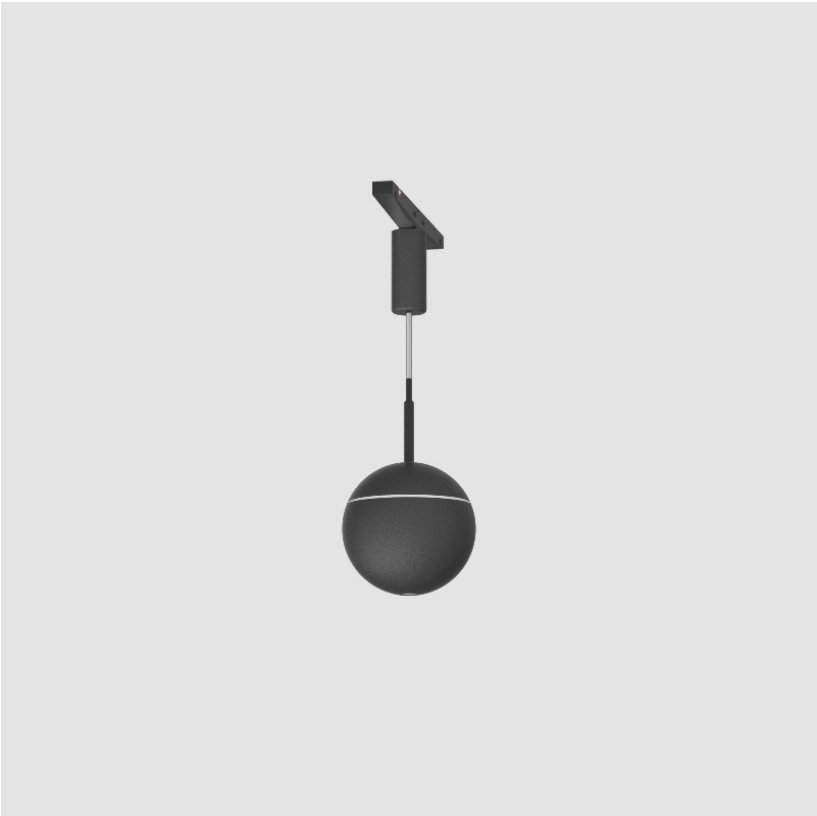

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

A380681-

DESCRIPTION

Snooker Insert for Minimal Track Suspension Round - 6.4W LED (Zhaga Standard) - 2700K / 3000K / 3500K / 4000K, 48Vdc, CRI90, Non- Dimming / Dali Dimming - Beam Angle: 32°/58° - Cable Options - Diffuser Touch of Color Options

GENERAL

Series: Snooker Glass
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL

Shape: Round
Diameter (mm): 74
Diameter (in): 2 15/16
Height (mm): 76
Height (in): 3
Diffuser: Opal, Yellow, Orange, Red, Green, Blue
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Accent Finish: OPL / YEL / ORA / RED / BLU / GRN
Fixture Material: Aluminum
Cable Details: 2000mm/78 3/4" or 4000mm/157 1/2" Cable - Color Options: Black / White / Orange / Red / Green

ELECTRICAL

Input Wattage Range: 1 - 9 W
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Total Output Wattage (W): 5.4
Dimming: Non-Dimmable / 0-10V Dimming
Driver Included: No
Driver Location: Integrated
Driver Type: Constant Voltage - Universal
Driver Class: Class 2
Input Voltage (V): 48
Constant Current (MA): 500
Upon Request: 0-10V Dimming with Tridonic Bridge

LED


Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 3500 / 4000
Max. Delivered Lumen (lm): 310 / 328 / 347 / 356
Nominal Lumen (lm): 460 / 487 / 514 / 528
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL

Beam Angle: 32 / 58
Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

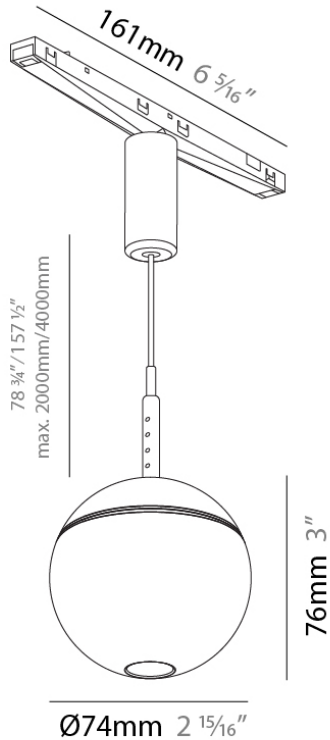

STMSH48V-SUS-SYS COMPONENTS TRACK

A380753-

DESCRIPTION
Minimal Track Suspension - Imagine Micro - Insert - 35mm/1 3/8" x 90mm/2 5/8" - 6.4W LED, 2700K / 3000K / 3500K / 4000K - 48V, Adjustable - Non-Dimming / Dali Dim, CRI:90 - Beam: 14°

GENERAL
Series: Imagine Micro
Partner: Prolicht
Division: Architectural
Installation: Track
Product Type: Modular Systems
Mounting Location: Ceiling
Light Distribution: Direct

PHYSICAL
Aperture Sizes - Downlights: 1"
Shape: Cylinder
Diameter (mm): 35
Diameter (in): 1 3/8
Height (mm): 90
Height (in): 3 9/16
Fixture Finish: SSR / BKV / CWI / CRY / HAB / UFT / ITA / RUA / FTG / MYG / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / CHC / COM / ABZ / JAG / OBR / MOS / ROR
Holder Finish: WHI / BLK
Fixture Material: Aluminum

ELECTRICAL
Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 6.4
Input Voltage (V): 48

LED
Delivered Lumen Range: 100 - 499 lm
Color Temperature (°K): 2700 / 3000 / 4000
Max. Delivered Lumen (lm): 110 / 119 / 127
Nominal Lumen (lm): 372 / 399 / 427
CRI: >90 CRI
Lamp Life (hrs): 50000

OPTICAL
Beam Angle: 14
Adjustability: Rotational 350°; Tilt 90°

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-121-48V-BLK

DESCRIPTION

End Feed for Micro Track - Black

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 140.5

Length (in): 5 9/16

Width (mm): 19

Width (in): 3/4

Height (mm): 10.2

Height (in): 3/8

Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: BLK

Fixture Material: Aluminum


ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

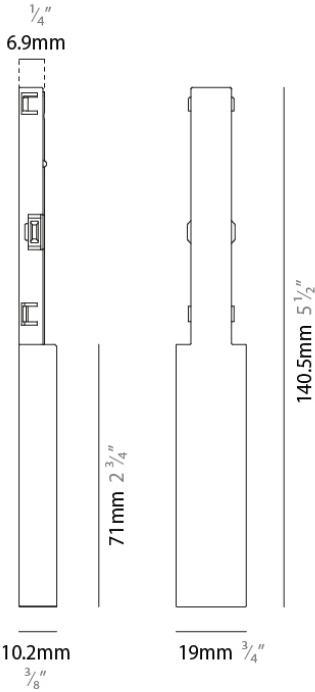

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-121-48V-WHI

DESCRIPTION

End Feed for Micro Track - White

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 140.5

Length (in): 5 9/16

Width (mm): 19

Width (in): 3/4

Height (mm): 10.2

Height (in): 3/8

Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: WHI

Fixture Material: Aluminum



ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

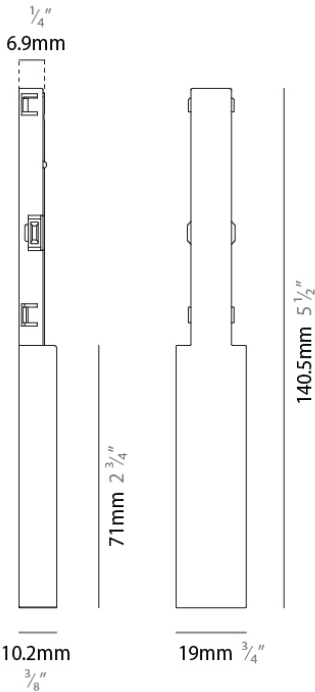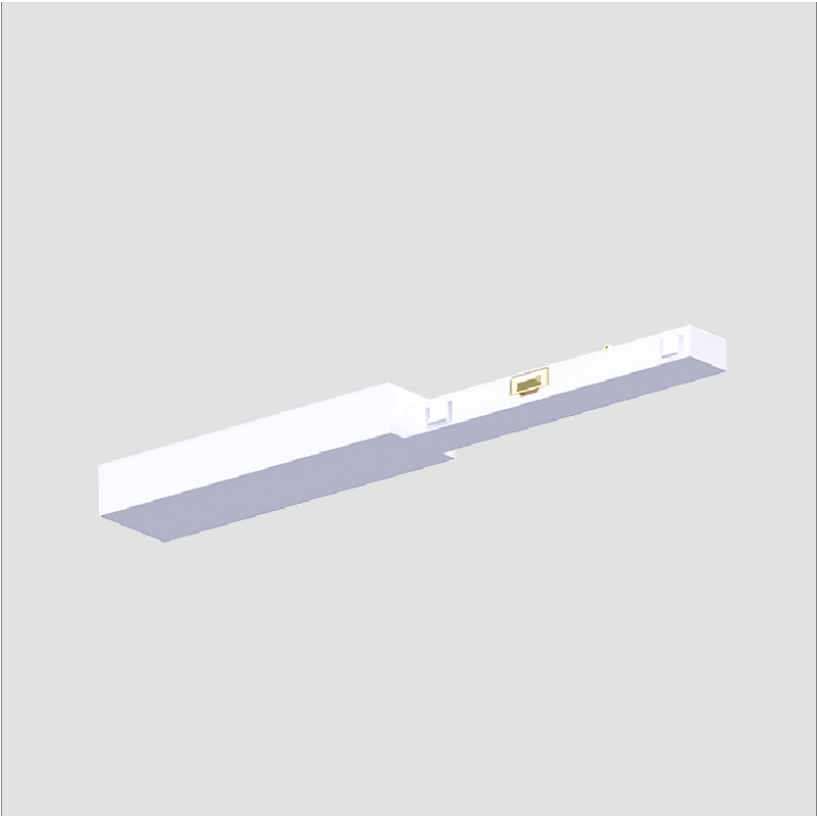

STMSH48V-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-121S-BLK

DESCRIPTION

Concealed End Feed for Micro Track - Black

GENERAL

Division: Architectural

PHYSICAL

Length (mm): 116.1

Length (in): 4 5/16

Width (mm): 19

Width (in): 3/4

Height (mm): 6.9

Height (in): 1/4


Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: BLK

ELECTRICAL

Driver Included: No

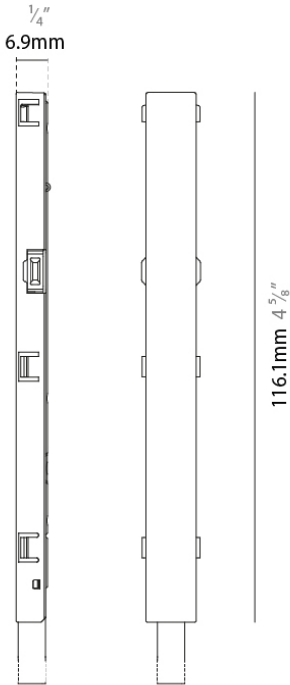

STMSH48V-SUS-SYS COMPONENTS

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-121S-WHI

DESCRIPTION

Concealed End Feed for Micro Track - White

GENERAL

Division: Architectural

PHYSICAL

Length (mm): 116.1

Length (in): 4 5/16

Width (mm): 19

Width (in): 3/4

Height (mm): 6.9

Height (in): 1/4



Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: WHI

ELECTRICAL

Driver Included: No

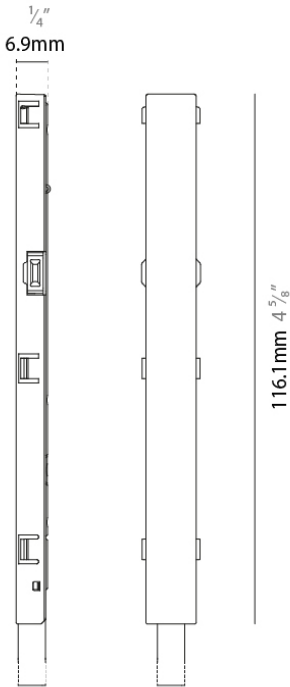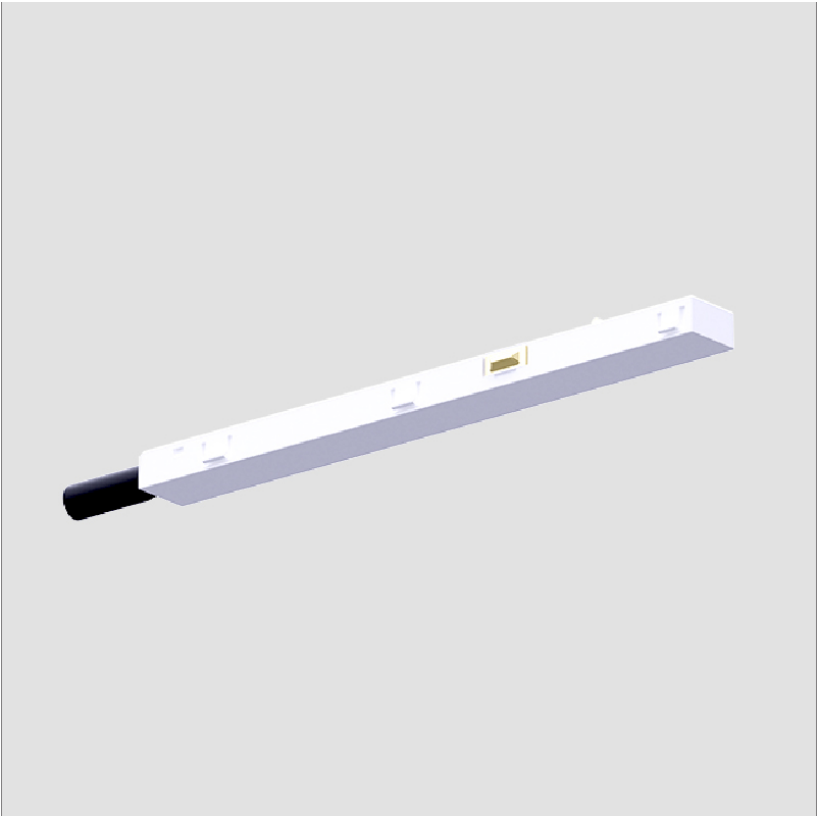

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-141-48V-BLK

DESCRIPTION

Central Feed for Micro Track - Black

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 112.5

Length (in): 4 7/16

Height (mm): 6.9

Height (in): 1/4

Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: BLK

Fixture Material: Aluminum


ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

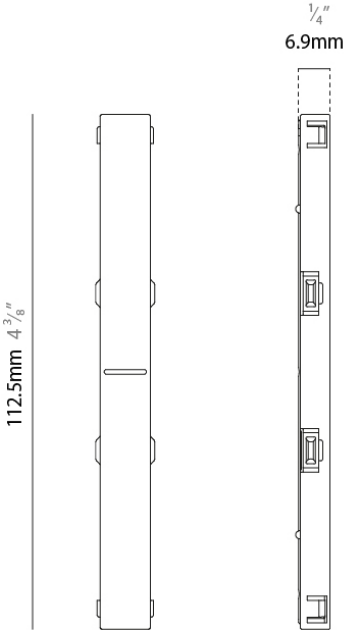

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-141-48V-WHI

DESCRIPTION

Central Feed for Micro Track - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 112.5
Length (in): 4 7/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0299
Weight (lbs): 0.0659
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

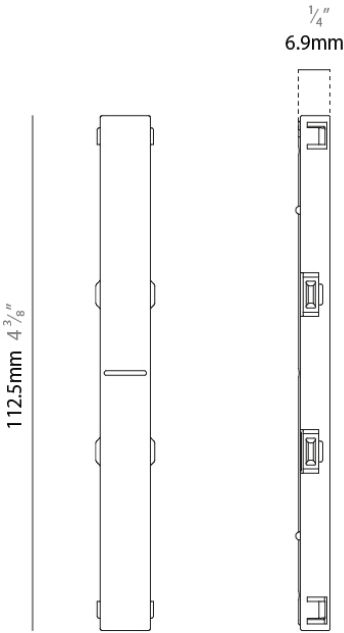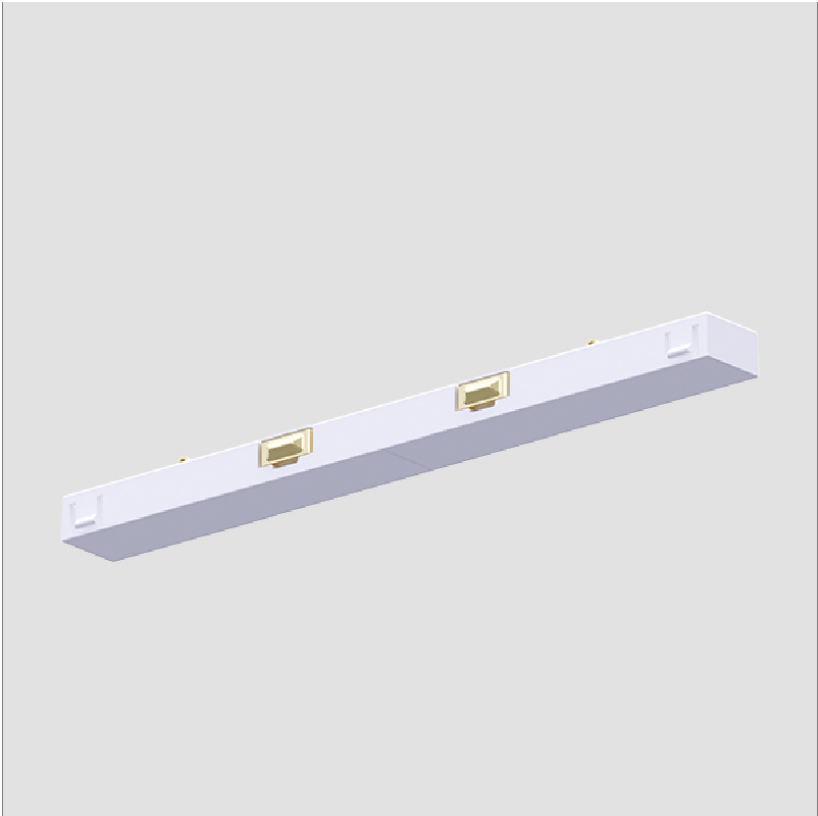

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-210-48V

DESCRIPTION

Cutting Tool For PVC for field cutting

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Weight (kg): 0.067
Weight (lbs): 0.148
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

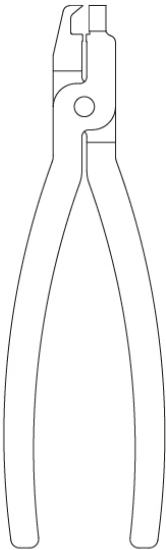

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-3400-48V-BLK

DESCRIPTION

L-Connector for Micro Track, Inside Corner (Feedable) - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 86.7
Length (in): 3 7/16
Width (mm): 86.7
Width (in): 3 7/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0541
Weight (lbs): 0.12
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

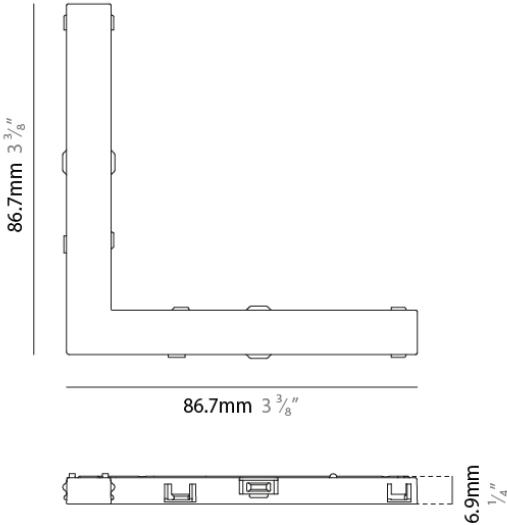

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-3400-48V-WHI

DESCRIPTION

L-Connector for Micro Track, Inside Corner (Feedable) - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 86.7
Length (in): 3 7/16
Width (mm): 86.7
Width (in): 3 7/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0541
Weight (lbs): 0.12
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

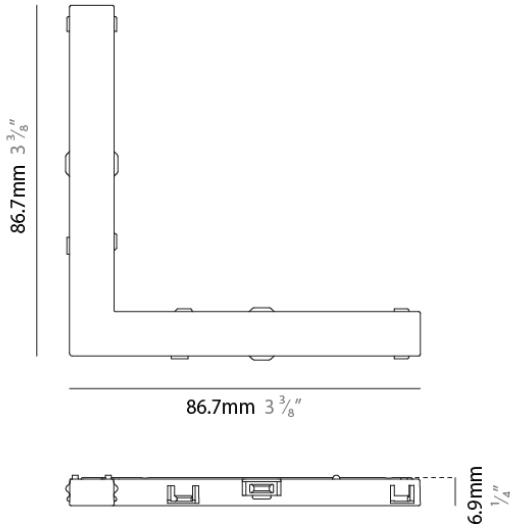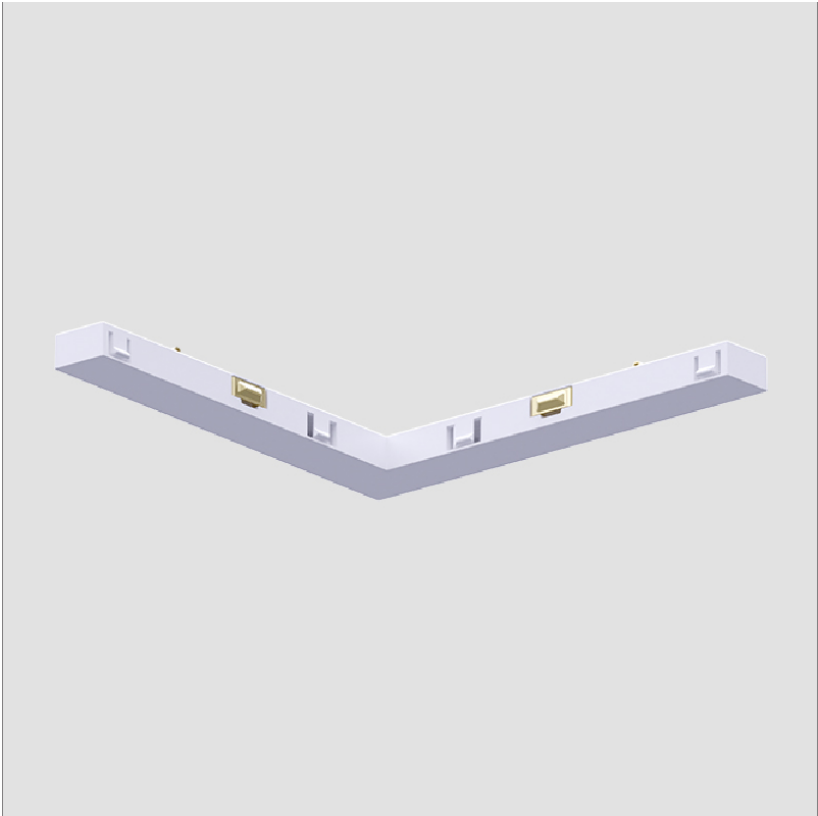

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-3600-48V-BLK

DESCRIPTION

Adjustable Connector for Micro Track, Adjustable Corner (Feedable) - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 238
Length (in): 9 3/8
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

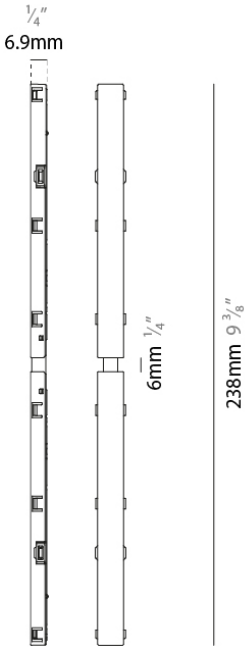

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-3600-48V-WHI

DESCRIPTION

Adjustable Connector for Micro Track, Adjustable Corner (Feedable) - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 238
Length (in): 9 3/8
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

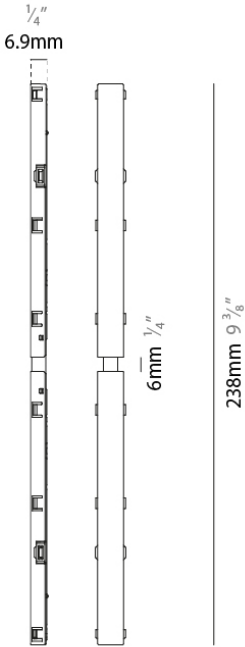

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-3700-48V-BLK

DESCRIPTION

L-Connector for Micro Track, Ceiling-Wall (Feedable) - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 86.7
Length (in): 3 7/16
Width (mm): 86.7
Width (in): 3 7/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0541
Weight (lbs): 0.12
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

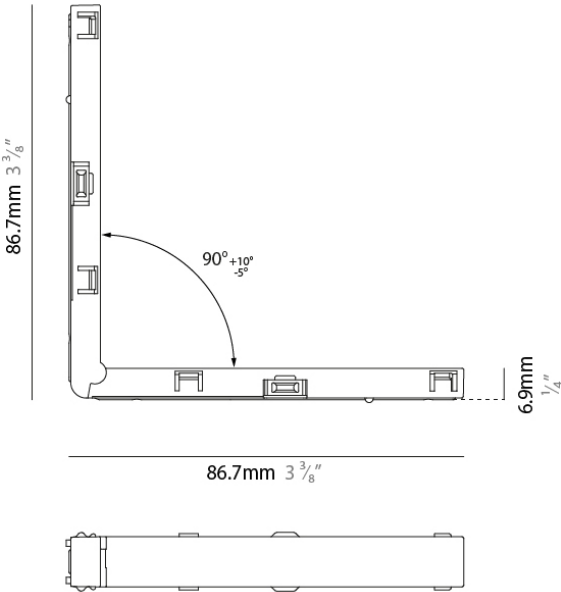

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-3700-48V-WHI

DESCRIPTION

L-Connector for Micro Track, Ceiling-Wall (Feedable) - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 86.7
Length (in): 3 7/16
Width (mm): 86.7
Width (in): 3 7/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0541
Weight (lbs): 0.12
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

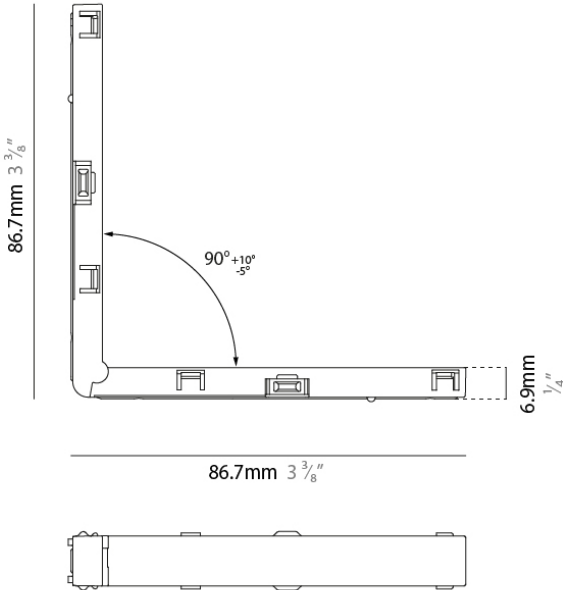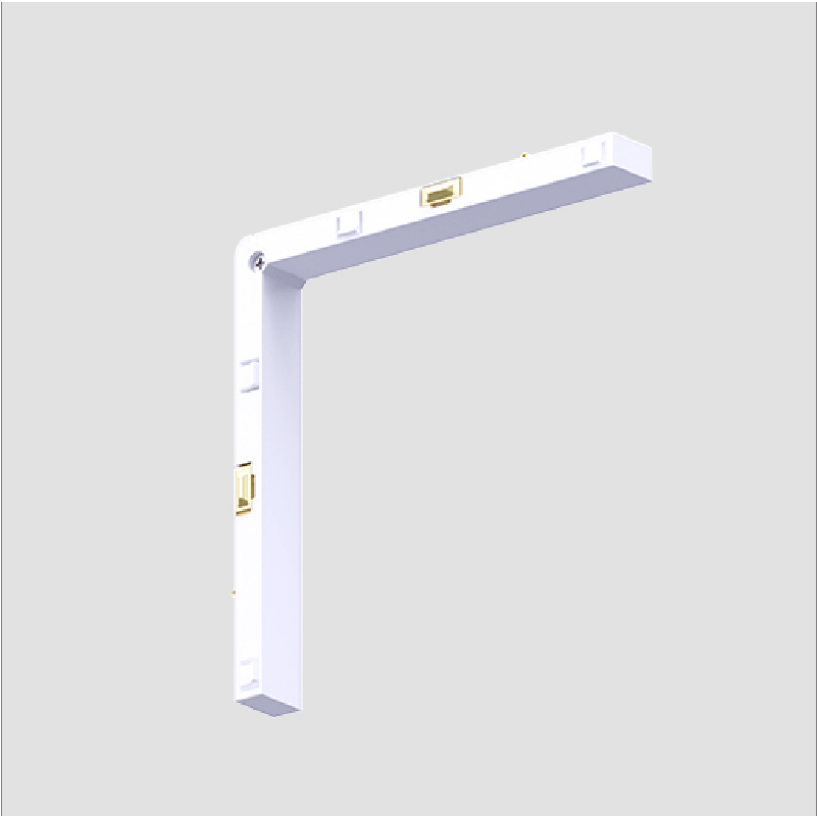

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-4400R-48V-BLK

DESCRIPTION

Cover 4' for Micro Track - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 1219
Length (in): 48
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.0425
Weight (lbs): 0.0935
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

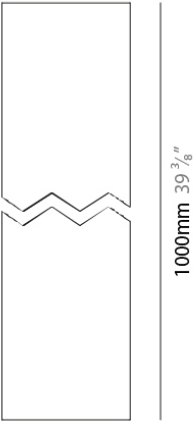

STMSH48V-SUS-SYS COMPONENTS TRACK

STMS-4400R-48V-GRY

DESCRIPTION

Cover 4' for Micro Track - Grey

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 1219

Length (in): 48

Width (mm): 13.5

Width (in): 9/16

Height (mm): 4.7

Height (in): 3/16

Weight (kg): 0.0425

Weight (lbs): 0.0935

Fixture Finish: GRY

Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



STMSH48V-SUS-SYS COMPONENTS TRACK

STMS-4400R-48V-OPL

DESCRIPTION
Cover 4' for Micro Track - Opal

GENERAL
Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL
Shape: Rectangle
Length (mm): 1219
Length (in): 48
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.0425
Weight (lbs): 0.0935
Fixture Finish: OPL
Fixture Material: Aluminum

ELECTRICAL
Driver Included: No

RATINGS AND CERTIFICATIONS
Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-4400R-48V-WHI

DESCRIPTION

Cover 4' for Micro Track - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL




Shape: Rectangle
Length (mm): 1219
Length (in): 48
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.0425
Weight (lbs): 0.0935
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

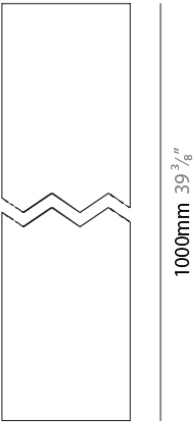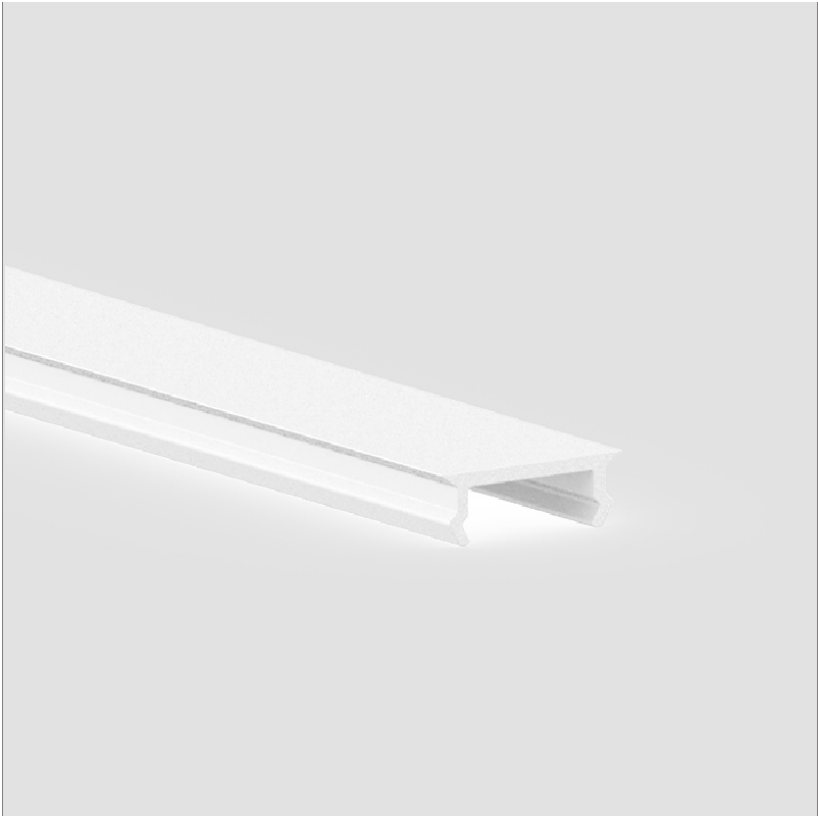

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-4800R-48V-BLK

DESCRIPTION

Cover 8' for Micro Track - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL

Shape: Rectangle
Length (mm): 2438
Length (in): 96
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.085
Weight (lbs): 0.187
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20



STMSH48V-SUS-SYS COMPONENTS TRACK

STMS-4800R-48V-GRY

DESCRIPTION

Cover 8' for Micro Track - Grey

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 2438

Length (in): 96

Width (mm): 13.5

Width (in): 9/16

Height (mm): 4.7

Height (in): 3/16

Weight (kg): 0.085

Weight (lbs): 0.187

Fixture Finish: GRY

Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



STMSH48V-SUS-SYS COMPONENTS TRACK

STMS-4800R-48V-OPL

DESCRIPTION

Cover 8' for Micro Track - Opal

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL

Shape: Rectangle
Length (mm): 2438
Length (in): 96
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.085
Weight (lbs): 0.187
Fixture Finish: OPL
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-4800R-48V-WHI

DESCRIPTION

Cover 8' for Micro Track - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL




Shape: Rectangle
Length (mm): 2438
Length (in): 96
Width (mm): 13.5
Width (in): 9/16
Height (mm): 4.7
Height (in): 3/16
Weight (kg): 0.085
Weight (lbs): 0.187
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

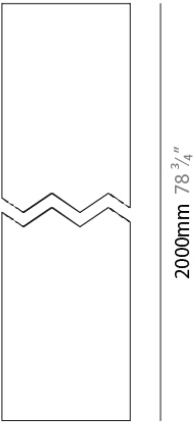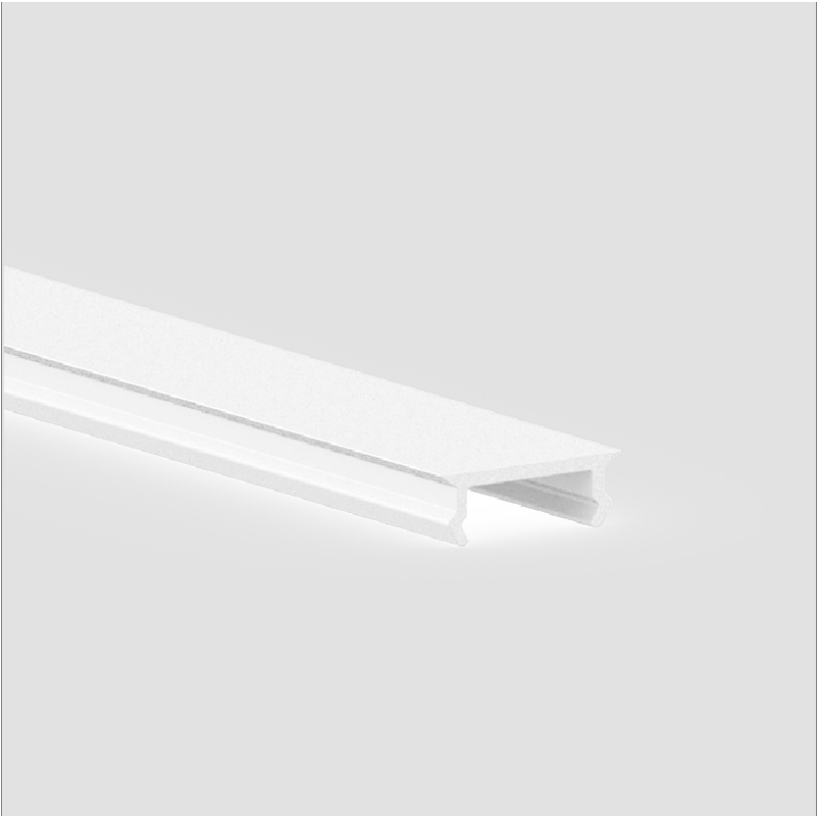

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-512CL-48V-BLK

DESCRIPTION

Ceiling Mounting Long Bracket for Surface Mount Micro Track-Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 50
Length (in): 1 15/16
Width (mm): 15.6
Width (in): 5/8
Height (mm): 5.38
Height (in): 3/16
Weight (kg): 0.0175
Weight (lbs): 0.038
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

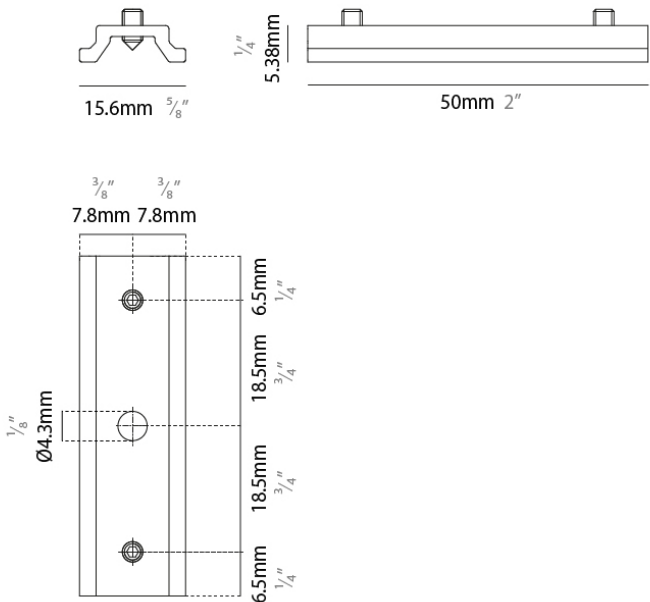

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-512CL-48V-WHI

DESCRIPTION

Ceiling Mounting Long Bracket for Suspension Micro Track-White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 50
Length (in): 1 15/16
Width (mm): 15.6
Width (in): 5/8
Height (mm): 5.38
Height (in): 3/16
Weight (kg): 0.0175
Weight (lbs): 0.038
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

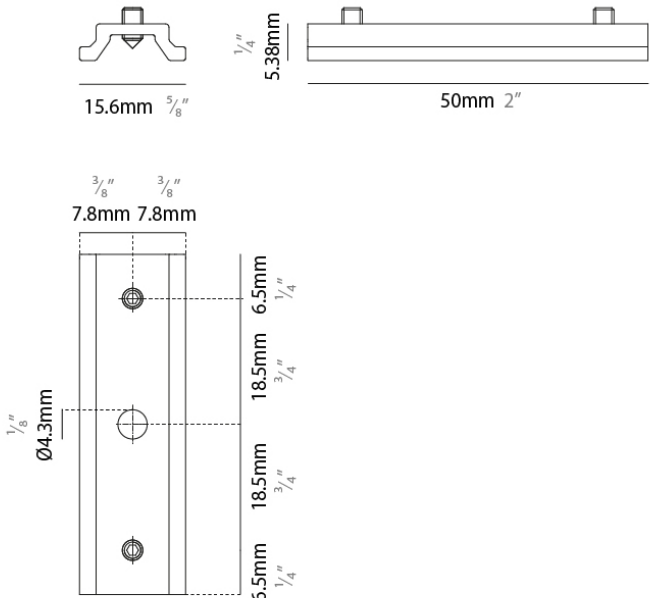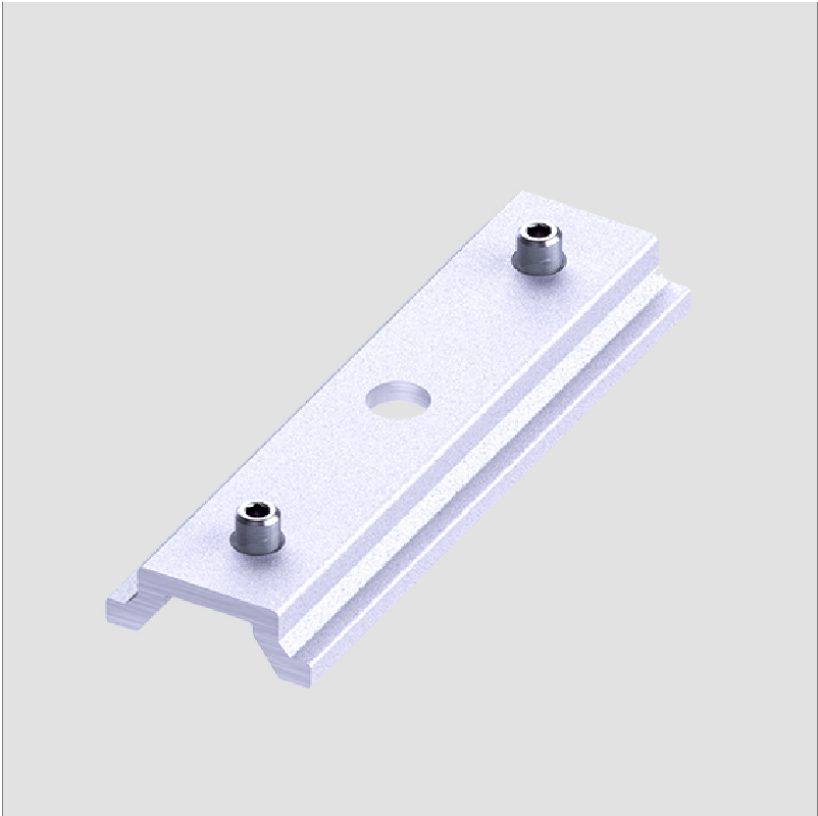

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-512CS-48V-BLK

DESCRIPTION

Ceiling Mounting Short Bracket for Suspension Micro Track-Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 25
Length (in): 63/64
Width (mm): 15.6
Width (in): 5/8
Height (mm): 5.38
Height (in): 3/16
Weight (kg): 0.0127
Weight (lbs): 0.028
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

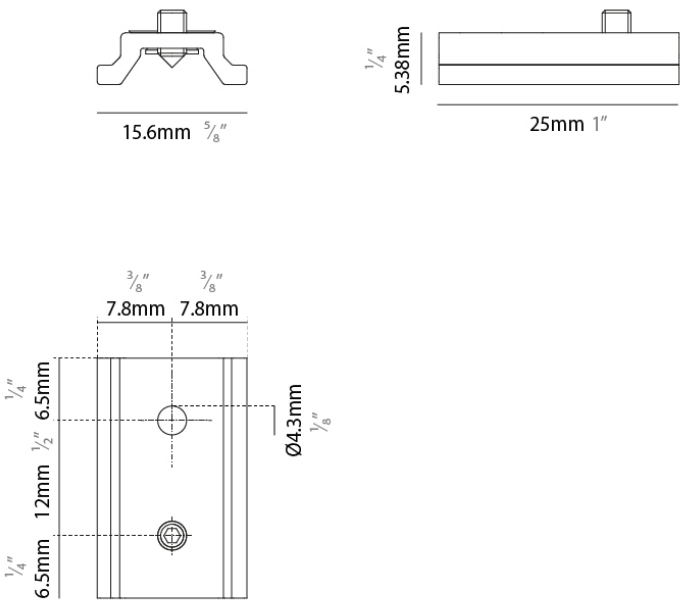

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-512CS-48V-WHI

DESCRIPTION

Ceiling Mounting Short Bracket for Suspension Micro Track - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL




Shape: Rectangle
Length (mm): 25
Length (in): 63/64
Width (mm): 15.6
Width (in): 5/8
Height (mm): 5.38
Height (in): 3/16
Weight (kg): 0.0127
Weight (lbs): 0.028
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

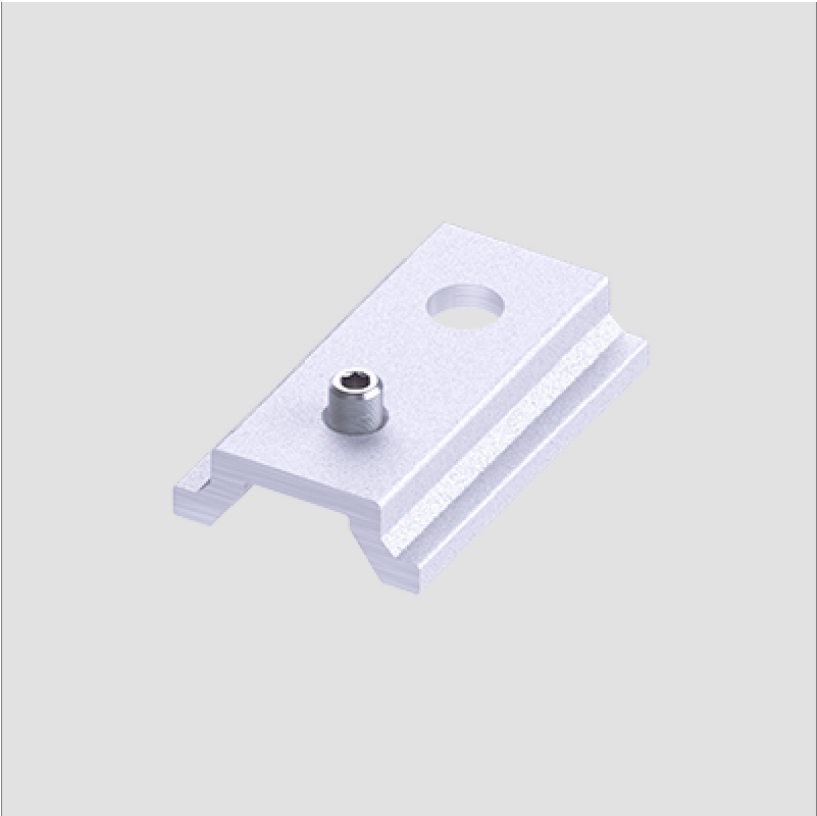

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526D-48V-BLK

DESCRIPTION

Double Spot Adapter Without Contacts - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 132.4
Length (in): 5 3/16
Width (mm): 8
Width (in): 5/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

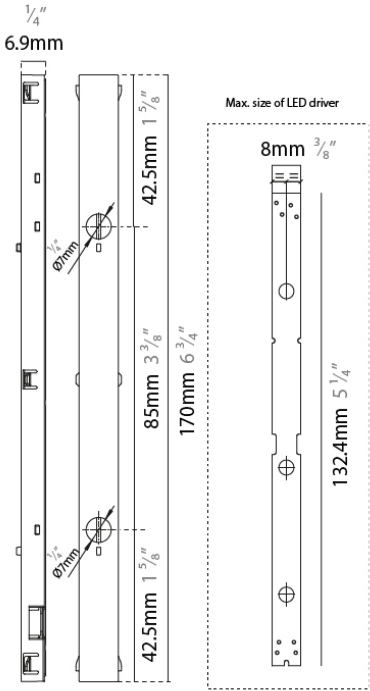

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526D-48V-WHI

DESCRIPTION

Double Spot Adapter Without Contacts - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 132.4
Length (in): 5 3/16
Width (mm): 8
Width (in): 5/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

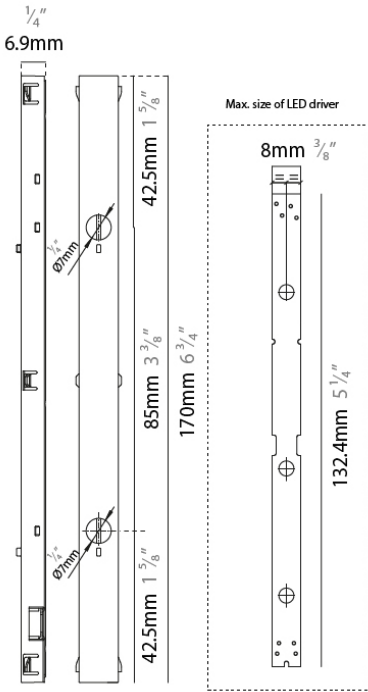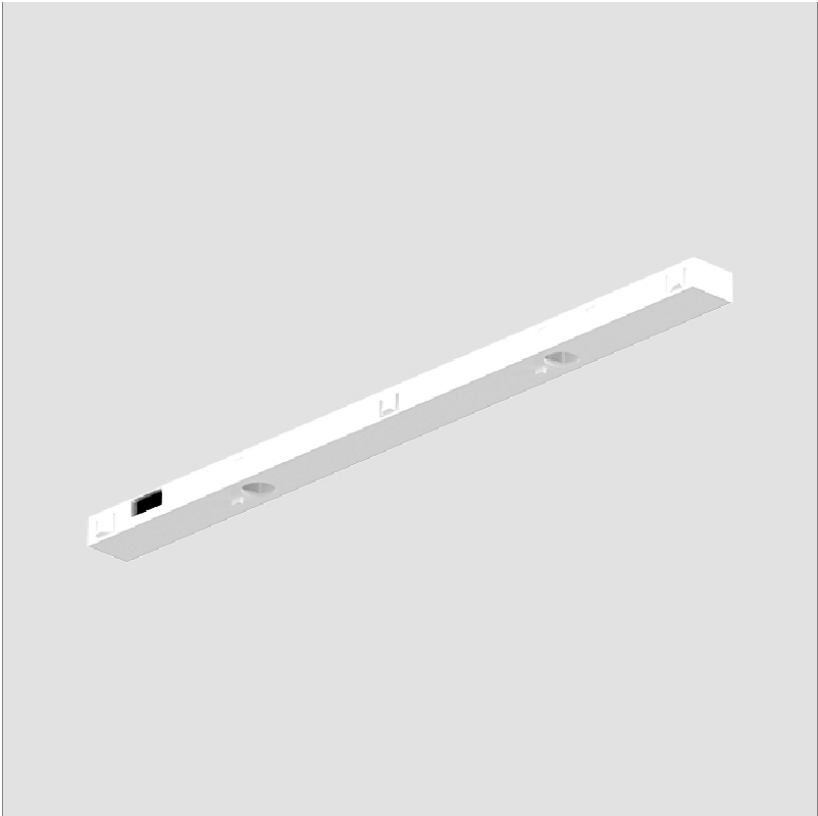

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526E-48V-BLK

DESCRIPTION

Adapter for Electronic No Contacts - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 151.2
Length (in): 5 15/16
Width (mm): 8
Width (in): 5/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

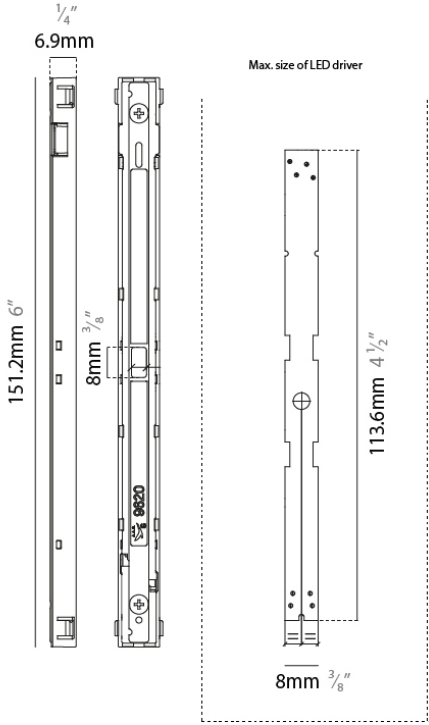

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526E-48V-WHI

DESCRIPTION

Adapter for Electronic No Contacts - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 151.2
Length (in): 5 15/16
Width (mm): 8
Width (in): 5/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

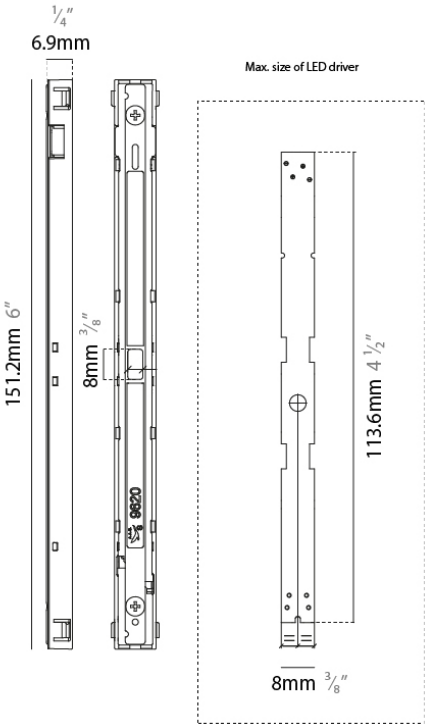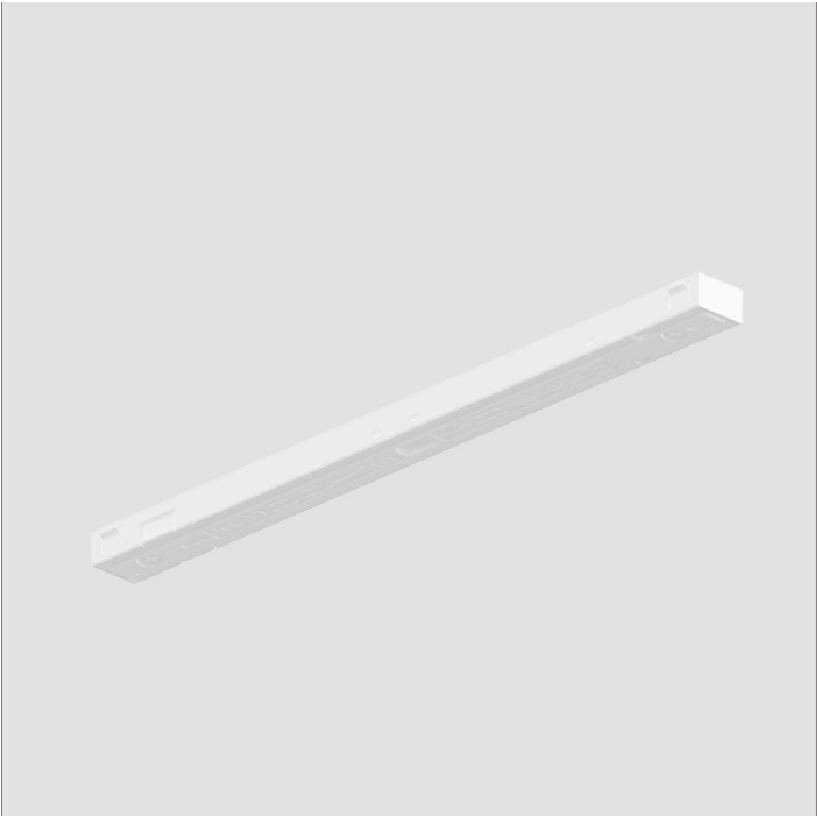

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526F-48V-BLK

DESCRIPTION

Flexible Adapter - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL




Shape: Rectangle
Length (mm): 101
Length (in): 3 31/32
Width (mm): 12
Width (in): 1/2
Height (mm): 12.1
Height (in): 1/2
Weight (kg): 0.0299
Weight (lbs): 0.0659
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

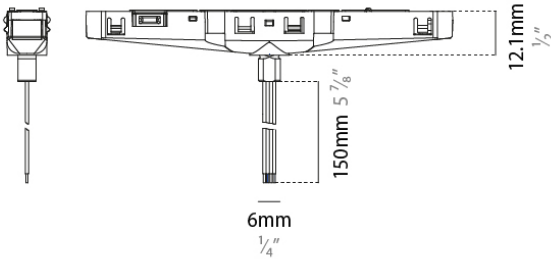

STMSH48V-SUS-SYS COMPONENTS TRACK

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-526F-48V-WHI

DESCRIPTION

Flexible Adapter - White

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 101

Length (in): 3 31/32

Width (mm): 12

Width (in): 1/2

Height (mm): 12.1

Height (in): 1/2

Weight (kg): 0.0299

Weight (lbs): 0.0659

Fixture Finish: WHI

Fixture Material: Aluminum




ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

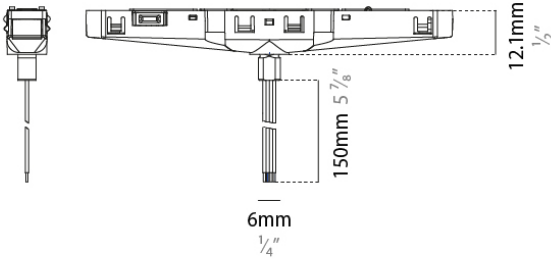

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-526M-48V-BLK

DESCRIPTION

Mechanical Single Adapter No Contact 10N - Black

GENERAL

Partner: Prolight
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 113.6
Length (in): 4 1/2
Width (mm): 8
Width (in): 5/16
Height (mm): 12.5
Height (in): 1/2
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

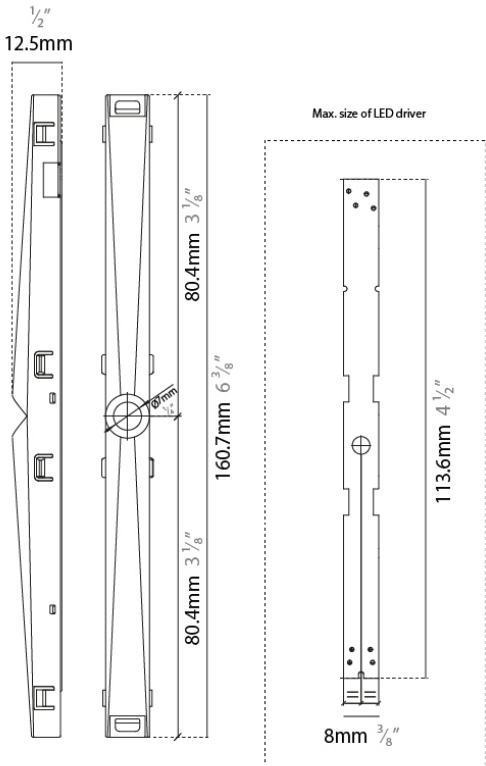

PROJECT
TYPE
NOTES
QUANTITY
DATE

STMS-526M-48V-WHI

DESCRIPTION

Mechanical Single Adapter No Contact 10N - White

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL



Shape: Rectangle
Length (mm): 113.6
Length (in): 4 1/2
Width (mm): 8
Width (in): 5/16
Height (mm): 12.5
Height (in): 1/2
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: WHI
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

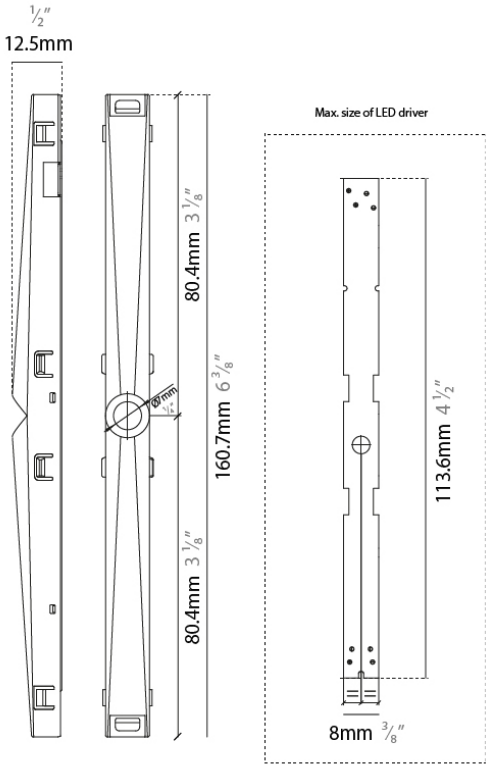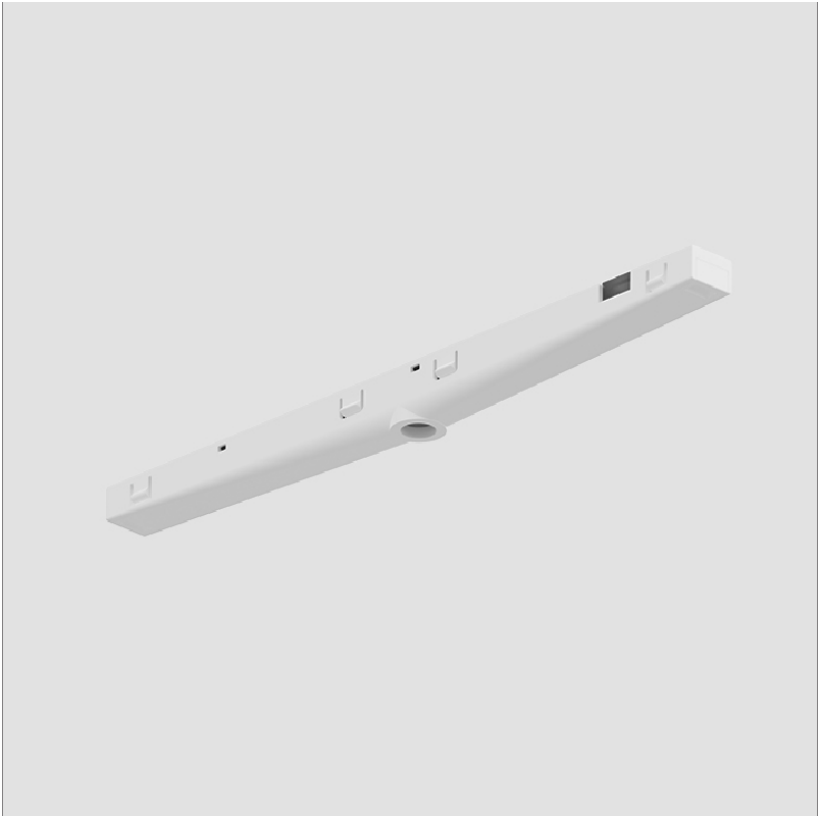

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526S-48V-BLK

DESCRIPTION

Single Spot Adapter Without Contacts - Black

GENERAL

Partner: Prolicht
Division: Architectural
Installation: Track

PHYSICAL


Shape: Rectangle
Length (mm): 113.6
Length (in): 4 1/2
Width (mm): 8
Width (in): 5/16
Height (mm): 6.9
Height (in): 1/4
Weight (kg): 0.0317
Weight (lbs): 0.07
Fixture Finish: BLK
Fixture Material: Aluminum

ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

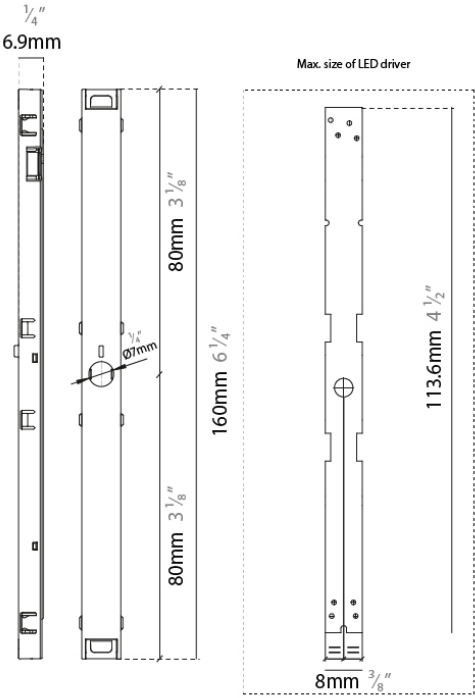

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

STMS-526S-48V-WHI

DESCRIPTION

Single Spot Adapter Without Contacts - White

GENERAL

Partner: Prolicht

Division: Architectural

Installation: Track

PHYSICAL

Shape: Rectangle

Length (mm): 113.6

Length (in): 4 1/2

Width (mm): 8

Width (in): 5/16

Height (mm): 6.9

Height (in): 1/4

Weight (kg): 0.0317

Weight (lbs): 0.07

Fixture Finish: WHI

Fixture Material: Aluminum



ELECTRICAL

Driver Included: No

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

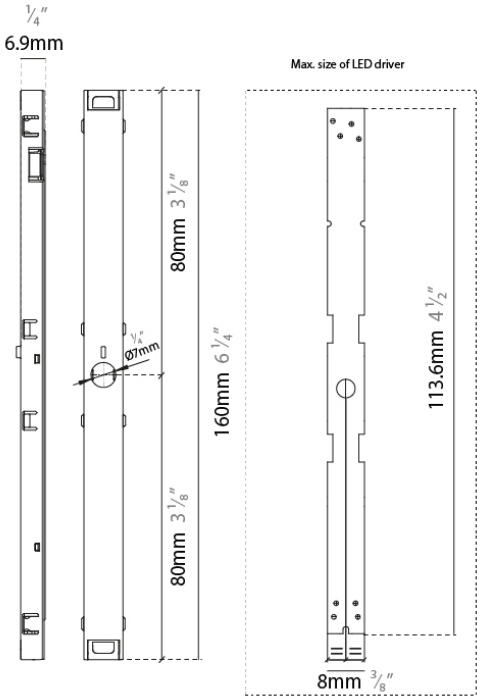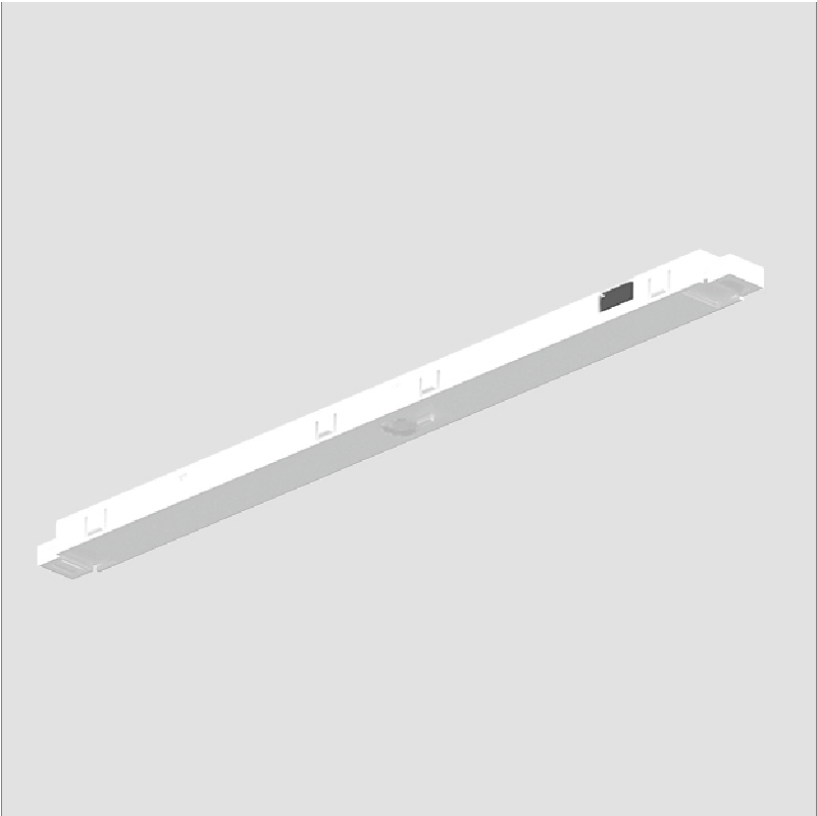

STMSH48V-SUS-SYS COMPONENTS

PROJECT

TYPE

NOTES

QUANTITY

DATE

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)