

D111076-

base number

Finish Finish Options Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Savina	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL

Snape: Cone	
Diameter (mm): 250	
Diameter (in): 9 13/16	
Height (mm): 600	
Height (in): 23 ½	

Max. Overall Height (mm): 2600 Max. Overall Height (in): 102 3/8

Light Distribution: Direct
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN /

Holder Finish: MWH / MBK
Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

TER / WHI

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 5.5
Lamp Base: GU10
Input Voltage (V): 120


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



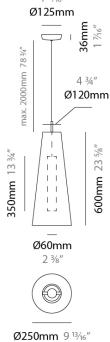






D111076-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE

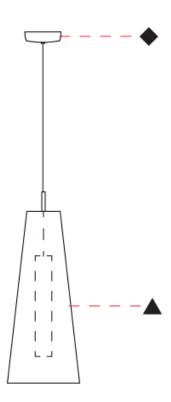





COLOR FINISH CHART


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish
































Holder Finish









PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART



Standard Colors with [S-]

UV outdoor treatment for colors with [*]
For non-standard color finishes there is a minimum quantity required or additional cost applied, and an extended lead time. Avoid the additional cost by exceeding the minimum quantity.



PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

COMPLETE COLOR FINISH CHART



Standard Colors with [S-]

UV outdoor treatment for colors with [*]
For non-standard color finishes there is a minimum quantity required or additional cost applied, and an extended lead time. Avoid the additional cost by exceeding the minimum quantity.



PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART



Standard Colors with [S-]

UV outdoor treatment for colors with [*]
For non-standard color finishes there is a minimum quantity required or additional cost applied, and an extended lead time. Avoid the additional cost by exceeding the minimum quantity.



PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART



Standard Colors with [S-]

UV outdoor treatment for colors with [*]
For non-standard color finishes there is a minimum quantity required or additional cost applied, and an extended lead time. Avoid the additional cost by exceeding the minimum quantity.



PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

COMPLETE COLOR FINISH CHART











PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

T		_	a 85		special LED (upon request) PGR_PGRW_tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
$\overline{\uparrow}$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	71-600	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
$\dot{\Delta}$	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
ZŢ	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
□ •+	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	4⊚	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	دول) ه	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
J	available upon request	O	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

	above the surface)			
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)			
IK04	rotected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm bove the surface)			
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)			
(KO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) $$			
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$			
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)			
IK09	protected against 10 joules impact (equivalent to $5.0 kg$ mass dropped from 200mm above the surface)			
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) $$			

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm