

D111106-

base number

Finish Finish Options Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Tina
Brand: Ole
Division: Design

Mounting Type: Suspension Mounting Location: Ceiling

Subcategory: Up/Down Light

PHYSICAL

Shape: Abstract
Diameter (mm): 300
Diameter (in): 11 13/16

Height (mm): 450 Height (in): 17 11/16

Max. Overall Height (mm): 2450

Max. Overall Height (in): 96 1/16

Light Distribution: Omnidirectional

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK

Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm Cable

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26


Input Voltage (V): 120

Upon Request: 277Vac / GU24


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20










Ø300mm 11 13/16"





D111106-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

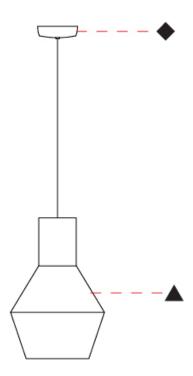






COLOR FINISH CHART


PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Fixture Finish































Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT TYPE SPECIFIER QUANTITY DATE



























Pant. WHITE 71

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART





Pant. 2915C

Pant. 2707C

60

Pant. 324C

313



PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART

VERDE BILLAR

S - DARK GREEN

Pant. 5616C

CRUDO

Pant. 7401C

CAMELLO

Pant. 731C

161

Pant. 340C

353











PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

COMPLETE COLOR FINISH CHART





PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

COMPLETE COLOR FINISH CHART















PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
Ť	wall and ceiling: recessed and surface mounted	<u>`</u>	rotating		warm dim / natural dimming LED
		V.			0
1	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	Y	color of suspension cable	71400	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(°K)	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	9	drive on
4	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d **	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C.S.	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. @	ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	. (A)	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	9	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

100000	2819904000 PA-24598000 DEVENOUS PARTIES O
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09)	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)