ZANEEN.

_

BASS SUSPENSION

D111119-

base number	Finish	Finish
	Options	Options

1. To build a product code in our configurator select the specify button on the base model # product page 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

GENERAL	
Series: Bass	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Rectangle	
Length (mm): 250	
Length (in): 9 ¹³ / ₁₆	
Width (mm): 250	
Width (in): 9 ¹³ / ₁₆	
Height (mm): 380	
Height (in): 14 ¹⁵ / ₁₆	
Max. Overall Height (mm): 2380	
Max. Overall Height (in): 93 ¹¹ / ₁₆	
Light Distribution: Direct / Indirect	
Weight (kg): 3.5	
Weight (lbs): 7.72	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN TER / WHI	1 \
Holder Finish: MWH / MBK	
Fixture Material: Fabric Cord / Metal	
Cable Details: 2000mm Cable	
Upon Request: Other fabric cord colors available upon request (see downloadable f chart)	inish
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20

PROJECT

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.


In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



D111119-

PROJECT

FROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		

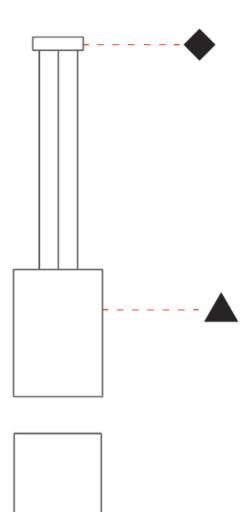

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com




PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Fixture Finish

Beige - BEI	Black - BLK	Blue - BLU	Cognac - COG	Dark Green - DGN	Gray - GRY
Maroon - MRN	Mocha - MOC	Mustard - MUS	Olive - OLV	Silver - SIL	Stone - STN
Terracotta - TER	White - WHI	_			

Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com



PROJECT

FROJECT		
ТҮРЕ		
SPECIFIER		
QUANTITY		
DATE		





196

120

GRAY- GRY Pant. 10C



SILVER - SIL Pant. 7C



BLACK- BLK Pant. BLACK C 211



STONE - STN Pant. 7528C 1196







MOCHA - MOC Pant. 7504C 175



TERRACOTTA - TER Pant. 153C 205











WHITE- WHI Pant. WHITE





OLIVE - OLV Pant. 5625C 323



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Page 4/9 Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com October 21, 2024, 2:52 am

D



COMPLETE COLOR FINISH CHART

71

2621

S - WHITE- WHI Pant. WHITE



LITIO* Pant. 5425C



S - BLACK- BLK Pant. BLACK C 211



PACIFIC Pant. 2767C 68

AZUL ROYAL Pant. 288C



BLAVINA Pant. 2915C



CRYSTAL Pant. GLASS



75

DELHIN Pant. 430C 126

BOREAL Pant. 7547C 1786



S - BLUE (INDIGO) Pant. 653C 61



OCEANO Pant. 294C

67

60



ESCARCHA Pant. 2707C



ALPACA Pant. 429C



PROJECT TYPE SPECIFIER

QUANTITY DATE

S - GRAY- GRY Pant. 10C 120



NOCTURNO Pant. 7547C

66

125



ALITALIA Pant. 646C



AZUL ELECTRICO Pant. 2945



LAGO Pant. 324C



S - SILVER - SIL



TUNEL Pant. BLACK 7C 169



MARINO Pant. 289C



63

MEDAS Pant. 295C 24





Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com October 21, 2024, 2:52 am

Page 5/9



PRC TYPE

QUANTITY DATE

)J	IE	C	Т		

TYPE	
SPECIFIER	

COMPLETE COLOR FINISH CHART

320



MUSGO Pant. 5535C



LAVANDA Pant. 374C 2214



ASTRACAN Pant. 7529C

101

187



MARRON Pant. 476C



AVELLANA Pant. 729C



VERDE BILLAR 353 Pant. 340C



S - DARK GREEN Pant. 5616C 301



CRUDO Pant. 7401C 170



CAMELLO Pant. 731C

161



MARRON SUPER Pant. BLACK 4C 189



S - BEIGE - BEI Pant. 7270 196





S - OLIVE Pant. 5625C



323

OPALE Pant. 402 1442



CASTANO Pant. 4625C 1674



MADERA Pant. 7519C

2183



ARENA Pant. 465C



VERDE OSC. Pant. 3298C 358



S - STONE - STN Pant. 7528C 1196



TABACO Pant. 1545C 203

S - MOCHA Pant. 7504C



175

BEIGE / CAMEL Pant. 1265C



Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com October 21, 2024, 2:52 am



PROJECT

TYPE

SPECIFIER QUANTITY

DATE

COMPLETE COLOR FINISH CHART

15



MIMOSA Pant. 108C



NARANJA Pant. 164C



ROJO Pant. 186C 241

CLARETE Pant. 209C



PURPURA





AMARILLO Pant. 109U



S - TERRACOTTA Pant. 153C 205



FUEGO Pant. 185C

245



BURDEOS Pant. 188C 163

CICLAMOR Pant. 2050

264







CALABAZA Pant. 158C



SATAN Pant. 207C 19





285

FUCSIA Pant. 212C













PESCA Pant. 218C



Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com October 21, 2024, 2:52 am



PROJECT

SPECIFIER

TYPE

QUANTITY DATE

COMPLETE COLOR FINISH CHART



AMORATADO Pant. 265C 135



ALEJANDRIA Pant. 196C 261



LAPIZLAZULI Pant. 2745C

62



CANET Pant. 2717C









Standard Colors with [S-]

Other fabric cord colors available upon request. Price increase and minimum quantities may apply

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Page 8/9 Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com. In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com October 21, 2024, 2:52 am

Page 8/9



LEGEND

PROJECT

T	 רר		

TYPE

SPECIFIER QUANTITY

DATE

special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ 1 floor-mounted Y pivotable \circledast 1 0 wall and ceiling: recessed and surface mounted rotating warm dim / natural dimming LED Œ illuminate tilted Î ceiling-mounted and wall-mounted rechargeable battery powered Ø Ţ wall-mounted color of suspension cable fixture with natural vivid LED (upon request) -> 111 \mathbb{Y} 1 CRI omni-directional light distribution length of suspension cable color rendering index Λ direct light distribution Δ reflector degree selection °K color temperature direct/indirect light distribution s s super spot LM) lumen (luminous flux) Å LM indirect light distribution lens efficacy (lumens per watt) asymmetric light distribution Q UGR Unified Glare Rating (UGR) range from 5-40 lens pack 0 ÷ marine grade (AISI 316 stainless steel) Ă aura light distribution shine ring 9 round wall or ceiling cut-out lacksquareintegrated shine ring with diffuser 1 walk on 5 square wall or ceiling cut-out Ö free individual colors 01-29 . drive on individual colors: 00 (free of charge), 01-25 (extra d Ċ DSC the supplied jig specifies the cutout dimensions Dark Sky Compliance charge) Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) (++) M minimum distance (meters) lamp - object luminaire part to be colored (F1) Ġ • Î lamp protected against explosion recessed depth luminaire part to be colored (F2) blown glass using traditional methods by master € ceiling thickness in mm luminaire part to be colored (F3) A glass blower T ceiling thickness selection luminaire part to be colored (F4) 1) acoustic material dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) luminaire part to be colored (F5) protection class I, protection insulation included or excluded LED driver/transformer/ control gear color of 3-circuit adaptor protection class II, protection insulation \odot У indirect diffuser 1 separately switchable ETL Certified to UL and CSA Standards 2 sensor D direct diffuser 6 UL Certified to UL and CSA Standards 0 \odot ball-proof (upon request) SP CSA Certified to UL and CSA Standards remote control

IP RATING

available upon request

2

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
1965	protected against ingress of dust protected against jets of water
1966	protected against ingress of dust protected against powerful jets of water or heavy seas
1967	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

(Z)

КО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
КОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
КО5	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
КОб	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
КОВ	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
1609	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

Certified for North American Standards

Zaneen Group Inc. © 2024, T 1800-388-3382, F 416-247-9319, www.zaneen.com

Available for International specifications by adding 'INT' at the end of the existing Model #. For assistance on 'custom' specifications, contact zteam@zaneen.com.

U

accessory

In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com