

#### D111125-

base number

Options

#### DESCRIPTION

Kit Pop-Up - Suspension - 3 Light Holder (Lateral) with swag kit - 3 x 3000mm / 118 1/8" cable - 3 x Max. 15W Retrofit LED - E26 - A19 - (Shade sold separately)

- 1.To build a product code in our configurator select the specify button on the base model # product page
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series:	Kit Pop-Up
Brand:	Ole

Division: Design

Mounting Type: Suspension

Mounting Location: Ceiling

#### PHYSICAL

Shape: Round

Diameter (mm): 180

Diameter (in): 7 1/16

Height (mm): 30

Height (in): 1  $\frac{3}{16}$ 

Max. Overall Height (mm): 3000

Max. Overall Height (in): 118  $\frac{1}{8}$ 

Light Distribution: Direct

Fixture Finish: MWH / MBK Fixture Material: Metal

Cable Details: 3000mm Cable

#### **ELECTRICAL**

Number of Lamps: 3

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26


Input Voltage (V): 120

Upon Request: 277Vac / GU24


## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

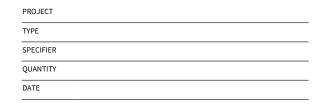












# **ZANEEN**®

# **KIT POP-UP SUSPENSION**

D111125-

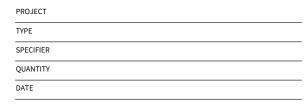

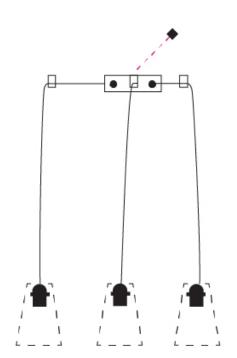







COLOR FINISH CHART

#### **Fixture Finish**

Matte White - MWH	




**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT TYPE SPECIFIER QUANTITY DATE



















71

Pant. WHITE









**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

# **COMPLETE COLOR FINISH CHART**





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

358

104

# **COMPLETE COLOR FINISH CHART**





VERDE BILLAR

Pant. 340C

353



**AVELLANA** 

Pant. 729C

152



PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

# **COMPLETE COLOR FINISH CHART**





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

# **COMPLETE COLOR FINISH CHART**











PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

# **LEGEND**

=	loor-mounted				
-	1001-Indulted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
/ w	vall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
↑ ce	eiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow \parallel w$	vall-mounted	T	color of suspension cable	1H00	fixture with natural vivid LED (upon request)
Y or	omni-directional light distribution	<b></b>	length of suspension cable	CRI	color rendering index
<b>∆</b> di	direct light distribution		reflector degree selection	(K)	color temperature
di	direct/indirect light distribution	s s	super spot	(X)	lumen (luminous flux)
in	ndirect light distribution	*	lens	(₹	efficacy (lumens per watt)
as	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
au	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
ℴ ro	ound wall or ceiling cut-out	$\odot$	integrated shine ring with diffuser	3	walk on
SC SC	quare wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
ද්දි th	he supplied jig specifies the cutout dimensions	0	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d•≱ m	ninimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
<u></u> re	ecessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
<u></u> Се	eiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
<b>1</b> ce	eiling thickness selection		luminaire part to be colored (F4)		acoustic material
== (s	dimmable DP (phase), DV (0-10V), DD (dali), DS step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
in cc	ncluded or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8 Se	separately switchable	$\odot$	indirect diffuser		ETL Certified to UL and CSA Standards
<b>ಿ</b> ″/ se	sensor	0	direct diffuser	։ (Մ) us	UL Certified to UL and CSA Standards
[ re	emote control	0	ball-proof (upon request)	<b>(B)</b>	CSA Certified to UL and CSA Standards
<b>J</b> av	available upon request	9	accessory	$\mathbf{Z}$	Certified for North American Standards

## **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

## **IK RATING**

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm