ZANEEN®

DRUM SURFACE

D112012-

base number

Finish Options

- $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$
- 2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Drum
Brand: Ole
Division: Design
Mounting Type: Surface
Mounting Location: Ceiling

PHYSICAL

Subcategory: Ambient

Shape: Drum
Diameter (mm): 500
Diameter (in): 19 11/16
Height (mm): 470
Height (in): 18 ½
Light Distribution: Direct
Weight (kg): 3.3
Weight (lbs): 7.3
Diffuser: PMMA - Opal
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: BLK

Fixture Material: Fabric Cord / Metal

 $\label{thm:cond} \mbox{Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)}$

ELECTRICAL

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120

Upon Request: 277Vac / GU24 RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards


IP rating: IP20





 \emptyset 380mm 14 15/16"











D112012-

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

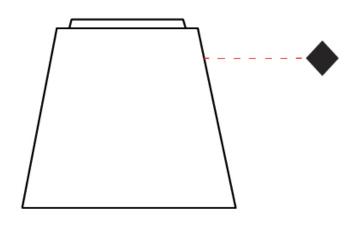








COLOR FINISH CHART


PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

Fixture Finish
































Holder Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT TYPE SPECIFIER QUANTITY DATE

















71

Pant. WHITE



301







Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

358

104





PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		











PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

\downarrow	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
氢	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	Ø	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	Index .	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
Ä	direct light distribution	Δ	reflector degree selection	(°K)	color temperature
X	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
M	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	\otimes	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
G **	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	4 ⊚	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. .	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c (Մ) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	®	CSA Certified to UL and CSA Standards
J	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm