

### D114005-

base number

Finish Options

1.To	build	a produ	ıct cod	le in	our	configu	rator	select	the s	pecify	button	on t	he l	base	mode	el#
prod	uct po	age														

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

PHYSICAL
Shape: Dome
Diameter (mm): 240
Diameter (in): 9 <sup>7</sup> / <sub>16</sub>
Height (mm): 345
Height (in): 13 %,
Light Distribution: Indirect
Weight (kg): 1.6
Weight (lbs): 3.53
Diffuser: Satin Glass
Holder Finish: Granulated White

Holder Finish: Granulated White

Fixture Material: Fabric Cord / Metal


Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24


## RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

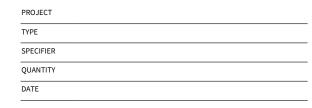












D114005-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

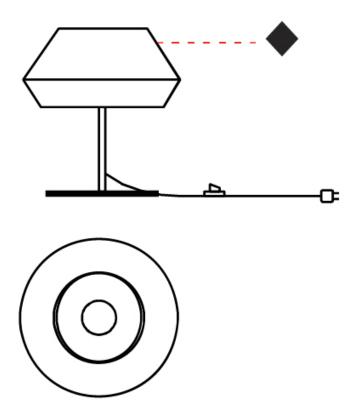






COLOR FINISH CHART

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

#### **Fixture Finish**

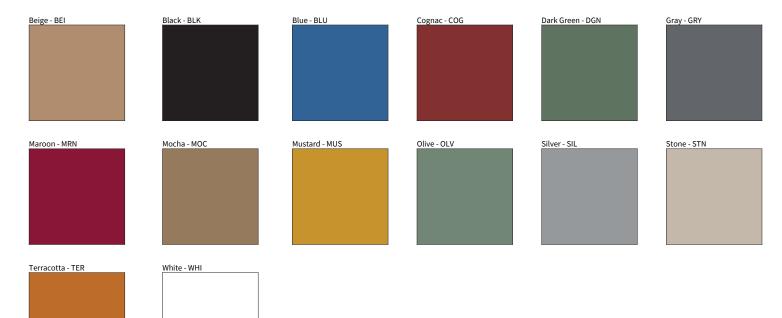

#### **Holder Finish**

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT TYPE SPECIFIER QUANTITY DATE



























**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

358

104





PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			





PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	











PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

# **LEGEND**

100		_		-	
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	C	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	in the second	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	<b>℃</b> K)	color temperature
X	direct/indirect light distribution	s s	super spot	(Z)	lumen (luminous flux)
Y	indirect light distribution	*	lens	<b>₩</b>	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\Lambda}$	aura light distribution	0	shine ring	€	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
ZŢ	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
<b>□</b> **	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
- Watto	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
४	separately switchable	$\odot$	indirect diffuser		ETL Certified to UL and CSA Standards
<b>9</b>	sensor	0	direct diffuser	c (U) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	<b>®</b> :	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	<b>Z</b>	Certified for North American Standards

## **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

## **IK RATING**

above the surface)

	anaphotic (in the College of the Col
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) $$
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm