

#### D114009-

base number

Finish Options

1.To build a product code in our configu	ırator select the specif	y button on the	base model i
product page			

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

Series: Drum	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Ambient	

#### PHYSICAL

Snape: Drum	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 1680	
Height (in): 66 1/8	
Colors of the Broad Colors	

Light Distribution: Direct / Indirect

Weight (kg): 6 Weight (lbs): 13.2

Diffuser: Cord Shade - Beige / Black / Blue / Brown / Dark Green / Green / Gray / Lithium / Maroon / Marsala / Red / Silver / Stone / White

Fixture Finish: GWT

Fixture Material: Fabric Cord / Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120


#### Upon Request: 277Vac / GU24 RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE



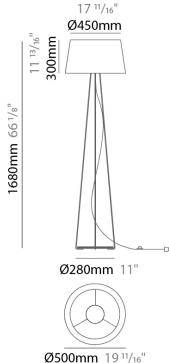







D114009-

PROJECT	
YPE	
PECIFIER	_
QUANTITY	_
ATE	_

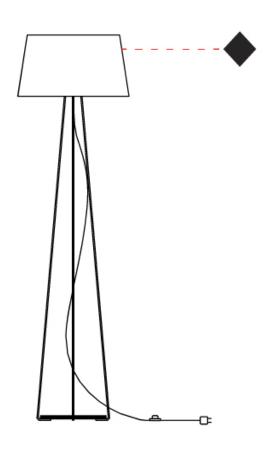







COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

#### Fixture Finish

Granulated White - GWT	

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.





PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

























(0)

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		





PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			







PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	





PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		











PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

## **LEGEND**

T T	Vari		a N.S.		special LED (upon request) PGP_PGPW_tunable
<u></u>	floor-mounted	Á	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
$\uparrow$	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	<b>←</b>	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
Z)	square wall or ceiling cut-out	Ġ	free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>□</b> +,+	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\perp}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>(</b> )	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
<u>جه</u>	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>(II</b> )	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	O	direct diffuser	։ (Մ) «s	UL Certified to UL and CSA Standards
	remote control	$\oplus$	ball-proof (upon request)	<b>(1)</b>	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	<b>(Z</b> )	Certified for North American Standards

## **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

#### **IK RATING**

above the surface)

above the surface)

IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to $5.0 kg$ mass dropped from $400 mm$ above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm