

NODO

L7T00007-

GENERAL

Division: Architectural _____
 Series: Nodo _____
 Brand: Letroh _____

PHYSICAL

Diameter (mm): 15 _____
 Diameter (in): $9 \frac{15}{16}$ _____
 Length (mm): 100 _____
 Length (in): $3 \frac{15}{16}$ _____
 Extension (mm): 520 _____
 Extension (in): $20 \frac{1}{2}$ _____
 Weight (kg): 0.50 _____
 Weight (lbs): 1.1 _____
 Light Distribution: Adjustable / Direct _____
 Fixture Finish: SSR / WHI / BLK _____
 Fixture Material: Aluminum _____

ELECTRICAL

Lamp Type: LED _____
 Driver Included: Yes _____
 Input Wattage (W): 4.5 _____
 Constant Current (MA): 350 _____
 Input Wattage (Range): 1 - 9 W _____



LED

Color Temperature (°K): 3000 _____
 Delivered Lumens (Range): 100 - 499 lm _____
 Max. Delivered Lumen (lm): 400 _____
 CRI: >90 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards _____
 IP rating: IP20 _____

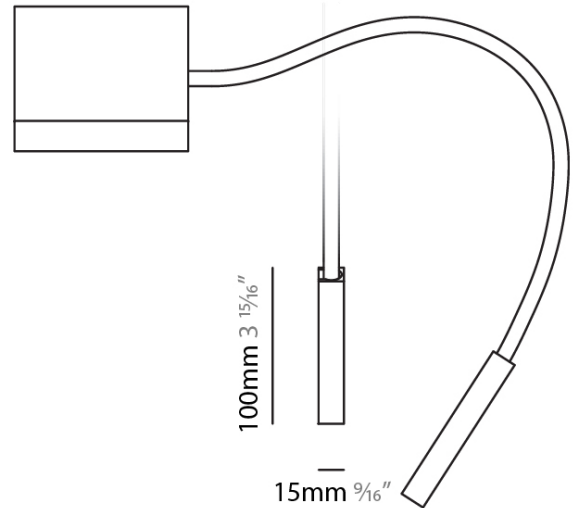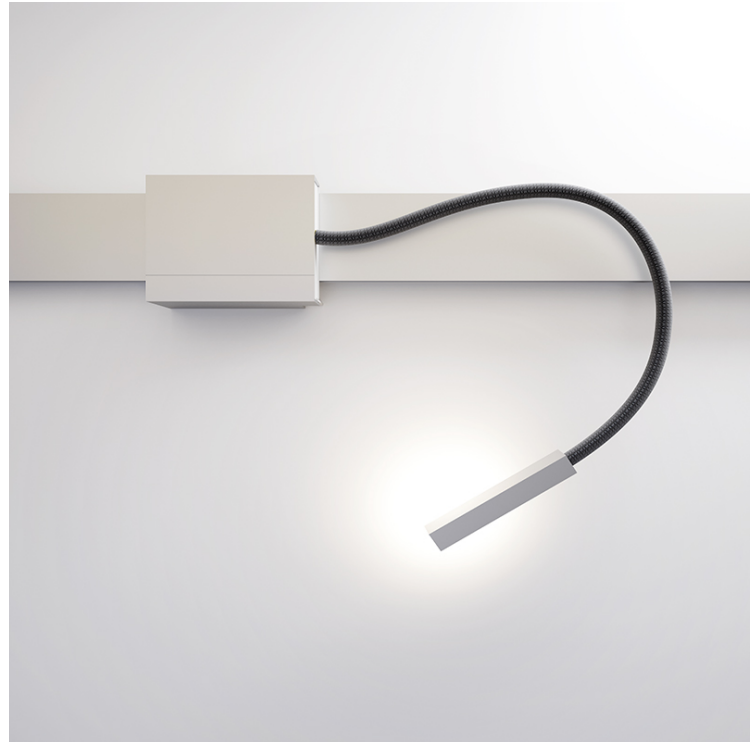

Hose: $\varnothing 9\text{mm } \frac{3}{8}$ "
 Maximum extension 520mm $20 \frac{1}{2}$ "




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

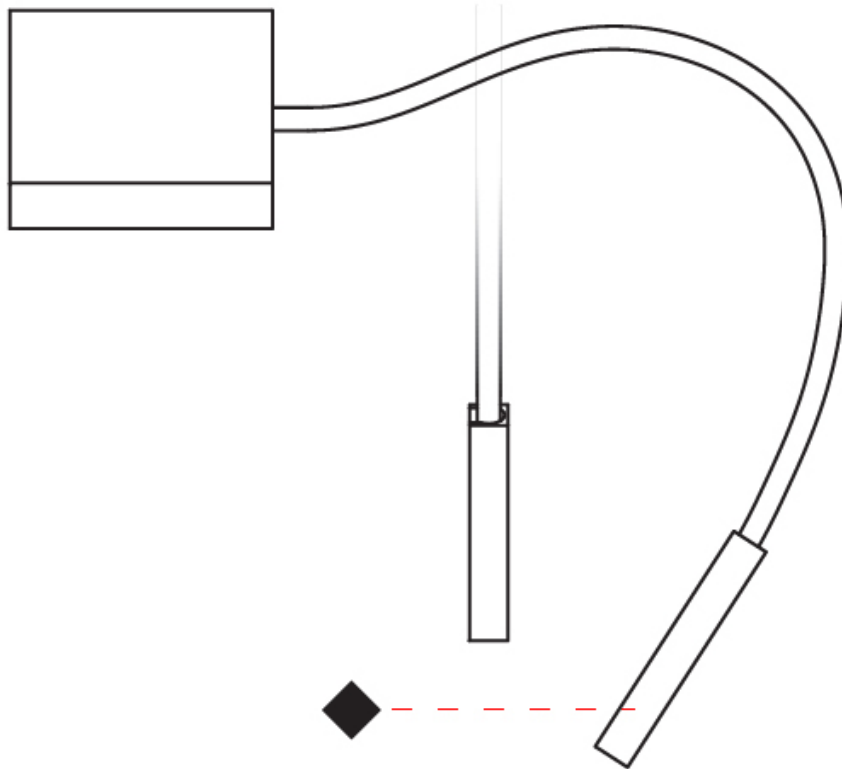

A

NODO

COLOR FINISH CHART

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

Satin Silver - SSR



White - WHI

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

