

D141203-

base number

Finish F Options O

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 130
Diameter (in): $5\frac{1}{8}$
Height (mm): 280
Height (in): 11
Max. Overall Height (mm): 1780
Max. Overall Height (in): 70 ½
Light Distribution: Omnidirectional
Weight (kg): 0.860
Weight (lbs): 1.90
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal
Cable Details: Black Rubber Cable

FI FCTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

IP rating: IP20

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	










D141203-

PROJECT	
ТУРЕ	
SPECIFIER	
QUANTITY	
DATE	

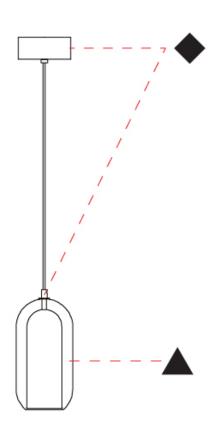





D141204-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 150
Diameter (in): 5 1/8
Height (mm): 340
Height (in): 13 3/8
Max. Overall Height (mm): 1830
Max. Overall Height (in): 72 $\frac{1}{16}$
Light Distribution: Omnidirectional
Weight (kg): 1.356
Weight (lbs): 2.99
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal
Cable Details: Black Rubber Cable

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 8	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: GU24 / 277Vac	

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certi	ified for North American Standards	
IP rating: IP20		












D141204-

PROJECT	
TYPE	_
SPECIFIER	_
QUANTITY	_
DATE	

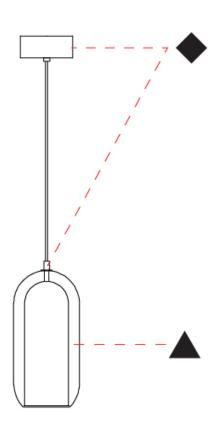





D141205-

base number

Finish Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Ambient	

Subcategory: Ambient PHYSICAL Shape: Cylinder Diameter (mm): 210 Diameter (in): 8 ½ Height (mm): 480 Height (in): 18 ½ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 ½ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA Holder Finish: CHR / SGD / SBK	
Shape: Cylinder Diameter (mm): 210 Diameter (in): 8 ½ Height (mm): 480 Height (in): 18 ½ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 ½ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Subcategory: Ambient
Diameter (mm): 210 Diameter (in): 8 ½ Height (mm): 480 Height (in): 18 ½ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 ½ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	PHYSICAL
Diameter (in): 8 ½ Height (mm): 480 Height (in): 18 ½ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 ½ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Shape: Cylinder
Height (mm): 480 Height (in): 18 $\frac{7}{l_8}$ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 $\frac{15}{l_5}$ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Diameter (mm): 210
Height (in): 18 $\frac{7}{8}$ Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 $\frac{15}{16}$ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Diameter (in): 8 1/4
Max. Overall Height (mm): 1980 Max. Overall Height (in): 77 ¹⁵ / ₁₆ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Height (mm): 480
Max. Overall Height (in): 77 ¹⁵ / ₁₆ Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Height (in): 18 $\frac{7}{8}$
Light Distribution: Omnidirectional Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Max. Overall Height (mm): 1980
Weight (kg): 2.800 Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Max. Overall Height (in): 77 $^{15}\!\!/_{16}$
Weight (lbs): 6.17 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Light Distribution: Omnidirectional
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Weight (kg): 2.800
	Weight (lbs): 6.17
Holder Finish: CHR / SGD / SBK	Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
	Holder Finish: CHR / SGD / SBK

Fixture Material: Glass / Metal

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable

ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8
Lamp Base: E26
Input Voltage (V): 120
Upon Request: GU24 / 277Vac

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		










D141205-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

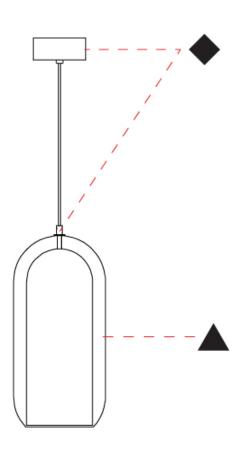





D141206-

base number

Finish Options Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron Monopoint	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcatagony Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Cylinder
Diameter (mm): 280
Diameter (in): 11
Height (mm): 550
Height (in): 21 ⁵ / ₈
Max. Overall Height (mm): 2050
Max. Overall Height (in): 80 11/16
Light Distribution: Omnidirectional
Weight (kg): 3.570
Weight (lbs): 7.87
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK Fixture Material: Glass / Metal

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable

FI FCTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8
Lamp Base: E26
Input Voltage (V): 120
Upon Request: GU24 / 277Vac

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

TYPE SPECIFIER
SPECIFIER
QUANTITY
DATE



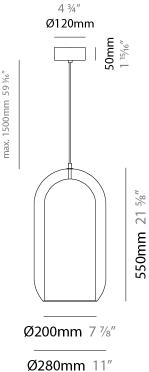






D141206-

PROJECT	
YPE	
SPECIFIER	
QUANTITY	
DATE	

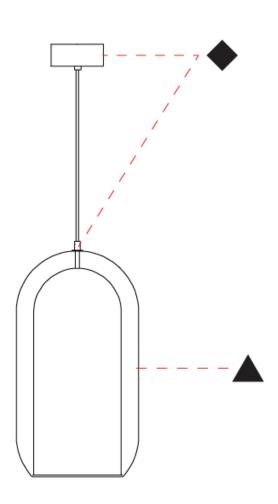





AERON 3 LIGHT LINEAR SUSPENSION

D141211-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron 3 Light Linear	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 4
Lamp Base: E12
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



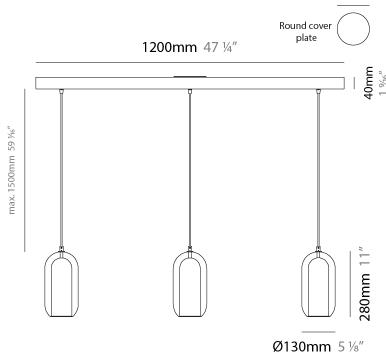




Page 9/21



AERON 3 LIGHT LINEAR SUSPENSION

D141211-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

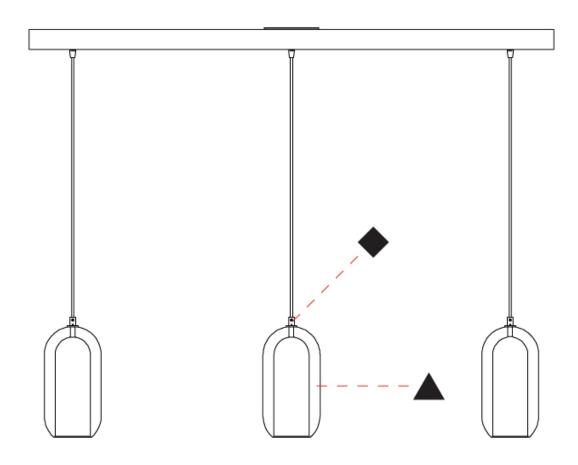





AERON 3 LIGHT CLUSTER SUSPENSION

D141212-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron 3 Light Cluster	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	

PHYSICAL	
Shape: Cylinder	
Diameter (mm): 540	
Diameter (in): 21 1/4	
Height (mm): 210	
Height (in): 8 1/4	
Max. Overall Height (mm): 1710	
Max. Overall Height (in): 67 1/16	

Light Distribution: Omnidirectional

Weight (kg): 6.830 Weight (lbs): 15.06

Subcategory: Ambient

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK Fixture Material: Glass / Metal

Cable Details: 1,500mm / 59 1/16" - Black Rubber Cable

FLECTRICAL

ELECTRICAL
Number of Lamps: 2 + 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 8 + 4
Lamp Base: E26 + E12
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



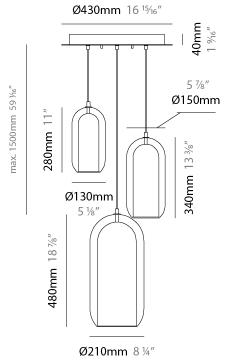






AERON 3 LIGHT CLUSTER SUSPENSION

D141212-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

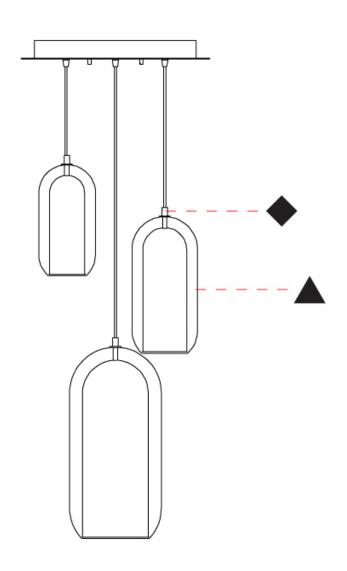





D144033-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

Subcategory: Table PHYSICAL Shape: Cylinder Diameter (mm): 130 Diameter (in): 5 1/s Height (mm): 290 Height (in): 11 1/1s Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA Holder Finish: CHR / SGD / SBK	
Shape: Cylinder Diameter (mm): 130 Diameter (in): 5 ½ Height (mm): 290 Height (in): 11 ½ Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Subcategory: Table
Diameter (mm): 130 Diameter (in): 5 ½ Height (mm): 290 Height (in): 11 ½ Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	PHYSICAL
Diameter (in): 5 $\frac{1}{16}$ Height (mm): 290 Height (in): 11 $\frac{7}{16}$ Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Shape: Cylinder
Height (mm): 290 Height (in): 11 ½ Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Diameter (mm): 130
Height (in): 11 $\frac{7}{16}$ Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Diameter (in): 5 1/8
Light Distribution: Omnidirectional Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Height (mm): 290
Weight (kg): 1.210 Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Height (in): $11\frac{7}{16}$
Weight (lbs): 2.68 Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Light Distribution: Omnidirectional
Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA	Weight (kg): 1.210
	Weight (lbs): 2.68
Holder Finish: CHR / SGD / SBK	Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA
	Holder Finish: CHR / SGD / SBK

Cable Details: Black Rubber Cable

Fixture Material: Glass / Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			










D144033-



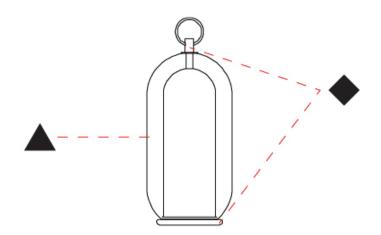





D144034-

base number

Finish Options

Finish Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Portable	
Mounting Location: Table	
Subcategory: Table	

PHYSICAL	
Shape: Cylinder	
Diameter (mm): 210	
Diameter (in): 8 1/4	
Height (mm): 490	
Height (in): 19 1/16	

Light Distribution: Omnidirectional Weight (kg): 4.000

Weight (lbs): 8.82

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK

Fixture Material: Glass / Metal

Cable Details: Black Rubber Cable

ELECTRICAL

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20












D144034-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

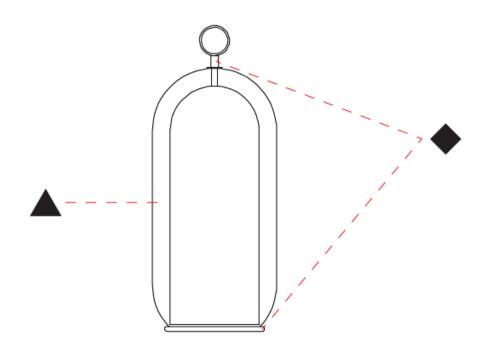





D144035-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron
Brand: Cangini & Tucci
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table

PHYSICAL
Shape: Cylinder
Diameter (mm): 280
Diameter (in): 11
Height (mm): 560
Height (in): 22 ½
Light Distribution: Omnidirectional

Weight (kg): 5.670 Weight (lbs): 12.50

Fixture Finish: AMB / GRN / PNK / RUB / SKB / SMK / TOB / TRA

Holder Finish: CHR / SGD / SBK
Fixture Material: Glass / Metal
Cable Details: Black Rubber Cable

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS

 $\underline{\hbox{Certified By: Certified for North American Standards}}$

IP rating: IP20











D144035-


PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

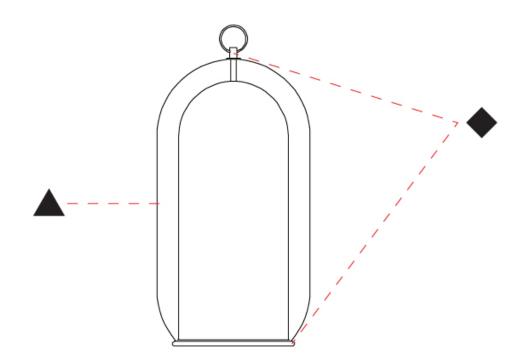





AERON MODULAR SYSTEM SUSPENSION

D14AERON-MOD-SYS

base number

1.To build a product code in ou	r configurator	select the	specify	button o
the base model # product page	د			

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Aeron	
Subseries: Aeron Modular System	
Brand: Cangini & Tucci	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Modular	

PHYSICAL

ELECTRICAL

Lamp Type: LED Retrofit
Bulb Included: Bulb Not Included
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE







AERON

COLOR FINISH CHART

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	

Fixture Finish



















Holder Finish





Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





AERON

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE

LEGEND

Т		_			special LED (upon request) RGR_RGRW_tunable
	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution		reflector degree selection	(K)	color temperature
	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩ <u></u>	efficacy (lumens per watt)
	asymmetric light distribution	\otimes	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ĉ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□+, +	minimum distance (meters) lamp - object	•	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth	lack	luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
₹	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
9	sensor	O	direct diffuser	։ (Մ) ու	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	(Z)	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

100000	288 (400 C) - 26 5 (100 C) - 26 5 (
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)