

D111000-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Suspen	sion
Mounting Location: Ceil	ling
Subcategory: Pendant	

Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Shape: Dome
Diameter (mm): 300
Diameter (in): 11 13/16
Height (mm): 200
Height (in): $7\frac{7}{8}$
Max. Overall Height (mm): 2200
Max. Overall Height (in): 86 ½
Light Distribution: Direct
Weight (kg): 1.5
Weight (lbs): 3.31
Diffuser: Satin Glass
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK
Accent Finish: Wired Frame - Black (except for white cord)

ELECTRICAL

Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm / 78 3/4" Cable - Transparent

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT	
TYPE	
SPECIFIER	
QUANTITY	
DATE	



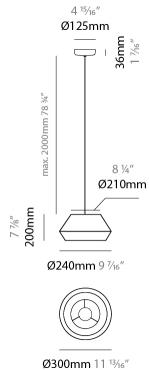





D111000-

ROJECT	
YPE	_
PECIFIER	_
UANTITY	_
ATE	_







D111001-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	

Division: Design	
Mounting Type: Suspension	
Mounting Location: Ceiling	
Subcategory: Pendant	
PHYSICAL	
Shape: Dome	
Diameter (mm): 530	
Diameter (in): 20 1/8	
Height (mm): 250	
Height (in): 9 13/16	
Max. Overall Height (mm): 2250	
Max. Overall Height (in): 89 %	
Light Distribution: Direct	
Weight (kg): 5	
Weight (lbs): 11.02	
Diffuser: Satin Glass	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI	
Holder Finish: MWH / MBK	
Accent Finish: Black (except for White Cord)	

Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm/78 3/4" Cable - Transparent

ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP2	0





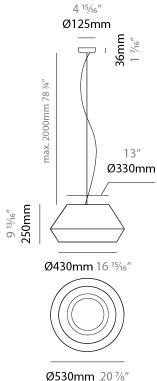






D111001-

PROJECT	
ГҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

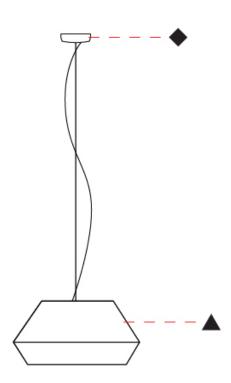





D111002-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo Brand: Ole Division: Design Mounting Type: Suspension Mounting Location: Ceiling

Subcategory: Pendant **PHYSICAL** Shape: Dome Diameter (mm): 750 Diameter (in): 29 1/2 Height (mm): 350 Height (in): 13 3/4 Max. Overall Height (mm): 2350 Max. Overall Height (in): 92 ½ Light Distribution: Direct Weight (kg): 10 Weight (lbs): 22.05 Diffuser: Satin Glass Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK

Accent Finish: Black (except for White Cord)

Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm/78 3/4" Cable - Transparent

ELECTRICAL Number of Lamps: 3 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





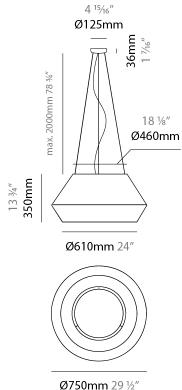






D111002-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE







D111003-

base number

Finish	Finish
Options	Option

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo
Brand: Ole
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

Subcategory: Pendant
PHYSICAL
Shape: Disc
Diameter (mm): 750
Diameter (in): 29 ½
Height (mm): 140
Height (in): $5\frac{1}{2}$
Max. Overall Height (mm): 2140
Max. Overall Height (in): 84 1/4
Light Distribution: Direct

Weight (kg): 10
Weight (lbs): 22.05

Diffuser: Satin Glass

Fixture Finish: BFL/BLK/BLU/CO

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK

Accent Finish: Black (except for White Cord)

Fixture Material: Fabric Cord / Metal

Cable Details: 2000mm/78 3/4" Cable - Transparent

ELECTRICAL

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		



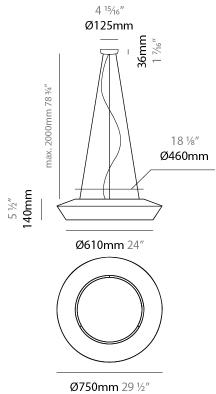






D111003-

PROJECT
YPE
SPECIFIER
QUANTITY
DATE





ZANEEN®

BANYO SURFACE

D113015-

base number

	_
Finish	Finish
Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: On/Off Switch	

Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: On/Off Switch
PHYSICAL
Shape: Round
Width (mm): 300
Width (in): 11 13/16
Height (mm): 230
Depth (mm): 300
Height (in): 9 ½
Extension (mm): 165
Extension (in): 6 ½
Light Distribution: Direct / Indirect
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Satin Glass
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK

ELECTRICAL

Accent Finish: Black (except for White Cord) Fixture Material: Fabric Cord / Metal

Number of Lamps: 1
Lamp Type: LED + LED Retrofit
Input Wattage (W): 3 (LED)
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current 500mA
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 500
Upon Request: GU24

LED	
Number of LEDs: 1	
Color Temperature (°K): 4000	
Max. Delivered Lumen (lm): 180	
CRI: >80 CRI	
Lamp Life (hrs): 25000	


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards	
IP rating: IP20	














D113015-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

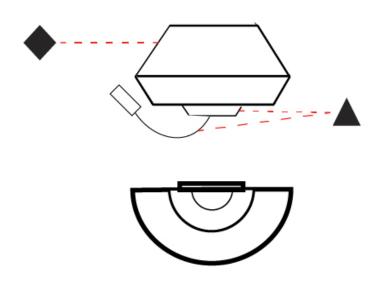





D113016-

base number

Finish	Finish
Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: On/Off Switch	

Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: On/Off Switch
PHYSICAL
Shape: Round
Width (mm): 300
Width (in): 11 13/16
Height (mm): 230
Depth (mm): 300
Height (in): 9 ½
Extension (mm): 165
Extension (in): 6 ½
Light Distribution: Direct / Indirect
Weight (kg): 1.2
Weight (lbs): 2.6
Diffuser: Satin Glass
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: MWH / MBK

ELECTRICAL

Accent Finish: Black (except for White Cord) Fixture Material: Fabric Cord / Metal


LELCTRICAL
Number of Lamps: 1
Lamp Type: LED + LED Retrofit
Input Wattage (W): 3 (LED)
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current 500mA
Driver Class: Class 2
Input Voltage (V): 120
Constant Current (MA): 500
Upon Request: GU24

LED	
Number of LEDs: 1	
Color Temperature (°K): 4000	
Max. Delivered Lumen (lm): 180	
CRI: >80 CRI	
Lamp Life (hrs): 25000	


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards
IP rating: IP20














D113016-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

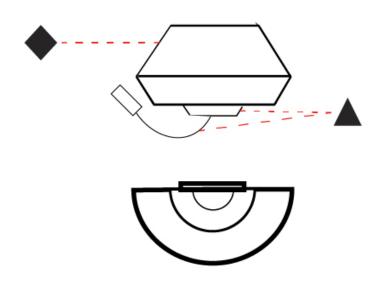



ZANEEN

BANYO SURFACE

D113017-

base number

Options

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo Brand: Ole Division: Design Mounting Type: Surface Mounting Location: Wall

Subcategory: Up/Down Light **PHYSICAL** Shape: Round Width (mm): 300 Width (in): 11 13/16 Height (mm): 230 Depth (mm): 300 Height (in): 9 1/16 Extension (mm): 165 Extension (in): 6 1/2 Light Distribution: Indirect Weight (kg): 1.1 Weight (lbs): 2.4 Diffuser: Satin Glass

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: MWH / MBK Accent Finish: Black (except for White Cord)

Fixture Material: Fabric Cord / Metal

ELECTRICAL

Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards














D113017-

PROJECT	
ТҮРЕ	_
SPECIFIER	_
QUANTITY	_
DATE	_

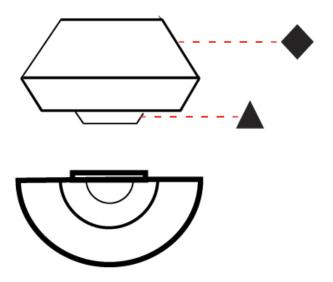





D113019-

base number

_	-
Finish	Finish
Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Up/Down Light	

Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Up/Down Light	
PHYSICAL	
Shape: Round	
Width (mm): 300	
Width (in): 11 13/16	
Height (mm): 230	
Depth (mm): 300	
Height (in): 9 1/16	
Extension (mm): 165	
Extension (in): 6 ½	
Light Distribution: Indirect	
Weight (kg): 1.1	
Weight (lbs): 2.4	
Diffuser: Satin Glass	
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS OLV / SIL / STN / TER / WHI	/
Holder Finish: MWH / MBK	

Fixture Material: Fabric Cord / Metal
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED

OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards IP rating: IP20














D113019-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE







D114004-

base number

Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	Series: Banyo
	Brand: Ole
	Division: Design
	Mounting Type: Portable
	Mounting Location: Table
	Subcategory: Table

Subcategory, rable
PHYSICAL
Shape: Dome
Diameter (mm): 300
Diameter (in): 11 ¹³ / ₁₆
Height (mm): 490
Height (in): 19 ⁵ / ₁₆
Light Distribution: Indirect
Weight (kg): 1.7
Weight (lbs): 3.7
Diffuser: Satin Glass
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: Granulated White

Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

ELECTRICAL


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

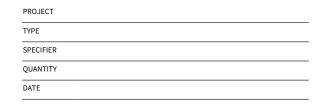



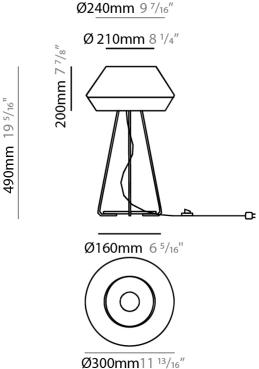






D114004-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

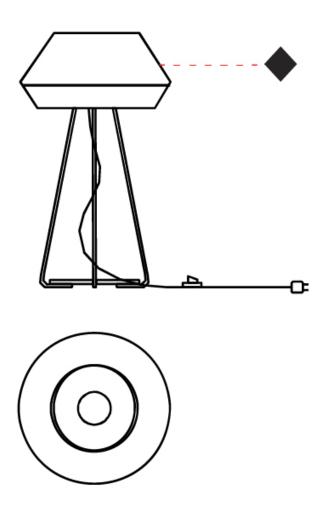





D114005-

base number

Finish Options

 $1. To \ build\ a\ product\ code\ in\ our\ configurator\ select\ the\ specify\ button\ on\ the\ base\ model\ \#\ product\ page$

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Table
Subcategory: Table

Mounting Location: Table
Subcategory: Table
PHYSICAL
Shape: Dome
Diameter (mm): 240
Diameter (in): 9 $\frac{7}{16}$
Height (mm): 345
Height (in): 13 1/16
Light Distribution: Indirect
Weight (kg): 1.6
Weight (lbs): 3.53
Diffuser: Satin Glass
Fixture Finish: BEI / BLW / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: Granulated White

downloadable finish chart)

Fixture Material: Fabric Cord / Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: A19
Bulb Included: Bulb Not Included
Max. Wattage Per Lamp (W): 15
Lamp Base: E26
Input Voltage (V): 120
Upon Request: 277Vac / GU24
Upon Request: 277Vac / GU24

Upon Request: Other fabric cord colors available upon request (see

LED


OPTICAL

RATINGS AND CERTIFICATIONS Certified By: Certified for North American Standards

Certified by, Certified for North American St.














D114005-

PROJECT
TYPE

SPECIFIER
QUANTITY
DATE

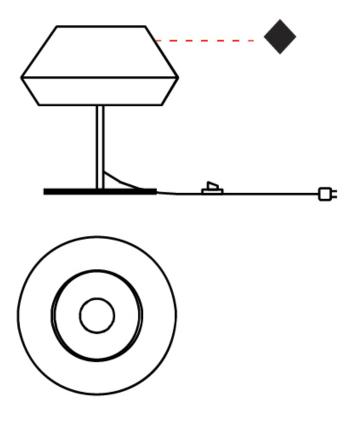





D114006-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

Series: Banyo	
Brand: Ole	
Division: Design	
Mounting Type: Portable	
Mounting Location: Floor	
Subcategory: Floor	Т

Mounting Location: Floor
Subcategory: Floor
PHYSICAL
Shape: Dome
Diameter (mm): 330
Diameter (in): 13
Height (mm): 1680
Height (in): 66 1/8
Light Distribution: Indirect
Weight (kg): 6
Weight (lbs): 13.2
Diffuser: Satin Glass
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI
Holder Finish: Granulated White

Holder Finish: Granulated White	
Fixture Material: Fabric Cord / Metal	

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)

LED


OPTICAL

Certified By: Certified for North American Standards

RATINGS AND CERTIFICATIONS





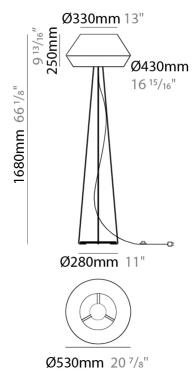







D114006-

PROJECT	
ТҮРЕ	
SPECIFIER	_
QUANTITY	_
DATE	

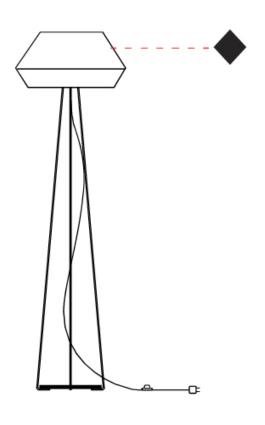







D114007-

base number

Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Banyo Brand: Ole Division: Design Mounting Type: Portable Mounting Location: Floor

Subcategory: Floor **PHYSICAL** Shape: Dome Diameter (mm): 330 Diameter (in): 13 Height (mm): 1670 Height (in): 65 3/4 Light Distribution: Indirect Weight (kg): 5.5 Weight (lbs): 12.1 Diffuser: Satin Glass Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: Granulated White Fixture Material: Fabric Cord / Metal

Upon Request: Other fabric cord colors available upon request (see downloadable finish chart)


ELECTRICAL Number of Lamps: 1 Lamp Type: LED Retrofit Lamp Shape: A19 Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 15 Lamp Base: E26 Input Voltage (V): 120 Upon Request: 277Vac / GU24

LED


OPTICAL

Certified By: Certified for North American Standards

RATINGS AND CERTIFICATIONS

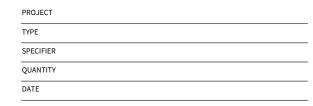



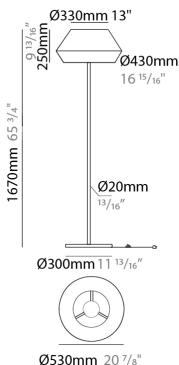







D114007-

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

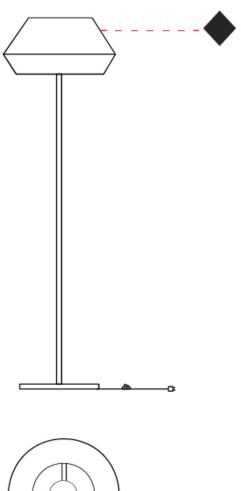








BANYO


COLOR FINISH CHART


PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		


Fixture Finish
































Holder Finish









BANYO SUSPENSION, SURFACE, PORTABLE

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Λ	•	•	۵	n	+	Е	in	iis	h

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.





COLOR FINISH CHART

PROJECT
TYPE
NOTES
QUANTITY
DATE





















OLIVE - OLV Pant. 5625C	323
6	ALL STATES
¥	W. T.

Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	





PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











BANYO

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

LEGEND

	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
Ť	wall and ceiling: recessed and surface mounted	` ئ	rotating		warm dim / natural dimming LED
		V	3		0
1	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	Y	color of suspension cable	71400	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(°K)	color temperature
	direct/indirect light distribution	s s	super spot	LM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩)	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
X	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
\Box	square wall or ceiling cut-out		free individual colors 01-29	9	drive on
4	the supplied jig specifies the cutout dimensions	C	individual colors: 00 (free of charge), 01-25 (extra charge)	OSC	Dark Sky Compliance
d **	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<u></u>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
C.S.	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. @	ETL Certified to UL and CSA Standards
•	sensor	0	direct diffuser	. (A)	UL Certified to UL and CSA Standards
	remote control	0	ball-proof (upon request)	(II)	CSA Certified to UL and CSA Standards
9	available upon request	9	accessory	\mathbf{Z}	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

IK02	above the surface)
IK03	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IKO6	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm

protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm