

Δ	3	5	7	7	5.	

base number

Temperature (Diamond)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq	
Subseries: Bioniq Round Deep	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Downlight	

mounting Type recessed
Mounting Location: Ceiling
Subcategory: Downlight
PHYSICAL
Shape: Round
Diameter (mm): 139
Diameter (in): 5 ½
Height (mm): 151
Height (in): 5 15/16
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 170
Min. Recessing Depth (in): 6 11/16
Light Distribution: Downlight
Weight (kg): 0.926
Weight (lbs): 2.04
Firstone Firefold CCD / DIAV / CDV / HAD / LAC / HET / ITA / DHA / DHD

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast Cut-out Measurements: 130mm / 5 1/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 28.6

Total Output Wattage (W): 26.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Housing: See components

Input Voltage (V): 120 - 277

Constant Current (MA): 700

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2030 / 2080 / 2186 / 2230

Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530

CRI: >90 CRI


Efficiency (%): 0.631

Lamp Life (hrs): 50000


Reflector°: 20 / 25 / 40

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards





















A35275-

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE







A35284-

base number

Color Finishes Reflecter Temperature (Diamond) Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq
Subseries: Bioniq Round Deep
Brand: Prolicht
Division: Architectural
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Downlight

Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Round
Diameter (mm): 139
Diameter (in): 5 ½
Height (mm): 151
Height (in): 5 ½
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 170
Min. Recessing Depth (in): 6 ½
Light Distribution: Downlight
Weight (kg): 0.951
Weight (lbs): 2.1

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast Cut-out Measurements: 130mm / 5 1/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 28.6

Total Output Wattage (W): 26.4

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1890 / 1940 / 2038 / 2080

Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530

CRI: >90 CRI

Efficiency (%): 0.631


Lamp Life (hrs): 50000

OPTICAL


Reflector°: 20 / 25 / 40

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

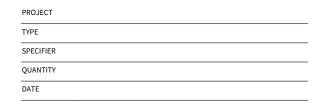



















A35284-

PROJECT	
TYPE	
SPECIFIER	_
QUANTITY	_
DATE	_







BIONIQ ROUND SEMI ADJUSTABLE RECESSED

A35308		-	-
base number	Color	Finishes	Reflector

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

	
Series: Bioniq	
Subseries: Bioniq Round Semi Adjustable	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Downlight	

Mounting Location: Ceiling
Subcategory: Downlight
PHYSICAL
Shape: Round
Diameter (mm): 139
Diameter (in): 5 ½
Height (mm): 137
Height (in): 5 3/8
Ceiling Thickness (mm): 10 / 12.5 / 15
Ceiling Thickness (in): 3/8 or 1/2 or 9/16
Min. Recessing Depth (mm): 150
Min. Recessing Depth (in): 5 1/8
Light Distribution: Adjustable / Downlight
Weight (kg): 0.856
Weight (lbs): 1.89
Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR

MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast Cut-out Measurements: 130mm / 5 1/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 28.6 Total Output Wattage (W): 26 Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming) Driver Included: No Driver Location: Recessed Housing Driver Type: Constant Current - Universal Driver Class: Class 2 Housing: See components

Input Voltage (V): 120 - 277 Constant Current (MA): 700

Number of LEDs: 1


Color Temperature (°K): 2700 / 3000 / 3500 / 4000 Max. Delivered Lumen (lm): 1890 / 1930 / 2028 / 2070 Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530 CRI: >90 CRI Efficiency (%): 0.631 Lamp Life (hrs): 50000

OPTICAL


Reflector°: 20 / 25 / 40 Adjustability: Rotational 355°; Tilt 10°

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

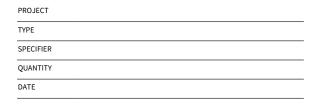





















BIONIQ ROUND SEMI ADJUSTABLE RECESSED

A35308-

ROJECT
YPE
PECIFIER
UANTITY
ATE







A35341		-	-
base number	Color	Finishes	Reflector

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq	
Subseries: Bioniq Round Wallwash	
Brand: Prolicht	
Division: Architectural	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Wallwash	

Mounting Location: Ceiling	
Subcategory: Wallwash	
PHYSICAL	
Shape: Round	
Diameter (mm): 139	
Diameter (in): 5 ½	
Height (mm): 126	
Height (in): 4 15/16	
Ceiling Thickness (mm): 10 / 12.5 / 15	
Ceiling Thickness (in): 3/8 or 1/2 or 9/16	
Min. Recessing Depth (mm): 140	
Min. Recessing Depth (in): 5 ½	
Light Distribution: Adjustable / Asymmetric	
Weight (kg): 0.816	
Weight (lbs): 1.8	
F F I COD / DIA / COV / LIAD / LAC / LIFT / LTA / DIA / DIA	

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast
Cut-out Measurements: 130mm / 5 1/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)
Input Wattage (W): 28.6
Total Output Wattage (W): 26
Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only) and 0-10V Dimming)
Driver Included: No
Driver Location: Recessed Housing
Driver Type: Constant Current - Universal
Driver Class: Class 2
Housing: See components
Input Voltage (V): 120 - 277
Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 2320 / 2380 / 2499 / 2550

Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530

CRI: >90 CRI

OPTICAL

Reflector°: 20 / 25 / 40
Adjustability: Fixed

Lamp Life (hrs): 50000


RATINGS AND CERTIFICATIONS


Certified By: Certified for North American Standards

IP rating: IP20

PROJECT
TYPE
SPECIFIER
QUANTITY
DATE










A35341-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

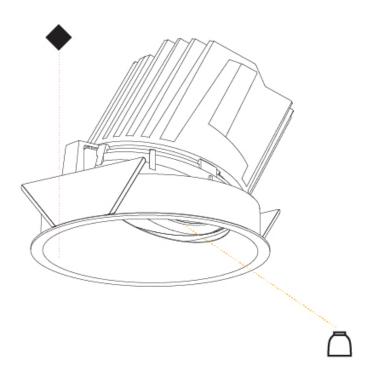





A37858	-	-	-
base number	Color	Finishes	Reflector

Temperature (Diamond) Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Bioniq Subseries: Bioniq Round Wallwash Brand: Prolicht Division: Architectural Mounting Type: Recessed Mounting Location: Ceiling Subcategory: Downlight

PHYSICAL Shape: Round Diameter (mm): 139 Diameter (in): 5 1/2 Height (mm): 137 Height (in): 5 \(^{3}\){ Ceiling Thickness (mm): 10 / 12.5 / 15 / 25 Ceiling Thickness (in): 3/8 or 1/2 or 9/16 Min. Recessing Depth (mm): 150 Min. Recessing Depth (in): $5\frac{7}{8}$ Light Distribution: Adjustable / Asymmetric Weight (kg): 0.865 Weight (lbs): 1.9

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG / OBR / MOS / ROR

Fixture Material: Aluminum Die Cast Cut-out Measurements: 130mm / 5 1/8"

ELECTRICAL

Lamp Type: LED (Zhaga Standard) Input Wattage (W): 28.6 Total Output Wattage (W): 26

Dimming: Tri-Mode (Non-Dimming and Phase Dimming (120Vac only)

and 0-10V Dimming)

Driver Included: No

Driver Location: Recessed Housing

Driver Type: Constant Current - Universal

Housing: See components

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 1890 / 1930 / 2028 / 2070

Nominal Lumen (lm): 3210 / 3290 / 3459 / 3530

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

Reflector°: 20 / 25 / 40


Adjustability: Fixed

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards


























A37858-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

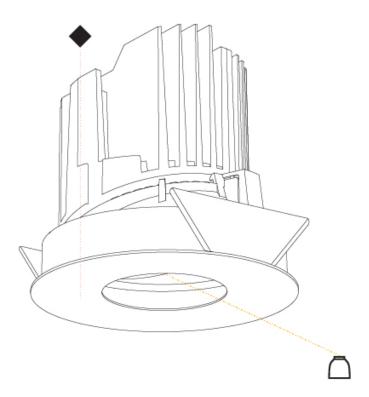





BIONIQ

PROJECT			
TYPE			
SPECIFIER			
QUANTITY			
DATE			

Fixture Finish



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently betwee Physical: When texture is involved, there will be variations in color, character and tone within a pro



and between product families.



BIONIQ

PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE

LEGEND

Tre T					anasial LED (unan request) DCD, DCDW tunable
<u></u>	floor-mounted	¥	pivotable	⊛	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	ى	rotating	0	warm dim / natural dimming LED
$ \top $	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	THESE	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
À	direct light distribution	Δ	reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	ĹM	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
$\overline{\mathbf{A}}$	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
ZŢ	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
€	the supplied jig specifies the cutout dimensions	Č	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
d •→	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\perp}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm	•	luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	1 100
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	\odot	indirect diffuser	. (1)	ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c(U) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	O	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

above the surface)

100000	288 (400 C) - 26 5 (100 C) - 26 5 (
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm