




DELIGHT LOLLIPOP ROUND RECESSED

A35692-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

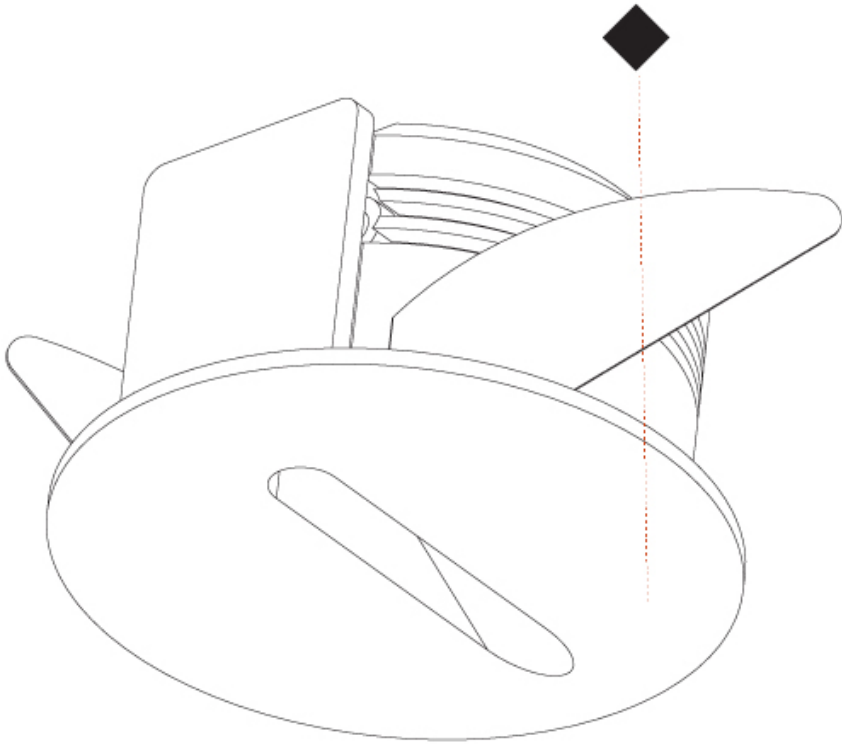

DELIGHT LOLLIPOP ROUND WIDE RECESSED

A35693- -

|             |             |           |
|-------------|-------------|-----------|
| base number | Color       | Finishes  |
|             | Temperature | (Diamond) |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Delight

Subseries: Delight Lollipop Round Wide

Brand: Prolicht

Division: Architectural

Mounting Type: Recessed

Mounting Location: Wall

Subcategory: Step Light

PHYSICAL

Shape: Round

Diameter (mm): 55

Diameter (in): 2 3/16

Depth (mm): 35

Depth (in): 1 3/8

Min. Recessing Depth (mm): 40

Min. Recessing Depth (in): 1 9/16

Light Distribution: Asymmetric

Weight (kg): 0.11

Weight (lbs): 0.25

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 2.2

Total Output Wattage (W): 2

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - 120 / 277Vac

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 150 / 160 / 170

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

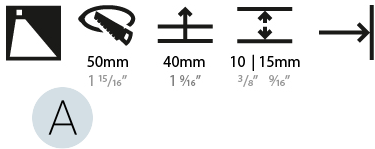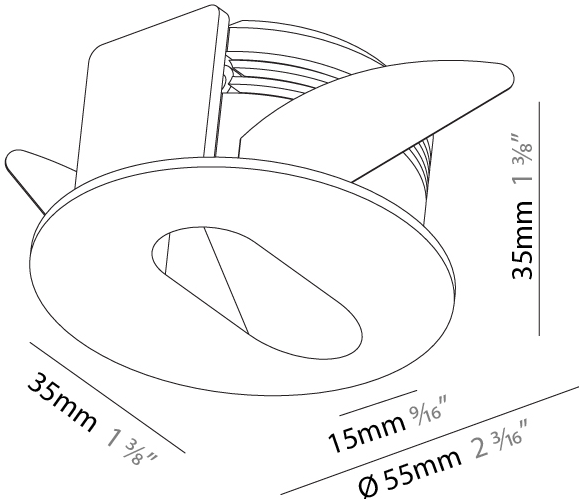

DELIGHT LOLLIPOP ROUND WIDE RECESSED

A35693-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |



DELIGHT LOLLIPOP SQUARE RECESSED

A35694- -

|             |             |           |
|-------------|-------------|-----------|
| base number | Color       | Finishes  |
|             | Temperature | (Diamond) |

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Delight

Subseries: Delight Lollipop Square

Brand: Prolicht

Division: Architectural

Mounting Type: Recessed

Mounting Location: Wall

Subcategory: Step Light

PHYSICAL

Shape: Square

Length (mm): 53

Length (in): 2 1/16

Height (mm): 53

Depth (mm): 35

Height (in): 2 1/16

Depth (in): 1 3/8

Min. Recessing Depth (mm): 40

Min. Recessing Depth (in): 1 9/16

Light Distribution: Asymmetric

Weight (kg): 0.11

Weight (lbs): 0.25

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 2.2

Total Output Wattage (W): 2

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - 120 / 277Vac

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 80 / 80 / 90

Nominal Lumen (lm): 144

CRI: >90 CRI

Lamp Life (hrs): 50000



OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

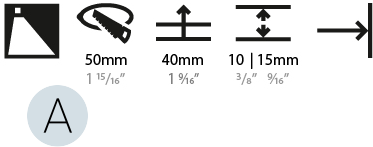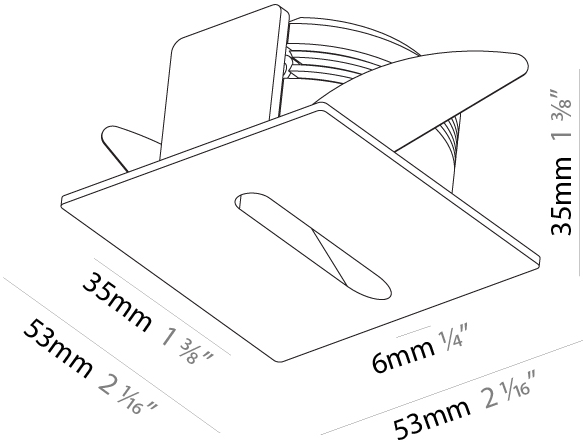

DELIGHT LOLLIPOP SQUARE RECESSED

A35694-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

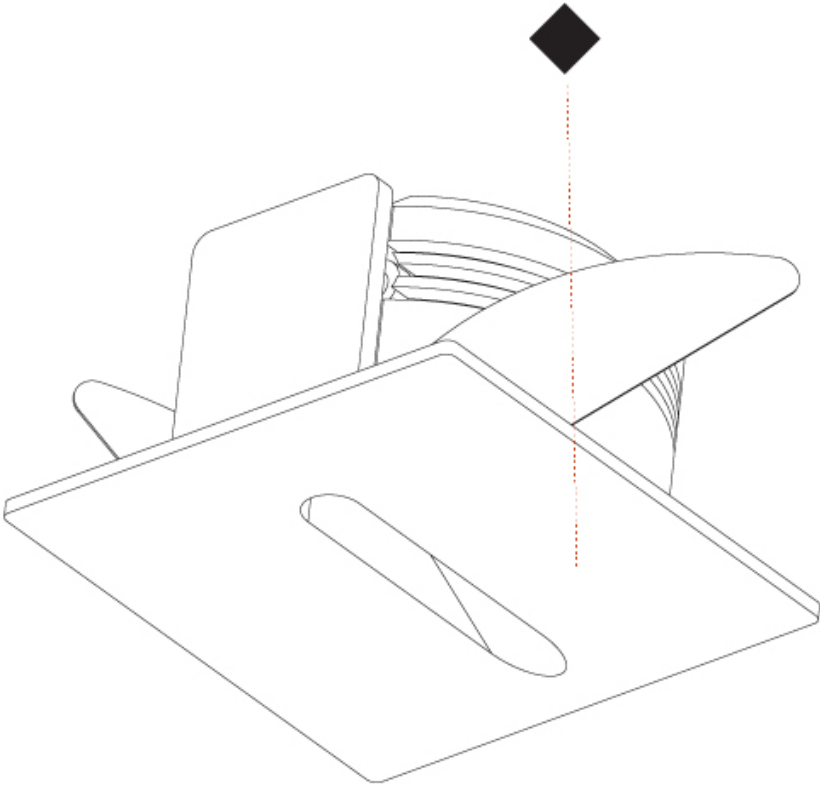

DELIGHT LOLLIPOP SQUARE WIDE RECESSED

A35695-

-

base number

Color

Finishes

Temperature

(Diamond)

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Delight

Subseries: Delight Lollipop Square Wide

Brand: Prolicht

Division: Architectural

Mounting Type: Recessed

Mounting Location: Wall

Subcategory: Step Light

PHYSICAL

Shape: Square

Length (mm): 53

Length (in): 2 1/4

Height (mm): 53

Depth (mm): 35

Height (in): 2 1/4

Depth (in): 1 3/8

Min. Recessing Depth (mm): 40

Min. Recessing Depth (in): 1 9/16

Light Distribution: Asymmetric

Weight (kg): 0.11

Weight (lbs): 0.25

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 2.2

Total Output Wattage (W): 2

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - 120 / 277Vac

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 4000

Max. Delivered Lumen (lm): 150 / 160 / 170

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

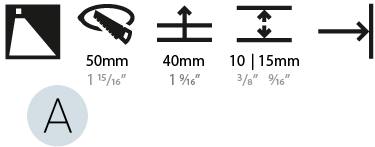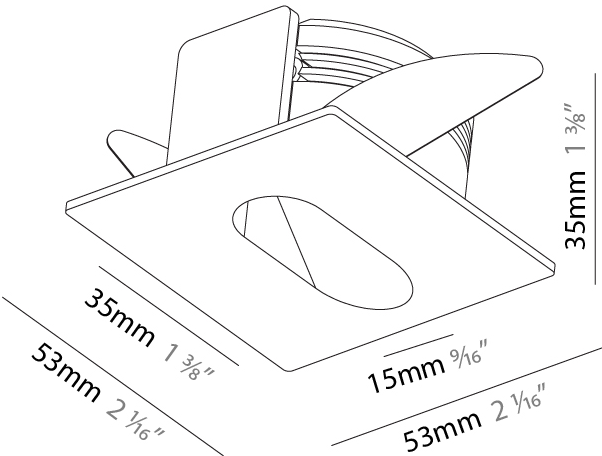

DELIGHT LOLLIPOP SQUARE WIDE RECESSED

A35695-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |





DELIGHT STRING WIDE RECESSED

A35699-

base number

Color  
Temperature

Finishes  
(Diamond)

Finishes  
(Triangle)

1. To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

Series: Delight

Subseries: Delight String Wide

Brand: Prolicht

Division: Architectural

Mounting Type: Recessed

Mounting Location: Wall

Subcategory: Step Light

PHYSICAL

Shape: Rectangle

Length (mm): 250

Length (in): 9 13/16

Width (mm): 40

Width (in): 1 9/16

Height (mm): 250

Depth (mm): 26

Height (in): 9 13/16

Depth (in): 1

Ceiling Thickness (mm): 10 / 12 / 15

Ceiling Thickness (in): 3/8 or 1/2 or 9/16

Min. Recessing Depth (mm): 30

Min. Recessing Depth (in): 1 3/16

Light Distribution: Asymmetric

Weight (kg): .83

Weight (lbs): 1.8

Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG

Fixture Material: Aluminum

Cut-out Measurements: 240mm / 9 7/16" x 34mm / 1 5/16"

ELECTRICAL

Lamp Type: LED (Zhaga Standard)

Input Wattage (W): 2.2

Total Output Wattage (W): 2

Dimming: 0-10V Dimming / Phase Dimming (120Vac Only)

Driver Included: No

Driver Location: Remote

Driver Type: Constant Current - 120 / 277Vac

Driver Class: Class 2

Input Voltage (V): 120 - 277

Constant Current (MA): 700

LED

Number of LEDs: 1

Color Temperature (°K): 2700 / 3000 / 3500 / 4000

Max. Delivered Lumen (lm): 60 / 60 / 68 / 70

CRI: >90 CRI

Lamp Life (hrs): 50000

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20



PROJECT

TYPE

SPECIFIER

QUANTITY


DATE

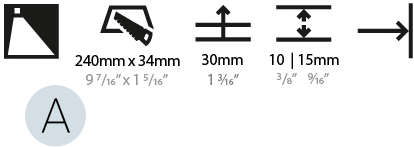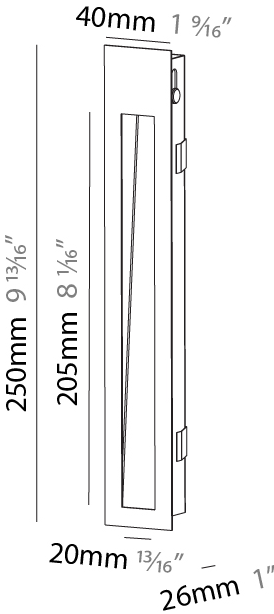

DELIGHT STRING WIDE RECESSED

A35699-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

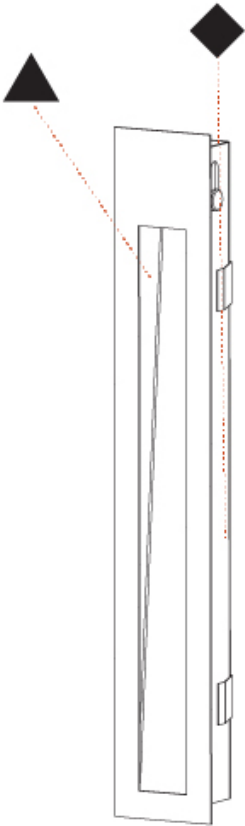

DELIGHT STRING STEP RECESSED

A35700-

|             |                               |                       |                        |
|-------------|-------------------------------|-----------------------|------------------------|
| base number | LED Color<br>Temp<br>30/35/50 | Finishes<br>(Diamond) | Finishes<br>(Triangle) |
|-------------|-------------------------------|-----------------------|------------------------|

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                |
|--------------------------------|
| Series: Delight                |
| Subseries: Delight String Step |
| Brand: Prolicht                |
| Division: Architectural        |
| Mounting Type: Recessed        |
| Mounting Location: Wall        |
| Subcategory: Step Light        |

PHYSICAL

|   |
|---|
| Shape: Rectangle  |
| Length (mm): 190  |
| Length (in): 7 1/2  |
| Height (mm): 40   |
| Depth (mm): 27  |
| Height (in): 1 9/16   |
| Depth (in): 1 1/16  |
| Ceiling Thickness (mm): 10 / 12 / 15  |
| Ceiling Thickness (in): 3/8 or 1/2 or 9/16  |
| Min. Recessing Depth (mm): 30   |
| Min. Recessing Depth (in): 1 3/16   |
| Light Distribution: Asymmetric  |
| Weight (kg): 0.208  |
| Weight (lbs): 0.4576  |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG |
| Fixture Material: Aluminum  |
| Cut-out Measurements: 140mm / 5 1/2" x 34mm / 1 5/16"   |

ELECTRICAL

|  |
|--|
| Lamp Type: LED (Zhaga Standard)                      |
| Input Wattage (W): 2.2                               |
| Total Output Wattage (W): 2                          |
| Dimming: 0-10V Dimming / Phase Dimming (120Vac Only) |
| Driver Included: No                                  |
| Driver Location: Remote                              |
| Driver Type: Constant Voltage - 120 / 277Vac         |
| Driver Class: Class 2                                |
| Input Voltage (V): 120 - 277                         |
| Output Voltage (V): 24                               |

LED



|  |
|--|
| Number of LEDs: 1                          |
| Color Temperature (°K): 3000 / 3500 / 5000 |
| Max. Delivered Lumen (lm): 60              |
| CRI: >80 CRI                               |
| Lamp Life (hrs): 50000                     |

OPTICAL

RATINGS AND CERTIFICATIONS

|  |
|--|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

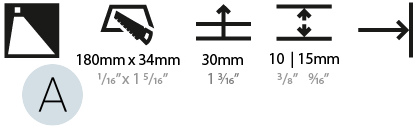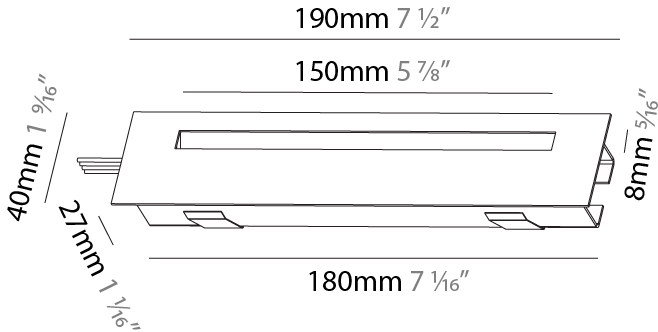

DELIGHT STRING STEP RECESSED

A35700-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

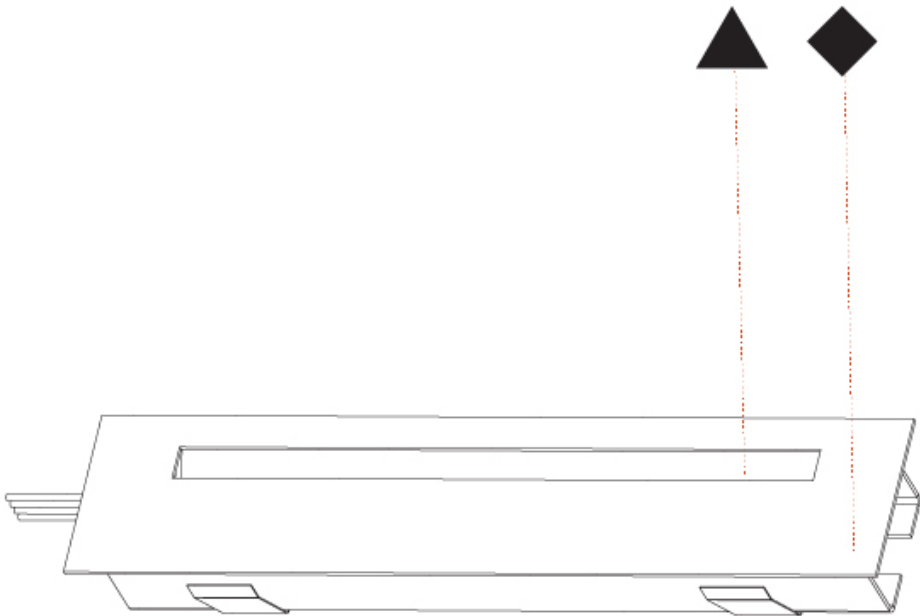

DELIGHT STRING STEP RECESSED

A35701-

|             |                               |                       |                        |
|-------------|-------------------------------|-----------------------|------------------------|
| base number | LED Color<br>Temp<br>30/35/50 | Finishes<br>(Diamond) | Finishes<br>(Triangle) |
|-------------|-------------------------------|-----------------------|------------------------|

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                |
|--------------------------------|
| Series: Delight                |
| Subseries: Delight String Step |
| Brand: Prolicht                |
| Division: Architectural        |
| Mounting Type: Recessed        |
| Mounting Location: Wall        |
| Subcategory: Step Light        |

PHYSICAL

|   |
|---|
| Shape: Rectangle  |
| Length (mm): 340  |
| Length (in): 13 3⁄8   |
| Height (mm): 40   |
| Depth (mm): 27  |
| Height (in): 1 9⁄16   |
| Depth (in): 1 1⁄16  |
| Ceiling Thickness (mm): 10 / 12 / 15  |
| Ceiling Thickness (in): 3⁄8 or 1⁄2 or 9⁄16  |
| Min. Recessing Depth (mm): 30   |
| Min. Recessing Depth (in): 1 3⁄16   |
| Light Distribution: Asymmetric  |
| Weight (kg): 0.404  |
| Weight (lbs): 0.89  |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG |
| Fixture Material: Aluminum  |
| Cut-out Measurements: 330mm / 13" x 34mm / 1 5⁄16"  |

ELECTRICAL

|  |
|--|
| Lamp Type: LED (Zhaga Standard)                      |
| Input Wattage (W): 4                                 |
| Total Output Wattage (W): 3.6                        |
| Dimming: 0-10V Dimming / Phase Dimming (120Vac Only) |
| Driver Included: No                                  |
| Driver Location: Remote                              |
| Driver Type: Constant Voltage - 120 / 277Vac         |
| Driver Class: Class 2                                |
| Input Voltage (V): 120 - 277                         |
| Output Voltage (V): 24                               |

LED



|  |
|--|
| Number of LEDs: 1                          |
| Color Temperature (°K): 3000 / 3500 / 5000 |
| Max. Delivered Lumen (lm): 120             |
| CRI: >80 CRI                               |
| Lamp Life (hrs): 50000                     |

OPTICAL

RATINGS AND CERTIFICATIONS

|  |
|--|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

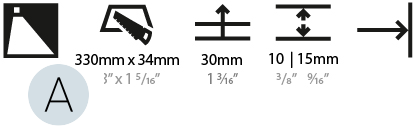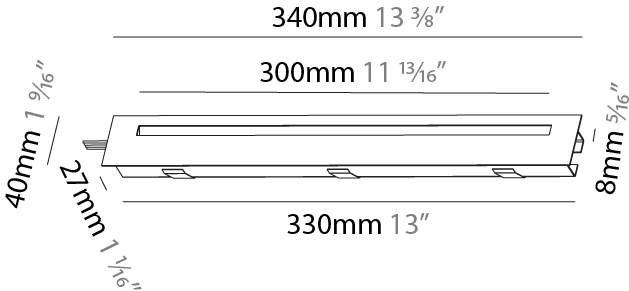

DELIGHT STRING STEP RECESSED

A35701-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |



DELIGHT STRING STEP WIDE RECESSED

A35702-

|             |                               |                       |                        |
|-------------|-------------------------------|-----------------------|------------------------|
| base number | LED Color<br>Temp<br>30/35/50 | Finishes<br>(Diamond) | Finishes<br>(Triangle) |
|-------------|-------------------------------|-----------------------|------------------------|

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                     |
|-------------------------------------|
| Series: Delight                     |
| Subseries: Delight String Step Wide |
| Brand: Prolicht                     |
| Division: Architectural             |
| Mounting Type: Recessed             |
| Mounting Location: Wall             |
| Subcategory: Step Light             |

PHYSICAL

|   |
|---|
| Shape: Rectangle  |
| Length (mm): 190  |
| Length (in): 7 1/2  |
| Height (mm): 40   |
| Depth (mm): 27  |
| Height (in): 1 9/16   |
| Depth (in): 1 1/16  |
| Ceiling Thickness (mm): 10 / 12 / 15  |
| Ceiling Thickness (in): 3/8 or 1/2 or 9/16  |
| Min. Recessing Depth (mm): 30   |
| Min. Recessing Depth (in): 1 3/16   |
| Light Distribution: Asymmetric  |
| Weight (kg): 0.208  |
| Weight (lbs): .4576   |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG |
| Fixture Material: Aluminum  |
| Cut-out Measurements: 140mm / 5 1/2" x 34mm / 1 5/16"   |

ELECTRICAL

|  |
|--|
| Lamp Type: LED (Zhaga Standard)                      |
| Input Wattage (W): 2.2                               |
| Total Output Wattage (W): 2                          |
| Dimming: 0-10V Dimming / Phase Dimming (120Vac Only) |
| Driver Included: No                                  |
| Driver Location: Remote                              |
| Driver Type: Constant Voltage - 120 / 277Vac         |
| Driver Class: Class 2                                |
| Input Voltage (V): 120 - 277                         |
| Output Voltage (V): 24                               |

LED



|  |
|--|
| Number of LEDs: 1                          |
| Color Temperature (°K): 3000 / 3500 / 5000 |
| Max. Delivered Lumen (lm): 60              |
| CRI: >80 CRI                               |
| Lamp Life (hrs): 50000                     |

OPTICAL

RATINGS AND CERTIFICATIONS

|  |
|--|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

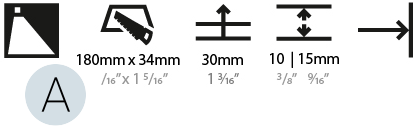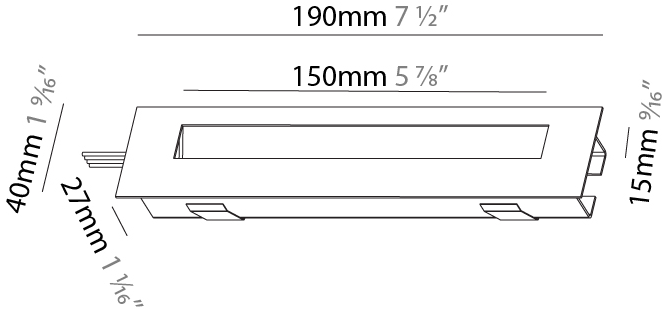

DELIGHT STRING STEP WIDE RECESSED

A35702-

|           |  |
|-----------|--|
| PROJECT   |  |
| TYPE      |  |
| SPECIFIER |  |
| QUANTITY  |  |
| DATE      |  |

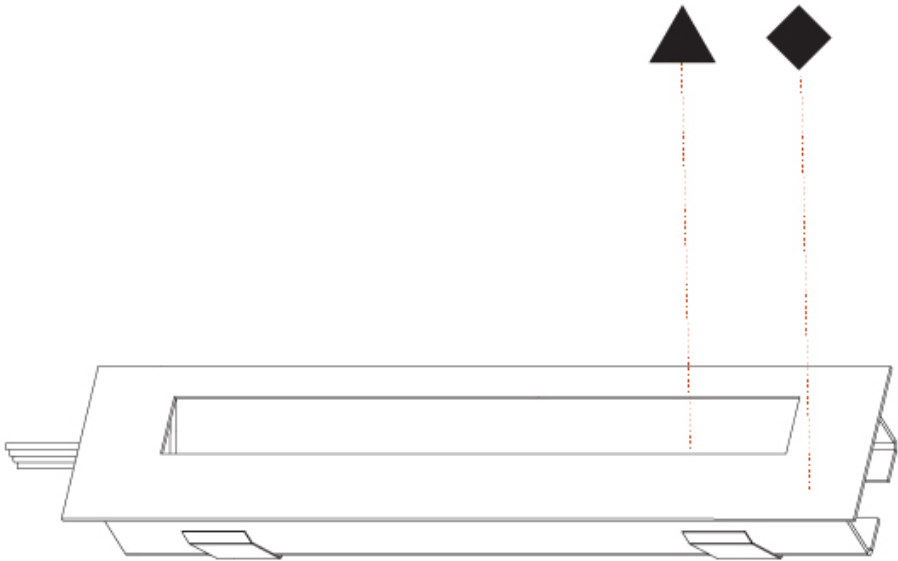



DELIGHT STRING STEP WIDE RECESSED

A35703-

|             |                               |                       |                        |
|-------------|-------------------------------|-----------------------|------------------------|
| base number | LED Color<br>Temp<br>30/35/50 | Finishes<br>(Diamond) | Finishes<br>(Triangle) |
|-------------|-------------------------------|-----------------------|------------------------|

- 1.To build a product code in our configurator select the specify button on the base model # product page
2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

GENERAL

|                                     |
|-------------------------------------|
| Series: Delight                     |
| Subseries: Delight String Step Wide |
| Brand: Prolicht                     |
| Division: Architectural             |
| Mounting Type: Recessed             |
| Mounting Location: Wall             |
| Subcategory: Step Light             |

PHYSICAL

|   |
|---|
| Shape: Rectangle  |
| Length (mm): 340  |
| Length (in): 13 3/8   |
| Height (mm): 40   |
| Depth (mm): 27  |
| Height (in): 1 9/16   |
| Depth (in): 1 1/16  |
| Min. Recessing Depth (mm): 30   |
| Min. Recessing Depth (in): 1 3/16   |
| Light Distribution: Asymmetric  |
| Weight (kg): 0.388  |
| Weight (lbs): 0.854   |
| Fixture Finish: SSR / BKV / CWI / CRY / HAB / LAG / UFT / ITA / RUA / RUR / MIC / FTG / MYG / TWT / LOD / PUS / FRO / FUP / KIA / POP / BLS / SPG / MEY / GOH / GUM / CHC / COM / ABZ / JAG |
| Fixture Material: Aluminum  |
| Cut-out Measurements: 330mm / 13" x 34mm / 1 5/16"  |

ELECTRICAL

|  |
|--|
| Lamp Type: LED (Zhaga Standard)                      |
| Input Wattage (W): 4                                 |
| Total Output Wattage (W): 3.6                        |
| Dimming: 0-10V Dimming / Phase Dimming (120Vac Only) |
| Driver Included: No                                  |
| Driver Location: Remote                              |
| Driver Type: Constant Voltage - 120 / 277Vac         |
| Driver Class: Class 2                                |
| Input Voltage (V): 120 - 277                         |
| Output Voltage (V): 24                               |

LED



|  |
|--|
| Number of LEDs: 1                          |
| Color Temperature (°K): 3000 / 3500 / 5000 |
| Max. Delivered Lumen (lm): 120             |
| CRI: >80 CRI                               |
| Lamp Life (hrs): 50000                     |

OPTICAL

RATINGS AND CERTIFICATIONS

|  |
|--|
| Certified By: Certified for North American Standards |
| IP rating: IP20                                      |


|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

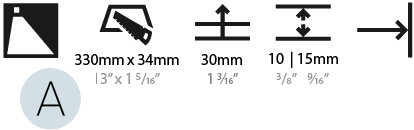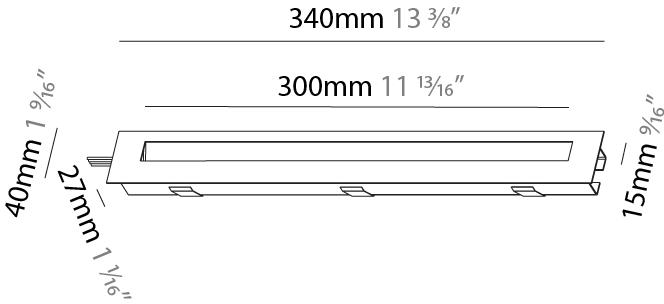

DELIGHT STRING STEP WIDE RECESSED

A35703-

|           |
|-----------|
| PROJECT   |
| TYPE      |
| SPECIFIER |
| QUANTITY  |
| DATE      |

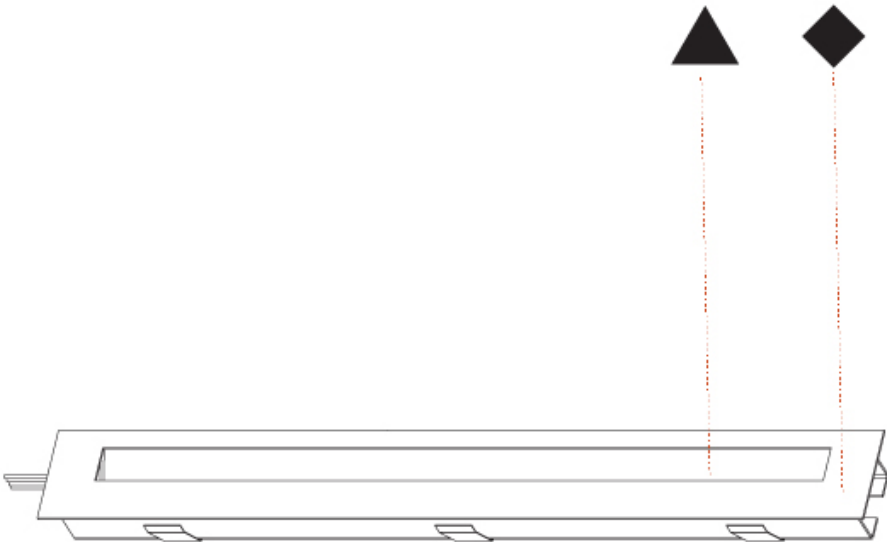

DELIGHT  
COLOR FINISH CHART

PROJECT

TYPE

SPECIFIER

QUANTITY

DATE

Fixture Finish

Sparkling Silver - 01 (SSR)

Black Velvet - 02 (BKV)

Crystal White - 03 (CWI)

Creamy - 04 (CRY)

Hampton Bay - 05 (HAB)

Lagoon - 06 (LAG)

Urban Forest - 07 (UFT)

In the Army - 08 (ITA)

Rusty Angel - 09 (RUA)

Rusty Rush - 10 (RUR)

Milk and Chocolate - 11 (MIC)

Fade to Gray - 12 (FTG)

Mysterious Gray - 13 (MYG)

Twilight - 14 (TWT)

Lost Dream - 15 (LOD)

Purple Sky - 16 (PUS)

Fresh Oh - 17 (FRO)

Funky P. - 18 (FUP)

Kissing Aphrodite - 19 (KIA)

Poseidon's Paradise - 20 (POP)

Blue Sky - 21 (BLS)

Spring Green - 22 (SPG)

Mellow Yellow - 23 (MEY)

Golden Heart - 24 (GOH)

Gun Metal - 25 (GUM)

Champagne Cream - 26 (CHC)

Copper Mine - 27 (COM)

Ancient Bronze - 28 (ABZ)

Jazz Gold - 29 (JAG)

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.  
**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.  
**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.



## LEGEND

|  |   |  |  |  |  |
|--|---|--|--|--|--|
|  | floor-mounted   |  | pivotal  |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|  | wall and ceiling: recessed and surface mounted            |  | rotating   |  | warm dim / natural dimming LED   |
|  | ceiling-mounted and wall-mounted                          |  | illuminate tilted  |  | rechargeable battery powered   |
|  | wall-mounted  |  | color of suspension cable                                    |  | fixture with natural vivid LED (upon request)  |
|  | omni-directional light distribution                       |  | length of suspension cable                                   |  | color rendering index  |
|  | direct light distribution                                 |  | reflector degree selection                                   |  | color temperature  |
|  | direct/indirect light distribution                        |  | super spot   |  | lumen (luminous flux)  |
|  | indirect light distribution                               |  | lens   |  | efficacy (lumens per watt)   |
|  | asymmetric light distribution                             |  | lens pack  |  | Unified Glare Rating (UGR) range from 5-40   |
|  | aura light distribution                                   |  | shine ring   |  | marine grade (AISI 316 stainless steel)  |
|  | round wall or ceiling cut-out                             |  | integrated shine ring with diffuser                          |  | walk on  |
|  | square wall or ceiling cut-out                            |  | free individual colors 01-29                                 |  | drive on   |
|  | the supplied jig specifies the cutout dimensions          |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance  |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth  |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion   |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material  |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation  |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation   |
|  | separately switchable                                     |  | indirect diffuser  |  | ETL Certified to UL and CSA Standards  |
|  | sensor  |  | direct diffuser  |  | UL Certified to UL and CSA Standards   |
|  | remote control  |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards  |
|  | available upon request                                    |  | accessory  |  | Certified for North American Standards   |

## IP RATING

|  |  |
|--|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)   |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water   |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas  |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods  |

## IK RATING

|  |   |
|--|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |